


GRID CONTROL RECTIFIER TUBE



TANTALUM ANODE AND XENON GAS FILLING

Maximum Rated Anode Current

D-c. Meter Value-Continuous	2.5 amps
D-c. Meter Value-Overload less than 3 sec.	3.7 amps
Averaging Time	4.5 secs
Oscillograph Peak-Continuously recurring	30 amps
Max. Instantaneous Short Circuit Current (0.1 sec.)	300 amps

Peak Forward Voltage (Max. Instantaneous)	900 volts
Peak Inverse Voltage (Max. Instantaneous)	1250 volts

Max. Commutation Factor (V/usec x A/usec) at a maximum initial inverse voltage of 350 volts	0.66
--	------

Filament

Voltage	2.5 volts
Current	9±2 amps
Heating Time (minimum)	30 secs

Average Arc Drop

Average Tube	10 volts
Highest Tube at end of life	14 volts

Anode Starting Voltage (D. C.) @ +4V d-c. grid voltage

Average Tube	40 volts
Highest Tube	75 volts

Grid Characteristics

Critical Grid Voltage @ 900 p. f. v.	-5.7±1.9 volts
Critical Grid Current	Less than 10 uamps
Grid-Anode Capacitance	approx. 2 uuf
Grid-Filament Capacitance	approx. 14 uuf

Maximum Negative Grid Voltage	100 volts
-------------------------------	-----------

Deionization Time	Less than 1000 usecs
-------------------	----------------------

Ambient Temperature Limits	-55° to +75° C.
----------------------------	-----------------

Mounting Position	Any
-------------------	-----

Overall Dimensions	1-9/16" x 6" max.
--------------------	-------------------

Weight	3 ozs.
--------	--------


Connections

Filament and Grid	Metal medium 4-pin bayonet base A4-10
Anode	C1-5 cap at top (0.56" dia.)

The filament must be lit before drawing d-c. load current.

The anode is designed to operate at red heat when under full load. All of the above values are for returns to the filament center tap.

The Engineering Manual contains additional information which should be considered in the circuit design.

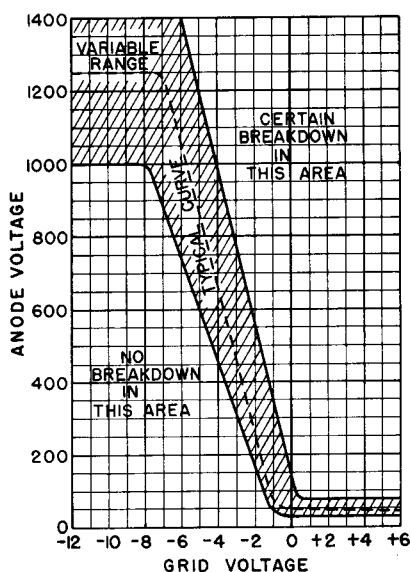

ELECTRONS, INCORPORATED
127 Sussex Avenue
Newark 3, New Jersey