



Essential Characteristics


PRINCIPAL RATINGS, ELECTRICAL AND PHYSICAL CHARACTERISTICS




Receiving,
Special-Purpose,
Five-Star Tubes,
and Compactrons

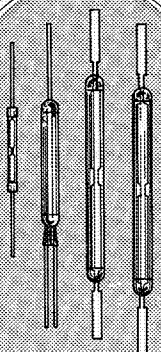

Reed Switches



Picture Tubes




Entertainment
Semiconductors,
Accessories and
Integrated Circuits

Thyratrons




Ignitrons

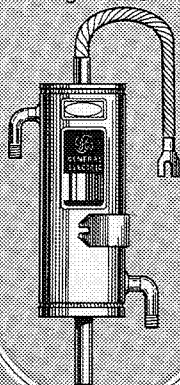

Vidicons



Radio-TV
Pilot Lamps



TUBE PRODUCTS DEPARTMENT

ESSENTIAL CHARACTERISTICS

- **Receiving Tubes**
- **Five-Star Tubes**
- **Special-Purpose Tubes**
- **Planar and Ceramic Tubes**
- **Thyratrons**
- **Ignitrons**
- **Vidicons**
- **Picture Tubes**
- **Entertainment Semiconductor Components**
- **Reed Switches**
- **Radio & TV Pilot Lamps**

Fourteenth Edition

Prepared by

C. E. Albrecht

W. O. Shelton

H. E. Schrecker

R. G. Kempton

Tube Products Department

General Electric Company

Owensboro, Kentucky 42301

Copyright 1973 by General Electric Company

Printed in United States of America

FOREWORD

ESSENTIAL CHARACTERISTICS is especially prepared to provide the Service Technician with a single source of reference containing data on every tube likely to be found in any home receiver—AM, FM, Hi-Fi, or television—as well as special purposes, Planar and ceramic tubes, Thyratrons, Ignitrons, Vidicons, Reed Switches, Radio & TV Pilot Lamps and Entertainment Semiconductors.


Data presented include those characteristics and ratings essential to fast, efficient trouble-shooting. Basing diagrams for all tubes, including picture tubes, are in the back of the book with an index by tube type.

The electronics engineer, amateur, and experimenter will also find this a valuable quick-reference for tubes currently in use.

Included in the present edition of this hand book are the many new receiving tubes recently announced for use in television applications and a section listing the essential physical and electrical characteristics of television picture tubes both monochrome and color. For reference purposes and for the convenience of the user, five-star, special-purpose, planar, ceramic, thyatron, and ignition tubes have been included with receiving tubes.

A section entitled "Explanation of Terms and Data Used in This Book" is included to aid in the proper evaluation of the information presented. Following this section are tube classification charts arranged to provide a quick and convenient reference to the tubes that are available for specific classes of service in which the reader may be interested. The tube listings follow this section.

Requests for additional information will receive prompt attention if addressed to: Engineering Section, Tube Products Department, General Electric Company, Owensboro, Kentucky 42301.

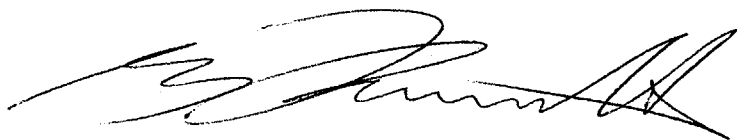

G. B. Farnsworth
General Manager—Tube Products Department
General Electric Company

Since the information presented in this handbook is industry-wide in scope, the inclusion of a tube in this publication does not necessarily imply its availability from the General Electric Co.

TABLE OF CONTENTS

| | |
|--|-----|
| Explanation of Terms and Data Used in this book | 5 |
| Classification Charts | |
| Five-Star Types | 10 |
| Receiving Types | |
| Diodes | 11 |
| Triodes..... | 12 |
| Triple or Three-Section Triodes..... | 12 |
| Triodes with Diodes | 13 |
| Triode-Pentodes | 13 |
| Pentode Voltage Amplifiers | 14 |
| Pentode Power Amplifiers | 14 |
| Beam Triodes | 15 |
| Pentodes with Diodes | 15 |
| Dual-Control Pentodes | 15 |
| Heptodes | 15 |
| Miscellaneous Types | 15 |
| Special-Purpose Types | 16 |
| Thyratrons | 16 |
| Planar and Ceramic Types | 17 |
| Ignitrons | 18 |
| Vidicons | 19 |
| X-Radiation Rated Recommended Replacements for High-Voltage Rectifier and Shunt Regulator Tubes | 20 |
| X-Radiation Symbol Definition | 21 |
| Characteristics and Ratings | 22 |
| General Electric Multiple/Brand Receiving Tube Replacement Guide | 276 |
| Receiving Tube - Interchangeability Guide Foreign Types vs. American Types.. | 279 |
| Industrial, Military, and Special-Purpose Tubes and Their Prototypes | 290 |
| Typical Receiving Tube Characteristic Curves | 293 |
| Radio and Television Pilot Lamps | 305 |
| Picture Tubes - Characteristics and Ratings | |
| Color | 306 |
| Monochrome | 318 |
| Vidicons - Condensed Data | 346 |
| Outline Drawings | |
| Standard Configurations | 348 |
| T - X Table (see page 8) | 374 |
| Reed Switch Condensed Data | 384 |

(Continued on page 4)

Table of Contents (Continued)

| | |
|--|-----|
| Entertainment Semiconductors — Condensed Data | |
| Description | 387 |
| Universal Transistors | 388 |
| Outline Drawings | 394 |
| Silicon and Germanium Rectifiers | 401 |
| Field Effect Transistors | 402 |
| Selenium Rectifiers for Color TV | 403 |
| GE Quartz Crystals | 403 |
| Variable Capacitance Diodes | 404 |
| GE Entertainment Transistors Registered JEDEC Types | 404 |
| Germanium and Silicon Diodes | 405 |
| Selenium Dual-Diode Rectifiers | 405 |
| Zener Diodes | 406 |
| Maintenance Industrial Replacement Semiconductors | 407 |
| Outline Drawings | 408 |
| Integrated Circuits | 410 |
| Index of Basing Diagrams by Tube Type | |
| Receiving, Five-Star, Special-Purpose, Planar and Ceramic Tubes, Thyratrons and Ignitrons..... | 414 |
| Color Picture Tubes | 423 |
| Monochrome Picture Tubes | 424 |
| Vidicons | 427 |
| Basing Diagrams | |
| Receiving, Five-Star, Special-Purpose, Planar and Ceramic Tubes, Thyratrons and Ignitrons | 428 |
| Color Picture Tubes | 429 |
| Monochrome Picture Tubes | 471 |
| Vidicons | 472 |
| Vidicons | 473 |

The components and arrangements disclosed herein may be covered by patents of General Electric Company or others. Neither the disclosure of any information herein nor the sale of components by General Electric Company conveys any license under patent claims covering combinations of components with other devices or elements. In the absence of an express written agreement to the contrary, General Electric Company assumes no liability for patent infringement arising out of any use of the components with other devices or elements by any purchaser of components or others.

X-RADIATION WARNING

The voltages employed in some television receivers and other high-voltage equipment are sufficiently high that high-voltage rectifier and shunt regulator tubes, television picture tubes and certain other high-voltage electron tubes may produce soft X-rays which can constitute a health hazard on prolonged exposure at close range, unless such tubes are adequately shielded. The need for this precaution must always be considered in equipment design.

Precautions must be exercised during the servicing of equipment employing any of the above high-voltage tubes to assure that all shielding components are replaced to their intended positions before the equipment is operated.

Before operating any electron tube at 10,000 volts or higher, the tube manufacturer's detailed rating sheet for that particular tube should be reviewed.

EXPLANATION OF TERMS AND DATA USED IN THIS BOOK

RATING—A limiting value of voltage, current, frequency, etc., beyond which tube life may be seriously impaired.

CHARACTERISTIC—A property of a tube, inherent in its design, such as its ability to deliver a certain power output with specific electrode voltages applied.

BOGEY—An average *characteristic* value; a tube exhibiting these average values is termed a *bogey* tube.

RATING SYSTEMS

Maximum ratings given in this book are based on one of the three rating systems in common use: the design-center system, the design-maximum system, or the absolute-maximum system. Ratings based on the two latter systems are indicated by a footnote reference, and if the rating is not followed by a footnote symbol the design-center rating system is applicable. To determine whether or not a tube is used within ratings in a specific application, the rating system specified must be taken into account since each rating system requires a different procedure for determining conformance to ratings.

Design-Center Rating System To establish conformance to ratings in the design-center rating system, the ratings should not be exceeded with a *bogey* tube operating in the equipment under *average* conditions with respect to supply voltage, signal, temperature, component values, adjustment of controls, and other variables.

Design-Maximum Rating System To establish conformance to ratings in the design-maximum rating system, the ratings should not be exceeded with a *bogey* tube operating in the equipment under the *worst probable* combination of conditions with respect to supply voltage, signal, temperature, component values, adjustment of controls, and other variables.

Absolute-Maximum Rating System To establish conformance to ratings in the absolute-maximum rating system, the ratings should not be exceeded with *any tube of the specified type* operating in the equipment under the *worst probable* combination of conditions with respect to supply voltage, signal, temperature, component values, adjustment of controls, and other variables.

The term "worst probable combination of conditions" used above is not intended to include conditions under which useful performance of the equipment could not be obtained, since the equipment is not likely to be operated for long under such conditions.

ELECTRODE VOLTAGES

Electrode voltages indicated as "Max" in the tables are maximum ratings, and are measured with respect to the following reference points:

1. For cathode types, the reference point is the cathode terminal.
2. For filamentary types operated on direct current, the reference point is the negative terminal of the filament.
3. For filamentary types operated on alternating current, the reference point is the electrical center of the filament, usually located at the center-tap of the heater-supply transformer, rather than at the physical center of the filament.

POWER DISSIPATION


Plate Dissipation For Class A amplifiers, the maximum plate dissipation occurs at the zero-signal condition. The maximum peak input signal voltage should not exceed the bias voltage.

For Class B amplifiers, the maximum plate dissipation theoretically occurs at approximately 63 percent of the maximum-signal conditions, but practically may occur at any signal-voltage value.

For converters, the maximum plate dissipation occurs at the zero-signal condition and at the frequency at which the oscillator-developed bias is a minimum.

Screen Dissipation When a maximum screen voltage is shown in the data, the full rated screen dissipation is allowable at any screen voltage within the screen-voltage rating. When a maximum screen-supply voltage is shown, the allowable screen dissipation must be decreased, according to the accompanying screen-rating chart, if the screen voltage is greater than 50 percent of the rated screen-supply voltage.

SCREEN RATING CHART

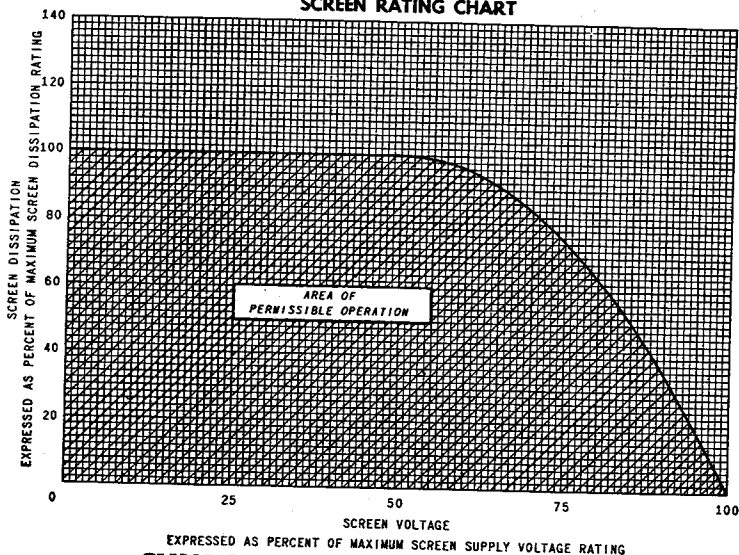

SYMBOLS AND ABBREVIATIONS

The following symbols and abbreviations are used throughout the tube characteristics data:

| | |
|---|----------------------------------|
| E_b —Plate Voltage | I_b —Plate current |
| E_c —Grid Voltage | I_c —Grid current |
| E_{c1} —Grid-number 1 voltage | I_{c1} —Grid-number 1 current |
| E_{c2} —Grid-number 2 voltage | I_{c2} —Grid-number 2 current |
| E_{c3} —Grid-number 3 voltage | I_k —Cathode current |
| E_{cc} —Grid supply voltage | K —Cathode |
| E_{cc1} —Grid-number 1 supply voltage | μ —Amplification factor |
| E_{cc2} —Grid-number 2 supply voltage | P —Plate |
| E_{cc3} —Grid-number 3 supply voltage | R_g —Grid resistor |
| G —Grid | R_{g1} —Grid-number 1 resistor |
| G_1 —Grid number 1 | R_{g2} —Grid-number 2 resistor |
| G_2 —Grid number 2 | R_{g3} —Grid-number 3 resistor |
| G_3 —Grid number 3 | R_k —Cathode resistor |
| G_4 —Grid number 4 | R_p —Plate resistor |
| G_m —Transconductance | |

ARRANGEMENT OF DATA

The essential characteristics listed for each receiving tube are presented in columns described as follows from left to right:

TUBE TYPE

Tubes are arranged in numerical-alphabetical order. Those having the same basic designation but differing in suffix (e.g., 6BG6-G and 6BG6-GA) are grouped together when the types have equivalent electrical characteristics. All of the information presented applies to each type in the group, with the possible exception of the information in the "Outline Drawing," "Capacitance in Picofarads," "Filament Volts," or "Filament Amp." columns. When this information differs, the values are horizontally aligned with the type designations to which they apply.

Type designations printed in boldface indicate metal tubes, and designations in italics indicate miniature tubes. The symbol \odot is used for subminiature tubes, and the symbol \blacksquare is used for compactrons. All other types listed are larger glass tubes or special shapes, with the exception of planar tubes and nuvistors, which are so identified in the "Classification by Construction" column.

The following suffix letters are in common use in tube designations and have the indicated significance:

G signifies a glass bulb and an octal base.

GT signifies a T-9, straight-sided glass bulb and an octal base.

A, B, C, D, E, and F assigned in that order signify a later and modified version which can be substituted for any previous version but not vice-versa. The assignment of a suffix in this series does not convey any information as to the nature of the modification incorporated.

X signifies a base composed of special low-loss material.

Y signifies a base composed of special intermediate-loss material.

The symbol † indicates a type having heater warm-up time controlled for series-string service.

CLASSIFICATION BY CONSTRUCTION

This column presents a descriptive title for each tube. When the tube represents an improved or modified version of an older type, the basic prototype is given in parenthesis following the descriptive title. The inclusion of the prototype is done to give aid in identifying the general characteristics of the tube under consideration and does not necessarily imply direct interchangeability between this version and the prototype. Whether or not the tubes can be used interchangeably depends on the particular characteristics and requirements of each individual application.

X-RADIATION RATING

This column is applicable to High Voltage Rectifier, Shunt Regulator, and Cathode-Ray Tubes.

High Voltage Rectifier and Shunt Regulator Tubes — Information is presented on the maximum X-radiation rating \square in milliroentgens per hour (mR/hr) extracted from the latest available EIA published product information. The mR/hr maximum shown is based on known attenuation factors of tube construction materials and accumulated sample test data taken initially and during life test on the particular tube type, and the tubes do not exceed the maximum rating limit at any time throughout their useful life, when operated within the maximum ratings, including filament voltage, specified on the individual published product information sheets. This X-radiation maximum rating is based on the use of the Victoreen 440 RF/C Survey Meter as the standard instrument for X-radiation measurement with its plastic spacers four (4) inches from the external surface of the tube under test. Tube types having no X-radiation rating \circ are identified. For X-radiation rated replacement tubes, see chart § on page 20.

Cathode-Ray Tubes — Reference is made to available JEDEC X-radiation isodose and limit curves. \square Tube types having no X-radiation reference to isodose or limit curves are identified. Δ

BASE CONNECTIONS

The basing diagrams are arranged in numerical-alphabetical order in the back of this book with an index by tube type. These diagrams are schematic representations of the terminal connections and do not necessarily indicate internal tube construction.

As an additional feature, each basing diagram has listed all tube types having that particular basing arrangement; this listing is useful in a preliminary search for interchangeable tube types.

In tubes having more than one grid, the grids are numbered consecutively in accordance with their location proceeding from the cathode to the plate. Thus, grid number 1 is the grid which is physically located nearest the cathode. In pentodes, grid number 2 is generally referred to as the screen grid, and grid number 3 is generally referred to as the suppressor grid.

In multisection tubes that contain two or more structurally similar sections, the similar sections are designated as section 1, section 2, etc., depending upon the connection of the electrodes to the terminal pins. The highest section number is assigned to that section having an electrode connected to the lowest-numbered base pin, and successively lower numbers are assigned to additional sections according to the sequence in which the connections of the same type of electrode in all sections are made to successively higher-numbered base pins. When similar sections have one or more electrodes in common, the assignment of section designations is determined by whichever independent electrode is connected to the lowest-numbered base pin.

OUTLINE DRAWINGS

This column presents information on the physical characteristics of each tube. When the physical characteristics of a tube conform to standard or commonly used configurations, an outline drawing number is shown which refers to tube drawings presented in the section "Outline Drawings." If the physical characteristics of a tube do not conform to any of the standard outline drawings, the designation "T-X" is shown. In this case, reference should be made to the T-X Table at the end of the Outline Drawing Section which presents data relative to the physical characteristics of these special tubes.

FILAMENT VOLTS

Unless otherwise stated in this column, the filament or heater may be operated with either alternating or direct current. If two values of filament voltage are given, the tube has a center-tapped filament or heater and may be operated with the halves in series or parallel.

FILAMENT AMP

This column lists the filament or heater currents. These current values are for a bogey tube operated at the filament voltage specified in the "Filament Volts" column. If the filament or heater is center-tapped, the currents are aligned with the corresponding voltages for series and parallel operation.

MAX PLATE WATTS

The plate dissipation listed is a maximum rating. For interpretation of maximum ratings, see the section "Rating Systems."

MAX PLATE VOLTS

The plate voltage listed is a maximum rating. For interpretation of maximum ratings, see the section "Rating Systems."

MAX SCREEN VOLTS AND WATTS

The screen voltage and dissipation listed are maximum ratings. When the symbol \ddagger is used, the screen voltage is a supply voltage. For interpretation of screen ratings, see the section "Rating Systems."

CAPACITANCE IN PICOFARADS

Unless otherwise noted, all capacitance values are average values, and those for glass tubes are measured with an external close-fitting metal shield connected to the cathode terminal. The symbol \clubsuit indicates a maximum value of capacitance, and the symbol \blacktriangle indicates a value measured without external shield. All values are measured with the filament or heater cold and with no direct-current electrode voltages applied.

In measuring the capacitances, all metal parts except the input and output electrodes are connected to the cathode. These metal parts include internal and external shields, base sleeves, and unused pins. In multisection tubes, the electrodes of the sections not common to the section under test are connected to ground.

Input capacitance is measured from the input grid to all other electrodes except the plate, which is connected to ground.

Output capacitance is measured from the plate to all other electrodes except the input grid, which is connected to ground.

Grid-to-plate capacitance is measured from the input grid to the plate, with all other electrodes connected to ground.

The capacitance values for twin-section or triple-section tubes refer to each section unless subscript numbers are used to designate the values for each section. Subscript designations are also used with the capacitance values of dissimilar double-section and three-section tubes.

SERVICE

This column indicates a potential application of the type. The class of service listed is not necessarily the only one for which the tube is suitable.

Class A Amplifier is an amplifier in which the grid bias and applied alternating grid voltage are such that plate current in a specific tube flows at all times.

Class AB Amplifier is an amplifier in which the grid bias and applied alternating grid voltage are such that plate current in a specific tube flows for appreciably more than half but less than the entire electrical cycle.

Class C Amplifier is an amplifier in which the grid bias is appreciably greater than the cutoff value so that the plate current in each tube is zero when no alternating grid voltage is applied and so that plate current in a specific tube flows for appreciably less than one-half of each cycle when an alternating grid voltage is applied.

To denote that grid current does not flow during any part of the input cycle, the suffix "1" may be added to the letter or letters of the class identification. The suffix "2" may be used to denote that grid current flows during some part of the cycle.

OTHER COLUMNS—GENERAL

The columns to the right of the "Service" column show typical electrode voltages applied and the characteristics obtained with these voltages when a bogy tube is used. The electrode voltages shown are not the only ones at which the tube may be operated; they are selected to show concisely some guiding information as to the characteristics of each tube type.

The electrode voltages listed are measured with respect to the following reference points:

For cathode types, the reference point is the cathode terminal; except that when cathode bias is used, the reference point is the negative terminal of the cathode-bias resistor.

For filamentary types operated on direct current, the reference point is the negative terminal of the filament.

For filamentary types operated on alternating current, the reference point is the electrical center of the filament, usually located at the center-tap of the heater-supply transformer, rather than at the physical center of the filament.

Filament or heater voltages are measured between the filament or heater terminals.

The column headings used are not always applicable for tubes designed to serve as television deflection-amplifiers, television dampers, signal rectifiers, power rectifiers, and regulators. In these cases the data reads across the space normally occupied by the columns. In addition, some of the data given may be ratings rather than characteristics.

PLATE VOLTS

Other values of plate voltage may be used, provided that they do not exceed the maximum rated plate voltage.

SCREEN VOLTS

Other values of screen voltage may be used, provided that the maximum rated screen voltage is not exceeded or, if maximum supply voltage is specified, the limitations of the Screen Rating Chart are observed.

NEG GRID VOLTS

The values of grid voltage or cathode bias are chosen to adjust the plate and screen currents to levels that give satisfactory tube operation and hold the plate and screen dissipations within the maximum ratings.

PLATE MILLIAMPERES

These values are for bogy tubes under the conditions given in the adjacent columns. The symbol †, used with audio-output tubes, indicates that the current listed was measured without a signal input to the control grid of the tube; maximum-input-signal plate currents are usually higher.

SCREEN MILLIAMPERES

These values are for bogy tubes under the conditions given in the adjacent columns. The symbol †, used with audio-output tubes, indicates that the current listed was measured without a signal input to the control grid of the tubes; maximum-input-signal screen currents are usually higher.

R_p, OHMS

The plate resistance (R_p) of an electronic tube is the ratio of a small change in plate voltage to the corresponding change in plate current, with all other electrode voltages maintained constant.

Gm, μ MHOS

The transconductance (Gm) of an electronic tube is the ratio of a small change in plate current to the small change in grid voltage that produces it, with all other electrode voltages maintained constant. Unless otherwise noted all transconductance values in this handbook are grid-number 1-to-plate transconductances.

μ FACTOR

The amplification factor (μ) of an electronic tube is the ratio of a small change in plate voltage to the small change in grid voltage when the plate current and all other electrode voltages are maintained constant.

LOAD FOR RATED OUTPUT, OHMS

When operating conditions are given for two tubes in push-pull, the symbol † indicates that the load resistance given is the plate-to-plate value.

POWER OUTPUT, WATTS

For power-output tubes, the value given refers to the average tube power output (plate-input power minus plate dissipation) for the indicated operating conditions. The useful power output is the tube output less the circuit losses. In Class-A operation, the rated tube power output is measured with an audio-frequency sinusoidal input signal whose peak value is equal to or less than the d-c grid-number 1 bias voltage applied to the tube.

CLASSIFICATION CHARTS

FIVE-STAR TYPES

Special-Quality Tubes for Critical Applications

| Classification | | 7-Pin Miniature | 9-Pin Miniature | Octal | |
|------------------|----------------------------|--------------------|--------------------|--|------|
| Diodes | Low-Current Rectifiers | 5726 6919 | | | |
| | Full-Wave Power Rectifiers | 6202 | 6203 | 6087 | |
| Triodes | Single | 6135 | | | |
| | Twin | $\mu < 40$ | 5844 | 5670 5687 5814-A 6189 6211-A 6386 7861 | |
| | | $\mu > 40$ | | 5751 5965-A 6072-A 6201 6414 6829 | |
| | Pentodes | Voltage Amplifiers | Sharp Cutoff | 5654 6136 6265 8425-A 8426-A | 6688 |
| Remote Cutoff | | | 5749 | | |
| | | Dual Control | 5725 | | |
| Power Amplifiers | | 6005 | 5686 6216 | | |
| | High-Voltage Regulators | | 7239 | | |
| Heptodes | | 5750 7036 | | | |
| Thyratrons | | 5727 | | | |

Receiving Types

DIODES

| Service | Max Output Current in Ma | Single | | | Twin | | Triple |
|---------------------------|--------------------------|--|---|---|----------|-----------------------------|-------------|
| | | Filament | Cathode | | Filament | Cathode | Cathode |
| TV High-Voltage Rectifier | 0.5 | 1AD2-A 1AV2-A 1BC2-A 1BC2-B 1BH2-A 1BY2-A 1DG3 1DG3-A 1G3-GTA 1K3-A <i>1V2</i> <i>1X2-C</i> | | | | | |
| | 0.6 to 1.9 | <i>2AV2</i> | 2AS2-A 2BU2 | 3AT2-B 3BN2-A | | | |
| | 2.0 to 3.0 | 3CU3-A 3DC3 | 2CN3-B 3A3-C 3AW2-A 3BS2-B 3BT2-A 3BW2 3CN3-B 3DA3 | 3DB3 3DF3 3DF3-A 3DH3 3DJ3 3DR3 3DS3 | | | |
| Low-Current Rectifier | 1.0 per plate | | | | | | <i>6BJ7</i> |
| | 9.0 to 12 per plate | | | | | <i>6AL5</i> <i>12AL5</i> | <i>6BC7</i> |
| Power Rectifier | 50 to 99 | | | | | <i>6X4</i> | |
| | 100 to 149 | | <i>55W4</i> | <i>50DC4</i> | 5Y3-GT | | |
| | 150 to 199 | | | | | <i>6CA4</i> | |
| | 200 to 299 | | | | 5U4:GB | | |
| TV Damping Diode | 120 to 175 | | 6AX3 6AX4-GTB 6AY3-B 6BJ3 6BW3 12AX3 12AY3-A 12BT3 | 17AX3 17AY3-A 17BW3 22BW3 <i>1/2</i> 32HQ7 <i>1/2</i> 33GT7 <i>1/2</i> 33GY7 <i>1/2</i> 33GY7-A | | | |
| | 180 to 350 | | 6BE3 6BS3-A 6BZ3 6CG3 6CJ3 6CL3 6DE4 6DN3 12BE3 12BS3-A 12CL3 <i>1/2</i> 12HE7 | 17BE3 17BS3-A 17BZ3 17DE4 19CG3 19DE3 22DE4 25CG3 34CE3 <i>1/2</i> 38HE7 <i>1/2</i> 38HK7 | | | |
| | 400 to 450 | | 6DK3 6DQ3 6DQ3-A | 19DK3 19DQ3 25DK3 | | | |

Type designations of miniature tubes are shown in italics.

TRIODES

| Amplification Factor μ | Single | | | | | Twin or Double | | | | |
|----------------------------|---|--|---------------------|-------------|--|--|---|--|---|--|
| | Heater Current in Milliamperes | | | | | Heater Current in Milliamperes | | | | |
| | 600 | 450 | 300 | 150 | Other | 600 | 450 | 300 | 150 | Other |
| 2.0 to 9.0 | <i>12B4-A</i> | | <i>12B4-A</i> | | | $\frac{1}{2}$ 10GF7-A | $\frac{1}{2}$ 11CY7 $\frac{1}{2}$ 13GF7-A $\frac{1}{2}$ 15EA7 $\frac{1}{2}$ 15FY7 | | | $\frac{1}{2}$ 6CY7 $\frac{1}{2}$ 6EA7 $\frac{1}{2}$ 6EM7 $\frac{1}{2}$ 6FM7 $\frac{1}{2}$ 6FY7 $\frac{1}{2}$ 6GF7-A $\frac{1}{2}$ 6GL7 |
| 10 to 19 | <i>6AF4-B</i> <i>6DZ4</i> <i>6S4-A</i> | <i>6AF4-B</i> <i>6DZ4</i> | | <i>6C4</i> | <i>6AF4-A</i> <i>6DZ4</i> | $\frac{1}{4}$ 4HA7 $\frac{1}{2}$ 6BA11 $\frac{1}{2}$ 6CM7 <i>6GU7</i> <i>12BH7-A</i> | $\frac{1}{2}$ 5HA7 $\frac{1}{2}$ 8BA11 | <i>12AU7-A</i> <i>12BH7-A</i> $\frac{1}{2}$ 7247 | <i>12AU7-A</i> $\frac{1}{2}$ 7247 | $\frac{1}{2}$ 6FJ7 |
| 20 to 29 | $\frac{1}{2}$ 13JZ8 | $\frac{1}{2}$ 17JZ8 | $\frac{1}{2}$ 25JZ8 | | $\frac{1}{2}$ 6JZ8 $\frac{1}{2}$ 24JZ8 | <i>6CG7</i> $\frac{1}{2}$ 6CM7 <i>6FQ7</i> <i>6SN7-GTB</i> $\frac{1}{2}$ 16AK9 | <i>6CG7</i> <i>6FQ7</i> $\frac{1}{2}$ 23Z9 | <i>12FQ7</i> <i>12SN7-GTA</i> | | $\frac{1}{2}$ 6AK9 $\frac{1}{2}$ 6FJ7 $\frac{1}{3}$ 31AL10 |
| 30 to 39 | | | | | | | <i>6J6-A</i> | | | <i>6BQ7-A</i> <i>6BZ7</i> |
| 40 to 59 | $\frac{1}{2}$ 15MF8 $\frac{1}{2}$ 16LU8 $\frac{1}{2}$ 16LU8-A | $\frac{1}{2}$ 21LR8 $\frac{1}{2}$ 21LU8 | | | $\frac{1}{2}$ 6LR8 $\frac{1}{2}$ 6LU8 $\frac{1}{2}$ 6MFS | $\frac{2}{3}$ 8BU11 $\frac{1}{2}$ 11BT11 $\frac{1}{2}$ 11CA11 $\frac{1}{2}$ 11CF11 $\frac{1}{2}$ 11CH11 $\frac{1}{2}$ 16AK9 | <i>6BK7-B</i> <i>12AV7</i> $\frac{1}{2}$ 14BL11 $\frac{1}{2}$ 14BR11 $\frac{1}{2}$ 15AF11 $\frac{1}{2}$ 15BD11 $\frac{1}{2}$ 23Z9 | <i>12AY7</i> | <i>12AY7</i> | $\frac{1}{2}$ 6AK9 $\frac{1}{2}$ 6AS11 $\frac{1}{2}$ 6CA11 $\frac{2}{3}$ 6BH11 $\frac{2}{3}$ 6M11 <i>12AV7</i> $\frac{2}{3}$ 16BX11 $\frac{1}{3}$ 31AL10 |
| 60 to 69 | | | | <i>6AB4</i> | | $\frac{1}{2}$ 10GF7-A | $\frac{1}{2}$ 11CY7 <i>12AZ7-A</i> $\frac{1}{2}$ 13GF7-A $\frac{1}{2}$ 15EA7 $\frac{1}{2}$ 15FM7 $\frac{1}{2}$ 15FY7 | <i>6DT8</i> <i>12AT7</i> | <i>12AT7</i> <i>12DT8</i> | $\frac{1}{2}$ 6AS11 $\frac{1}{2}$ 6CA11 $\frac{1}{2}$ 6CY7 $\frac{1}{2}$ 6EA7 $\frac{1}{2}$ 6EM7 $\frac{1}{2}$ 6FM7 $\frac{1}{2}$ 6FY7 $\frac{1}{2}$ 6GF7-A $\frac{1}{2}$ 6GL7 <i>12AZ7-A</i> |
| 70 to 79 | <i>6GK5</i> | <i>6GK5</i> <i>6HA5</i> <i>6HM5</i> | <i>4GK5</i> | | <i>6GK5</i> <i>6HA5</i> <i>6HM5</i> | | | <i>6SL7-GT</i> | <i>12SL7-GT</i> | |
| 80 to 89 | | | | | <i>6AM4</i> | | | | | |
| 100 | | | | | | $\frac{1}{2}$ 4HA7 | $\frac{1}{2}$ 5HA7 | <i>6EU7</i> <i>12AX7</i> <i>12AX7-A</i> <i>7025</i> $\frac{1}{2}$ 7247 | <i>12AX7</i> <i>12AX7-A</i> <i>7025</i> $\frac{1}{2}$ 7247 | |

TRIPLE OR THREE-SECTION TRIODES

| Amplification Factor μ | Heater Current in Milliamperes | | | | |
|----------------------------|---|---|-----------------|--------------|---|
| | 600 | 450 | 300 | 150 | Other |
| Medium- μ 10 to 49 | <i>6AV11</i> $\frac{1}{2}$ 6K11 $\frac{1}{2}$ 6U10 <i>9MN8</i> | | <i>12AC10-A</i> | | <i>6MD8</i> <i>6MJ8</i> <i>6MN8</i> |
| High- μ 50 to 100 | <i>6AC10</i> <i>6C10</i> $\frac{1}{2}$ 6K11 $\frac{1}{2}$ 6U10 <i>9AK10</i> <i>9AM10</i> | <i>6D10</i> <i>6EZ8</i> <i>6GY8</i> <i>8AC10</i> | | <i>19EZ8</i> | <i>6AK10</i> |

Type designations of miniature tubes are shown in italics.

TRIODES WITH DIODES

| Amplification Factor μ | | Heater Current in Milliamperes | | | | |
|-------------------------------|---------------|--------------------------------|--------------|-------------|---|----------------|
| | | 600 | 450 | 300 | 150 | Other |
| 10 to 49 | with 2 diodes | 6B10 | 8B10 | | | |
| 50 to 100 | with 2 diodes | | <i>6FM8</i> | <i>6AV6</i> | <i>12AV6</i> <i>14GT8</i> <i>14JG8</i> <i>50AG11</i> | 6AG11 6AY11 |
| | with 3 diodes | | <i>6T8-A</i> | | <i>19T8</i> | |

TRIODE-PENTODES

| Transconductance, Pentode Section | Amplification Factor Triode Section | Heater Current in Milliamperes | | | |
|--------------------------------------|---|--------------------------------|---|------------------------------|--|
| | | 600 | 450 | 300 | Other |
| 5500 | 40 | <i>5CG8</i> | <i>6CG8-A</i> | | |
| 5500 | 70 | <i>5JW8</i> | <i>6LX8</i> | | <i>6JW8</i> |
| 6000 | 43 | <i>5FG7</i> | <i>6FG7</i> | | |
| 6400 | 40 | <i>5EA8</i> | <i>6EA8</i> <i>6HB7</i> | | <i>19EA8</i> |
| 6500 | 45 | | <i>6FV8-A</i> | | |
| 6500 | 95 | | | | 6T9 |
| 6500 | 70 | | | | <i>19HV8</i> |
| 7500 | 46 | <i>5GH8-A</i> <i>5KZ8</i> | <i>6GH8-A</i> <i>6JN8</i> <i>6KZ8</i> | <i>9GH8-A</i> <i>9KZ8</i> | <i>12JN8</i> <i>19JN8</i> <i>19KG8</i> |
| 8000 | 43 | <i>6AU8-A</i> | | | |
| 9000 | 100 | <i>6MV8</i> | | | |
| 9500 | 70 | <i>6AW8-A</i> | <i>8AW8-A</i> | | |
| 9500 | 110 | | <i>10LZ8</i> | | |
| 10000 | 40 | <i>8CX8</i> | | | <i>6CX8</i> |
| 10000 | 100 | <i>6KT8</i> | | | |
| 10700 | 70 | <i>6JV8</i> | <i>8JV8</i> | | |
| 11000 | 46 | | <i>10JY8</i> | | |
| 11500 | 100 | <i>8GN8</i> | <i>10GN8</i> | | <i>6GN8</i> |
| 12000 | 70 | | <i>11JE8</i> | | <i>6JE8</i> |
| 12500 | 100 | <i>8EB8</i> | | | <i>6EB8</i> |
| 13000 | 40 | | | | <i>6LJ8</i> |
| 19000 | 75 | | <i>10LW8</i> | | |
| 20000 | 46 | <i>10KR8</i> | | | <i>6KR8-A</i> |
| 20000 | 100 | | | | <i>6LY8</i> |
| 21000 | 20 | 9AH9 | | | 6AH9 |
| 30000 | 39 | | | | 6AG9 |
| 30000 | 59 | 8AL9 | | | 6AL9 |

Type designations of miniature tubes are shown in italics.

PENTODE VOLTAGE AMPLIFIERS

| Gm μ mhos | Sharp-Cutoff | | | | | Remote-Cutoff | | | | |
|------------------|--|---|---|--------------|---|---|---|-------------|--------------|--|
| | Heater Current in Milliamperes | | | | | Heater Current in Milliamperes | | | | |
| | 600 | 450 | 300 | 150 | Other | 600 | 450 | 300 | 150 | Other |
| 3,000 to 4,900 | | | | <i>6BH6</i> | | | | | | |
| 5,000 to 7,900 | <i>1/8</i> 8BU11 | <i>4AU6</i> <i>1/2</i> 9BJ11 | <i>6AU6-A</i> | <i>12AU6</i> | <i>1/2</i> 6BH11 | | <i>1/2</i> 9BJ11 | <i>6BA6</i> | <i>12BA6</i> | <i>12DZ6</i> |
| 8,000 to 8,900 | <i>3CB6</i> | <i>4CB6</i> <i>4DE6</i> <i>1/2</i> 8BM11 | <i>6CB6-A</i> | | <i>1/2</i> 6BW11 | <i>3BZ6</i> <i>4LU6</i> | <i>4BZ6</i> <i>4JH6</i> <i>1/2</i> 8BM11 | <i>6BZ6</i> | | |
| 9,000 to 9,900 | <i>3DK6</i> | <i>4DK6</i> | <i>6DK6</i> | | | | | | | |
| 10,000 to 11,000 | <i>12DQ7</i> | <i>1/2</i> 14BR11 <i>1/2</i> 15AF11 <i>1/2</i> 15BD11 | <i>12DQ7</i> | | <i>1/2</i> 6AF11 <i>1/2</i> 6AS11 <i>1/2</i> 6BD11 | <i>2FS5</i> <i>8AR11</i> <i>1/2</i> 8BQ11 | <i>3FS5</i> <i>11AR11</i> <i>1/2</i> 11BQ11 | | | <i>6AR11</i> <i>6FS5</i> <i>1/2</i> 16BQ11 |
| 11,100 to 13,000 | <i>8BN11</i> <i>1/2</i> 8BQ11 <i>8CB11</i> <i>12BY7-A</i> | <i>1/2</i> 11BQ11 | <i>12BY7-A</i> | | <i>6J11</i> <i>6JG5</i> <i>1/2</i> 6M11 <i>1/2</i> 16BQ11 <i>1/2</i> 16BX11 | | <i>4EH7</i> <i>5GM6</i> | <i>6EH7</i> | | <i>6BN11</i> <i>1/2</i> 6BW11 <i>6GM6</i> |
| 14,000 to 14,900 | | <i>4JD6</i> <i>5EW6</i> | <i>6JD6</i> | <i>15EW6</i> | <i>6EW6</i> | | | | | |
| 15,000 to 22,000 | <i>2GU5</i> <i>3JC6</i> <i>1/2</i> 11BT11 <i>1/2</i> 11CA11 <i>1/2</i> 11CF11 <i>1/2</i> 11CH11 | <i>4EJ7</i> <i>4JC6</i> <i>1/2</i> 14BL11 | <i>6EJ7</i> <i>6JC6</i> <i>6JC6-A</i> | | <i>6GU5</i> | | | | | <i>1/2</i> 6CA11 |
| 30,000 to 40,000 | <i>12GN7-A</i> | <i>7KY6</i> | | | | | | | | <i>12HG7</i> |

PENTODE POWER AMPLIFIERS

| Service | Power Output in watts | Heater Current in Milliamperes | | | | | |
|---------------------------------|-----------------------|--|--|------------------------------|--|---|---|
| | | 600 | 450 | 300 | 150 | Other | |
| Output Amplifier | 1.0 to 1.9 | <i>12CA5</i> | <i>1/2</i> 12AE10 <i>1/2</i> 13V10 | <i>25EH6</i> | <i>6AK6</i> <i>35C5</i> <i>50EH5</i> <i>50HK6</i> | <i>1/2</i> 18AJ10 | |
| | 2.0 to 2.9 | <i>12C5</i> <i>12CU5</i> | <i>17CU5</i> | <i>25C5</i> | <i>50C5</i> | <i>1/2</i> 6G11 <i>6CU5</i> | |
| | 4.0 to 6.0 | <i>5AQ5</i> <i>8BQ5</i> <i>1/2</i> 10AL10 <i>1/2</i> 10T10 <i>1/2</i> 10Z10 <i>1/2</i> 12BF11 | <i>6AQ5-A</i> <i>6V6-GTA</i> <i>10GK6</i> <i>1/2</i> 12AL11 <i>1/2</i> 12T10 <i>1/2</i> 13Z10 <i>1/2</i> 17AB10 <i>1/2</i> 17BF11 <i>1/2</i> 17BF11-A <i>7408</i> | | | <i>1/2</i> 6AD10 <i>1/2</i> 6AD10-A <i>1/2</i> 6AL11 <i>1/2</i> 6BF11 <i>6BQ5</i> <i>1/2</i> 6BY11 | <i>6GK6</i> <i>1/2</i> 6T10 <i>1/2</i> 6Z10 <i>1/2</i> 24BF11 <i>7189-A</i> |
| | 9.0 to 12.5 | | | | | <i>6L6-GC</i> <i>6550-A</i> | <i>7355</i> <i>7581-A</i> |
| Horizontal-Deflection Amplifier | | <i>12DQ6-B</i> <i>12GE5</i> <i>12JF5</i> <i>12JN6</i> <i>16GY5</i> <i>16KA6</i> <i>21JS6-A</i> <i>21LG6-A</i> <i>24LQ6</i> <i>26HU5</i> <i>26LW6</i> <i>26LX6</i> | <i>17DQ6-B</i> <i>17GE5</i> <i>17GV5</i> <i>17JB6-A</i> <i>17JM6</i> <i>17JN6</i> <i>21GV5</i> <i>21HB5-A</i> <i>21JV6</i> <i>21JZ6</i> <i>21KA6</i> <i>31JS6-A</i> <i>1/2</i> 33CT7 <i>1/2</i> 33CV7 <i>1/2</i> 33CV7-A <i>36KD6</i> <i>1/2</i> 38HE7 <i>1/2</i> 38HK7 <i>40KD6</i> | <i>30JZ6</i> <i>33JV6</i> | | <i>6DQ6-B</i> <i>6CE5</i> <i>6CF5</i> <i>6CV5</i> <i>6CY5</i> <i>6HB5</i> <i>6HE5</i> <i>6HF5</i> <i>6JB6-A</i> <i>6JE6-B</i> <i>6JE6-C</i> | <i>6JM6</i> <i>6JN6</i> <i>6JS6-B</i> <i>6JS6-C</i> <i>6JZ6</i> <i>6KD6</i> <i>6LB6</i> <i>6LW6</i> <i>6LX6</i> <i>1/2</i> 12HE7 <i>1/2</i> 32HQ7 <i>1/2</i> 53HK7 |
| Vertical-Deflection Amplifier | | <i>10JA5</i> <i>1/2</i> 16AK9 <i>1/2</i> 16LU8 <i>1/2</i> 16LU8-A | <i>1/2</i> 21LR8 <i>1/2</i> 21LU8 <i>1/2</i> 23Z9 | | | <i>6EZ5</i> <i>6HB6</i> <i>6HE5</i> <i>1/2</i> 6LR8 <i>1/2</i> 6LU8 <i>6JA5</i> | <i>6JB5</i> <i>1/2</i> 6AK9 <i>1/2</i> 31AL10 |

Type designations of miniature tubes are shown in italics.

| Classification | Heater Current in Milliamperes | | | | Other |
|---------------------|--------------------------------|-----|-----|-----|--|
| | 600 | 450 | 300 | 150 | |
| Shunt HV Regulators | | | | | 6BK4-C 6EH4-A 6EJ4-A 6EL4-A 6EN4 6LH6-A 6LJ6-A 6MA6 |
| Pulse Regulators | | | | | 6HS5 6HV5-A 6JD5 6JH5 6JK5 |

PENTODES WITH DIODES

| Classification | | Heater Current in Milliamperes | | | | Other |
|----------------------|-------------------------------|--------------------------------|------------------------------|-----|-----|--------------|
| | | 600 | 450 | 300 | 150 | |
| Sharp-Cutoff Pentode | with 1 diode with 2 diodes | <i>5AM8</i> <i>6LT8</i> | <i>6AM8-A</i> <i>8LT8</i> | | | <i>11LT8</i> |

DUAL-CONTROL PENTODES

| Classification | Heater Current in Milliamperes | | | | Other |
|------------------------|--|--|------------------------------|-----|---|
| | 600 | 450 | 300 | 150 | |
| Dual-Control Amplifier | <i>3DT6</i> <i>½10AL11</i> <i>½10T10</i> <i>½12BF11</i> | <i>4DT6</i> <i>6GX6</i> <i>6GY6</i> <i>6HZ6</i> <i>½12AE10</i> <i>½12AL11</i> <i>½12T10</i> <i>½13V10</i> <i>½17BF11</i> <i>½17BF11-A</i> | <i>6DT6</i> <i>6DT6-A</i> | | <i>½6AD10</i> <i>½6AD10-A</i> <i>½6AL11</i> <i>½6BF11</i> <i>½6BY11</i> <i>½6C11</i> <i>½6T10</i> <i>½18AJ10</i> <i>½24BF11</i> |

HEPTODES

| Service | Conversion Transconductance in Micromhos | Heater Current in Milliamperes | | | | Other |
|------------------------|--|--------------------------------|-------------|-------------|--------------|-------|
| | | 600 | 450 | 300 | 150 | |
| Converter | 450 to 500 | | | <i>6BE6</i> | <i>12BE6</i> | |
| Dual-Control Amplifier | | <i>3CS6</i> | <i>4CS6</i> | <i>6CS6</i> | | |

MISCELLANEOUS TYPES

| Classification | Heater Current in Milliamperes | | | | Other |
|------------------|---|---|--|-----|-----------------------------|
| | 600 | 450 | 300 | 150 | |
| Quadruple Diodes | <i>6JU8</i> <i>6JU8-A</i> | | | | |
| Triode-Tetrodes | | <i>6CL8-A</i> | | | |
| Tetrodes | <i>2CY5</i> | | | | <i>6CY5</i> |
| Twin Pentodes | <i>3BU8</i> <i>3HS8</i> <i>½6BA11</i> | <i>4BU8</i> <i>4HS8</i> <i>4MK8</i> <i>½8BA11</i> <i>10LE8</i> <i>12BV11</i> | <i>6BU8</i> <i>6HS8</i> <i>6MK8-A</i> | | <i>6BV11</i> <i>6LE8</i> |
| Gated-Beam Tube | <i>½10Z10</i> | <i>½13Z10</i> <i>½17AB10</i> | <i>6KS6</i> | | <i>½6Z10</i> |
| Sheet-Beam Tube | | | <i>6AR8</i> <i>6HW8</i> <i>6JH8</i> <i>6ME8</i> | | |

Type designations of miniature tubes are shown in italics.

SPECIAL-PURPOSE TYPES

| Classification | Diodes | | Triodes | | | Tetrodes | | Pentodes | | | Hep- todes Dual Control | Triode- Pen- todes |
|---|----------------------------|--------------------------|-------------|---|-------------|----------------|----------------------------|----------------------------|--|---|----------------------------------|---|
| | Single | Twin | Single | Twin | Double | With Diodes | Sharp Cutoff | Re- mote Cut- off | Power Amplifier | Regu- lator | | |
| Com- puter Types | | | | <i>6844</i> <i>6963</i> <i>6211-A</i> <i>6350</i> <i>6463</i> <i>7044</i> | | | | | <i>6197</i> | | | |
| Low- Micro- phonic Types | | | | <i>12AY7</i> | | | | | | | | |
| Mobile- Com- muni- ca- tions Types | | <i>6663</i> | <i>6664</i> | <i>6679</i> <i>6680</i> <i>6681</i> | | <i>7724</i> | <i>7167</i> <i>7717</i> | <i>6661</i> <i>6676</i> | <i>6660</i> <i>6662</i> | <i>6669</i> <i>6677</i> <i>7701</i> | | <i>6678</i> <i>7716</i> <i>8102</i> |
| Miscel- laneous | <i>5558</i> <i>5561</i> | <i>5R4</i> <i>GYA</i> | <i>7233</i> | <i>6AS7-GA</i> <i>6DJ8</i> <i>5998-A</i> <i>6080</i> <i>7025</i> <i>7370</i> | <i>7247</i> | | <i>6486</i> <i>8136</i> | | <i>6AK6</i> <i>5824</i> <i>6046</i> <i>7189-A</i> <i>7355</i> <i>7408</i> <i>7581</i> <i>7581-A</i> <i>8068</i> | <i>7239</i> | | |
| Low- Power Trans- mitting | | | | | | | | | <i>2DF4</i> <i>807</i> <i>6146-A</i> <i>6146-B</i> <i>6550-A</i> <i>6883-A</i> <i>6883-B</i> <i>7984</i> <i>8106</i> <i>8156</i> <i>8908</i> | | | |

Type designations of miniature tubes are shown in italics.

THYRATRONS

| Classification | DC Cathode Current in Amperes | Peak Inverse Anode Voltage | Filament or Heater | | Types |
|----------------|-------------------------------------|----------------------------------|---------------------|-----------------------|-----------|
| | | | Voltage in Volts | Current in Amperes | |
| Triodes | 0.025 | 350 | 6.3 | 0.25 | *6D4 |
| | 0.075 | 350 | 6.3 | 0.5 | 884 |
| | 0.5 | 500 | 2.5 | 5.0 | FG-81A |
| | 0.5 | 5000 | 2.5 | 5.0 | 5557 |
| | 1.0 | 1250 | 2.5 | 6.3 | 6014/C1K |
| | 1.5 | 1250 | 2.5 | 7.0 | 3C23 |
| | 1.5 | 1250 | 2.5 | 7.0 | 393A |
| | 1.6 | 20000 | 5.0 | 10.0 | 563A |
| | 1.6 | 15000 | 5.0 | 7.5 | 678 |
| | 2.5 | 1250 | 2.5 | 9.0 | 710/6011 |
| | 2.5 | 1250 | 2.5 | 9.0 | 710L/7518 |
| | 2.5 | 1000 | 5.0 | 4.5 | 5559 |
| | 2.5 | 1250 | 2.5 | 9.0 | 5632/C3J |
| | 2.5 | 1000 | 5.0 | 4.5 | 5720 |
| | 2.5 | 1000 | 5.0 | 4.5 | 5728 |
| | 2.5 | 3500 | 2.5 | 9.0 | 7725 |
| | 2.5 | 3500 | 2.5 | 9.0 | 7726 |
| | 3.2 | 1500 | 2.5 | 12.0 | 5544 |
| | 5.0 | 3000 | 5.0 | 19.0 | 414 |
| | 6.4 | 1500 | 2.5 | 21.0 | 6807 |
| 6.4 | 1500 | 2.5 | 21.0 | 6808 | |
| 6.4 | 1500 | 2.5 | 21.0 | 6809 | |
| 6.4 | 1500 | 2.5 | 21.0 | 6858/760 | |
| 6.4 | 1500 | 2.5 | 21.0 | 6859/760P | |
| 12.5 | 10000 | 5.0 | 20.0 | 5830 | |
| 16.0 | 1250 | 2.5 | 31.0 | 5665/C16J | |
| 18.0 | 1500 | 2.5 | 34.0 | 5855 | |
| Tetrodes | 0.2 | 500 | 6.3 | 0.15 | *5663 |
| | 0.028 | 500 | 6.3 | 0.15 | *5696A |
| | 0.1 | 1300 | 6.3 | 0.6 | *2D21 |
| | 0.1 | 1300 | 6.3 | 0.6 | 502A |
| | 0.1 | 1300 | 6.3 | 0.6 | 2050A |
| | 0.1 | 1300 | 6.3 | 0.6 | **5727 |
| | 0.5 | 1000 | 2.5 | 5.0 | FG-97 |
| | 0.5 | 500 | 2.5 | 5.0 | FG-98A |
| | 0.5 | 1300 | 6.3 | 2.5 | 6012 |
| | 2.5 | 500 | 5.0 | 7.0 | FG-154 |
| | 2.5 | 1000 | 5.0 | 4.5 | 5560 |
| | 3.2 | 2500 | 5.0 | 5.0 | 672A |
| | 6.4 | 2500 | 5.0 | 10.0 | FG-105 |
| | 6.4 | 2000 | 5.0 | 10.0 | FG-172 |

*Miniature types

**Five-Star Type

PLANAR AND CERAMIC TYPES

| Classification | Type | Approx. Envelope Diameter | Type of Terminal | Maximum Ratings | | Gm | μ | Typical Operation | Useful Frequencies Extend to * |
|-------------------------------|----------|---------------------------|------------------|--|------------------------|-------|---------------------------------|--------------------------------------|--------------------------------|
| | | | | Plate Dissipation (Watts) | Current (Milliamperes) | | | | |
| Triode Class A Operation | 2C40A | 1.3" | Octal | 6.5 ▲ | ib = 25 | 5100 | 35 | UHF Amp. | 3370 MHz |
| | 6299 | 0.5" | Coax. | 2.0 | ib = 12 | 15000 | 110 | Low Noise UHF Amp. | 3000 MHz |
| | 6771 | 0.5" | Coax. | 6.25 ▲ | ib = 25 | 23000 | 90 | UHF Amp. | 4000 MHz |
| | 7077 | 0.3" | Coax. | 1.0 | ik = 10 | 10000 | 90 | Low Noise UHF Amp. | 7500 MHz |
| | 7296 | 0.5" | Lug(T) | 5.5 | ik = 30 | 16500 | 90 | VHF Amp. | 500 MHz |
| | 7462 | 0.3" | Lug | 2.0 | ik = 10 | 10500 | 94 | Low Noise VHF Amp. | 500 MHz |
| | 7644 | 0.5" | Coax. | 1.0 | ib = 12 | 15000 | 110 | Low Noise VHF Amp. | 3000 MHz |
| | 7768 | 0.5" | Coax. | 5.5 | ik = 30 | 50000 | 225 | Low Noise RF Amp. | 3000 MHz |
| | 7784 | 0.5" | Coax. | 2.0 | ib = 12 | 15000 | 110 | Low Noise VHF Amp. | 3000 MHz |
| | 8083 | 0.3" | Lug(T) | 1.0 | ik = 10 | 10500 | 94 | Low Noise VHF Amp. | 500 MHz |
| Triode Class B or C Operation | 2C39A | 1.2" | Coax. | 100 ▲ | ik = 125 | 22000 | 100 | UHF Power Amp., Osc., or Freq. Mult. | 2500 MHz |
| | 2C39B | 1.3" | Coax. | 100 | ik = 125 | 24800 | 95 | UHF Power Amp., Osc., or Freq. Mult. | 2500 MHz |
| | 2C39WA | 1.3" | Coax. | 100 | ik = 125 | 24800 | 95 | UHF Power Amp., Osc., or Freq. Mult. | 2500 MHz |
| | 2C40A | 1.3" | Octal | 6.5 ▲ | ib = 25 | 5100 | 35 | UHF Power Amp., or Osc. | 3370 MHz |
| | 2C43 | 1.3" | Octal | 12.0 ▲ | ib = 40 | 8100 | 50 | UHF Power Amp., or Osc. | 3000 MHz |
| | 3CX100A5 | 1.3" | Coax. | 100 ▲ | ik = 125 | 25000 | 100 | UHF Power Amp., Osc., or Freq. Mult. | 3000 MHz |
| | 6442 | 0.5" | Coax. | 8.0 ▲ | ib = 35 | 16500 | 50 | UHF Power Amp., Osc., or Freq. Mult. | 5000 MHz |
| | 6771 | 0.5" | Coax. | 6.25 ▲ | ib = 25 | 23000 | 90 | UHF Power Amp., Osc., or Freq. Mult. | 6000 MHz |
| | 6897 | 1.3" | Coax. | 100 ▲ | ik = 125 | 24800 | 95 | UHF Power Amp., Osc., or Freq. Mult. | 2500 MHz |
| | 7289 | 1.0" | Coax. | 100 ▲ | ik = 125 | 25000 | 100 | UHF Power Amp., Osc., or Freq. Mult. | 3000 MHz |
| | 7296 | 0.5" | Lug(T) | 5.5 | ik = 30 | 16500 | 90 | VHF Power Amp., Osc., or Freq. Mult. | 500 MHz |
| | 7391 | 0.5" | Coax. | 2.25 ▲ | ib = 15 | 11000 | 62 | UHF Power Amp., Osc., or Freq. Mult. | 6000 MHz |
| | 7486 | 0.3" | Coax. | 1.0 | ik = 10 | 10500 | 90 | UHF Power Amp., Osc., or Freq. Mult. | 7500 MHz |
| | 7588 | 0.5" | Lug(T) | 5.5 | ik = 30 | 45000 | 175 | Low Noise VHF Amp. | 500 MHz |
| | 7720 | 0.3" | Lug | 1.0 | ik = 10 | 10500 | 90 | VHF Power Amp., Osc., or Freq. Mult. | 500 MHz |
| | 7913 | 0.5" | Coax. | 5.5 | ik = 30 | 40000 | 100 | VHF Power Amp., Osc., or Freq. Mult. | 3000 MHz |
| | 8082 | 0.3" | Lug(T) | 1.0 | ik = 11 | 10500 | 90 | VHF Power Amp., Osc., or Freq. Mult. | 500 MHz |
| | GE12661 | 0.3" | Coax. | 4.0 | ik = 40 | 8500 | 40 | Power Osc. | 3000 MHz |
| | GE14501 | 0.3" | Coax. | 2.0 | ik = 80 | 12500 | 90 | Power Amp. or Osc. | 7500 MHz |
| | GE16411 | 0.3" | Coax. | 1.0 | ik = 40 | 12500 | 75 | Power Amp. or Osc. | 7500 MHz |
| GE16841 | 0.3" | Coax. | 1.5 | ik = 20 | 17000 | 78 | CW Amp. or Osc. | 7500 MHz | |
| Triode Pulse Operation | 2C40A | 1.3" | Octal | 4.0 ▲ | ib = 2000 | 5100 | 35 | Pulsed Osc. or Amp. | 3000 MHz |
| | 2C42 | 1.3" | Octal | 12.0 ▲ | ik = 4000 | 8000 | 48 | UHF Oscillator | 3370 MHz |
| | 2C43 | 1.3" | Octal | 12.0 | ik = 4000 | 8100 | 50 | Pulsed Osc. or Amp. | 3370 MHz |
| | 2C46 | 1.3" | Octal | 12.0 | ib = 40 | 3500 | 60 | UHF Osc. | 3370 MHz |
| | 6442 | 0.5" | Coax. | 7.5 ▲ | ik = 3750 | 16500 | 50 | Pulsed Osc. or Amp. | 5000 MHz |
| | 6771 | 0.5" | Coax. | 5.0 ▲ | ik = 1950 | 23000 | 90 | Pulsed Osc. or Amp. | 5000 MHz |
| | 7815 | 1.2" | Coax. | 10.0 ▲ | ip = 3000 | | | Pulsed Osc. or Amp. | 3000 MHz |
| | 7815R | 1.3" | Coax. | 100 ▲ | lg = 5.0 ip = 3000 | | | Pulsed Osc. or Amp. | 3000 MHz |
| | 7910 | 0.3" | Coax. | 1.5 | ik = 800 | 16000 | 75 | Pulsed Osc. or Amp. | 7500 MHz |
| | 7911 | 0.5" | Coax. | 6.5 | ik = 3500 | 25000 | 58 | Pulsed Osc. or Amp. | 6000 MHz |
| | GE13971 | 0.6" | Coax. | 6.5 | ik = 1810 | 25000 | 58 | Pulsed Osc. or Amp. | 6000 MHz |
| | GE14811 | 0.6" | Coax. | 6.5 | ik = 1200 | 29000 | 60 | Pulsed Osc. | 6000 MHz |
| GE15371 | 0.5" | Coax. | 10.0 | ik = 2000 | 22000 | 85 | Pulsed Osc. and Amp. | 6000 MHz | |
| GE16231 | 0.6" | Coax. | 6.5 | ik = 600 | 50000 | 225 | Pulsed Amp. | 3000 MHz | |
| GE17241 | 0.7" | Coax. | 10.0 | ik = 3000 | 13500 | 95 | Pulsed Osc. and Amp. | 3000 MHz | |
| GE17701 | 0.7" | Coax. | 30.0 | ik = 6000 | 26000 | 58 | Pulsed Osc. or Amp. | 3000 MHz | |
| GE18651 | 0.6" | Coax. | 6.5 | ik = 1860 | 22000 | 58 | Pulsed Osc. or Amp. | 6000 MHz | |
| GL51025 | 1.2" | Coax. | 110 | ik = 15000 | | | Pulsed Osc. | 1300 MHz | |
| GL51074 | 1.2" | Coax. | 110 | | | | High Voltage Version of GL51025 | 1300 MHz | |
| Diodes | 2B22 | 1.3" | Octal | Tube Voltage Drop: Ib = 20 Milliamperes | | | Power Detector or Mon. | | 1500 MHz |
| | 7266 | 0.3" | Octal | Tube Voltage Drop: 1 Volt @ 1.0 Milliamperes | | | Instrument Detector | | 7500 MHz |
| | 7841 | 0.3" | Octal | Tube Voltage Drop: 2.6 Volts @ 5.0 Milliamperes | | | Signal Detector | | 7500 MHz |
| | GL6251 | 5.0" | Coax. | 25KW | ik = 8000 | | | Power Amp. or Osc. | 220 MHz |

PLANAR AND CERAMIC TYPES (Cont'd)

| Classification | Type | Approx. Envelope Diameter | Type of Terminal | Maximum Ratings | | Gm | μ | Typical Operation | Useful Frequencies Extend to * |
|----------------|----------|---------------------------|------------------|---------------------------|-------------------------|-------|-------|-----------------------|--------------------------------|
| | | | | Plate Dissipation (Watts) | Current (Milli-amperes) | | | | |
| Tetrodes | GL6283 | 2.3" | Coax. | 500 | ib = 250 | | 14 | Mil. Comm. System | 1250 MHz |
| | GL6848 | 4.0" | Coax. | 2.0KW | ib = 800 | | 20 | Power Amp. or Osc. | 800 MHz |
| | GL6942 | 3.5" | Coax. | 1.5KW | ib = 700 | | 17 | UHF Amp. or Osc. | 1000 MHz |
| | GL7399 | 2.3" | Coax. | 500 | ib = 10000 | | 10.5 | Pulsed Amp. or Osc. | 1500 MHz |
| | GL7985 | 2.7" | Coax. | 3.5KW | ib = 600 | | 20 | Power Amp. or Osc. | 800 MHz |
| | GL8500 | 2.3" | Coax. | 500 | ib = 250 | | 14 | Power Amp. | 1500 MHz |
| | GL8513 | 6.0" | Coax. | 4.0KW | | | 20 | Power Amp. or Osc. | 800 MHz |
| | GL8866 | 1.7" | Coax. | 150 | ib = 5000 | | | Pulsed Amp. or Osc. | 1500 MHz |
| | GL51038 | 2.0" | Coax. | 600 | ib = 10000 | | | Pulsed Amp. | 1500 MHz |
| | GL51038R | 2.0" | Coax. | 600 | ib = 10000 | | | Pulsed Amp. | 1500 MHz |
| | GL51064 | 4.0" | Coax. | 2.75KW | ib = 700 | | 17 | VHF-UHF Mil. Comm. | 1500 MHz |
| | GL51065 | 2.0" | Coax. | 600 | ib = 6000 | | | Detector Equip. | 1250 MHz |
| | GL51070 | | Coax. | 600 | | | | CW Version of GL51065 | 1500 MHz |
| | | | | | | | | | 900 MHz |

*The frequency listed is one at which significant application data are available or expected, and does not necessarily represent an absolute frequency limit.

(T) Provision is made for mounting with T-bolt.

▲At this dissipation level, anode cooling is usually necessary to prevent exceeding maximum permissible seal temperature.

IGNITRONS

| Classification | Maximum Electrical Ratings | | | | | Types | |
|------------------------------------|----------------------------|--------------------|---|---------------------------------------|--------------------------|----------------------|---------|
| | Supply Volts RMS | Maximum Demand KVA | Corresponding Average Anode Current Amperes | Maximum Average Anode Current Amperes | Corresponding Demand KVA | | |
| Resistance Welding Control Service | 250-600 | 300 | 12.1 | 22.4 | 100 | GL-5550 | |
| | 250-600 | 600 | 30.2 | 56 | 200 | GL-5551A/GL-5551A-PC | |
| | 250-600 | 1200 | 75.6 | 140 | 400 | GL-5552A/GL-5552A-PC | |
| | 250-600 | 2400 | 192 | 355 | 800 | GL-5553B/GL-5553B-PC | |
| | 2400 | 1200 | 75 | 113 | 600 | GL-5554 | |
| | 2400 | 2400 | 135 | 207 | 1105 | GL-5555 | |
| | 2400 | 4800 | 270 | 414 | 2210 | GL-5564 | |
| | Integral Apply. | Thermostat | Version of GL-5554. Same Ratings | | | | |
| | Integral Apply. | Thermostat | Version of GL-5555. Same Ratings | | | | GL-6512 |
| | Integral Apply. | Thermostat | Version of GL-5564. Same Ratings | | | | GL-6513 |
| | 250-600 | 4800(1) | 486 | 900 | 1600 | GL-6515 | |
| | 250-600 | 600 | 30.2 | 56 | 200 | GL-7151 | |
| | 250-600 | 1200 | 75.6 | 140 | 400 | GL-7669/GL-7669-PC | |
| | 250-600 | 2400 | 192 | 355 | 800 | GL-7671/GL-7671-PC | |
| | 250-600 | 1800 | 135 | 220 | 600 | GL-7673/GL-7673-PC | |
| | 250-600 | 1800 | 135 | 220 | 600 | GL-7681/GL-7681-PC | |
| | 250-600 | 1800 | 135 | 220 | 600 | GL-7998/GL-7998-PC | |
| | 250-600 | 4800(1) | 486 | 900 | 1600 | GL-8205 | |
| | 250-600 | 1000 | 43.2 | 75 | 200 | GL-37250/GL-37250-PC | |
| | 250-600 | 1000 | 43.2 | 75 | 200 | GL-37251/GL-37251-PC | |
| 250-600 | 2000 | 108 | 150 | 380 | GL-37252/GL-37252-PC | | |
| 250-600 | 2000 | 108 | 150 | 380 | GL-37253/GL-37253-PC | | |
| 250-600 | 3000 | 224 | 400 | 1000 | GL-37254/GL-37254-PC | | |
| 250-600 | 3000 | 224 | 400 | 1000 | GL-37255/GL-37255-PC | | |

| Classification | Peak Inverse Voltage Volts | Maximum Peak Anode Current Amperes | Corresponding Average Anode Current Amperes | Maximum Average Anode Current Amperes | Corresponding Peak Anode Current Amperes | Types | |
|---|----------------------------|------------------------------------|---|---|--|-------------|-----------|
| Frequency Changer Welding Control Service | 1200 | 600 | 5 | 22.5 | 135 | GL-5551A | |
| | 1500 | 480 | 4 | 18 | 108 | GL-5551A-PC | |
| | 1200 | 3000 | 40 | 140 | 840 | GL-5553B | |
| | 1500 | 2400 | 32 | 112 | 672 | GL-5553B-PC | |
| | 1200 | 1500 | 20 | 70 | 420 | GL-5822A | |
| | 1500 | 1200 | 16 | 56 | 336 | GL-5822A-PC | |
| | 1200 | 600 | 5 | 22.5 | 135 | GL-7660 | |
| | 1500 | 480 | 4 | 18 | 108 | GL-7660-PC | |
| | 1200 | 1500 | 20 | 70 | 420 | GL-7672 | |
| | 1500 | 1200 | 16 | 56 | 336 | GL-7672-PC | |
| | 1200 | 3000 | 40 | 140 | 840 | GL-7673 | |
| | 1500 | 2400 | 32 | 112 | 672 | GL-7673-PC | |
| | 1200 | 2250 | 30 | 105 | 630 | GL-7681 | |
| | 1500 | 1800 | 24 | 84 | 502 | GL-7681-PC | |
| | 1200 | 2250 | 30 | 105 | 630 | GL-7998 | |
| 1500 | 1800 | 24 | 84 | 502 | GL-7998-PC | | |
| Capacitor Discharge Service | Peak Anode Voltage Volts | | Peak Anode Current Amperes | Typical Discharge Rate Pulse Per Minute | Ionization Time-Microseconds | | |
| | Forward | Inverse | | | | | |
| | 35,000 | 35,000 | 20,000 | 2 | 0.8 | | GL-5630 |
| | 50,000 | 50,000 | 30,000 | 2 | 0.8 | | GL-6228 |
| | 15,000 | 15,000 | 35,000 | 2 | 0.5 | | GL-7171 |
| | 20,000 | 20,000 | 100,000 | 2 | 0.5 | | GL-7703** |
| 25,000 | 25,000 | 300,000 | 500 | 0.5 | GL-37207 | | |
| | 50,000 | 50,000 | 25,000 | 2 | 0.7 | GL-37248** | |

(1) Maximum demand current below 500 volts should not exceed 9600 amperes RMS.
 PC indicates plastic coated version.
 **All ratings based on use of liquid cooling except GL-7171 (air cooled), GL-7703 & GL-37248 (liquid or air).

VIDICONS

| Classification | Type |
|---|------------|
| Monochrome Film & CC TV Cameras | 7038 |
| | 8572 |
| | 8604 |
| Broadcast Color Television Cameras | 7038V |
| | Z7929R,B,G |
| | 8134V |
| | 8572V |
| General use in CC TV and Educational TV Cameras | 7262A |
| | 7735A |
| | 8573A |
| | 8134 |
| | 7263A |
| Ruggedized use in Military and CC TV Cameras | Z7912 |
| | 7735B |
| High Quality CC TV, Broadcast and Educational TV Cameras | 8507A |
| | 8541A |
| | Z7911 |
| Low Cost CC TV and Educational TV Cameras | Z7919 |
| | 8484H |
| Low Light Level for CC TV and Educational Cameras | 7735BX |
| High Quality Medical X-Ray TV Cameras | 8541X |
| | 8573X |
| | Z7975B |
| Extremely Low Light Level for CC TV and Educational Cameras | Z7975HRB |
| | Z7996B |
| | Z7996HRB |
| | Z7927B |
| | Z7927HRB |

X-RADIATION RATED RECOMMENDED REPLACEMENTS FOR HIGH VOLTAGE RECTIFIER AND SHUNT REGULATOR TUBES

HIGH VOLTAGE RECTIFIERS

| Tube Type | Replacement X-Radiation Rated Version | Current GE Renewal Branding | Tube Type | Replacement X-Radiation Rated Version | Current GE Renewal Branding |
|-----------|---|-----------------------------------|-----------|---|-----------------------------------|
| 1AD2 | 1AD2A | 1BY2A/1AD2A | 2V2 | — | — |
| 1AD2A | 1AD2A | 1BY2A/1AD2A | 2V3G | — | — |
| 1AJ2 | — | — | 2X2 | — | — |
| 1AU2 | — | — | 2X2A | — | — |
| 1AU3 | — | — | 2Y2 | — | — |
| 1AX2 | — | — | 3A2 | 3A2A | — |
| 1AY2 | 1AY2A | 1AY2A | 3A2A | 3A2A | — |
| 1AY2A | 1AY2A | 1AY2A | 3A3 | 3A3C | 3A3C/3AW3/3B2 |
| 1B3GT | 1G3GTA | 1G3GTA/1B3GT | 3A3A | 3A3C | 3A3C/3AW3/3B2 |
| 1BC2 | 1BC2A | 1BC2A | 3A3B | 3A3C | 3A3C/3AW3/3B2 |
| 1BC2A | 1BC2A | 1BC2A | 3A3C | 3A3C | 3A3C/3AW3/3B2 |
| 1BC2B | 1BC2B | 1BC2B | 3AT2 | 3AT2B | 3AT2B |
| 1BH2 | 1BH2A | 1BH2A | 3AT2A | 3AT2B | 3AT2B |
| 1BH2A | 1BH2A | 1BH2A | 3AT2B | 3AT2B | 3AT2B |
| 1BK2 | — | — | 3AW2 | 3AW2A | 3AW2A |
| 1BL2 | — | — | 3AW2A | 3AW2A | 3AW2A |
| 1BV2 | — | — | 3AW3 | 3A3C | 3A3C/3AW3/3B2 |
| 1BX2 | 1X2C | 1X2C/1BX2 | 3B2 | 3A3C | 3A3C/3AW3/3B2 |
| 1BY2 | 1BY2A | 1BY2A/1AD2A | 3BF2 | — | — |
| 1BY2A | 1BY2A | 1BY2A/1AD2A | 3BL2 | 3BL2A | 3BL2A |
| 1DG3 | 1DG3 | 1DG3 | 3BL2A | 3BL2A | 3BL2A |
| 1DG3A | 1DG3A | 1DG3A | 3BM2 | 3BM2A | 3BM2A |
| 1G3GT | 1G3GTA | 1G3GTA/1B3GT | 3BM2A | 3BM2A | 3BM2A |
| 1G3GTA | 1G3GTA | 1G3GTA/1B3GT | 3BN2 | 3BN2A | 3BN2A |
| 1H2 | — | — | 3BN2A | 3BN2A | 3BN2A |
| 1J3 | 1K3A | 1K3A/1J3 | 3BS2 | 3BS2B | 3BW2/3BS2B/3BT2A |
| 1J3A | 1K3A | 1K3A/1J3 | 3BS2A | 3BS2B | 3BW2/3BS2B/3BT2A |
| 1K3 | 1K3A | 1K3A/1J3 | 3BS2B | 3BS2B | 3BW2/3BS2B/3BT2A |
| 1K3A | 1K3A | 1K3A/1J3 | 3BT2 | 3BT2A | 3BW2/3BS2B/3BT2A |
| 1N2 | — | — | 3BT2A | 3BT2A | 3BW2/3BS2B/3BT2A |
| 1N2A | — | — | 3BW2 | 3BW2 | 3BW2/3BS2B/3BT2A |
| 1S2 | — | — | 3C2 | — | — |
| 1S2A | — | 1S2A/DY87 | 3CA3 | 3CA3A | 3CA3A |
| 1T2 | — | — | 3CA3A | 3CA3A | 3CA3A |
| 1V2 | — | 1V2 | 3CN3 | 3CN3B | 3CN3B |
| 1X2 | 1X2C | 1X2C/1BX2 | 3CN3A | 3CN3B | 3CN3B |
| 1X2A | 1X2C | 1X2C/1BX2 | 3CN3B | 3CN3B | 3CN3B |
| 1X2B | 1X2C | 1X2C/1BX2 | 3CU3 | 3CU3A | 3CU3A |
| 1X2C | 1X2C | 1X2C/1BX2 | 3CU3A | 3CU3A | 3CU3A |
| 1Y2 | — | — | 3CV3 | 3CV3A | — |
| 1Z2 | — | — | 3CV3A | 3CV3A | — |
| 2AH2 | 2BU2 | 2BU2/2AS2A/2AH2 | 3CX3 | 3DA3 | 3DA3/3CX3 |
| 2AS2 | 2AS2A | 2BU2/2AS2A/2AH2 | 3CY3 | 3DB3 | 3DB3/3CY3 |
| 2AS2A | 2AS2A | 2BU2/2AS2A/2AH2 | 3CZ3 | 3CZ3A | 3CZ3A |
| 2AV2 | — | 2AV2 | 3CZ3A | 3CZ3A | 3CZ3A |
| 2AZ2 | — | — | 3DA3 | 3DA3 | 3DA3/3CX3 |
| 2B3 | — | — | 3DB3 | 3DB3 | 3DB3/3CY3 |
| 2BA2 | — | — | 3DC3 | 3DC3 | 3DC3 |
| 2BJ2 | 2BJ2A | — | 3DF3 | 3DF3 | 3DF3 |
| 2BJ2A | 2BJ2A | — | 3DF3A | 3DF3A | 3DF3A |
| 2BU2 | 2BU2 | 2BU2/2AS2A/2AH2 | 3DH3 | 3DH3 | 3DH3 |
| 2CN3A | 2CN3B | 2CN3B | 3DJ3 | 3DJ3 | 3DJ3 |
| 2CN3B | 2CN3B | 2CN3B | 3DR3 | 3DR3 | 3DR3 |
| 2J2 | — | — | 3DS3 | 3DS3 | 3DS3 |
| 2L2 | — | — | 5642 | — | — |

SHUNT REGULATORS

| Tube Type | Replacement X-Radiation Rated Version | Current GE Renewal Branding | Tube Type | Replacement X-Radiation Rated Version | Current GE Renewal Branding |
|------------------|--|--|------------------|--|--|
| 6BD4 | 6BK4C | 6BK4C/6EL4A | 6EJ4 | 6EJ4A | 6EJ4A |
| 6BD4A | 6BK4C | 6BK4C/6EL4A | 6EJ4A | 6EJ4A | 6EJ4A |
| 6BK4 | 6BK4C | 6BK4C/6EL4A | 6EL4 | 6EL4A | 6EL4A |
| 6BK4A | 6BK4C | 6BK4C/6EL4A | 6EL4A | 6EL4A | 6EL4A |
| 6BK4B | 6BK4C | 6BK4C/6EL4A | 6EN4 | 6EN4 | 6EN4 |
| 6BK4C | 6BK4C | 6BK4C/6EL4A | 6LC6 | 6LJ6A | 6LJ6A/6LH6A |
| 6BU4 | — | — | 6LH6 | 6LH6A | 6LJ6A/6LH6A |
| 6BU5 | — | — | 6LH6A | 6LH6A | 6LJ6A/6LH6A |
| 6EA4 | 6EH4A | 6EH4A | 6LJ6 | 6LJ6A | 6LJ6A/6LH6A |
| 6EF4 | 6EJ4A | 6EJ4A | 6LJ6A | 6LJ6A | 6LJ6A/6LH6A |
| 6EH4 | 6EH4A | 6EH4A | 6MA6 | 6MA6 | 6MA6 |
| 6EH4A | 6EH4A | 6EH4A | | | |

X-RADIATION SYMBOL DEFINITION

▣ The EIA Published Product Information, as of March 1, 1972, contains an X-radiation rating, as shown herein, for this tube type. Adequate shielding must be in place to limit X-radiation to a level consistent with Public Law 90-602 "Radiation Control for Health and Safety Act of 1968." For X-Radiation Characteristics, Controls, Measurements and Warning see JEDEC Publications 67A and 73A and the latest EIA Published Product Information for this type.

⊕ The EIA Published Product Information, as of March 1, 1972, does not contain an X-radiation rating for this type. Replace only with the latest X-radiation rated version of the same type or an X-radiation rated equivalent as shown in the High Voltage Rectifier and Shunt Regulator Interchangeability chart. Adequate shielding must be in place to limit X-radiation to a level consistent with Public Law 90-602 "Radiation Control for Health and Safety Act of 1968."

| Tube Type | Classification by Construction | Base Connections | Out-line Dwg | Filament Volts | Filament Amp | Max Plate Watts | Max Plate Volts | Max Screen Volts and Watts * | Capacitance in Picofarads | | |
|----------------|--|------------------|--------------|----------------|--------------|-----------------|---|------------------------------|---|--------|------------|
| | | | | | | | | | Input | Output | Grid-plate |
| OOA | Triode Detector | 4D | 14-1 | 5.0 DC | 0.25 | — | 45 | — | 3.2 | 2.0 | 8.5 |
| O1-A | Low-Mu Triode | 4D | 14-1 | 5.0 DC | 0.25 | — | 135 | — | 3.1 | 2.2 | 8.1 |
| OA2 | Glow-Discharge Diode Voltage Regulator | 5B0 | 5-3 | — | — | — | Anode supply = 185 volts d-c min | | | | |
| OA3 | Glow-Discharge Diode Voltage Regulator | 4AJ | 12-7 | — | — | — | Anode supply = 105 volts d-c min | | | | |
| OA3A | Glow-Discharge Diode Voltage Regulator | 4AJ | 9-7 | — | — | — | Anode supply = 105 volts d-c min | | | | |
| OA4-G | Gas Triode | 4V | 12-7 | — | — | — | — | — | — | — | — |
| OA5 | Gas Pentode | 6CB | T-X | — | — | — | — | — | — | — | — |
| OB2 | Glow-Discharge Diode Voltage Regulator | 5B0 | 5-3 | — | — | — | Anode supply = 133 volts d-c min | | | | |
| OB3 | Glow-Discharge Diode Voltage Regulator | 4AJ | 12-7 | — | — | — | Anode supply = 125 volts d-c min | | | | |
| OB3A | Glow-Discharge Diode Voltage Regulator | 4AJ | 9-7 | — | — | — | Anode supply = 130 volts d-c min | | | | |
| OC2 | Glow-Discharge Diode Voltage Regulator | 5B0 | 5-3 | — | — | — | Anode supply = 115 volts d-c min | | | | |
| OC3 | Glow-Discharge Diode Voltage Regulator | 4AJ | 12-7 | — | — | — | Anode supply = 133 volts d-c min | | | | |
| OC3A | Glow-Discharge Diode Voltage Regulator | 4AJ | 9-7 | — | — | — | Anode supply = 133 volts d-c min | | | | |
| OD3 | Glow-Discharge Diode Voltage Regulator | 4AJ | 12-7 | — | — | — | Anode supply = 185 volts d-c min | | | | |
| OD3A | Glow-Discharge Diode Voltage Regulator | 4AJ | 9-7 | — | — | — | Anode supply = 185 volts d-c min | | | | |
| OY4 OY4-G | Half-Wave Gas Rectifier | 4BU | 8-3 T-X | — | — | — | Pins 7 and 8 must be connected together | | | | |
| OZ4 OZ4-G | Full-Wave Gas Rectifier | 4R | 8-3 T-X | — | — | — | — | — | — | — | — |
| OZ4-A | Full-Wave Gas Rectifier | 4R | 8-1 | — | — | — | — | — | — | — | — |
| IA3 | High-Frequency Diode | 5AP | 5-2 | 1.4 | 0.15 | — | — | — | — | — | — |
| IA4-p IA4-t | Remote-Cutoff RF Pentode | 4M 4K | 12-6 | 2.0 DC | 0.06 | — | 180 | 67.5 | 5.0▲ | 11.0▲ | 0.007 |
| IA5-GT | Power Amplifier Pentode | 6X | 9-11 | 1.4 DC | 0.05 | — | 110 | 110 | — | — | — |
| IA6 | Pentagrid Converter | 6L♦ | 12-6 | 2.0 DC | 0.06 | — | 180 | 67.5 | Osc I _{ct} = 0.2 ma R _{g1} = 50,000 ohms | | |

■ Compactron.
† Zero signal.
◆ Per section.

† Plate-to-plate.
◆ Maximum.
‡ Supply voltage.

◎ Subminiature type.
▲ Without external shield.
◆ Design maximum rating.

◎ Total for all similar sections.
◎ Absolute maximum rating.
Conversion transconductance.

● See X-Radiation Warning, page 4.

| Service | Plate Volts | Screen Volts | Neg Grid Volts | Plate Milli-amperes | Screen Milli-amperes | R _p Ohms | G _m μmhos | μ Factor | Load for Rated Output, Ohms | Power Output, Watts | Tube Type | |
|--|--|--------------|----------------|---------------------|----------------------|--|----------------------|--|-----------------------------|---------------------|--------------|------|
| Detector | 45 | — | 0 | 1.5 | — | 30,000 | 666 | 20 | — | — | OA | |
| Class A Amplifier | 135 | — | 9.0 | 3.0 | — | 10,000 | 800 | 8 | — | — | OA-A | |
| { d-c operating current = 5 ma min d-c operating current = 30 ma max } | | | | | | Ionization voltage = 155 volts d-c Operating voltage = 150 volts d-c Regulation (5 to 30 milliamperes) = 2.0 volts | | | | | | OA# |
| { d-c operating current = 5 ma min d-c operating current = 40 ma max } | | | | | | Ionization voltage = 100 volts d-c Operating voltage = 75 volts d-c Regulation (5 to 40 milliamperes) = 5.0 volts | | | | | | OA3 |
| { d-c operating current = 5 ma min d-c operating current = 40 ma max } | | | | | | Ionization voltage = 105 volts d-c Operating voltage = 90 volts d-c Regulation (5 to 40 milliamperes) = 6.5 volts | | | | | | OA3A |
| Peak cathode current = 100 ma max; d-c cathode current = 25 ma max; Starter anode drop = 55 volts; anode drop = 70 volts | | | | | | | | | | | | |
| Peak Cathode current = 10 ma min; Max power input = 1.0 watts; Anode firing voltage = 15 volts min | | | | | | | | | | | | |
| { d-c operating current = 5 ma min d-c operating current = 30 ma max } | | | | | | Ionization voltage = 115 volts d-c Operating voltage = 105 volts d-c Regulation (5 to 30 milliamperes) = 1.0 volt | | | | | | OA6 |
| { d-c operating current = 5 ma min d-c operating current = 40 ma max } | | | | | | Ionization voltage = 110 volts d-c Operating voltage = 90 volts d-c Regulation (5 to 40 milliamperes) = 8.0 volts | | | | | | OB# |
| { d-c operating current = 5 ma min d-c operating current = 30 ma max } | | | | | | Ionization voltage = 125 volts d-c Operating voltage = 90 volts d-c Regulation (5 to 30 milliamperes) = 6.0 volts | | | | | | OB3 |
| { d-c operating current = 5 ma min d-c operating current = 30 ma max } | | | | | | Ionization voltage = 105 volts d-c Operating voltage = 75 volts d-c Regulation (5 to 30 milliamperes) = 3.0 volts | | | | | | OB3A |
| { d-c operating current = 5 ma min d-c operating current = 40 ma max } | | | | | | Ionization voltage = 115 volts d-c Operating voltage = 105 volts d-c Regulation (5 to 40 milliamperes) = 2.0 volts | | | | | | OC# |
| { d-c operating current = 5 ma min d-c operating current = 40 ma max } | | | | | | Ionization voltage = 127 volts d-c Operating voltage = 105 volts d-c Regulation (5 to 40 milliamperes) = 4.0 volts | | | | | | OC3 |
| { d-c operating current = 5 ma min d-c operating current = 40 ma max } | | | | | | Ionization voltage = 160 volts d-c Operating voltage = 150 volts d-c Regulation (5 to 40 milliamperes) = 4.0 volts | | | | | | OC3A |
| { d-c operating current = 5 ma min d-c operating current = 40 ma max } | | | | | | Ionization voltage = 180 volts d-c Operating voltage = 150 volts d-c Regulation (5 to 40 milliamperes) = 5.5 volts | | | | | | OD3 |
| Peak current = 500 ma max; d-c output current = 75 ma max, 40 ma min; max starting voltage = 95 volts d-c; peak inverse voltage = 300 volts max | | | | | | | | | | | | |
| Starter supply voltage per plate = 300 peak volts min; min d-c output = 30 milliamperes; max d-c output = 90 milliamperes; peak current per plate = 270 milliamperes; max peak inverse voltage = 880 volts | | | | | | | | | | | | |
| Full-Wave Rectifier | Max d-c output current = 110 ma; minimum d-c output current = 30 ma; max peak inverse voltage = 880 volts; minimum starter supply voltage per plate = 300 volts; max peak plate current per plate = 330 ma | | | | | | | | | | | |
| Half-Wave Rectifier | Max d-c output current = 0.5 ma; max peak inverse voltage = 330 volts; rms supply voltage = 117 volts; max peak current = 5.0 ma | | | | | | | | | | | |
| Class A Amplifier | 180 | 67.5 | 3 | 2.3 | 0.8 | 1,000,000 | 750 | — | — | — | OA4 OA4-G | |
| Class A Amplifier | 90 85 | 90 85 | 4.5 4.5 | 4.0† 3.5† | 0.8† 0.7† | 300,000 300,000 | 850 800 | — | 25,000 | 0.115 0.100 | OZ4 OZ4-G | |
| Converter | 180 | 67.5 | 3.0 | 1.3 | 2.4 | 500,000 | 300 # | E _{c3} (Osc Plate) = 180 thru 20,000 ohms I _{c3} = 2.3 ma | | | OA4-A | |
| 1A5 | | | | | | | | | | | | |
| 1A4-p 1A4-t | | | | | | | | | | | | |
| 1A5-GT | | | | | | | | | | | | |
| 1A6 | | | | | | | | | | | | |

Metal tubes are shown in bold-face type, miniature tubes in italics.

† G3 and G5 are screen. G4 is signal-input grid. ‡ Maximum screen dissipation appears immediately below the screen voltage.

¶ G2 and G4 are screen. G3 is signal-input grid.

‡ Heater warm-up time controlled.

1, 2, 3, etc. indicate tube sections.

| Tube Type | Classification by Construction | § X-Radiation Rating | Base Connections | Out-line Dwg. | Filament Volts | Filament Amps | Max. Plate Watts | Max. Plate Volts | * Max. Screen Volts and Watts | Capacitance in Picofarads | | |
|-----------------|----------------------------------|----------------------|------------------|---------------|----------------|---------------|------------------|---|-------------------------------|--|---------|------------|
| | | | | | | | | | | Input | Out-put | Grid-Plate |
| 1A7-G 1A7-GT | Pentagrid Converter | | 7Z† | 9-28 9-18 | 1.4 DC | 0.05 | — | 110 | 60 | Osc I _{cl} = 0.035 ma R _{gt} = 200,000 ohms | | |
| 1AB5 | Remote-Cutoff RF Pentode | | 5BF | 9-32 | 1.2 DC | 0.130 | 1.0 | 150 | 150‡ 0.3 | 2.8 | 4.2 | 0.25 ♣ |
| 1AC5 ● | Power Amplifier Pentode | | 8CP | 3-5 | 1.25 DC | 0.04 | — | 67.5 | 67.5 | — | — | — |
| 1AD2 ■ ● | Half-Wave High-Voltage Rectifier | ⊕ | 12GV | 9-98 | 1.25 | 0.2 | — | Tube Voltage Drop: 225 volts at 7.0 ma d-c | | | | |
| 1AD2-A ■ ● | Half-Wave High-Voltage Rectifier | 0.5 mR/hr ⊕ | 12GV | 9-144 | 1.25 | 0.2 | — | Tube Voltage Drop: 225 volts at 7.0 ma d-c | | | | |
| 1AD4 ● | Sharp-Cutoff RF/AF Pentode | | 1AD4 | 2-1 | 1.25 DC | 0.1 | — | 45 | 45 | 4.5 | 4.5 | 0.01 ♣ |
| 1AD5 ● | Sharp-Cutoff RF Pentode | | 8CP | 3-5 | 1.25 DC | 0.04 | — | 67.5 | 67.5 | 1.9 | 3.0 | 0.009 ♣ |
| 1AE4 | Sharp-Cutoff RF Pentode | | 6AR | 5-2 | 1.25 DC | 0.1 | — | 90 | 90 | 3.6 | 4.4 | 0.008 ♣ |
| 1AE5 ● | Heptode Mixer | | 1AE5 ▼ | T-X | 1.25 DC | 0.06 | — | 45 | 45 | I _{d1} (Injection) = 1.5 μa R _{gt} = 200,000 ohms | | |
| 1AF4 | Sharp-Cutoff Pentode | | 6AR | 5-2 | 1.4 DC | 0.025 | — | 110 | 90 | 3.8 | 7.6 | 0.009 ♣ |
| 1AF5 | Diode Sharp-Cutoff Pentode | | 6AU | 5-2 | 1.4 DC | 0.025 | — | 110 | 110 | 2.5 | 4.8 | 0.17 ♣ |
| 1AG4 ● | Power Amplifier Pentode | | 512AX | 2-1 | 1.25 DC | 0.04 | — | 90 | 90 | — | — | — |
| 1AG5 ● | Diode-Pentode | | 1AG5 | 2-1 | 1.25 | 0.03 | — | 50 | 50 | — | — | — |
| 1AH4 ● | RF Pentode | | 1AD4 | 2-1 | 1.25 DC | 0.04 | — | 90 | 90 | 3.5▲ | 4.5▲ | 0.01▲ ♣ |
| 1AJ2 ■ ● | Half-Wave High-Voltage Rectifier | ⊕ | 12EL | 9-98 | 1.25 | 0.2 | — | Tube Voltage Drop: 140 volts at 7.0 ma d-c | | | | |
| 1AJ5 ● | Diode Sharp-Cutoff Pentode | | 1AG5 | 2-1 | 1.25 DC | 0.04 | — | 90 | 90 | 1.7 | 2.4 | 0.10 |
| 1AK4 ● | Sharp-Cutoff RF Pentode | | 1AD4 | 2-1 | 1.25 DC | 0.02 | — | 90 | 90 | 3.5▲ | 4.5▲ | 0.01♣ ▲ |
| 1AK5 ● | Diode Sharp-Cutoff Pentode | | 1AG5 | 2-1 | 1.25 DC | 0.02 | — | 90 | 90 | 2.0 | 2.7 | 0.10♣ |
| 1AM4 | Remote-Cutoff RF Pentode | | 6AR | 5-2 | 1.4 DC | 0.025 | — | 90 | 67.5 | 3.6▲ | 7.5▲ | 0.01♣ |
| 1AQ6 | Pentagrid Converter | | 7AT ▼ | 5-2 | 1.4 DC | 0.025 | — | 90 | 67.5 | Osc I _{cl} = 0.14 ma R _{gt} = 100,000 ohms | | |
| 1AR6 | Diode Sharp-Cutoff Pentode | | 6AU | 5-2 | 1.4 DC | 0.025 | — | 90 | 90 | — | — | — |
| 1AS6 | Diode Sharp-Cutoff Pentode | | 6BW | 5-2 | 1.4 DC | 0.025 | — | 90 | 90 | — | — | — |
| 1AU2 | Half-Wave High-Voltage Rectifier | | 9U | 6-2 | 1.1 | 0.19 | — | Tube Voltage Drop: 100 volts at 4.5 ma d-c | | | | |
| 1AU3 ● | Half-Wave High-Voltage Rectifier | ⊕ | 3C | 12-18 | 1.25 | 0.2 | — | Tube Voltage Drop: 225 volts at 7.0 ma d-c | | | | |
| 1AX2 ● | Half-Wave High-Voltage Rectifier | ⊕ | 9V | 6-7 | 1.4 | 0.65 | — | Tube Voltage Drop: 200 volts at 7.0 ma d-c | | | | |

§ See pages 20 and 21 for X-Radiation Rated Recommended Replacement Chart and Symbol Definitions—

⊕—X-Radiation Rated, and ⊕—No X-Radiation Rating.

■ Compactron.
† Zero signal.
♣ Per section.

† Plate-to-plate.
♣ Maximum.
‡ Supply voltage.

● Subminiature type.
▲ Without external shield.
◆ Design maximum rating.

⊕ Total for all similar sections.
⊕ Absolute maximum rating.
Conversion transconductance.

● See X-Radiation Warning, page 4.

| Service | Plate Volts | Screen Volts | Neg Grid Volts | Plate Milli-amperes | Screen Milli-amperes | R_p , Ohms | G_m , μ mhos | μ Factor | Load for Rated Output, Ohms | Power Output, Watts | Tube Type |
|----------------------|---|------------------|-----------------------------------|---------------------|----------------------|-------------------------------|--------------------|--|-----------------------------|-------------------------|-----------------|
| Converter | 90 | 45 | 0 | 0.6 | 0.7 | 600,000 | 250 # | E _{c2} (Osc Plate) = 90 I _{c2} = 1.2 ma | | | 1A7-G 1A7-GT |
| Class A Amplifier | 150 90 | 150 90 | 1.5 R _{g1} = 1 meg | 6.8 3.5 | 2.0 0.8 | 125,000 275,000 | 1350 1100 | — | — | — | 1A85 |
| Class A Amplifier | 67.5 45 30 | 67.5 45 30 | 4.5 3.0 2.0 | 2.0 1.0 0.5 | 0.4 0.2 0.1 | 150,000 170,000 200,000 | 750 600 450 | — | 25,000 40,000 50,000 | 0.050 0.015 0.005 | 1AC5 ● |
| TV Flyback Rectifier | Max inverse voltage (d-c and peak) ◆ = 26,000 volts (d-c component ◆ = 22,000 volts); max d-c output current ◆ = 0.5 ma; max peak current ◆ = 50 ma. Terminals 4 and 10 may be used as tie points for components at or near filament potential. | | | | | | | | | | 1AD2 ■ ● |
| TV Flyback Rectifier | Max inverse voltage (d-c and peak) ◻ = 26,000 volts (d-c component ◻ = 22,000 volts); max d-c output current ◻ = 0.5 ma; max peak current ◻ = 50 ma. Terminals 4 and 10 may be used as tie points for components at or near filament potential. | | | | | | | | | | 1AD2-A ■ ● |
| Class A Amplifier | 45 | 45 | R _{g1} = 2 meg | 3.0 | 0.8 | 500,000 | 2000 | — | — | — | 1AD4 ● |
| Class A Amplifier | 67.5 30 | 67.5 30 | 0 0 | 1.85 0.45 | 0.75 0.16 | 700,000 700,000 | 735 430 | — | — | — | 1AD5 ● |
| Class A Amplifier | 90 | 90 | 0 | 3.5 | 1.2 | 500,000 | 1550 | — | — | — | 1AE4 |
| Mixer | 45 | 45 | 0 | 0.9 | 2.0 | 200,000 | 200 # | — | — | — | 1AE5 ● |
| Class A Amplifier | 90 67.5 | 90 67.5 | 0 0 | 1.8 1.2 | 0.55 0.32 | 1,800,000 2,200,000 | 1050 925 | — | — | — | 1AF4 |
| Class A Amplifier | 90 67.5 | 90 67.5 | 0 0 | 1.1 0.7 | 0.4 0.25 | 2,000,000 2,800,000 | 600 550 | — | — | — | 1AF5 |
| Class A Amplifier | 41.4 | 41.4 | 3.6 | 2.4† | 0.6† | 180,000 | 1,000 | — | 12,000 | 0.035 | 1AG4 ● |
| Class A Amplifier | 45 22.5 | 45 22.5 | 2.0 0 | 0.28 0.17 | 0.12 0.043 | 2,500,000 700,000 | 250 235 | — | — | — | 1AG5 ● |
| Class A Amplifier | 45 | 45 | R _{g1} = 5 meg | 0.75 | 0.2 | 1,500,000 | 750 | — | — | — | 1AH4 ● |
| TV Flyback Rectifier | Max inverse voltage (d-c and peak) ◆ = 26,000 volts (d-c component ◆ = 22,000 volts); max d-c output current ◆ = 0.5 ma; max peak current ◆ = 50 ma. Terminals 2 and 10 may be used as tie points for components at or near filament potential. | | | | | | | | | | 1AJ2 ■ ● |
| Class A Amplifier | 45 | 45 | R _{g1} = 5 meg | 1.0 | 0.3 | 300,000 | 425 | — | — | — | 1AJ5 ● |
| Class A Amplifier | 45 | 45 | R _{g1} = 5 meg | 0.75 | 0.2 | 1,500,000 | 750 | — | — | — | 1AK4 ● |
| Class A Amplifier | 45 | 45 | R _{g1} = 5 meg | 0.5 | 0.2 | 400,000 | 280 | — | — | — | 1AK5 ● |
| Class A Amplifier | 90 | 67.5 | 0 | 2.4 | 0.9 | 500,000 | 350 | — | — | — | 1AM4 |
| Converter | 90 | 45 | 0 | 0.64 | — | 800,000 | 250 # | — | — | — | 1AQ5 |
| Class A Amplifier | 67.5 | 67.5 | 0 | 0.9 | 0.25 | 800,000 | 500 | — | — | — | 1AR5 |
| Class A Amplifier | 67.5 | 67.5 | 0 | 0.9 | 0.25 | 800,000 | 500 | — | — | — | 1AS5 |
| TV Focus Rectifier | Max inverse voltage (d-c and peak) ◆ = 8,250 volts (d-c component ◆ = 7,000 volts); max d-c output current ◆ = 0.6 ma; max peak current ◆ = 11 ma. Socket terminals 2, 3, 6, 7 and 8 may not be used as tie points. | | | | | | | | | | 1AU2 |
| TV Flyback Rectifier | Max inverse voltage (d-c and peak) ◆ = 30,000 volts (d-c component ◆ = 26,000 volts); max d-c output current ◆ = 0.5 ma; max peak current ◆ = 50 ma. Socket terminals 4 and 6 may be used as tie points for components at or near filament potential; 1, 3, 5 and 8 may be connected to terminal 7. | | | | | | | | | | 1AU3 ● |
| TV Flyback Rectifier | Max inverse voltage (d-c and peak) ◻ = 25,000 volts (d-c component ◻ = 20,000 volts); max d-c output current ◻ = 0.5 ma; max peak current ◻ = 45 ma. Socket terminals 3 and 7 may be used as tie points for components at or near filament potential. | | | | | | | | | | 1AV2 ● |

Metal tubes are shown in bold-face type, miniature tubes in italics.

◆ G3 and G5 are screen. G4 is signal-input grid.

▼ G2 and G4 are screen. G3 is signal-input grid.

1, 2, 3, etc. indicate tube sections.

‡ Maximum screen dissipation appears

immediately below the screen voltage.

† Heater warm-up time controlled.

| Tube Type | Classification by Construction | § X-Radiation Rating | Base Connections | Out-line Dwg. | Filament Volts | Filament Amps | Max. Plate Watts | Max. Plate Volts | * Max. Screen Volts and Watts | Capacitance in Picofarads | | |
|-----------------|--------------------------------------|----------------------|------------------|--------------------|----------------|---------------|------------------|--|-------------------------------|--|--------|------------|
| | | | | | | | | | | Input | Output | Grid-Plate |
| 1AY2 ● | Half-Wave High-Voltage Rectifier | ⊙ | 1AY2 | 9-128 | 1.25 | 0.2 | — | Tube Voltage Drop: 75 volts at 7.0 ma d-c | | | | |
| 1AY2-A ● | Half-Wave High-Voltage Rectifier | 0.5 mR/hr ▲ | 1AY2 | 9-128 | 1.25 | 0.2 | — | Tube Voltage Drop: 100 volts at 7.0 ma d-c | | | | |
| 1B3-GT ● | Half-Wave High-Voltage Rectifier | ⊙ | 3C | 9-51 or 9-52 | 1.25 | 0.2 | — | Tube Voltage Drop: 100 volts at 7.0 ma d-c | | | | |
| 1B4-p | Sharp-Cutoff RF Pentode | | 4M | 12-6 | 2.0 DC | 0.06 | — | 180 | 67.5 | 5.0▲ | 11▲ | 0.007♣ |
| 1B5/25-S | Duplex-Diode Medium-Mu Diode | | 6M | 12-5, 9-26 | 2.0 DC | 0.06 | — | 135 | — | 1.6▲ | 1.9▲ | 3.6▲ |
| 1B7-G 1B7-GT | Pentagrid Converter | | 7Z♠ | 9-28 9-18 | 1.4 DC | 0.1 | — | 110 | 65 | Osc I _{cl} = 0.035 ma R _{g1} = 200,000 ohms | | |
| 1B8-GT | Diode-Triode Power Amplifier Pentode | | 8AW | 9-17 | 1.4 DC | 0.1 | — | 110 110 | 110 | Pentode Section Triode Section | | |
| 1BC2 ● | Half-Wave High-Voltage Rectifier | ⊙ | 9RG | 6-18 | 1.25 | 0.2 | — | Tube Voltage Drop: 80 volts at 7.0 ma d-c | | | | |
| 1BC2-A ● | Half-Wave High-Voltage Rectifier | 0.5 mR/hr ▲ | 9RG | 6-18 | 1.25 | 0.2 | — | Tube Voltage Drop: 80 volts at 7.0 ma d-c | | | | |
| 1BC2-B ● | Half-Wave High-Voltage Rectifier | 0.5 mR/hr ▲ | 9RG | 6-18 | 1.25 | 0.2 | — | Tube Voltage Drop: 80 volts at 7.0 ma d-c | | | | |
| 1BH2 ● | Half-Wave High-Voltage Rectifier | ⊙ | 9RG | T-X | 1.25 | 0.2 | — | Tube Voltage Drop: 80 volts at 7.0 ma d-c | | | | |
| 1BH2-A ● | Half-Wave High-Voltage Rectifier | 0.5 mR/hr ▲ | 9RG | T-X | 1.25 | 0.2 | — | Tube Voltage Drop: 80 volts at 7.0 ma d-c | | | | |
| 1BK2 ● | Half-Wave High-Voltage Rectifier | ⊙ | 9Y | 6-7 | 1.4 | 0.55 | — | Tube Voltage Drop: 100 volts at 11 ma d-c | | | | |
| 1BL2 ● | Half-Wave High-Voltage Rectifier | ⊙ | 1AY2 | 6-19 | 1.25 | 0.2 | — | Tube Voltage Drop: 130 volts at 7.0 ma d-c | | | | |
| 1BV2 ● | Half-Wave High-Voltage Rectifier | ⊙ | 1BV2 | T-X | 1.25 | 0.2 | — | Tube Voltage Drop: 80 volts at 7.0 ma d-c | | | | |
| 1BX2 ● | Half-Wave High-Voltage Rectifier | 0.5 mR/hr ▲ | 9Y | 6-7 | 1.25 | 0.2 | — | Tube Voltage Drop: 100 volts at 7.0 ma d-c | | | | |
| 1BY2 ■ | Half-Wave High-Voltage Rectifier | 25.0 mR/hr ▲ | 12HZ | 9-98 | 1.25 | 0.2 | — | Tube Voltage Drop: 225 volts at 7.0 ma d-c | | | | |
| 1BY2-A ■ | Half-Wave High-Voltage Rectifier | 0.5 mR/hr ▲ | 12HZ | 9-144 | 1.25 | 0.2 | — | Tube Voltage Drop: 225 volts at 7.0 ma d-c | | | | |

§ See pages 20 and 21 for X-Radiation Rated Recommended Replacement Chart and Symbol Definitions—

▲ — X-Radiation Rated, and ⊙ — No X-Radiation Rating.

■ Compactron.

† Plate-to-plate.

⊕ Subminiature type.

⊕ Total for all similar sections.

↑ Zero signal.

♣ Maximum.

▲ Without external shield.

■ Absolute maximum rating.

♣ Per section.

‡ Supply voltage.

♣ Design maximum rating.

Conversion transconductance.

● See X-Radiation Warning, page 4.

| Service | Plate Volts | Screen Volts | Neg Grid Volts | Plate Milli- am- peres | Screen Milli- am- peres | R_p , Ohms | G_m , μ mhos | μ Factor | Load for Rated Out- put, Ohms | Power Out- put, Watts | Tube Type |
|----------------------|---|-----------------|----------------------|---------------------------------|----------------------------------|------------------------|-----------------------|--|--|--------------------------------|----------------------------|
| TV Flyback Rectifier | Max inverse voltage (d-c and peak) $\diamond = 26,000$ volts (d-c component $\diamond = 22,000$ volts); max d-c output current $\diamond = 0.5$ ma; max peak current $\diamond = 50$ ma. | | | | | | | | | | 1AV2 ● |
| TV Flyback Rectifier | Max inverse voltage (d-c and peak) $\square = 26,000$ volts (d-c component $\square = 22,000$ volts); max d-c output current $\diamond = 0.5$ ma; max peak current $\diamond = 50$ ma. | | | | | | | | | | 1AV2-A ● |
| TV Flyback Rectifier | Max inverse voltage (d-c and peak) $\diamond = 26,000$ volts (d-c component $\diamond = 22,000$ volts); max d-c output current $\diamond = 0.5$ ma; max peak current $\diamond = 50$ ma. Socket terminals 4 and 6 may be used as tie points for components at or near filament potential; 1, 3, 5 and 8 may be connected to terminal 7. | | | | | | | | | | 1B3-GT ● |
| Class A Amplifier | 180 90 | 67.5 67.5 | 3.0 3.0 | 1.7 1.6 | 0.6 0.7 | 1,500,000 1,000,000 | 650 600 | — — | — — | — — | 1B4-p — |
| Class A Amplifier | 135 | — | 3.0 | 0.8 | — | 35,000 | 575 | 20 | — | — | 1B5/25-S — |
| Converter | 90 | 45 | 0 | 1.5 | 1.3 | 350,000 | 350 # | E_{c1} (Osc Plate) = 90 $I_{c1} = 1.6$ ma | | — | 1B7-G 1B7-GT |
| Class A Amplifier | 90 | 90 | 6.0 | 6.3† | 1.4† | — | 1,150 | — | 14,000 | 0.210 | 1B8-GT |
| Class A Amplifier | 90 | — | 0 | 0.15 | — | 240,000 | 275 | — | — | — | — |
| TV Flyback Rectifier | Max inverse voltage (d-c and peak) $\square = 18,000$ volts (d-c component $\diamond = 15,000$ volts); max d-c output current $\diamond = 0.5$ ma; max peak current $\diamond = 45$ ma. Socket terminal 7 may be used as tie point for components at or near filament potential. | | | | | | | | | | 1BC? ● |
| TV Flyback Rectifier | Max inverse voltage (d-c and peak) $\square = 18,000$ volts (d-c component $\square = 15,000$ volts); max d-c output current $\diamond = 0.5$ ma; max peak current $\diamond = 45$ ma. Socket terminal 7 may be used as tie point for components at or near filament potential. | | | | | | | | | | 1BC2-A ● |
| TV Flyback Rectifier | Max inverse voltage (d-c and peak) $\square = 18,000$ volts (d-c component $\square = 15,000$ volts); max d-c output current $\diamond = 0.5$ ma; max peak current $\diamond = 45$ ma. Socket terminal 7 may be used as tie point for components at or near filament potential. | | | | | | | | | | 1BC2-B ● |
| TV Flyback Rectifier | Max inverse voltage (d-c and peak) $\diamond = 18,000$ volts (d-c component $\diamond = 15,000$ volts); max d-c output current $\diamond = 0.5$ ma; max peak current $\diamond = 45$ ma. Socket terminal 7 may be used as tie point for components at or near filament potential. | | | | | | | | | | 1BH2 ● |
| TV Flyback Rectifier | Max inverse voltage (d-c and peak) $\square = 18,000$ volts (d-c component $\square = 15,000$ volts); max d-c output current $\diamond = 0.5$ ma; max peak current $\diamond = 45$ ma. Socket terminal 7 may be used as tie point for components at or near filament potential. | | | | | | | | | | 1BH2-A ● |
| TV Flyback Rectifier | Max inverse voltage (d-c and peak) $\diamond = 24,000$ volts (d-c component $\diamond = 20,000$ volts); max d-c output current $\diamond = 0.88$ ma; max peak current $\diamond = 44$ ma. Socket terminals 3 and 7 may be used as tie points for components at or near filament potential. | | | | | | | | | | 1BK2 ● |
| TV Flyback Rectifier | Max inverse voltage (d-c and peak) $\diamond = 22,000$ volts (d-c component $\diamond = 18,000$ volts); max d-c output current $\diamond = 0.5$ ma; max peak current $\diamond = 45$ ma. | | | | | | | | | | 1BL2 ● |
| TV Flyback Rectifier | Max inverse voltage (d-c and peak) $\diamond = 18,000$ volts (d-c component $\diamond = 15,000$ volts); max d-c output current $\diamond = 0.5$ ma; max peak current $\diamond = 45$ ma. Socket terminal 7 may be used as tie point for components at or near filament potential. | | | | | | | | | | 1BV2 ● |
| TV Flyback Rectifier | Max inverse voltage (d-c and peak) $\diamond = 22,000$ volts (d-c component $\diamond = 18,000$ volts); max d-c output current $\diamond = 0.5$ ma; max peak current $\diamond = 45$ ma. Socket terminals 3 and 7 may be used as tie points for components at or near filament potential. | | | | | | | | | | 1BX2 ● |
| TV Flyback Rectifier | Max inverse voltage (d-c and peak) $\square = 26,000$ volts (d-c component $\square = 22,000$ volts); max d-c output current $\diamond = 0.5$ ma; max peak current $\diamond = 50$ ma. Socket terminals 3, 4, 7 and 10 may be used as tie points for components near filament potential. | | | | | | | | | | 1BY2 \blacksquare ● |
| TV Flyback Rectifier | Max inverse voltage (d-c and peak) $\square = 26,000$ volts (d-c component $\square = 22,000$ volts); max d-c output current $\diamond = 0.5$ ma; max peak current $\diamond = 50$ ma. Socket terminals 3, 4, 7 and 10 may be used as tie points for components at or near filament potential. | | | | | | | | | | 1BY2-A \blacksquare ● |

Metal tubes are shown in bold-face type, miniature tubes in italics.

◆ G3 and G5 are screen. G4 is signal-input grid.

▼ G2 and G4 are screen. G3 is signal-input grid.

1, 2, 3, etc. indicate tube sections.

* Maximum screen dissipation appears immediately below the screen voltage.

† Heater warm-up time controlled.

| Tube Type | Classification by Construction | X-Radiation Rating | Base Connections | Out-line Dwg. | Filament Volts | Filament Amps | Max. Plate Watts | Max. Plate Volts | * Max. Screen Volts and Watts | Capacitance in Picofarads | | |
|------------------|--------------------------------------|-------------------------------|------------------|-----------------------|----------------|---------------|---------------------|---|-------------------------------|--|-----------------------|-------------------|
| | | | | | | | | | | Input | Out-put | Grid-Plate |
| 1C3 | Medium-Mu Triode | | 5CF | 5-2 | 1.4 DC | 0.05 | — | 110 | — | 0.9 | 4.2 | 1.8 |
| 1C5-GT | Power Amplifier Pentode | | 6X | 9-11 | 1.4 DC | 0.1 | — | 110 | 110 | — | — | — |
| 1C6 | Pentagrid Converter | | 6L \uparrow | 12-6 | 2.0 DC | 0.12 | 0.3 | 180 | 67.5 0.2 | Osc $I_{c1} = 0.2$ ma $R_{g1} = 50,000$ ohms | | |
| 1C7-G | Pentagrid Converter | | 7Z \uparrow | 12-8 | 2.0 DC | 0.12 | 0.3 | 180 | 67.5 0.2 | Osc $I_{c1} = 0.2$ ma $R_{g1} = 50,000$ ohms | | |
| 1C8 | Pentagrid Converter | | 8CN ∇ | 3-2 | 1.25 DC | 0.04 | — | 67.5 | 45 | Osc $I_{c1} = 0.070$ ma $R_{g1} = 100,000$ ohms | | |
| 1D3 | Low-Mu High Frequency Triode | | 8DN | 3-2 | 1.25 AC/DC | 0.3 | — | 110 | — | 1.0 | 1.0 | 2.6 |
| 1D5-Gp | Remote-Cutoff RF Pentode | | 5Y | 12-8 | 2.0 DC | 0.06 | — | 180 | 67.5 | 5.0 \blacktriangle | 11.0 \blacktriangle | 0.007 \clubsuit |
| 1D5-Gt | Remote-Cutoff RF Tetrode | | 5R | 12-8 | 2.0 DC | 0.06 | — | 180 | 67.5 | — | — | — |
| 1D7-G | Pentagrid Converter | | 7Z \uparrow | 12-8 | 2.0 DC | 0.06 | — | 180 | 67.5 | Osc $I_{c1} = 0.2$ ma $R_{g1} = 50,000$ ohms | | |
| 1D8-GT | Diode-Triode Power Amplifier Pentode | | 8AJ | 9-17 | 1.4 DC | 0.1 | — | 110 110 | 110 — | Pentode Section Triode Section | | |
| 1DG3 | Half-Wave High-Voltage Rectifier | 0.5 mR/hr \blacktriangle | 8ND | 9-168 | 1.25 | 0.2 | — | Tube Voltage Drop: 225 volts at 7.0 ma d-c | | | | |
| 1DG3-A | Half-Wave High-Voltage Rectifier | 0.5 mR/hr \blacktriangle | 8ND | 9-168 | 1.25 | 0.2 | — | Tube Voltage Drop: 225 volts at 7.0 ma d-c | | | | |
| 1DN6 | Diode-Pentode | | 6BW | 5-2 | 1.4 DC | 0.05 | — | 90 | 90 | — | — | — |
| 1DY4 ∇ | UHF Triode Oscillator | | 7DK | 5-2 | 1.6 | 0.6 | 1.5 \blacklozenge | 135 \blacklozenge | — | 3.5 | 1.15 | 2.0 |
| 1DY4-A ∇ | UHF Triode Oscillator | | 7DK | 5-1 | 1.6 | 0.6 | 1.5 \blacklozenge | 135 \blacklozenge | — | 3.5 | 1.15 | 2.0 |
| 1E4-G | Medium-Mu Triode | | 5S | 9-25 | 1.4 DC | 0.05 | — | 110 | — | 2.4 | 6.0 | 2.4 |
| 1E5-Gp | Sharp-Cutoff RF Pentode | | 5Y | 12-8 | 2.0 DC | 0.06 | — | 180 | 67.5 | 5.0 \blacktriangle | 11.0 \blacktriangle | 0.007 \clubsuit |
| 1E7-G 1E7-GT | Twin-Pentode Power Amplifier | | 8C | 12-7 9-11, 9-41 | 2.0 DC | 0.24 | 1.5 \blacklozenge | 135 | 135 0.5 | Each Section Both Sections in Push-pull | | |
| 1E8 | Pentagrid Converter | | 8CN ∇ | 3-5 | 1.25 DC | 0.04 | — | 67.5 | 45 | Osc $I_{c1} = 0.070$ ma $R_{g1} = 100,000$ ohms | | |
| 1F4 | Power Amplifier Pentode | | 5K | 14-1 | 2.0 DC | 0.12 | 1.75 | 180 | 180 0.75 | — | — | — |
| 1F5-G | Power Amplifier Pentode | | 6X | 12-7 | 2.0 DC | 0.12 | 1.75 | 180 | 180 0.75 | — | — | — |
| 1F6 | Duplex-Diode Sharp-Cutoff Pentode | | 6W | 12-6 | 2.0 DC | 0.06 | 0. | 180 | 67.5 0.05 | 4.0 \blacktriangle | 9.0 \blacktriangle | 0.007 \clubsuit |
| 1F7-GH 1F7-GV | Duplex-Diode Sharp-Cutoff Pentode | | 7AF | 12-8 | 2.0 DC | 0.06 | — | 180 | 67.5 | 3.8 | 9.5 | 0.01 \clubsuit |
| 1G3-GT | Half-Wave High-Voltage Rectifier | \blacktriangle | 3C | 9-53 or 9-54 | 1.25 | 0.2 | — | Tube Voltage Drop: 100 volts at 7.0 ma d-c | | | | |
| 1G3-GTA | Half-Wave High-Voltage Rectifier | 0.5 mR/hr \blacktriangle | 3C | T-X | 1.25 | 0.2 | — | Tube Voltage Drop: 100 volts at 7.0 ma d-c | | | | |

§ See pages 20 and 21 for X-Radiation Rated Recommended Replacement Chart and Symbol Definitions—

\blacktriangle —X-Radiation Rated, and \blacktriangle —No X-Radiation Rating.

\blacklozenge Compactron.

\uparrow Plate-to-plate.

\circ Subminiature type.

\circ Total for all similar sections.

\uparrow Zero signal.

\blacklozenge Maximum.

\blacktriangle Without external shield.

\circ Absolute maximum rating.

\blacklozenge Per section.

\ddagger Supply voltage.

\blacklozenge Design maximum rating.

$\#$ Conversion transconductance.

● See X-Radiation Warning, page 4.

| Service | Plate Volts | Screen Volts | Neg Grid Volts | Plate Milli-amperes | Screen Milli-amperes | R _p , Ohms | G _m , μmhos | μ Factor | Load for Rated Output, Ohms | Power Output, Watts | Tube Type |
|----------------------|---|------------------|----------------------|----------------------|----------------------|-------------------------|------------------------|--|-----------------------------|-----------------------|------------------|
| Class A Amplifier | 90 90 | — | 3.0 0 | 1.4 4.5 | — | 19,000 11,200 | 760 1,300 | 14.5 14.5 | — | — | 1C3 |
| Class A Amplifier | 90 83 | 90 83 | 7.5 7.0 | 7.5† 7.0† | 1.8† 1.6† | 115,000 110,000 | 1,550 1,500 | — | 8,000 9,000 | 0.240 0.200 | 1C5-GT |
| Converter | 180 | 67.5 | 3.0 | 1.5 | 2.0 | 700,000 | 325 # | E _{os} (Osc Plate) = 180 thru 20,000 ohms I _{os} = 4.0 ma | | | 1C6 |
| Converter | 180 | 67.5 | 3.0 | 1.5 | 2.0 | 700,000 | 325 # | E _{os} (Osc Plate) = 180 thru 20,000 ohms I _{os} = 4.0 ma | | | 1C7-G |
| Converter | 67.5 | 67.5 | 0 | 1.0 | 1.5 | 400,000 | 150 # | R _{os} = 20,000 ohms | | | 1C8 ● |
| Class A Amplifier | 90 | — | 5.0 | 12.5 | — | — | 3,400 | 8.7 | — | — | 1D3 ● |
| Class A Amplifier | 180 | 67.5 | 3.0 | 2.3 | 0.8 | 1,000,000 | 750 | — | — | — | 1D5-Gp |
| Class A Amplifier | 180 | 67.5 | 3.0 | 2.2 | 0.7 | 600,000 | 650 | — | — | — | 1D5-Gt |
| Converter | 180 | 67.5 | 3.0 | 1.3 | 2.4 | 500,000 | 300 # | E _{os} (Osc Plate) = 180 thru 20,000 ohms I _{os} = 2.3 ma | | | 1D7-G |
| Class A Amplifier | 90 | 90 | 9.0 | 5.0 | 1.0 | 200,000 | 925 | — | 12,000 | 0.20 | 1D8-GT |
| Class A Amplifier | 90 | — | 0 | 1.1 | — | 43,500 | 575 | 25 | — | — | 1D8-GT |
| TV Flyback Rectifier | Max inverse voltage (d-c and peak) □ = 26,000 volts (d-c component □ = 22,000 volts); max d-c output current ◆ = 0.5 ma; max peak current ◆ = 50 ma. Socket terminals 1 and 7 may be used as tie points for components at or near filament potential. | | | | | | 26,000 | — | — | — | 1DG3 ● |
| TV Flyback Rectifier | Max inverse voltage (d-c and peak) □ = 26,000 volts (d-c component □ = 22,000 volts); max d-c output current ◆ = 0.5 ma; max peak current ◆ = 50 ma. Socket terminals 1 and 7 may be used as tie points for components at or near filament potential. | | | | | | 26,000 | — | — | — | 1DG3-A ● |
| Class A Amplifier | 67.5 | 67.5 | 0 | 2.1 | 0.55 | 600,000 | 630 | — | — | — | 1DN5 |
| Class A Amplifier | 90 | — | R _k = 180 | 10.4 | — | — | 11,000 | 28 | — | — | 1DY4¶ |
| Class A Amplifier | 90 | — | R _k = 180 | 10.4 | — | — | 11,000 | 28 | — | — | 1DY4-A¶ |
| Class A Amplifier | 90 90 | — | 0 3.0 | 4.5 1.4 | — | 11,200 19,000 | 1,300 760 | 14.5 14.5 | — | — | 1E4-G |
| Class A Amplifier | 180 90 | 67.5 67.5 | 3.0 3.0 | 1.7 1.6 | 0.6 0.7 | 1,500,000 1,000,000 | 650 600 | — | — | — | 1E5-Gp |
| Class A Amplifier | 135 90 135 | 135 90 135 | 4.5 3.0 7.5 | 7.5† 3.8† 7.0† | 2.2† 1.1† 2.0† | 260,000 340,000 — | 1,425 1,150 — | — | 16,000 20,000 24,000 | 0.29 0.11 0.575 | 1E7-G 1E7-GT |
| Converter | 67.5 | 67.5 | 0 | 1.0 | 1.5 | 400,000 | 150 # | R _{os} = 20,000 ohms | | | 1E8 ● |
| Class A Amplifier | 135 90 | 135 90 | 4.5 3.0 | 8† 4 | 2.4† 1.1 | 200,000 240,000 | 1,700 1,400 | — | 16,000 | 0.31 | 1F4 |
| Class A Amplifier | 135 90 | 135 90 | 4.5 3.0 | 8† 4 | 2.4† 1.1 | 200,000 240,000 | 1,700 1,400 | — | 16,000 | 0.31 | 1F5-G |
| Class A Amplifier | 180 | 67.5 | 1.5 | 2.2 | 0.7 | 1,000,000 | 650 | — | — | — | 1F6 |
| Class A Amplifier | 180 | 67.5 | 1.5 | 2.2 | 0.7 | 1,000,000 | 650 | — | — | — | 1F7-GH 1F7-GV |
| TV Flyback Rectifier | Max inverse voltage (d-c and peak) □ = 26,000 volts (d-c component = 21,000 volts); max d-c output current = 0.5 ma; max peak current = 50 ma. Socket terminals 4 and 6 may be used as tie points for components at or near filament potential; 1, 3, 5 and 8 may be connected to terminal 7. | | | | | | 26,000 | — | — | — | 1G3-GT ● |
| TV Flyback Rectifier | Max inverse voltage (d-c and peak) □ = 26,000 volts (d-c component □ = 21,000 volts); max d-c output current ◆ = 0.5 ma; max peak current ◆ = 50 ma. Socket terminals 4 and 6 may be used as tie points for components at or near filament potential; 1, 3, 5 and 8 may be connected to terminal 7. | | | | | | 26,000 | — | — | — | 1G3-GTA ● |

etal tubes are shown in bold-face type, miniature tubes in italics.

G3 and G5 are screen. G4 is signal-input grid.

G2 and G4 are screen. G3 is signal-input grid.

b, z, etc. indicate tube sections.

□ Maximum screen dissipation appears immediately below the screen voltage.

¶ Heater warm-up time controlled.

| Tube Type | Classification by Construction | X-Radiation Rating | Base Connections | Out-line Dwg. | Filament Volts | Filament Amps | Max. Plate Watts | Max. Plate Volts | *Max. Screen Volts and Watts | Capacitance in Picofarads | | |
|-----------------|----------------------------------|--------------------|------------------|-----------------------|----------------|---------------|------------------|---|------------------------------|--|--------|------------|
| | | | | | | | | | | Input | Output | Grid-Plate |
| 1G4-GT | Medium-Mu Triode | | 5S | 9-11 | 1.4 DC | 0.05 | — | 110 | — | 2.2▲ | 3.4▲ | 2.8▲ |
| 1G5-G | Power Amplifier Pentode | | 6X | 12-7 | 2.0 DC | 0.12 | 1.25 | 135 | 135 0.6 | — | — | — |
| 1G6-GT | Twin-Triode Power Amplifier | | 7AB | 9-11 or 9-41 | 1.4 DC | 0.1 | — | 110 | — | — | — | — |
| 1H2 ● | Half-Wave High-Voltage Rectifier | ⊙ | 9LX | 6-9 | 1.4 | 0.55 | — | Tube Voltage Drop: 100 volts at 7.0 ma d-c | | | | |
| 1H4-G 1H4-GT | Medium-Mu Triode | | 5S | 12-7 9-11, 9-41 | 2.0 DC | 0.06 | — | 180 | — | Single Tube 2 Tubes Push-pull | | |
| 1H5-G 1H5-GT | Diode High-Mu Triode | | 5Z | 9-28 9-18 | 1.4 DC | 0.05 | — | 110 | — | 0.75 | 4.6 | 1.1 |
| 1H6-G 1H6-GT | Duplex-Diode Medium-Mu Triode | | 7AA | 12-7 9-11, 9-41 | 2.0 DC | 0.06 | — | 135 | — | — | — | — |
| 1J3 ● | Half-Wave High-Voltage Rectifier | ⊙ | 3C | 9-51 or 9-52 | 1.25 | 0.2 | — | Tube Voltage Drop: 225 volts at 7.0 ma d-c | | | | |
| 1J3-A ● | Half-Wave High-Voltage Rectifier | ⊙ | 3C | 9-51 or 9-52 | 1.25 | 0.2 | — | Tube Voltage Drop: 225 volts at 7.0 ma d-c | | | | |
| 1J5-G | Power Amplifier Pentode | | 6X | 14-3 | 2.0 DC | 0.12 | — | 135 | 135 | — | — | — |
| 1J6-G 1J6-GT | Twin-Triode Power Amplifier | | 7AB | 12-7 9-16 | 2.0 DC | 0.24 | — | 135 | — | Both Sections in Push-pull | | |
| 1K3 ● | Half-Wave High-Voltage Rectifier | ⊙ | 3C | 9-53 or 9-54 | 1.25 | 0.2 | — | Tube Voltage Drop: 225 volts at 7.0 ma d-c | | | | |
| 1K3-A ● | Half-Wave High-Voltage Rectifier | 0.5 mR/hr ▲ | 3C | T-X | 1.25 | 0.2 | — | Tube Voltage Drop: 225 volts at 7.0 ma d-c | | | | |
| 1L4 | Sharp-Cutoff RF Pentode | | 6AR | 5-2 | 1.4 DC | 0.05 | — | 110 | 90 | 3.6▲ | 7.5▲ | 0.008▲ |
| 1L6 | Pentagrid Converter | | 7DC♦ | 5-2 | 1.4 DC | 0.05 | — | 110 | 65 | Osc $I_{c1} = 0.035$ ma $R_{gt} = 200,000$ ohms | | |
| 1LA4 | Power Amplifier Pentode | | 5AD | 9-30 | 1.4 DC | 0.05 | — | 110 | 110 | — | — | — |
| 1LA6 | Pentagrid Converter | | 7AK♦ | 9-30 | 1.4 DC | 0.05 | — | 110 | 65 | Osc $I_{c1} = 0.035$ ma $R_{gt} = 200,000$ ohms | | |
| 1LB4 | Power Amplifier Pentode | | 5AD | 9-30 | 1.4 DC | 0.05 | — | 110 | 110 | — | — | — |
| 1LB6 | Pentagrid Mixer | | 8AX | 9-30 | 1.4 DC | 0.05 | — | 90 | 67.5 | E_{ca} (Injection) = 10 v peak | | |
| 1LC5 | Sharp-Cutoff RF Pentode | | 7AO | 9-30 | 1.4 DC | 0.05 | — | 110 | 45 | 3.2 | 7.0 | 0.007 |
| 1LC6 | Pentagrid Converter | | 7AK♦ | 9-30 | 1.4 DC | 0.05 | — | 110 | 45 | Osc $I_{c1} = 0.035$ ma $R_{gt} = 200,000$ ohms | | |
| 1LD5 | Diode Sharp-Cutoff Pentode | | 6AX | 9-30 | 1.4 DC | 0.05 | — | 90 | 45 | 3.2 | 6.0 | 0.18 |
| 1LE3 | Medium-Mu Triode | | 4AA | 9-30 | 1.4 DC | 0.05 | — | 110 | — | 1.7 | 3.0 | 1.7 |
| 1LF3 | Medium-Mu Triode | | 4AA | 9-30 | 1.4 DC | 0.05 | — | 110 | — | 1.7 | 3.0 | 1.7 |
| 1LG5 | Semi-Remote-Cutoff RF Pentode | | 7AO | 9-30 | 1.4 DC | 0.05 | — | 110 | 110 | 3.2 | 7.0 | 0.007 |
| 1LH4 | Diode High-Mu Triode | | 5AG | 9-30 | 1.4 DC | 0.05 | — | 110 | — | 2.0 | 2.4 | 1.2 |
| 1LN5 | Sharp-Cutoff RF Pentode | | 7AO | 9-30 | 1.4 DC | 0.05 | — | 110 | 110 | 3.0 | 8.0 | 0.007 |

§ See pages 20 and 21 for X-Radiation Rated Recommended Replacement Chart and Symbol Definitions—

▲ — X-Radiation Rated, and ⊙ — No X-Radiation Rating.

■ Compaction.

† Plate-to-plate.

⊙ Subminiature type.

⊙ Total for all similar sections.

† Zero signal.

♦ Maximum.

▲ Without external shield.

⊙ Absolute maximum rating.

♦ Per section.

§ Supply voltage.

♦ Design maximum rating.

Conversion transconductance.

● See X-Radiation Warning, page 4.

| Service | Plate Volts | Screen Volts | Neg Grid Volts | Plate Milli-amperes | Screen Milli-amperes | R _p , Ohms | C _m , μmhos | # Factor | Load for Rated Out-put, Ohms | Power Out-put, Watts | Tube Type |
|-----------------------------|---|--------------|----------------|---------------------|----------------------|--------------------------|------------------------|--|------------------------------|----------------------|-----------|
| Class A Amplifier | 90 | — | 6 | 2.3 | — | 10,700 | 825 | 8.8 | — | — | 1G4-GT |
| Class A Amplifier | 135 | 135 | 13.5 | 8.7† | 2.5† | 160,000 | 1,550 | — | 9,000 | 0.55 | 1G5-G |
| Class A Amplifier | 90 | 90 | 6.0 | 8.5† | 2.5† | 133,000 | 1,500 | — | 8,500 | 0.25 | 1G5-G |
| Class A Amplifier ♦ | 90 | — | 0 | 1.0 | — | 40,000 | 825 | 33 | — | — | 1G6-GT |
| Class B Amplifier ⊕ | 90 | — | 0 | 2.0† | — | — | — | — | 12,000 † | 0.675 | 1G6-GT |
| TV Flyback Rectifier | Max inverse voltage (d-c and peak) ♦ = 30,000 volts (d-c component ♦ = 24,000 volts); max d-c output current ♦ = 0.5 ma; max peak current ♦ = 50 ma. Socket terminals 3 and 7 may be used as tie points for components at or near filament potential. | | | | | | | | | | 1H2 ● |
| Class A Amplifier { | 180 | — | 13.5 | 3.1 | — | 10,300 | 900 | 9.3 | — | — | 1H4-G |
| Class B Amp. | 90 | — | 4.5 | 2.5 | — | 11,000 | 850 | 9.3 | — | — | 1H4-GT |
| Class B Amp. | 157.5 | — | 15.0 | 1.0† | — | Input Signal = .260 watt | | 8,000† | 2.1 | — | 1H4-GT |
| Class A Amplifier | 90 | — | 0 | 0.15 | — | 240,000 | 275 | 65 | — | — | 1H5-G |
| Class A Amplifier | 135 | — | 3.0 | 0.8 | — | 35,000 | 575 | 20 | — | — | 1H5-GT |
| Class A Amplifier | 135 | — | 3.0 | 0.8 | — | 35,000 | 575 | 20 | — | — | 1H6-G |
| Class A Amplifier | 135 | — | 3.0 | 0.8 | — | 35,000 | 575 | 20 | — | — | 1H6-GT |
| TV Flyback Rectifier | Max inverse voltage (d-c and peak) ♦ = 26,000 volts (d-c component ♦ = 22,000 volts); max d-c output current ♦ = 0.5 ma; max peak current ♦ = 50 ma. Socket terminals 4 and 6 may be used as tie points for components at or near filament potential; 1, 3, 5 and 8 may be connected to terminal 7. | | | | | | | | | | 1J3 ● |
| TV Flyback Rectifier | Max inverse voltage (d-c and peak) ♦ = 28,000 volts (d-c component ♦ = 24,000 volts); max d-c output current ♦ = 0.5 ma; max peak current ♦ = 50 ma. Socket terminals 4 and 6 may be used as tie points for components at or near filament potential; 1, 3, 5 and 8 may be connected to terminal 7. | | | | | | | | | | 1J3-A ● |
| Class A Amplifier | 135 | 135 | 16.5 | 7.0 | 2.0 | 105,300 | 950 | — | 135,000 | 0.45 | 1J5-G |
| Class B Amplifier | 135 | — | 0 | 5.0† | — | Input Signal = .170 watt | | 10,000† | 2.1 | — | 1J6-G |
| Class B Amplifier | 135 | — | 0 | 5.0† | — | Input Signal = .170 watt | | 10,000† | 2.1 | — | 1J6-GT |
| TV Flyback Rectifier | Max inverse voltage (d-c and peak) ♦ = 26,000 volts (d-c component ♦ = 22,000 volts); max d-c output current ♦ = 0.5 ma; max peak current ♦ = 50 ma. Socket terminals 4 and 6 may be used as tie points for components at or near filament potential; 1, 3, 5 and 8 may be connected to terminal 7. | | | | | | | | | | 1K3 ● |
| TV Flyback Rectifier | Max inverse voltage (d-c and peak) □ = 26,000 volts (d-c component □ = 22,000 volts); max d-c output current □ = 0.5 ma; max peak current □ = 50 ma. Socket terminals 4 and 6 may be used as tie points for components at or near filament potential; 1, 3, 5 and 8 may be connected to terminal 7. | | | | | | | | | | 1K3-A ● |
| Class A Amplifier Converter | 90 | 90 | 0 | 4.5 | 2.0 | 350,000 | 1,025 | — | — | — | 1L4 |
| Class A Amplifier Converter | 90 | 45 | 0 | 0.5 | 0.6 | 650,000 | 300 # | E _{c2} (Osc Plate) = 90 I _{c2} = 1.2 ma | | — | 1L6 |
| Class A Amplifier Converter | 90 | 90 | 4.5 | 4.0† | 0.8† | 300,000 | 850 | — | 25,000 | 0.115 | 1LA4 |
| Class A Amplifier Converter | 85 | 85 | 4.5 | 3.5† | 0.7† | 300,000 | 800 | — | 25,000 | 0.100 | 1LA4 |
| Class A Amplifier Converter | 90 | 45 | 0 | 0.55 | 0.6 | 750,000 | 250 # | E _{c2} (Osc Plate) = 90 I _{c2} = 1.2 ma | | — | 1LA6 |
| Class A Amplifier Mixer | 90 | 90 | 9.0 | 5.0† | 1.0† | 250,000 | 925 | — | 12,000 | 0.20 | 1LB4 |
| Class A Amplifier Mixer | 90 | 67.5 | 0 | 0.4 | 2.2 | 2,000,000 | 100 # | G ₂ & 4 are screen; G ₁ is signal grid | | — | 1LB6 |
| Class A Amplifier Converter | 90 | 45 | 0 | 1.15 | 0.30 | 1,000,000 | 775 | — | — | — | 1LC5 |
| Class A Amplifier Converter | 90 | 35 | 0 | 0.75 | 0.7 | 650,000 | 275 # | E _{c2} (Osc Plate) = 45 I _{c2} = 1.4 ma | | — | 1LC6 |
| Class A Amplifier | 90 | 45 | 0 | 0.6 | 0.1 | 750,000 | 575 | — | — | — | 1LD5 |
| Class A Amplifier | 90 | — | 0 | 4.5 | — | 11,200 | 1,300 | 14.5 | — | — | 1LE3 |
| Class A Amplifier | 90 | — | 3.0 | 1.4 | — | 19,000 | 760 | 14.5 | — | — | 1LE3 |
| Class A Amplifier | 90 | — | 0 | 4.5 | — | 11,200 | 1,300 | 14.5 | — | — | 1LF3 |
| Class A Amplifier | 90 | — | 3.0 | 1.4 | — | 19,000 | 760 | 14.5 | — | — | 1LF3 |
| Class A Amplifier | 90 | 45 | 0 | 1.7 | 0.4 | 1,000,000 | 800 | — | — | — | 1LG5 |
| Class A Amplifier | 90 | 90 | 1.5 | 3.7 | 0.9 | 500,000 | 1,150 | — | — | — | 1LG5 |
| Class A Amplifier | 90 | — | 0 | 0.15 | — | 240,000 | 275 | 65 | — | — | 1LH4 |
| Class A Amplifier | 90 | 90 | 0 | 1.6 | 0.35 | 1,100,000 | 800 | — | — | — | 1LN5 |

Metal tubes are shown in bold-face type, miniature tubes in italics.

♦ G3 and G5 are screen. G4 is signal-input grid.

♥ G2 and G4 are screen. G3 is signal-input grid.

1, 2, 3, etc. indicate tube sections.

✱ Maximum screen dissipation appears

immediately below the screen voltage.

† Heater warm-up time controlled.

| Tube Type | Classification by Construction | § X-Radiation Rating | Base Connections | Outline Dwg. | Filament Volts | Filament Amps | Max. Plate Watts | Max. Plate Volts | * Max. Screen Volts and Watts | Capacitance in Picofarads | | |
|-----------------|----------------------------------|----------------------|------------------|--------------|----------------|---------------|------------------|---|-------------------------------|--|-------------|------------|
| | | | | | | | | | | Input | Output | Grid-Plate |
| 1N2 ● | Half-Wave High-Voltage Rectifier | Ⓐ | 3C | 12-18 | 1.25 | 0.2 | — | Tube Voltage Drop: 100 volts at 7.0 ma d-c | | | | |
| 1N2-A ● | Half-Wave High-Voltage Rectifier | Ⓐ | 3C | T-X | 1.25 | 0.2 | — | Tube Voltage Drop: 100 volts at 7.0 ma d-c | | | | |
| 1N5-G 1N5-GT | Sharp-Cutoff RF Pentode | | 5Y | 9-28 9-18 | 1.4 DC | 0.05 | — | 110 | 110 | 3.0 2.8 | 10.0 9.0 | 0.007 ♣ |
| 1N6-G 1N6-GT | Diode Power-Amplifier Pentode | | 7AM | T-X 9-11 | 1.4 DC | 0.05 | — | 110 | 110 | — | — | — |
| 1P5-G 1P5-GT | Remote-Cutoff RF Pentode | | 5Y | 9-28 9-18 | 1.4 DC | 0.05 | — | 110 | 110 | 3.0 — | 10.0 — | 0.007 ♣ |
| 1Q5-GT | Beam Power Amplifier | | 6AF | 9-11 9-41 | 1.4 DC | 0.1 | — | 110 | 110 | — | — | — |
| 1Q6 ● | Diode Pentode | | 8CO | 3-2 | 1.25 DC | 0.04 | — | 100 | 100 | 1.8 | 4.2 | 0.085 |
| 1R4 | High-Frequency Diode | | 4AH | 9-30 | 1.4 | 0.15 | — | Tube Voltage Drop: 8 v at 2 ma d-c | | | | |
| 1R6 | Pentagrid Converter | | 7AT ♠ | 5-2 | 1.4 DC | 0.05 | — | 90 | 67.5 | Osc I _{c1} = 0.25 ma R _{g1} = 100,000 ohms Osc I _{c1} = 0.15 ma R _{g1} = 100,000 ohms | | |
| 1S2 ● | Half-Wave High-Voltage Rectifier | Ⓐ | 9DT | 6-7 | 1.4 | 0.550 | — | — | — | — | — | — |
| 1S2-A ● | Half-Wave High-Voltage Rectifier | Ⓐ | 9DT | 6-7 | 1.4 | 0.550 | — | — | — | — | — | — |
| 1S4 | Power Amplifier Pentode | | 7AV | 5-2 | 1.4 DC | 0.1 | — | 90 | 67.5 | — | — | — |
| 1S5 | Diode Sharp-Cutoff Pentode | | 6AU | 5-2 | 1.4 DC | 0.05 | — | 90 | 90 | — | — | — |
| 1S6 ● | Diode-Pentode | | 8DA | 3-2 | 1.25 DC | 0.04 | — | 100 | 100 | — | — | — |
| 1SA6-GT | RF Pentode | | 6BD | 9-12 | 1.4 DC | 0.05 | — | 90 | 67.5 | 5.2 | 8.6 | 0.01 ♣ |
| 1SB6-GT | Diode Pentode | | 6BE | 9-11 | 1.4 DC | 0.05 | — | 90 | 67.5 | 3.2 | 3.0 | 0.25 |
| 1T2 ● | Half-Wave High-Voltage Rectifier | Ⓐ | 1AY2 | T-X | 1.4 | 0.14 | — | Tube Voltage Drop: 4.0 ma at 46 volts d-c | | | | |
| 1T4 | Remote-Cutoff Pentode | | 6AR | 5-2 | 1.4 DC | 0.05 | — | 90 | 90 | 3.6 | 7.5 | 0.01 ♣ |
| 1T5-GT | Beam Power Amplifier | | 6X | 9-11 | 1.4 DC | 0.05 | — | 110 | 110 | 4.8 | 8.0 | 0.5 |
| 1T6 ● | Diode-Pentode | | 8DA | 3-5 | 1.25 DC | 0.04 | — | 67.5 | 67.5 | — | — | — |
| 1U4 | Sharp-Cutoff RF Pentode | | 6AR | 5-2 | 1.4 DC | 0.05 | — | 120 ♠ | 120 ♠ | 3.6 | 7.5 | 0.01 ♣ |
| 1U5 | Diode Sharp-Cutoff Pentode | | 6BW | 5-2 | 1.4 DC | 0.05 | — | 100 ♠ | 100 ♠ | — | — | — |
| 1U6 | Pentagrid Converter | | 7DC ♠ | 5-2 | 1.4 DC | 0.025 | — | 110 | 65 | Osc I _{c1} = 0.028 ma R _{g1} = 200,000 ohms | | |
| 1-V | Half-Wave High-Vacuum Rectifier | | 4G | 12-5 | 6.3 | 0.3 | — | Tube Voltage Drop: 20 v at 90 ma d-c | | | | |
| 1V2 | Half-Wave High-Voltage Rectifier | | 9U | 6-2 | 0.625 | 0.3 | — | Tube Voltage Drop: 135 volts at 7.0 ma d-c | | | | |

§ See pages 20 and 21 for X-Radiation Rated Recommended Replacement Chart and Symbol Definitions—

Ⓐ—X-Radiation Rated, and Ⓐ—No X-Radiation Rating.

♣ Compactron.

‡ Plate-to-plate.

Ⓢ Subminiature type.

Ⓢ Total for all similar sections.

Ⓢ Zero signal.

♣ Maximum.

Ⓢ Without external shield.

♣ Absolute maximum rating.

♣ Per section.

‡ Supply voltage.

♣ Design maximum rating.

Conversion transconductance.

● See X-Radiation Warning, page 4.

| Service | Plate Volts | Screen Volts | Neg Grid Volts | Plate Milli- am- peres | Screen Milli- am- peres | R _p , Ohms | G _m , μmhos | μ Factor | Load for Rated Out- put, Ohms | Power Out- put, Watts | Tube Type | |
|----------------------|---|--------------------------|----------------------|---------------------------------|----------------------------------|--|---------------------------|--|--|--------------------------------|-----------------|-----|
| TV Flyback Rectifier | Max inverse voltage (d-c and peak) ⚡ = 28,000 volts (d-c component ⚡ = 24,000 volts); max d-c output current ⚡ = 0.5 ma; max peak current ⚡ = 50 ma. Socket terminals 4 and 6 may be used as tie points for components at or near filament potential; 1, 3, 5 and 8 may be connected to terminal 7. | | | | | | | | | | 1N2 ● | |
| TV Flyback Rectifier | Max inverse voltage (d-c and peak) ⚡ = 28,000 volts (d-c component ⚡ = 24,000 volts); max d-c output current ⚡ = 0.5 ma; max peak current ⚡ = 50 ma. Socket terminals 4 and 6 may be used as tie points for components at or near filament potential; 1, 3, 5 and 8 may be connected to terminal 7. | | | | | | | | | | 1N2-A ● | |
| Class A Amplifier | 90 | 90 | 0 | 1.2 | 0.3 | 1,500,000 | 750 | — | — | — | 1N5-G 1N5-GT | |
| Class A Amplifier | 90 | 90 | 4.5 | 3.4† | 0.7† | 300,000 | 800 | — | 25,000 | 0.100 | 1N6-G 1N6-GT | |
| Class A Amplifier | 90 | 90 | 0 | 2.3 | 0.7 | 800,000 | 750 | — | — | — | 1P5-G 1P5-GT | |
| Class A Amplifier | 90 85 | 90 85 | 4.5 5.0 | 9.5† 7.0† | 1.3† 0.8† | 90,000 70,000 | 2,200 1,950 | — | 8,000 9,000 | 0.27 0.25 | 1Q5-GT | |
| Class A Amplifier | 67.5 30 | 67.5 30 | 0 0 | 1.6 0.33 | 0.40 0.09 | 400,000 500,000 | 600 330 | — | — | — | 1Q6 ● | |
| Half-Wave Rectifier | Max d-c output current = 1.0 ma; max rms supply voltage = 117 volts | | | | | | | | | | — | 1R4 |
| Converter | 90 | 67.5 | 0 | 1.5 | 3.5 | 400,000 | 280 # | — | — | — | 1R6 | |
| Converter | 45 | 45 | 0 | 0.7 | 2.1 | 500,000 | 210 # | — | — | — | | |
| TV Flyback Rectifier | Max inverse voltage (d-c and peak) = 27,000 volts (d-c component = 22,000 volts); max d-c output current = 0.8 ma; max peak current = 40 ma. Socket terminals 3 and 7 may be used as tie points for components at or near heater potential. | | | | | | | | | | 1S2 ● | |
| TV Flyback Rectifier | Max inverse voltage (d-c and peak) = 27,000 volts (d-c component = 22,000 volts); max d-c output current = 0.8 ma; max peak current = 40 ma. Socket terminals 3 and 7 may be used as tie points for components at or near heater potential. | | | | | | | | | | 1S2-A ● | |
| Class A Amplifier | 90 67.5 45 | 67.5 67.5 45.0 | 7.0 7.0 4.5 | 7.4† 7.2† 3.8† | 1.4† 1.5† 0.8† | 100,000 100,000 100,000 | 1,575 1,550 1,250 | — — — | 8,000 5,000 8,000 | 0.270 0.180 0.065 | 1S4 | |
| Class A Amplifier | 67.5 | 67.5 | 0 | 1.6 | 0.4 | 600,000 | 625 | — | — | — | 1S6 | |
| Class A Amplifier | 67.5 30 | 67.5 30 | 0 0 | 1.6 0.33 | 0.4 0.10 | 400,000 500,000 | 600 330 | — | — | — | 1S6 ● | |
| Class A Amplifier | 90 | 67.5 | 0 | 2.45 | 0.68 | 800,000 | 970 | — | — | — | 1SA6-GT | |
| Class A Amplifier | 90 | 67.5 | 0 | 1.45 | 0.38 | 700,000 | 665 | — | — | — | 1SB6-GT | |
| TV Flyback Rectifier | Max inverse voltage (d-c and peak) = 15,000 volts; max d-c output current = 20 ma; max peak current = 12 ma. | | | | | | | | | | 1T2 ● | |
| Class A Amplifier | 90 90 67.5 45 | 67.5 45 67.5 45 | 0 0 0 0 | 3.5 1.8 3.4 1.7 | 1.4 0.67 1.5 0.7 | 500,000 800,000 250,000 350,000 | 900 750 875 700 | — — — — | — — — — | — — — — | 1T4 | |
| Class A Amplifier | 90 | 90 | 6.0 | 6.5† | 0.8 † | 250,000 | 1,150 | — | 14,000 | 0.170 | 1T5-GT | |
| Class A Amplifier | 67.5 30 | 67.5 30 | 0 0 | 1.6 0.33 | 0.4 0.10 | 400,000 500,000 | 600 330 | — | — | — | 1T6 ● | |
| Class A Amplifier | 90 | 90 | 0 | 1.6 | 0.5 | 1,000,000 | 900 | — | — | — | 1U4 | |
| Class A Amplifier | 67.5 | 67.5 | 0 | 1.6 | 0.4 | 600,000 | 625 | — | — | — | 1U6 | |
| Converter | 90 | 45 | 0 | 0.6 | 0.6 | 500,000 | 300 # | E _{cs} (Osc Plate) = 90 I _{cs} = 1.1 ma | | — | 1U6 | |
| Half-Wave Rectifier | Max d-c output current = 45 ma; max peak inverse voltage = 1000 volts; max rms supply voltage = 325 v; max peak current = 270 ma | | | | | | | | | | — | 1-V |
| TV Focus Rectifier | Max inverse voltage (d-c and peak) ⚡ = 8,250 volts (d-c component ⚡ = 7,000 volts); max d-c output current ⚡ = 0.6 ma; max peak current ⚡ = 11 ma. | | | | | | | | | | 1V2 | |

Metal tubes are shown in bold-face type, miniature tubes in italics.

♦ G3 and G5 are screen. G4 is signal-input grid.

♠ G2 and G4 are screen. G3 is signal-input grid.

1, 2, 3, etc. indicate tube sections.

⚡ Maximum screen dissipation appears

immediately below the screen voltage.

† Heater warm-up time controlled.

| Tube Type | Classification by Construction | X-Radiation Rating | Base Connections | Outline Dwg. | Filament Volts | Filament Amps | Max. Plate Watts | Max. Plate Volts | *Max. Screen Volts and Watts | Capacitance in Picofarads | | |
|-----------|----------------------------------|--------------------|------------------|--------------|----------------|---------------|------------------|---|------------------------------|---|--------|------------|
| | | | | | | | | | | Input | Output | Grid-Plate |
| 1V5 ⊙ | Power Amplifier Pentode | | 8CP | 3-2 | 1.25 DC | 0.04 | — | 100 | 100 | — | — | — |
| 1V6 ⊙ | Triode-Pentode Converter | | 1V6 | 2-3 | 1.25 DC | 0.04 | — | 90 | 90 | Osc $I_{c1} = 12 \mu a$ $R_{g1} = 1 \text{ meg}$ | | |
| 1W4 | Power Amplifier Pentode | | 5BZ | 5-2 | 1.4 DC | 0.05 | — | 110 | 110 | 3.6 | 7.0 | 0.1 |
| 1W5 ⊙ | Sharp-Cutoff RF Pentode | | 8CP | 3-2 | 1.25 DC | 0.04 | — | 100 | 100 | 2.3 | 3.0 | 0.009 ⚡ |
| 1X2 ● | Half-Wave High-Voltage Rectifier | ⊕ | 9Y | 6-7 | 1.25 | 0.2 | — | Tube Voltage Drop: 100 volts at 7.0 ma d-c | | | | |
| 1X2-A ● | Half-Wave High-Voltage Rectifier | ⊕ | 9Y | 6-7 | 1.25 | 0.2 | — | Tube Voltage Drop: 100 volts at 7.0 ma d-c | | | | |
| 1X2-B ● | Half-Wave High-Voltage Rectifier | ⊕ | 9Y | 6-7 | 1.25 | 0.2 | — | Tube Voltage Drop: 100 volts at 7.0 ma d-c | | | | |
| 1X2-C ● | Half-Wave High-Voltage Rectifier | 0.5 mR/hr ⊠ | 9Y | 6-7 | 1.25 | 0.2 | — | Tube Voltage Drop: 80 volts at 7.0 ma d-c | | | | |
| 1Y2 ● | Half-Wave High-Voltage Rectifier | ⊕ | 4P | T-X | 1.5 | 0.29 | — | Tube Voltage Drop: 100 volts at 8.0 ma d-c | | | | |
| 1Z2 ● | Half-Wave High-Voltage Rectifier | ⊕ | 7CB | T-X | 1.5 | 0.3 | — | Tube Voltage Drop: 50 volts at 5.0 ma d-c | | | | |
| C1K | Thyratron same as 6014 | | | | | | | | | | | |
| 2A3 | Power Amplifier Triode | | 4D | 16-1 | 2.5 | 2.5 | 15 | 300 | — | 7.5▲ | 5.5▲ | 16.5▲ |
| | | | | | | | | | | 2 tubes, push-pull | | |
| 2A4-G | Thyratron | | 5S | 12-7 | 2.5 | 2.5 | — | Anode Voltage Drop = 15 volts | | | | |
| 2A5 | Power Amplifier Pentode | | 6B | 14-1 | 2.5 | 1.75 | 11 | 375 | 285 | Pentode Connection | | |
| | | | | | | | | 350 | 3.75 | Triode Connection (G2 & P tied) | | |
| 2A6 | Duplex-Diode High-Mu Triode | | 6G | 12-6 | 2.5 | 0.8 | — | 250 | — | 1.7 | 3.8 | 1.7 |
| 2A7 | Pentagrid Converter | | 7C⚡ | 12-6 | 2.5 | 0.8 | 1.0 | 300 | 100 | Osc $I_{c1} = 0.4 \text{ ma}$ $R_{g1} = 50,000 \text{ ohms}$ | | |
| 2AF4† | UHF Triode Oscillator | | 7DK | 5-2 | 2.35 | 0.6 | 2.5⚡ | 150⚡ | — | 2.2 | 1.4 | 1.9 |
| 2AF4-A† | UHF Triode Oscillator | | 7DK | 5-1 | 2.35 | 0.6 | 2.5⚡ | 150⚡ | — | 2.2 | 1.4 | 1.9 |
| 2AF4-B† | UHF Triode Oscillator | | 7DK | 5-1 | 2.35 | 0.6 | 2.5⚡ | 150⚡ | — | 2.2 | 1.4 | 1.9 |
| 2AH2 ■ | Half-Wave High-Voltage Rectifier | ⊕ | 12DG | 9-99 | 2.5 | 0.3 | — | Tube Voltage Drop: 100 volts at 7.0 ma d-c | | | | |
| 2AS2 ■ | Half-Wave High-Voltage Rectifier | ⊕ | 12EW | 9-146 | 2.5 | 0.33 | — | Tube Voltage Drop: 100 volts at 7.0 ma d-c | | | | |
| 2AS2-A ■ | Half-Wave High-Voltage Rectifier | 25.0 mR/hr ⊠ | 12EW | 9-100 | 2.5 | 0.33 | — | Tube Voltage Drop: 75 volts at 7.0 ma d-c | | | | |

§ See pages 20 and 21 for X-Radiation Rated Recommended Replacement Chart and Symbol Definitions—

⊠—X-Radiation Rated, and ⊕—No X-Radiation Rating.

■ Compactron.
† Zero signal.
⚡ Per section.

‡ Plate-to-plate.
⚡ Maximum.
‡ Supply voltage.

⊙ Subminiature type.
▲ Without external shield.
⚡ Design maximum rating.

⊕ Total for all similar sections.
⊠ Absolute maximum rating.
Conversion transconductance.

| Service | Plate Volts | Screen Volts | Neg Grid Volts | Plate Milli-amperes | Screen Milli-amperes | R _p , Ohms | G _m , μmhos | μ Factor | Load for Rated Output, Ohms | Power Output, Watts | Tube Type |
|---------------------------------|---|------------------|------------------------|----------------------|----------------------|-------------------------------|------------------------|----------|---|-------------------------|------------------|
| Class A Amplifier | 67.5 45 30 | 67.5 45 30 | 4.5 3.0 2.0 | 2.0 1.0 0.5 | 0.4 0.2 0.1 | 150,000 175,000 200,000 | 750 600 450 | — | 25,000 40,000 50,000 | 0.050 0.015 0.005 | 1V5 ● |
| Converter | 45 | 45 | R _g = 5 meg | 0.4 | 0.15 | 1,000,000 | 200 # | — | E _b (Triode Osc) = 45 E _b (Triode) = 0.4 ma | — | 1V6 ● |
| Class A Amplifier | 90 67.5 45 | 90 67.5 45 | 9.0 6.0 4.5 | 5.0† 3.8† 1.8† | 1.0† 0.8† 0.3† | 250,000 300,000 400,000 | 925 875 650 | — | 12,000 16,000 20,000 | 0.20 0.10 0.035 | 1W4 |
| Class A Amplifier | 67.5 30.0 | 67.5 30.0 | 0 0 | 1.85 0.45 | 0.75 0.16 | 700,000 700,000 | 735 430 | — | — | — | 1W5 ● |
| TV Flyback Rectifier | Max inverse voltage (d-c component) = 15,000 volts; max d-c output current = 1.0 ma; max peak current = 10 ma. Socket terminals 3 and 7 may be used as tie points for components at or near filament potential. | | | | | | | | | | 1X2 ● |
| TV Flyback Rectifier | Max inverse voltage (d-c and peak) = 20,000 volts (d-c component) = 16,000 volts; max d-c output current = 0.5 ma; max peak current = 45 ma. Socket terminals 3 and 7 may be used as tie points for components at or near filament potential. | | | | | | | | | | 1X2-A ● |
| TV Flyback Rectifier | Max inverse voltage (d-c and peak) = 20,000 volts (d-c component) = 18,000 volts; max d-c output current = 0.5 ma; max peak current = 45 ma. Socket terminals 3 and 7 may be used as tie points for components at or near filament potential. | | | | | | | | | | 1X2-B ● |
| TV Flyback Rectifier | Max inverse voltage (d-c and peak) = 22,000 volts (d-c component) = 18,000 volts; max d-c output current = 0.5 ma; max peak current = 45 ma. Socket terminals 3 and 7 may be used as tie points for components at or near filament potential. | | | | | | | | | | 1X2-C ● |
| TV Flyback Rectifier | Max inverse voltage (d-c and peak) = 50,000 volts; max d-c output current = 2.0 ma; max peak current = 10 ma. Socket terminals 2 and 3 may be used as tie points for components at or near filament potential. | | | | | | | | | | 1Y2 |
| Half-Wave Rectifier | Max inverse voltage (d-c and peak) = 20,000 volts; max d-c output current = 2.0 ma; max peak current = 10 ma. | | | | | | | | | | 1Z2 ● |
| | | | | | | | | | | | |
| Class A Amplifier | 250 | — | 45 | 60† | — | 800 | 5,250 | 4.2 | 2,500 | 3.5 | 2A3 |
| Class AB ₁ Amplifier | 300 | — | 62 | 80† | — | — | — | — | 3,000† | 15 | 2A3 |
| Relay Control | Max d-c anode current = 100 ma; max peak inverse voltage = 200 max volts; peak anode current = 1.25 amperes | | | | | | | | | | 2A4-G |
| Class A Amplifier | 285 | 285 | 20.0 | 38† | 7.0† | 78,000 | 2,500 | — | 7,000 | 4.8 | 2A5 |
| Class A Amplifier | 250 | — | 20.0 | 31 | — | 2,600 | 2,600 | 6.8 | 4,000 | 0.85 | 2A5 |
| Class A Amplifier | 250 | — | 2.0 | 0.9 | — | 91,000 | 1,100 | 100 | — | — | 2A6 |
| Converter | 250 | 100 | 3.0 | 3.5 | 2.7 | 360,000 | 550 # | — | E _{cs} (Osc Plate) = 250 thru 20,000 ohms I _{cs} = 4.0 ma | — | 2A7 |
| Class A Amplifier | 80 | — | R _k = 150 | 17.5 | — | 2,100 | 6,500 | 13.5 | — | — | 2AF4† 2AF4-A† |
| Class A Amplifier | 80 | — | R _k = 150 | 17.5 | — | 2,100 | 6,500 | 13.5 | — | — | 2AF4-B† |
| TV Flyback Rectifier | Max inverse voltage (d-c and peak) = 30,000 volts (d-c component) = 24,000 volts; max d-c output current = 1.5 ma; max peak current = 80 ma. Socket terminals 4 and 10 may be used as tie points for components at or near heater potential. | | | | | | | | | | 2AH2 ■ |
| TV Flyback Rectifier | Max inverse voltage (d-c and peak) = 30,000 volts (d-c component) = 24,000 volts; max d-c output current = 1.5 ma; max peak current = 80 ma. Socket terminals 4, 7 and 10 may be used as tie points for components at or near heater potential. | | | | | | | | | | 2AS2 ■ |
| TV Flyback Rectifier | Max inverse voltage (d-c and peak) = 30,000 volts (d-c component) = 24,000 volts; max d-c output current = 1.7 ma; max peak current = 90 ma. Socket terminals 4, 7 and 10 may be used as tie points for components at or near heater potential. | | | | | | | | | | 2AS2-A ■ |

Metal tubes are shown in bold-face type, miniature tubes in italics.

♦ G3 and G5 are screen. G4 is signal-input grid.

♠ G2 and G4 are screen. G3 is signal-input grid.

1, 2, 3, etc. indicate tube sections.

■ Maximum screen dissipation appears immediately below the screen voltage.

† Heater warm-up time controlled.

| Tube Type | Classification by Construction | X-Radiation Rating | Base Connections | Out-line Dwg. | Filament Volts | Filament Amps | Max. Plate Watts | Max. Plate Volts | * Max. Screen Volts and Watts | Capacitance in Picofarads | | |
|-------------|---|--------------------|------------------|---------------|----------------|---------------|------------------|--|---|---------------------------|-------------|------------|
| | | | | | | | | | | Input | Output | Grid-Plate |
| 2AV2 | Half-Wave High-Voltage Rectifier | | 9U | 6-2 | 1.8 | 0.225 | — | Tube Voltage Drop: 20 volts at 1.0 ma d-c | | | | |
| 2AZ2 ● | Half-Wave High-Voltage Rectifier | ⊙ | 9Y | 6-7 | 2.1 | 0.275 | — | Tube Voltage Drop: 70 volts at 7.0 ma d-c | | | | |
| 2B3 ● | Half-Wave High-Voltage Rectifier | ⊙ | 8HC | T-X | 1.75 | 0.25 | — | Tube Voltage Drop: 100 volts at 7.0 ma d-c | | | | |
| 2B7 | Duplex-Diode Semi-Remote Cutoff Pentode | | 7D | 12-6 | 2.5 | 0.8 | 2.25 | 300 | 125 0.3 | 3.5▲ | 9.5▲ | 0.007 ♣ |
| 2B22 | High-Frequency Diode (Planar) | | 2B22 | T-X | 6.3 | 0.75 | — | — | Tube Voltage Drop: 6.0 volts at 20 ma d-c | | | |
| 2BA2 | Half-Wave High-Voltage Rectifier | | 9U | 6-2 | 1.8 | 0.3 | — | Tube Voltage Drop: 55 volts at 6.5 ma d-c | | | | |
| 2BJ2 ● | Half-Wave High-Voltage Rectifier | ⊙ | 9RT | 6-7 | 2.3 | 0.3 | — | Tube Voltage Drop: 80 volts at 7.0 ma d-c | | | | |
| 2BJ2-A ● | Half-Wave High-Voltage Rectifier | 0.5 mR/hr ▲ | 9RT | 6-7 | 2.3 | 0.3 | — | Tube Voltage Drop: 80 volts at 7.0 ma d-c | | | | |
| 2BN4† | High Frequency Triode | | 7EG | 5-2 | 2.3 | 0.6 | 2.2◆ | 275◆ | — | 3.2 | 1.4 | 1.2 |
| 2BN4-A† | High-Frequency Triode | | 7EG | 5-2 | 2.35 | 0.6 | 2.2 | 275 | — | 3.2 | 1.4 | 1.2 |
| 2BU2 ● | Half-Wave High-Voltage Rectifier | 0.5 mR/hr | 12JB | 9-146 | 2.5 | 0.33 | — | Tube Voltage Drop: 100 volts at 7.0 ma d-c | | | | |
| 2C21/1642 | Medium-Mu Twin Triode | | 7BH | 12-6 | 6.3 | 0.6 | 2.1♣ | 250 | — | — | — | — |
| 2C22 | Medium-Mu Triode | | 4AM | T-X | 6.3 | 0.3 | 3.3 | 300 | — | 2.2 | 0.7 | 3.6 |
| 2C39 | Hi Mu Triode Planar | | 2C39 | TX | 6.3 | 1.1 | — | 1000 | — | 6.5 | 0.035 | 1.95 |
| 2C39-A | Hi Mu Triode Planar | | 2C39A | TX | 6.3 | 1.03 | 100 | 1000 | — | 6.5 | 0.035 | 1.95 |
| 2C39WA | Hi Mu Triode Planar | | 2C39WA | TX | 6.3 | 1.03 | 100 | 1000 | — | 6.5 | 0.035 | 2.01 |
| 2C39B | High-Mu Triode (Planar) | | 2C39B | T-X | 6.3 | 1.03 | 100 | 1,000 | — | 6.5▲ | 0.023▲ | 2.01▲ |
| 2C40 | Medium-Mu Triode (Planar) | | 2C40 | T-X | 6.3 | 0.75 | 6.5 | 500 | — | 2.15▲ | 0.03▲ | 1.3▲ |
| 2C40-A | Medium-Mu Triode (Planar) | | 2C40 | T-X | 6.3 | 0.75 | 6.5 | 500 | — | 2.15▲ | 0.03▲ | 1.3▲ |
| 2C42 | Plate Pulsed UHF Oscillator (Planar) | | 2C40 | T-X | 6.3 | 0.9 | 12 | 3,000 peak | — | 2.9▲ | 0.05 ▲♣ | 1.7▲ |
| 2C43 | High-Mu Triode (Planar) | | 2C43 | T-X | 6.3 | 0.9 | 12 | 500 | — | 3.0▲ | 0.04▲ ♣ | 1.8▲ |
| 2C46 | UHF Triode Oscillator (Planar) | | 2C40 | T-X | 6.3 | 0.75 | 12 | 500 | — | 2.2▲ | 0.025 ▲♣ | 1.7▲ |
| 2C50 | Medium-Mu Twin Triode | | 8BD | T-X | 12.6 | 0.3 | 3.85♣ | — | — | — | — | — |
| 2C51 | High-Frequency Twin Triode | | 8CJ | 6-1 | 6.3 | 0.3 | 1.5♣ | 300 | — | 2.3 | 1.3 | 1.3 |
| 2C52 | High-Mu Twin Triode | | 8BD | 9-12 | 12.6 | 0.3 | 1.0♣ | 300 | — | 2.3 | 0.75 | 2.7 |

See pages 20 and 21 for X-Radiation Rated Recommended Replacement Chart and Symbol Definitions—

▲ — X-Radiation Rated, and ⊙ — No X-Radiation Rating.

■ Compactron.

‡ Plate-to-plate.

⊙ Subminiature type.

⊙ Total for all similar sections.

† Zero signal.

♣ Maximum.

▲ Without external shield.

⊙ Absolute maximum rating.

♣ Per section.

‡ Supply voltage.

◆ Design maximum rating.

Conversion transconductance.

● See X-Radiation Warning, page 4.

| Service | Plate Volts | Screen Volts | Neg Grid Volts | Plate Milli- am- peres | Screen Milli- am- peres | R_p , Ohms | G_m , μ amhos | μ Factor | Load for Rated Out- put, Ohms | Power Out- put, Watts | Tube Type |
|-------------------------------------|--|-----------------|----------------------|---------------------------------|----------------------------------|--------------------|------------------------|-----------------|--|--------------------------------|-------------------|
| TV Focus Rectifier | Max inverse voltage (d-c and peak) $\square = 8,250$ volts (d-c component $\diamond = 7,000$ volts); max d-c output current $\diamond = 0.6$ ma; max peak current $\diamond = 11$ ma. | | | | | | | | | | |
| TV Flyback Rectifier | Max inverse voltage (d-c and peak) $\diamond = 22,000$ volts (d-c component $\diamond = 18,000$ volts); max d-c output current $\diamond = 0.5$ ma; max peak current $\diamond = 45$ ma. Socket terminals 3 and 7 may be used as tie points for components at or near filament potential. | | | | | | | | | | |
| TV Flyback Rectifier | Max inverse voltage (d-c and peak) $\diamond = 27,000$ volts (d-c component $\diamond = 22,000$ volts); max d-c output current $\diamond = 0.5$ ma; max peak current $\diamond = 50$ ma. Socket terminals 3 and 5 may be used as tie points for components at or near filament potential; do not connect to any other circuit. | | | | | | | | | | |
| Class A Amplifier | 250 250 | 125 100 | 3.0 3.0 | 9.0 6.0 | 2.3 1.5 | 600,000 800,000 | 1,125 1,000 | — — | — — | — — | 2B7 |
| Detector | Max d-c output current $\square = 20$ ma; max peak inverse voltage $\square = 300$ volts; max peak current $\square = 700$ ma | | | | | | | | | | |
| TV Focus Rectifier | Max inverse voltage (d-c and peak) $\diamond = 8,250$ volts (d-c component $\diamond = 7,000$ volts); max d-c output current $\diamond = 0.6$ ma; max peak current $\diamond = 50$ ma. | | | | | | | | | | |
| TV Flyback Rectifier | Max inverse voltage (d-c and peak) $\diamond = 20,000$ volts; max d-c output current $\diamond = 1.0$ ma; max peak current $\diamond = 80$ ma. | | | | | | | | | | |
| TV Flyback Rectifier | Max inverse voltage (d-c and peak) $\square = 22,000$ volts (d-c component $\square = 20,000$ volts); max d-c output current $\diamond = 1.0$ ma; max peak current $\diamond = 80$ ma. | | | | | | | | | | |
| Class A Amplifier | 150 | — | $R_k = 220$ | 9.0 | — | 6,300 | 6,800 | 43 | — | — | 2B7A \dagger |
| Class A Amplifier | 150 | — | $R_k = 220$ | 9.0 | — | 5,400 | 8,000 | 43 | — | — | 2B7A-4A \dagger |
| TV Flyback Rectifier | Max inverse voltage (d-c and peak) $\square = 30,000$ volts (d-c component $\square = 24,000$ volts); max d-c output current $\diamond = 1.5$ ma; max peak current $\diamond = 80$ ma. Socket terminals 4, 10 and 11 may be used as tie points for components at or near heater potential. | | | | | | | | | | |
| Class A Amplifier \clubsuit | 250 | — | 16.5 | 8.3 | — | 7,600 | 1,375 | 10.4 | — | — | 2C21/1642 |
| Class A Amplifier | 300 | — | 10.5 | 11 | — | 6,600 | 3,000 | 20 | — | — | 2C22 |
| CW Oscillator | 800 | — | 48 | 58 | — | — | 17,000 | 100 | — | 25 | 2C39 |
| Oscillator at 500Mc | 900 | — | 22 | 90 | — | — | — | — | — | 27 | 2C39-A |
| Oscillator at 500Mc | 900 | — | 40 | 90 | — | — | — | — | — | 40 | 2C39WA |
| Oscillator at 500 Mc | 900 | — | 40 | 90 | — | — | — | — | — | 40 | 2C39B |
| Oscillator at 3,370 Mc | 250 | — | 5.0 | 20 | — | — | — | — | — | 0.075 | 2C40 |
| Plate-Pulsed Oscillator at 3,000 Mc | 1,400 Peak | — | — | 1,000 Peak | — | — | — | — | — | 300 Peak | 2C40-A |
| Plate-Pulsed Oscillator at 1,050 Mc | Peak plate voltage = 3,000 volts; PRF = 1,000; PD = 1.0 microseconds; Peak power output = 1,750 watts. | | | | | | | | | | 2C42 |
| Plate-Pulsed Oscillator at 3,370 Mc | 3,000 Peak | — | — | 2,500 Peak | — | — | — | — | — | 1,750 Peak | 2C43 |
| UHF Oscillator at 1,100 Mc | 150 | — | — | 8.0 | — | — | — | — | — | 0.02 | 2C46 |
| Class A Amplifier \clubsuit | 200 | — | 11 | 18 | — | 3,450 | 2,900 | 10 | — | — | 2C50 |
| Class A Amplifier \clubsuit | 150 | — | $R_k = 240$ | 8.2 | — | 6,500 | 5,500 | 35 | — | — | 2C61 |
| Class A Amplifier \clubsuit | 250 | — | 2.0 | 1.3 | — | — | 1,900 | 100 | — | — | 2C52 |

Metal tubes are shown in bold-face type, *miniature tubes in italics.*

\diamond G3 and G5 are screen. G4 is signal-input grid.

\heartsuit G2 and G4 are screen. G3 is signal-input grid.

1, 2, 3, etc. indicate tube sections.

\ast Maximum screen dissipation appears immediately below the screen voltage.

\dagger Heater warm-up time controlled.

| Tube Type | Classification by Construction | X-Radiation Rating | Base Connections | Out-line Dwg. | Filament Volts | Filament Amps | Max. Plate Watts | Max. Plate Volts | * Max. Screen Volts and Watts | Capacitance in Picofarads | | |
|-------------|----------------------------------|--------------------|------------------|-----------------|----------------|---------------|------------------|---|--|--|--------|------------|
| | | | | | | | | | | Input | Output | Grid-Plate |
| 2CN3-A ● | Half-Wave High-Voltage Rectifier | ▲ | 8MU | T-X | 1.8 | 0.9 | — | Tube Voltage Drop: 60 volts at 7.0 ma d-c | | | | |
| 2CN3-B ● | Half-Wave High-Voltage Rectifier | 25.0 mR/hr ▲ | 8MU | 9-153 | 1.8 | 0.9 | — | Tube Voltage Drop: 60 volts at 7.0 ma d-c | | | | |
| 2CW4¶ | High-Mu Triode (Nuvistor) | | 12AQ | 4-4 | 2.1 | 0.45 | 1.5⊕ | 135⊕ | — | 4.3▲ | 1.8▲ | 0.92▲ |
| 2CY5¶ | Sharp-Cutoff RF Tetrode | | 7EW | 5-2 | 2.4 | 0.6 | 2.0⊕ | 180⊕ | 180⊕ 0.5⊕ | 4.5 | 3.0 | 0.03 |
| 2D21 | Thyratron | | 7BN | 5-2 | 6.3 | 0.6 | — | Anode voltage drop = 8 volts | | | | |
| 2DF4 | Pentode | | 9JL | 6-2 | 2.5 1.25 | 0.345 0.69 | 4.5⊕ | 250⊕ | 125⊕ 1.5⊕ | 7.5▲ | 5.5▲ | 0.25▲ ▲ |
| 2DS4¶ | High-Mu Triode (Nuvistor) | | 12AQ | 4-4 | 2.1 | 0.45 | 1.5⊕ | 135⊕ | — | 4.3▲ | 1.8▲ | 0.92▲ |
| 2DV4¶ | Medium-Mu Triode (Nuvistor) | | 12EA | 4-4 | 2.1 | 0.45 | 1.0⊕ | 125⊕ | — | 4.4▲ | 1.9▲ | 1.8▲ |
| 2DX4¶ | UHF Triode Oscillator | | 7DK | 5-1 | 2.4 | 0.6 | 2.2⊕ | 150⊕ | — | 3.9 | 1.5 | 1.6 |
| 2DY4¶ | UHF Triode Oscillator | | 7DK | 5-2 | 2.05 | 0.45 | 1.5⊕ | 135⊕ | — | 3.5 | 1.15 | 2.0 |
| 2DY4-A¶ | UHF Triode Oscillator | | 7DK | 5-1 | 2.05 | 0.45 | 1.5⊕ | 135⊕ | — | 3.5 | 1.15 | 2.0 |
| 2DZ4¶ | UHF Triode Oscillator | | 7DK | 5-1 | 2.35 | 0.6 | 2.3⊕ | 135⊕ | — | 2.2 | 1.3 | 1.8 |
| 2E5 | Electron-Ray Indicator | | 6R | 9-26 or 12-5 | 2.5 | 0.8 | — | 250⊕ | Max target voltage = 250 Min target voltage = 125 | | | |
| 2E24 | Beam Pentode | | 7CL | T-X | 6.3 | 0.65 | 10⊕ | 300⊕ | 200⊕ 2.5⊕ | 9.5▲ | 7.0▲ | 0.12▲ ▲ |
| 2E26 | Beam Pentode | | 7CK | T-X | 6.3 | 0.8 | 10⊕ | 600⊕ | 250⊕ 2.5⊕ | Pentode Connection Two Tubes Push Pull | | |
| | | | | | | | 10⊕ | 400⊕ | 200⊕ 2.5⊕ | Pentode Connection Two Tubes, Push Pull | | |
| 2E30 | Beam Power Amplifier | | 7CQ | 5-3 | 6.0 3.0 | 0.65 1.30 | 10 | 250 | 250 5.2 | 9.6 | 14 | 0.18 ▲ |
| 2E31● | Sharp-Cutoff RF Pentode | | 2E31 | T-X | 1.25 DC | 0.05 | — | 45 | 45 | 4.2 | 4.0 | 0.018 ▲ |
| 2E32● | Sharp-Cutoff RF Pentode | | 2E31 | T-X | 1.25 DC | 0.05 | — | 45 | 45 | 4.2 | 4.0 | 0.018 ▲ |
| 2E35● | Power Amplifier Pentode | | 2E31 | T-X | 1.25 DC | 0.03 | — | 45 | 45 | 2.7 | 5.7 | 0.2 ▲ |
| 2E36● | Power Amplifier Pentode | | 2E31 | T-X | 1.25 DC | 0.03 | — | 45 | 45 | 2.7 | 5.7 | 0.2 ▲ |
| 2E41● | Diode Pentode | | 2E41 | T-X | 1.25 DC | 0.03 | — | 45 | 45 | 2.7 | 4.3 | 0.10 |
| 2E42● | Diode Pentode | | 2E41 | T-X | 1.25 DC | 0.03 | — | 45 | 45 | 2.7 | 4.3 | 0.10 |
| 2EA5¶ | Sharp-Cutoff RF Tetrode | | 7EW | 5-2 | 2.4 | 0.6 | 3.25⊕ | 250⊕ | 150⊕ 0.5⊕ | 4.5 | 3.0 | 0.05 ▲ |
| 2EG4 | High-Mu Triode (Nuvistor) | | 12AQ | 4-4 | 1.7 | 0.6 | 1.5⊕ | 135⊕ | — | 4.3▲ | 1.8▲ | 0.92▲ |
| 2EN5¶ | Twin Diode | | 7FL | 5-2 | 2.1 | 0.45 | — | Tube Voltage Drop: 5.0 volts at 20 ma d-c | | | | |
| 2ER5 | High-Frequency Triode | | 7FP | 5-2 | 2.3 | 0.6 | 2.2 | 250 | — | 4.4 | 4.0 | 0.36 |
| 2ES5¶ | High-Frequency Triode | | 7FP | 5-2 | 2.35 | 0.6 | 2.2⊕ | 250⊕ | — | 3.2 | 4.0 | 0.5 |
| 2EV5¶ | Sharp-Cutoff RF Tetrode | | 7EW | 5-2 | 2.4 | 0.6 | 3.25⊕ | 275⊕ | 180⊕ 0.2⊕ | 4.5 | 2.9 | 0.035 ▲ |
| 2FH5¶ | High-Frequency Triode | | 7FP | 5-2 | 2.35 | 0.6 | 2.2⊕ | 150⊕ | — | 3.2 | 4.0 | 0.52 |

§ See pages 20 and 21 for X-Radiation Rated Recommended Replacement Chart and Symbol Definitions—

▲—X-Radiation Rated, and ●—No X-Radiation Rating.

■ Compactron.
‡ Zero signal.
♣ Per section.

† Plate-to-plate.
♣ Maximum.
♣ Supply voltage.

● Subminiature type.
▲ Without external shield.
⊕ Design maximum rating.

⊕ Total for all similar sections
⊕ Absolute maximum rating.
Conversion transconductance.

| Service | Plate Volts | Screen Volts | Neg Grid Volts | Plate Milli-amperes | Screen Milli-amperes | R_p , Ohms | G_m , μ mhos | μ Factor | Load for Rated Output, Ohms | Power Output, Watts | Tube Type |
|--|---|--------------|----------------|---------------------|----------------------|--------------|--------------------|--------------|-----------------------------|---------------------|-------------|
| TV Flyback Rectifier | Max inverse voltage (d-c and peak) $\diamond = 38,000$ volts (d-c component $\diamond = 30,000$ volts); max d-c output current $\diamond = 2.2$ ma; max peak current $\diamond = 110$ ma. Socket terminals 4, 10 and 11 may be used as tie points for components at or near heater potential. | | | | | | | | | | 2CN3-A ● |
| TV Flyback Rectifier | Max inverse voltage (d-c and peak) $\square = 38,000$ volts (d-c component $\square = 30,000$ volts); max d-c output current $\diamond = 2.2$ ma; max peak current $\diamond = 110$ ma. Socket terminals 4, 10 and 11 may be used as tie points for components at or near heater potential. | | | | | | | | | | 2CN3-B ● |
| Class A Amplifier | 110 | — | $R_k = 130$ | 7.2 | — | 6,600 | 9,800 | 65 | — | — | 2CW4† |
| Class A Amplifier | 125 | 80 | 1.0 | 10 | 1.5 | 100,000 | 8,000 | — | — | — | 2CY6† |
| Controlled Rectifier | Max d-c cathode current $\square = 100$ ma; max peak inverse voltage $\square = 1,300$ volts; max peak cathode current $\square = 500$ ma | | | | | | | | | | 2D21 |
| Class A Amplifier | 120 | 120 | 3.6 | 40 | 3.5 | — | 7,500 | — | — | — | 2DF4 |
| Class A Amplifier | 110 | — | $R_k = 130$ | 6.5 | — | 7,000 | 9,000 | 63 | — | — | 2DS4† |
| Class A Amplifier | 75 | — | $R_k = 100$ | 10.5 | — | 3,100 | 11,500 | 35 | — | — | 2DV4† |
| Class A Amplifier | 85 | — | $R_k = 150$ | 10 | — | 2,700 | 11,000 | 30 | — | — | 2DX4† |
| Class A Amplifier | 90 | — | $R_k = 180$ | 10.4 | — | — | 11,000 | 28 | — | — | 2DY4† |
| Class A Amplifier | 90 | — | $R_k = 180$ | 10.4 | — | — | 11,000 | 28 | — | — | 2DY4-A† |
| Class A Amplifier | 80 | — | — | 15 | — | 2,000 | 6,700 | 14 | — | — | 2DZ4† |
| With 2,700 ohm resistor in plate circuit | | | | | | | | | | | |
| Tuning Indicator | Plate voltage = 250 thru 1 meg, target voltage = 250 ($E_c = -8$ volts, shadow = 0°) ($E_c = 0$ volt, shadow = 90°, plate current = 0.24 ma, target current = 4 ma) | | | | | | | | | | 2E5 |
| Class A Amplifier | 250 | 160 | 8.0 | 35† | 2.6† | — | — | — | 6,000 | 3.9 | 2E24 |
| Class AB1 Amplifier | 500 | 250 | 40 | 13† | — | — | — | — | 8,650 | 40 | 2E26 |
| Class AB2 Amplifier | 400 | 125 | 15 | 20† | — | — | — | — | 6,200† | 42 | |
| Class A Amplifier | 250 | 250 | 20 | 40† | 3.3† | 63,000 | 3,700 | — | 4,500 | 4.5 | 2E30 |
| Class A Amplifier | 22.5 | 22.5 | $R_g = 5$ meg | 0.4 | 0.3 | 350,000 | 500 | — | — | — | 2E31 ● |
| Class A Amplifier | 22.5 | 22.5 | $R_g = 5$ meg | 0.4 | 0.3 | 350,000 | 500 | — | — | — | 2E32 ● |
| Class A Amplifier | 45 | 45 | 1.25 | 0.45 | 0.11 | 250,000 | 500 | — | 100,000 | 0.006 | 2E35 ● |
| Class A Amplifier | 45 | 45 | 1.25 | 0.45 | 0.11 | 250,000 | 500 | — | 100,000 | 0.006 | 2E36 ● |
| Class A Amplifier | 22.5 | 22.5 | $R_g = 5$ meg | 0.35 | 0.12 | 250,000 | 375 | — | — | — | 2E41 ● |
| Class A Amplifier | 22.5 | 22.5 | $R_g = 5$ meg | 0.35 | 0.12 | 250,000 | 375 | — | — | — | 2E42 ● |
| Class A Amplifier | 250 | 140 | 1.0 | 10 | 0.95 | 150,000 | 8,000 | — | — | — | 2EA6† |
| Class A Amplifier | 110 | — | $R_k = 130$ | 6.5 | — | 7,000 | 9,000 | 63 | — | — | 2EG4 |
| Half-Wave Rectifier | Max d-c output current per plate $\diamond = 5.0$ ma | | | | | | | | | | 2EN5† |
| Class A Amplifier | 200 | — | 1.2 | 10 | — | — | 10,500 | 80 | — | — | 2ER6 |
| Class A Amplifier | 200 | — | 1.0 | 10 | — | 8,000 | 9,000 | 75 | — | — | 2ES6† |
| Class A Amplifier | 250 | 80 | 1.0 | 11.5 | 0.9 | 150,000 | 8,800 | — | — | — | 2EV6† |
| Class A Amplifier | 135 | — | 1.0 | 11 | — | 5,600 | 9,000 | 50 | — | — | 2FH6† |

Metal tubes are shown in bold-face type, *miniature tubes in italics*.

◆ G3 and G5 are screen. G4 is signal-input grid.

♦ G2 and G4 are screen. G3 is signal-input grid.

1, 2, 3, etc. indicate tube sections.

*Maximum screen dissipation appears immediately below the screen voltage.

† Heater warm-up time controlled.

| Tube Type | Classification by Construction | § X-Radiation Rating | Base Connections | Out-line Dwg. | Fila-ment Volts | Fila-ment Amps | Max. Plate Watts | Max. Plate Volts | * Max. Screen Volts and Watts | Capacitance in Picofarads | | |
|---------------|----------------------------------|----------------------|------------------|---------------|-----------------|----------------|------------------|---|-------------------------------|---|---------|------------|
| | | | | | | | | | | Input | Out-put | Grid-Plate |
| 2FQ6¶ | High-Frequency Triode | | 7FP | 5-2 | 2.3 | 0.6 | 2.5◆ | 200◆ | — | 4.8 | 4.0 | 0.4 |
| 2FQ5-A¶ | High-Frequency Triode | | 7FP | 5-2 | 2.3 | 0.6 | 2.5◆ | 200◆ | — | 5.0 | 3.5 | 0.52 |
| 2FS6¶ | "Shadow-Grid" Beam Pentode | | 7GA | 5-2 | 2.4 | 0.6 | 3.25◆ | 300◆ | 150◆ 0.15◆ | 4.8 | 2.8 | 0.016 |
| 2FV6¶ | Sharp-Cutoff RF Tetode | | 7FQ | 5-2 | 2.4 | 0.6 | 2.0◆ | 275◆ | 180◆ 0.5◆ | 4.5 | 3.0 | 0.03◆ |
| 2FY6 | High-Mu Triode | | 7FP | 5-2 | 2.4 | 0.6 | 2.2■ | 200■ | — | 4.75 | 4.3 | 0.48 |
| 2G21● | Triode-Heptode Converter | | 2G21 ▼ | T-X | 1.25 DC | 0.05 | — | 45 | 45 | Osc I _{cl} = 0.030 ma R _{g1} = 50,000 ohms | | |
| 2G22● | Triode-Heptode Converter | | 2G21 ▼ | T-X | 1.25 DC | 0.05 | — | 45 | 45 | Osc I _{cl} = 0.030 ma R _{g1} = 50,000 ohms | | |
| 2GK5¶ | High-Frequency Triode | | 7FP | 5-2 | 2.3 | 0.6 | 2.5◆ | 200◆ | — | 5.0 | 3.5 | 0.52 |
| 2GU5¶ | "Shadow-Grid" Beam Pentode | | 7GA | 5-2 | 2.4 | 0.6 | 3.0◆ | 300◆ | 150◆ 0.15◆ | 0.7▲ | 3.2▲ | 0.018▲ |
| 2GW5¶ | High-Mu Triode | | 7GK | 5-2 | 2.45 | 0.6 | 2.5◆ | 200◆ | — | 5.5 | 4.0 | 0.6 |
| 2HA5 | High-Mu Triode | | 7GM | 5-1 | 2.2 | 0.6 | 2.6◆ | 220◆ | — | 4.3 | 2.9 | 0.36 |
| 2HK5¶ | High-Frequency Triode | | 7GM | 5-2 | 2.3 | 0.6 | 2.3◆ | 200◆ | — | 4.4 | 2.6 | 0.29 |
| 2HM5¶ | High-Mu Triode | | 7GM | 5-2 | 2.0 | 0.6 | 2.6◆ | 200◆ | — | 4.5 | 3.0 | 0.34◆ |
| 2HQ5¶ | Triode | | 7GM | 5-2 | 2.4 | 0.6 | 2.5◆ | 200◆ | — | 5.0 | 3.5 | 0.52 |
| 2HR8 | Pentode | | 9BJ | 6-2 | 2.5 | 0.6 | 1.0 | 300 | 300 0.2 | 3.5▲ | 5.0▲ | 0.05◆ ▲ |
| 2J2● | Half-Wave High-Voltage Rectifier | Ⓐ | 9DT | T-X | 2.0 | 0.35 | — | — | — | — | — | — |
| 2L2● | Miniature High-Voltage Rectifier | Ⓐ | — | T-X | 2.0 | 0.2 | — | — | — | — | — | — |
| 2T4¶ | UHF Triode Oscillator | | 7DK | 5-1 | 2.35 | 0.6 | 3.5 | 200 | — | 2.6▲ | 0.4▲ | 1.7▲ |
| 2V2● | Half-Wave High-Voltage Rectifier | Ⓐ | 8FV | T-X | 2.5 1.25 | 0.2 0.4 | — | Tube Voltage Drop: 150 volts at 7.0 ma d-c | | | | |
| 2V3-G● | Half-Wave High-Voltage Rectifier | Ⓐ | 4Y | 12-8 | 2.5 | 5.0 | — | — | — | — | — | — |
| 2W3 2W3-GT | Half-Wave High-Vacuum Rectifier | | 4X | 8-6 9-12 | 2.5 | 1.5 | — | — | — | — | — | — |
| 2X2● | Half-Wave High-Voltage Rectifier | Ⓐ | 4AB | 12-6 | 2.5 | 1.75 | — | Tube voltage drop: 98 volts at 15 mA d-c | | | | |
| 2X2A● | Half-Wave High-Voltage Rectifier | Ⓐ | 4AB | 12-6 | 2.5 | 1.75 | — | — | — | — | — | — |
| 2Y2● | Half-Wave High-Voltage Rectifier | Ⓐ | 4P | 12-6 | 2.5 | 1.75 | — | — | — | — | — | — |
| 3A2● | Half-Wave High-Voltage Rectifier | Ⓐ | 9RT | 6-7 | 3.15 | 0.22 | — | Tube Voltage Drop: 70 volts at 7.0 ma d-c | | | | |
| 3A2-A● | Half-Wave High-Voltage Rectifier | 0.5 mR/hr ▲ | 9RT | 6-7 | 3.15 | 0.22 | — | Tube Voltage Drop: 70 volts at 7.0 ma d-c | | | | |
| 3A3● | Half-Wave High-Voltage Rectifier | Ⓐ | 8EZ | 9-52 | 3.15 | 0.22 | — | — | — | — | — | — |
| 3A3-A● | Half-Wave High-Voltage Rectifier | Ⓐ | 8EZ | T-X | 3.15 | 0.22 | — | Tube Voltage Drop: 100 volts at 7.0 ma d-c | | | | |

§ See pages 20 and 21 for X-Radiation Rated Recommended Replacement Chart and Symbol Definitions—

▲ — X-Radiation Rated, and Ⓐ — No X-Radiation Rating.

■ Compactor.

† Plate-to-plate.

● Subminiature type.

⊕ Total for all similar sections.

◆ Zero signal.

◆ Maximum.

⊖ Without external shield.

■ Absolute maximum rating.

◆ Per section.

◆ Supply voltage.

◆ Design maximum rating.

Conversion transconductance.

| Service | Plate Volts | Screen Volts | Neg Grid Volts | Plate Milli-amperes | Screen Milli-amperes | R _p Ohms | G _m μmhos | μ Factor | Load for Rated Output, Ohms | Power Output, Watts | Tube Type |
|----------------------|---|--------------|----------------------|---------------------|----------------------|---------------------|----------------------|--|-----------------------------|---------------------|-----------------|
| Class A Amplifier | 135 | — | 1.2 | 11.5 | — | 5,500 | 11,000 | 60 | — | — | 2FQ5 † |
| Class A Amplifier | 135 | — | 1.2 | 8.9 | — | 6,300 | 12,000 | 74 | — | — | 2FQ5-A † |
| Class A Amplifier | 275 | 135 | 0.2 | 9.0 | 0.17 | 240,000 | 10,000 | — | — | — | 2FS5 † |
| Class A Amplifier | 125 | 80 | 1.0 | 10 | 1.5 | 100,000 | 8,000 | — | — | — | 2FV6 † |
| Class A Amplifier | 135 | — | 1.0 | 11 | — | — | 13,000 | 70 | — | — | 2FY6 |
| Converter | 22.5 | 22.5 | 0 | 0.2 | 0.3 | 500,000 | 60 # | E _b (Triode Osc) = 22.5 I _b (Triode) = 1.0 ma | | — | 2G21 ● |
| Converter | 22.5 | 22.5 | 0 | 0.2 | 0.3 | 500,000 | 60 # | E _b (Triode Osc) = 22.5 I _b (Triode) = 1.0 ma | | — | 2G22 ● |
| Class A Amplifier | 135 | — | 1.0 | 11.5 | — | 5,400 | 15,000 | 78 | — | — | 2GK5 † |
| Class A Amplifier | 275 | 135 | 0.4 | 10 | 0.17 | 165,000 | 15,500 | — | — | — | 2GU5 † |
| Class A Amplifier | 135 | — | 1.0 | 12.5 | — | 5,800 | 15,000 | 70 | — | — | 2GW5 † |
| Class A Amplifier | 135 | — | 1.0 | 11.5 | — | — | 14,500 | 72 | — | — | 2HA5 |
| Class A Amplifier | 135 | — | 1.0 | 12.5 | — | 5,000 | 15,000 | 75 | — | — | 2HK5 † |
| Class A Amplifier | 135 | — | 1.0 | 12.5 | — | — | 14,500 | 78 | — | — | 2HM5 † |
| Class A Amplifier | 135 | — | 1.0 | 11.5 | — | 5,400 | 15,000 | 78 | — | — | 2HQ5 † |
| Class A Amplifier | 250 | 140 | 2.0 | 3.0 | 0.6 | 2,500,000 | 2,000 | — | — | — | 2HR8 |
| Flyback Rectifier | Max peak inverse voltage (absolute) ☐ = 27,000 volts; max peak inverse voltage (design center) ◆ = 23,500 volts; max d-c output current = 0.2 ma; max peak current = 80 ma. | | | | | | | | | | 2J2 ● |
| Flyback Rectifier | Max peak inverse voltage (no load) = 22,000 volts; max peak inverse voltage (on load) = 19,000 volts; max d-c output current = 0.5 mA max. peak current = 25 mA. | | | | | | | | | | 2L2 ● |
| Class A Amplifier | 80 | — | R _k = 150 | 18 | — | 1,860 | 7,000 | 13 | — | — | 2T4 † |
| TV Flyback Rectifier | Max inverse voltage (d-c and peak) = 21,000 volts; max d-c output current = 1.0 ma; max peak current = 80 ma. Socket terminals 1 and 3 may be used as tie points for components at or near filament potential. | | | | | | | | | | 2V2 ● |
| Half-Wave Rectifier | Max inverse voltage (d-c and peak) = 16,500 volts; max d-c output current = 2.0 ma; max peak current = 12 ma. Socket terminals 1, 3, 4, 5 and 6 may be used as tie points for components at or near filament potential. | | | | | | | | | | 2V3-G ● |
| Half-Wave Rectifier | Max d-c output current = 55 ma; max rms supply voltage = 350 volts | | | | | | | | | | 2W3 2W3-GT |
| Half-Wave Rectifier | Max. peak inverse voltage ☐ = 12500 volts; d-c output current = 7.5 mA; max. peak current = 100 mA. | | | | | | | | | | 2X2 ● |
| Half-Wave Rectifier | Max. peak inverse voltage = 12500 volts; d-c output current = 7.5 mA; max. peak current = 100 mA. | | | | | | | | | | 2X2A ● |
| Half-Wave Rectifier | Max. peak inverse voltage = 12000 volts; max. d-c output current = 5.0 mA. | | | | | | | | | | 2Y2 |
| TV Flyback Rectifier | Max inverse voltage (d-c and peak) = 18,000 volts; max d-c output current = 1.7 ma; max peak current = 80 ma. | | | | | | | | | | 3A2 ● |
| TV Flyback Rectifier | Max inverse voltage (d-c and peak) ☐ = 20,000 volts (d-c component ☐ = 18,000 volts); max d-c output current ◆ = 1.5 ma; max peak current ◆ = 80 ma. | | | | | | | | | | 3A2-A ● |
| TV Flyback Rectifier | Max inverse voltage (d-c and peak) ◆ = 30,000 volts; max d-c output current ◆ = 1.5 ma; max peak current ◆ = 88 ma. Socket terminals 4 and 6 may be used as tie points for components at or near heater potential. | | | | | | | | | | 3A3 ● |
| TV Flyback Rectifier | Max inverse voltage (d-c and peak) ◆ = 30,000 volts; max d-c output current ◆ = 2.0 ma; max peak current ◆ = 100 ma. Socket terminals 4 and 6 may be used as tie points for components at or near heater potential. | | | | | | | | | | 3A3-A ● |

Metal tubes are shown in bold-face type, *miniature tubes in italics.*

◆ G3 and G5 are screen. G4 is signal-input grid.

▼ G2 and G4 are screen. G3 is signal-input grid.

1, 2, 3, etc. indicate tube sections.

*Maximum screen dissipation appears immediately below the screen voltage.

† Heater warm-up time controlled.

| Tube Type | Classification by Construction | § X-Radiation Rating | Base Connections | Out-line Dwg. | Filament Volts | Filament Amps | Max. Plate Watts | Max. Plate Volts | * Max. Screen Volts and Watts | Capacitance in Picofarads | | |
|-----------------------------|--------------------------------------|----------------------|------------------|---------------|--------------------|----------------|------------------|--|-------------------------------|--|---------|------------|
| | | | | | | | | | | Input | Out-put | Grid-Plate |
| 3A3-B ● | Half-Wave High-Voltage Rectifier | 25.0 mR/hr ▲ | 8EZ | T-X | 3.15 | 0.22 | — | Tube Voltage Drop: 100 volts at 7.0 ma d-c | | | | |
| 3A3-C ● | Half-Wave High-Voltage Rectifier | 25.0 mR/hr ▲ | 8EZ | 9-169 | 3.15 | 0.22 | — | Tube Voltage Drop: 60 volts at 7.0 ma d-c | | | | |
| 3A4 | Power Amplifier Pentode | | 7BB | 5-2 | { 2.8 1.4 DC | { 0.1 0.2 | 2.3 | 150 | 90 0.4 | 4.8 | 4.2 | 0.20 ♣ |
| 3A5 | High-Frequency Twin Triode | | 7BC | 5-2 | { 2.8 1.4 DC | { 0.11 0.22 | 0.5♣ | 135 | — | 0.9 | 1.0 | 3.2 |
| 3A8-GT | Diode-Triode Sharp-Cutoff RF Pentode | | 8AS | 9-17 | { 2.8 1.4 DC | { 0.05 0.1 | — | 110 | — | Triode Section | | |
| | | | | | | | — | 110 | 110 | Pentode Section | | |
| 3AF4-A† 3AF4-B† 3AL5† | UHF Triode Oscillator | | 7DK | 5-1 | 3.2 | 0.45 | 2.5♣ | 150♣ | — | 2.2 | 1.4 | 1.9 |
| | Twin Diode | | 6BT | 5-1 | 3.15 | 0.6 | — | Tube Voltage Drop: 10 v at 60 ma d-c | | | | |
| 3AT2 ■ ● | Half-Wave High-Voltage Rectifier | Ⓐ | 12FV | 9-100 | 3.15 | 0.22 | — | Tube Voltage Drop: 77 volts at 7.0 ma d-c | | | | |
| 3AT2-A ■ ● | Half-Wave High-Voltage Rectifier | 25.0 mR/hr ▲ | 12FV | 9-100 | 3.15 | 0.22 | — | Tube Voltage Drop: 77 volts at 7.0 ma d-c | | | | |
| 3AT2-B ■ ● | Half-Wave High-Voltage Rectifier | 25.0 mR/hr ▲ | 12FV | 9-146 | 3.15 | 0.22 | — | Tube Voltage Drop: 60 volts at 7.0 ma d-c | | | | |
| 3AU6† | Sharp-Cutoff RF Pentode | | 7BK | 5-2 | 3.15 | 0.6 | 3.5♣ | 330♣ | 330♣ 0.75♣ | Pentode Connection | | |
| | | | | | | | 3.5♣ | 275♣ | — | Triode Connection (G ₂ , G ₃ , & P tied) | | |
| 3AV6† | Duplex-Diode High-Mu Triode | | 7BT | 5-2 | 3.15 | 0.6 | 0.5 | 300 | — | 2.2 | 1.2 | 2.0 |
| 3AW2 ■ ● | Half-Wave High-Voltage Rectifier | Ⓐ | 12HA | 9-100 | 3.15 | 0.35 | — | Tube Voltage Drop: 60 volts at 7.0 ma d-c | | | | |
| 3AW2-A ● | Half-Wave High-Voltage Rectifier | 25.0 mR/hr ▲ | 12HA | 9-146 | 3.15 | 0.35 | — | Tube Voltage Drop: 60 volts at 7.0 ma d-c | | | | |
| 3AW3 ● | Half-Wave High-Voltage Rectifier | Ⓐ | 8EZ | 9-53 | 3.15 | 0.22 | — | Tube Voltage Drop: 110 volts at 7.0 ma d-c | | | | |
| 3B2 ● | Half-Wave High-Voltage Rectifier | Ⓐ | 8GH | T-X | 3.15 | 0.22 | — | Tube Voltage Drop: 135 volts at 7.0 ma d-c | | | | |
| 3B4 | Beam Power Amplifier | | 7CY | 5-2 | 1.25 2.50 DC | 0.33 0.165 | 3.0☐ | 150☐ | 135☐ 1 | 4.6▲ | 7.6▲ | 0.16▲ ♣ |
| 3B5-GT | Beam Power Amplifier | | 7AQ | 9-12 | 1.4 2.8 DC | 0.1 0.05 | — | 67.5 | 67.5 | Parallel Filaments | | |
| | | | | | | | — | 67.5 | 67.5 | Series Filaments | | |
| 3B7 | High-Frequency Twin Triode | | 7BE | 9-30 | 1.4 2.8 DC | 0.22 0.11 | 2.7♣ | 180 | — | Both Sections in Push-pull | | |

§ See pages 20 and 21 for X-Radiation Rated Recommended Replacement Chart and Symbol Definitions—

▲ — X-Radiation Rated, and Ⓐ — No X-Radiation Rating.

■ Compactron. † Plate-to-plate.
 † Zero signal. ♣ Maximum.
 ♣ Per section. ‡ Supply voltage.

Ⓞ Subminiature type.
 ▲ Without external shield.
 ♣ Design maximum rating.

Ⓞ Total for all similar sections.
 ☐ Absolute maximum rating.
 # Conversion transconductance.

● See X-Radiation Warning, page 4.

| Service | Plate Volts | Screen Volts | Neg Grid Volts | Plate Milli-amperes | Screen Milli-amperes | R _p Ohms | G _m μmhos | μ Factor | Load for Rated Output, Ohms | Power Output, Watts | Tube Type |
|---------------------------------|--|--------------|----------------------|---------------------|----------------------|--------------------------|----------------------|----------|-----------------------------|---------------------|-----------------------------|
| TV Flyback Rectifier | Max inverse voltage (d-c and peak) $\square = 30,000$ volts (d-c component $\square = 24,000$ volts); max d-c output current $\diamond = 2.0$ ma; max peak current $\diamond = 100$ ma. Socket terminals 4 and 6 may be used as tie points for components at or near heater potential. | | | | | | | | | | 3A3-B ● |
| TV Flyback Rectifier | Max inverse voltage (d-c and peak) $\square = 38,000$ volts (d-c component $\square = 30,000$ volts); max d-c output current $\diamond = 2.0$ ma; max peak current $\diamond = 100$ ma. Socket terminals 4 and 6 may be used as tie points for components at or near heater potential. | | | | | | | | | | 3A3-C ● |
| Class A Amplifier | 150 | 90 | 8.4 | 13.3† | 2.2† | 100,000 | 1,900 | — | 8,000 | 0.7 | 3A4 |
| Class A Amplifier † | 90 | — | 2.5 | 3.7 | — | 8,300 | 1,800 | 15 | — | — | 3A6 |
| Class A Amplifier | 90 | — | 0 | 0.2 | — | 200,000 | 275 | — | — | — | 3A8-GT |
| Class A Amplifier | 90 | 90 | 0 | 1.5 | 0.5 | 800,000 | 750 | — | — | — | 3AF4-A† 3AF4-B† |
| Class A Amplifier | 80 | — | R _k = 150 | 17.5 | — | 2,100 | 6,500 | 13.5 | — | — | 3AF4-A† 3AF4-B† 3AL6† |
| Half-Wave Rectifier | Max d-c output current per plate = 9 ma; max peak inverse voltage = 330 volts; max rms supply voltage per plate = 117 volts; max peak current per plate = 54 ma | | | | | | | | | | 3AT2 ■ ● |
| TV Flyback Rectifier | Max inverse voltage (d-c and peak) $\diamond = 30,000$ volts; max d-c output current $\diamond = 1.7$ ma; max peak current $\diamond = 88$ ma. Socket terminals 4, 7 and 10 may be used as tie points for components at or near heater potential. | | | | | | | | | | 3AT2-A ■ ● |
| TV Flyback Rectifier | Max inverse voltage (d-c and peak) $\square = 30,000$ volts (d-c component $\square = 24,000$ volts); max d-c output current $\diamond = 1.7$ ma; max peak current $\diamond = 88$ ma. Socket terminals 4, 7 and 10 may be used as tie points for components at or near heater potential. | | | | | | | | | | 3AT2-B ■ ● |
| TV Flyback Rectifier | Max inverse voltage (d-c and peak) $\square = 38,000$ volts (d-c component $\square = 30,000$ volts); max d-c output current $\diamond = 1.7$ ma; max peak current $\diamond = 88$ ma. Socket terminals 4, 7 and 10 may be used as tie points for components at or near heater potential. | | | | | | | | | | 3A16† |
| Class A Amplifier | 250 | 150 | R _k = 68 | 10.6 | 4.3 | 1,000,000 | 5,200 | — | — | — | 3A16† |
| Class A Amplifier | 100 | 100 | R _k = 150 | 5.0 | 2.1 | 500,000 | 3,900 | — | — | — | 3A16† |
| Class A Amplifier | 250 | — | R _k = 330 | 12.2 | — | — | 4,800 | 36 | — | — | 3A16† |
| Class A Amplifier | 250 | — | 2.0 | 1.2 | — | 62,500 | 1,600 | 100 | — | — | 3A16† |
| Class A Amplifier | 100 | — | 1.0 | 0.5 | — | 80,000 | 1,250 | 100 | — | — | 3A16† |
| TV Flyback Rectifier | Max inverse voltage (d-c and peak) $\diamond = 38,000$ volts (d-c component $\diamond = 30,000$ volts); max d-c output current $\diamond = 2.2$ ma; max peak current $\diamond = 110$ ma. Socket terminals 4, 7 and 10 may be used as tie points for components at or near heater potential. | | | | | | | | | | 3A16† |
| TV Flyback Rectifier | Max inverse voltage (d-c and peak) $\square = 38,000$ volts (d-c component $\square = 30,000$ volts); max d-c output current $\diamond = 2.2$ ma; max peak current $\diamond = 110$ ma. Socket terminals 4, 7 and 10 may be used as tie points for components at or near heater potential. | | | | | | | | | | 3A16† |
| TV Flyback Rectifier | Max inverse voltage (d-c and peak) $\diamond = 30,000$ volts; max d-c output current $\diamond = 1.7$ ma; max peak current $\diamond = 88$ ma. Socket terminals 4 and 6 may be used as tie points for components at or near heater potential. | | | | | | | | | | 3A16† |
| TV Flyback Rectifier | Max inverse voltage (d-c and peak) $\square = 35,000$ volts (d-c component = 25,000 volts); max d-c output current = 1.1 ma; max peak current = 80 ma. Socket terminal 4 may be used as tie point for components at or near heater potential. | | | | | | | | | | 3A16† |
| Class C Amplifier | 150 | 135 | 38 | 25 | 6.2 | Input Signal = 0.07 watt | | | — | 1.25 | 3B4 |
| Class A Amplifier | 67.5 | 67.5 | 7.0 | 8.0† | 0.6† | 100,000 | 1,650 | — | 5,000 | 0.2 | 3B5-GT |
| Class A Amplifier | 67.5 | 67.5 | 7.0 | 6.7† | 0.5† | 100,000 | 1,500 | — | 5,000 | 0.18 | 3B5-GT |
| Class AB ₂ Amplifier | 135 | — | 0 | 18.2† | — | — | 1,900 | 20 † | 16,000 | 1.5 | 3B7 |

Metal tubes are shown in bold-face type, *miniature tubes in italics.*

♦ G3 and G5 are screen. G4 is signal-input grid.

♥ G2 and G4 are screen. G3 is signal-input grid.

1, 2, 3, etc. indicate tube sections.

✱ Maximum screen dissipation appears immediately below the screen voltage.

† Heater warm-up time controlled.

| Tube Type | Classification by Construction | § X-Radiation Rating | Base Connections | Out-line Dwg. | Filament Volts | Filament Amps | Max. Plate Watts | Max. Plate Volts | * Max. Screen Volts and Watts | Capacitance in Picofarads | | | |
|-----------|----------------------------------|----------------------|------------------|---------------|----------------|---------------|------------------|--|-------------------------------|---|--------------------|------------|---------|
| | | | | | | | | | | Input | Output | Grid-Plate | |
| 3B28 | Half-Wave Gas Rectifier | | 4P | T-X | 2.5 | 5.0 | — | Tube Voltage Drop = 10 Volts | | | | | |
| 3BA6¶ | Remote-Cutoff RF Pentode | | 7BK | 5-2 | 3.15 | 0.6 | 3.4◆ | 330◆ | 330◆ | 0.7◆ | 5.5 | 5.5 | 0.0035◆ |
| 3BC5¶ | Sharp-Cutoff RF Pentode | | 7BD | 5-2 | 3.15 | 0.6 | 2.3◆ | 330◆ | 330◆ | 0.55◆ | Pentode Connection | | |
| | | | | | | | 2.9◆ | 330◆ | — | Triode Connection (G ₂ & P tied) | | | |
| 3BE6¶ | Pentagrid Converter | | 7CH ▼ | 5-2 | 3.15 | 0.6 | 1.0 | 300 | 100 1.0 | Osc I _{c1} = 0.5 ma R _{g1} = 20,000 ohms | | | |
| 3BF2● | Half-Wave High-Voltage Rectifier | ▲ | 12GQ | 9-100 | 3.6 | 0.225 | — | — | — | — | — | — | |
| 3BL2■ | Half-Wave High-Voltage Rectifier | ▲ | 12HK | 9-100 | 3.3 | 0.285 | — | Tube Voltage Drop: 50 volts at 7.0 ma d-c | | | | | |
| 3BL2-A■ | Half-Wave High-Voltage Rectifier | 25.0 mR/hr ▲ | 12HK | 9-100 | 3.3 | 0.285 | — | Tube Voltage Drop: 50 volts at 7.0 ma d-c | | | | | |
| 3BM2■ | Half-Wave High-Voltage Rectifier | ▲ | 12HK | 9-100 | 3.0 | 0.3 | — | Tube Voltage Drop: 50 volts at 7.0 ma d-c | | | | | |
| 3BM2-A■ | Half-Wave High-Voltage Rectifier | 25.0 mR/hr ▲ | 12HK | 9-100 | 3.0 | 0.3 | — | Tube Voltage Drop: 50 volts at 7.0 ma d-c | | | | | |
| 3BN2■ | Half-Wave High-Voltage Rectifier | ▲ | 12FV | 9-100 | 3.15 | 0.3 | — | Tube Voltage Drop: 150 volts at 7.0 ma d-c | | | | | |
| 3BN2-A■ | Half-Wave High-Voltage Rectifier | 25.0 mR/hr ▲ | 12FV | 9-146 | 3.15 | 0.3 | — | Tube Voltage Drop: 150 volts at 7.0 ma d-c | | | | | |
| 3BN4¶ | High-Frequency Triode | | 7EG | 5-2 | 3.0 | 0.45 | 2.2◆ | 275◆ | — | 3.2 | 1.4 | 1.2 | |
| 3BN4-A¶ | High-Frequency Triode | | 7EG | 5-2 | 3.0 | 0.45 | 2.2 | 275 | — | 3.2 | 1.4 | 1.2 | |
| 3BN6¶ | Gated-Beam Discriminator | | 7DF | 5-3 | 3.15 | 0.6 | — | 330◆ | 110◆ | E _{c1} = 1.25 volts RMS | | | |
| 3BS2■ | Half-Wave High-Voltage Rectifier | ▲ | 12HY | 9-100 | 3.15 | 0.48 | — | Tube Voltage Drop: 60 volts at 7.0 ma d-c | | | | | |
| 3BS2-A■ | Half-Wave High-Voltage Rectifier | ▲ | 12HY | 9-100 | 3.15 | 0.48 | — | Tube Voltage Drop: 60 volts at 7.0 ma d-c | | | | | |
| 3BS2-B■ | Half-Wave High-Voltage Rectifier | 25.0 mR/hr ▲ | 12HY | 9-100 | 3.15 | 0.48 | — | Tube Voltage Drop: 60 volts at 7.0 ma d-c | | | | | |
| 3BT2■ | Half-Wave High-Voltage Rectifier | ▲ | 12HY | 9-100 | 3.15 | 0.48 | — | Tube Voltage Drop: 70 volts at 7.0 ma d-c | | | | | |
| 3BT2-A | Half-Wave High-Voltage Rectifier | 25.0 mR/hr ▲ | 12HY | 9-100 | 3.15 | 0.48 | — | Tube Voltage Drop: 70 volts at 7.0 ma d-c | | | | | |

§ See pages 20 and 21 for X-Radiation Rated Recommended Replacement Chart and Symbol Definitions—

▲ — X-Radiation Rated, and ◐ — No X-Radiation Rating.

■ Compactron.

† Zero signal.

◆ Per section.

‡ Plate-to-plate.

◆ Maximum.

‡ Supply voltage.

◐ Subminiature type.

▲ Without external shield.

◆ Design maximum rating.

◐ Total for all similar sections.

◆ Absolute maximum rating.

Conversion transconductance.

● See X-Radiation Warning, page 4.

| Service | Plate Volts | Screen Volts | Neg Grid Volts | Plate Milli-amperes | Screen Milli-amperes | R _p Ohms | G _m μmhos | μ Factor | Load for Rated Output, Ohms | Power Output, Watts | Tube Type |
|--------------------------|--|--------------|-----------------------------|---------------------|----------------------|---------------------|----------------------|----------|-----------------------------|---------------------|---------------|
| Half-Wave Rectifier | Max d-c output current $\square = 0.5$ amperes; max peak inverse voltage $\square = 5,000$ volts; max peak current $\square = 2.0$ amperes | | | | | | | | | | 3B28 |
| Class A Amplifier | 250 | 100 | R _k = 68 | 11 | 4.2 | 1,000,000 | 4,400 | — | — | — | 3BA6¶ |
| | 100 | 100 | R _k = 68 | 10.8 | 4.4 | 250,000 | 4,300 | — | — | — | |
| Class A Amplifier | 250 | 150 | R _k = 180 | 7.5 | 2.1 | 800,000 | 5,700 | — | — | — | 3BC6¶ |
| | 125 | 125 | R _k = 100 | 8.0 | 2.4 | 500,000 | 6,100 | — | — | — | |
| | 100 | 100 | R _k = 180 | 4.7 | 1.4 | 600,000 | 4,900 | — | — | — | |
| Class A Amplifier | 250 | — | R _k = 820 | 6.0 | — | 9,000 | 4,400 | 40 | — | — | |
| | 180 | — | R _k = 330 | 8.0 | — | 6,000 | 6,000 | 42 | — | — | |
| Converter | 250 | 100 | 1.5 | 2.9 | 6.8 | 1,000,000 | 475 # | — | — | — | 3BE6¶ |
| | 100 | 100 | 1.5 | 2.6 | 7.0 | 400,000 | 455 # | — | — | — | |
| TV Flyback Rectifier | Max inverse voltage (d-c and peak) $\diamond = 35,000$ volts; max d-c output current $\diamond = 2.2$ ma; max peak current $\diamond = 115$ ma. | | | | | | | | | | 3BF2 ■ |
| TV Flyback Rectifier | Max inverse voltage (d-c and peak) $\diamond = 33,000$ volts (d-c component $\diamond = 27,500$ volts); max d-c output current $\diamond = 2.0$ ma; max peak current $\diamond = 100$ ma. Socket terminals 4, 7 and 10 may be used as tie points for components at or near filament potential. | | | | | | | | | | 3BL2 ■ ● |
| TV Flyback Rectifier | Max inverse voltage (d-c and peak) $\square = 33,000$ volts (d-c component $\square = 27,500$ volts); max d-c output current $\diamond = 2.0$ ma; max peak current $\diamond = 100$ ma. Socket terminals 4, 7 and 10 may be used as tie points for components at or near filament potential. | | | | | | | | | | 3BL2-A ■ ● |
| TV Flyback Rectifier | Max inverse voltage (d-c and peak) $\diamond = 33,000$ volts (d-c component $\diamond = 27,500$ volts); max d-c output current $\diamond = 2.0$ ma; max peak current $\diamond = 100$ ma. Socket terminals 4, 7 and 10 may be used as tie points for components at or near filament potential. | | | | | | | | | | 3MB2 ■ ● |
| TV Flyback Rectifier | Max inverse voltage (d-c and peak) $\square = 33,000$ volts (d-c component $\square = 27,500$ volts); max d-c output current $\diamond = 2.0$ ma; max peak current $\diamond = 100$ ma. Socket terminals 4, 7 and 10 may be used as tie points for components at or near filament potential. | | | | | | | | | | 3BM2-A ■ ● |
| TV Flyback Rectifier | Max inverse voltage (d-c and peak) $\diamond = 30,000$ volts (d-c component $\diamond = 27,500$ volts); max d-c output current $\diamond = 1.7$ ma; max peak current $\diamond = 88$ ma. Socket terminals 4, 7 and 10 may be used as tie points for components at or near heater potential. | | | | | | | | | | 3BN2 ■ ● |
| TV Flyback Rectifier | Max inverse voltage (d-c and peak) $\square = 30,000$ volts (d-c component $\square = 27,500$ volts); max d-c output current $\diamond = 1.7$ ma; max peak current $\diamond = 88$ ma. Socket terminals 4, 7 and 10 may be used as tie points for components at or near heater potential. | | | | | | | | | | 3BN2-A ■ ● |
| Class A Amplifier | 150 | — | R _k = 220 | 9.0 | — | 6,300 | 6,800 | 43 | — | — | 3BN4¶ |
| Class A Amplifier | 150 | — | R _k = 220 | 9.0 | — | 5,400 | 8,000 | 43 | — | — | 3BN4-A¶ |
| FM Limiter-Discriminator | 285¶ | 100 | R _k = 200 to 400 | 0.49 | 9.8 | — | — | — | 330,000 | — | 3BN6¶ |
| TV Flyback Rectifier | Max inverse voltage (d-c and peak) $\diamond = 38,000$ volts (d-c component $\diamond = 30,000$ volts); max d-c output current $\diamond = 2.2$ ma; max peak current $\diamond = 110$ ma. Socket terminals 4 and 10 may be used as tie points for components at or near heater potential. | | | | | | | | | | 3BS2 ■ ● |
| TV Flyback Rectifier | Max inverse voltage (d-c and peak) $\diamond = 38,000$ volts (d-c component $\diamond = 30,000$ volts); max d-c output current $\diamond = 2.2$ ma; max peak current $\diamond = 110$ ma. Socket terminals 4 and 10 may be used as tie points for components at or near heater potential. | | | | | | | | | | 3BS2-A ■ ● |
| TV Flyback Rectifier | Max inverse voltage (d-c and peak) $\square = 38,000$ volts (d-c component $\square = 30,000$ volts); max d-c output current $\diamond = 2.2$ ma; max peak current $\diamond = 110$ ma. Socket terminals 4 and 10 may be used as tie points for components at or near heater potential. | | | | | | | | | | 3BS2-B ■ ● |
| TV Flyback Rectifier | Max inverse voltage (d-c and peak) $\square = 38,000$ volts (d-c component $\square = 30,000$ volts); max d-c output current $\diamond = 2.2$ ma; max peak current $\diamond = 110$ ma. Socket terminals 4 and 10 may be used as tie points for components at or near heater potential. | | | | | | | | | | 3BT2 ■ ● |
| TV Flyback Rectifier | Max inverse voltage (d-c and peak) $\square = 38,000$ volts (d-c component $\square = 30,000$ volts); max d-c output current $\diamond = 2.2$ ma; max peak current $\diamond = 110$ ma. Socket terminals 4 and 10 may be used as tie points for components at or near heater potential. | | | | | | | | | | 3BT2-A ■ ● |

Metal tubes are shown in bold-face type, *miniature tubes in italics.*

◆ G3 and G5 are screen. G4 is signal-input grid.

▼ G2 and G4 are screen. G3 is signal-input grid.

1, 2, 3, etc. indicate tube sections.

✱ Maximum screen dissipation appears immediately below the screen voltage.

¶ Heater warm-up time controlled.

| Tube Type | Classification by Construction | § X-Radiation Rating | Base Connections | Out-line Dwg. | Filament Volts | Filament Amps | Max. Plate Watts | Max. Plate Volts | * Max. Screen Volts and Watts | Capacitance in Picofarads | | |
|-----------|----------------------------------|----------------------|------------------|---------------|----------------|---------------|------------------|--|-------------------------------|--|---------|-------------|
| | | | | | | | | | | Input | Out-put | Grid-Plate |
| 3BU8¶ | Twin Pentode | | 9FG | 6-3 | 3.15 | 0.6 | 1.1 ⬥ ♣ | 300 ⬥ | 150 ⬥ 0.75 | — | — | — |
| 3BU8-A¶ | Twin Pentode | | 9FG | 6-3 | 3.15 | 0.6 | 1.1 ⬥ ♣ | 300 ⬥ | 150 ⬥ 0.75 | — | — | — |
| 3BW2 ■ | Half-Wave High-Voltage Rectifier | 25.0 mR/hr ▲ | 12HY | 9-146 | 3.15 | 0.48 | — | Tube Voltage Drop: 70 volts at 7.0 ma d-c | | | | |
| 3BY6¶ | Dual Control Heptode | | 7CH | 5-2 | 3.15 | 0.6 | 2.3 ⬥ | 330 ⬥ | 330 ⬥ 1.1 ⬥ | — | — | — |
| 3BZ6¶ | Semi-Remote-Cutoff RF Pentode | | 7CM | 5-2 | 3.15 | 0.6 | 2.3 ⬥ | 330 ⬥ | 330 ⬥ 0.55 ⬥ | 7.0 | 3.0 | .0015 ♣ |
| 3C2 ● | Half-Wave High-Voltage Rectifier | ⊙ | 8FV | 12-19 | 3.15 1.58 | 0.21 0.42 | — | Tube Voltage Drop: 62 volts at 7.0 ma d-c | | | | |
| 3C5-GT | Power-Amplifier Pentode | | 7AQ | 9-12 | 1.4 2.8 DC | 0.1 0.05 | — | 110 110 | 110 110 | Parallel Filaments Series Filaments | | |
| 3C6 | Medium-Mu Twin Triode | | 7BW | 9-30 | 1.4 2.8 DC | 0.1 0.05 | — | 110 110 | — | Section 1 / Parallel Section 2 / Filaments Section 1 / Series Section 2 / Filaments | | |
| 3C23 | Thyratron | | 3G | T-X | 2.5 | 7.0 | — | Anode Voltage Drop = 15 Volts | | | | |
| 3CA3 ● | Half-Wave High-Voltage Rectifier | ⊙ | 8MH | 9-51 | 3.6 | 0.225 | — | Tube Voltage Drop: 100 volts at 11 ma d-c | | | | |
| 3CA3-A ● | Half-Wave High-Voltage Rectifier | 25.0 mR/hr ▲ | 8EZ | T-X | 3.6 | 0.225 | — | Tube Voltage Drop: 60 volts at 7.0 ma d-c | | | | |
| 3CB6¶ | Sharp-Cutoff RF Pentode | | 7CM | 5-2 | 3.15 | 0.6 | 2.3 ⬥ | 330 ⬥ | 330 ⬥ 0.55 ⬥ | 6.5 | 3.0 | 0.015 ♣ |
| 3CE6¶ | Sharp-Cutoff RF Pentode | | 7BD | 5-2 | 3.15 | 0.6 | 2.0 | 300 | 150 0.5 | 6.5 ▲ | 1.9 ▲ | 0.03 ♣ ▲ |
| 3CF6¶ | Sharp-Cutoff RF Pentode | | 7CM | 5-2 | 3.15 | 0.6 | 2.3 ⬥ | 330 ⬥ | 330 ⬥ 0.55 ⬥ | 6.5 | 3.0 | 0.015 ♣ |
| 3CN3 ● | Half-Wave High-Voltage Rectifier | ⊙ | 8MU | T-X | 3.15 | 0.48 | — | Tube Voltage Drop: 60 volts at 7.0 ma d-c | | | | |
| 3CN3-A ● | Half-Wave High-Voltage Rectifier | ⊙ | 8MU | T-X | 3.15 | 0.48 | — | Tube Voltage Drop: 60 volts at 7.0 ma d-c | | | | |
| 3CN3-B ● | Half-Wave High-Voltage Rectifier | 25.0 mR/hr ▲ | 8MU | 9-153 | 3.15 | 0.48 | — | Tube Voltage Drop: 60 volts at 7.0 ma d-c | | | | |

§ See pages 20 and 21 for X-Radiation Rated Recommended Replacement Chart and Symbol Definitions—

▲ — X-Radiation Rated, and ⊙ — No X-Radiation Rating.

■ Compactron. ♣ Plate-to-plate.
† Zero signal. ♣ Maximum.
♣ Per section. ‡ Supply voltage.

⊙ Subminiature type.
▲ Without external shield.
⬥ Design maximum rating.

⊙ Total for all similar sections.
⬥ Absolute maximum rating.
Conversion transconductance.

● See X-Radiation Warning, page 4.

| Service | Plate Volts | Screen Volts | Neg Grid Volts | Plate Milli-amperes | Screen Milli-amperes | R_p , Ohms | G_m , μ mhos | μ Factor | Load for Rated Output, Ohms | Power Output, Watts | Tube Type |
|------------------------------|--|--------------|-------------------|---------------------|----------------------|--------------|--------------------|--------------|-----------------------------|---------------------|---|
| Sync Separator and AGC Keyer | 100 | 67.5 | $I_{c1} = 0.1$ ma | 2.2 | 5.0 | — | — | — | $E_{c3} = 0$ volts | — | 3B8 ¶ |
| | 100 | 67.5 | 0 | — | — | — | 1,500 | — | $E_{c3} = 0$ volts | — | (Characteristics given are for each section separately with plate and grid number 3 of opposite section grounded) |
| Sync Separator and AGC Keyer | 100 | 67.5 | $I_{c1} = 0.1$ ma | 2.2 | 3.3 | — | — | — | $E_{c3} = 0$ volts | — | 3B8-A ¶ |
| | 100 | 67.5 | 0 | — | — | — | 1,500 | — | $E_{c3} = 0$ volts | — | (Characteristics given are for each section separately with plate and grid number 3 of opposite section grounded) |
| TV Flyback Rectifier | Max inverse voltage (d-c and peak) $\square = 38,000$ volts (d-c component $\square = 30,000$ volts); max d-c output current $\diamond = 2.2$ ma; max peak current $\diamond = 110$ ma. Socket terminals 4 and 10 may be used as tie points for components at or near heater potential. | | | | | | | | | | 3BW2 ■ |
| Gated Amplifier | 250 | 100 | 2.5 | 6.5 | 9 | — | 1,900 | — | $E_{c3} = -2.5$ volts | — | 3BY6 ¶ |
| Class A Amplifier | 10 | 25 | 0 | 1.4 | 3.5 | — | — | — | $E_{c3} = 0$ volts | — | 3BZ6 ¶ |
| | 125 | 125 | $R_k = 56$ | 14 | 3.6 | 260,000 | 8,000 | — | — | — | |
| TV Flyback Rectifier | 125 | 125 | 4.5 | — | — | — | 700 | — | — | — | 3C2 ● |
| | Max inverse voltage (d-c and peak) $\diamond = 33,000$ volts (d-c component $\diamond = 28,000$ volts); max d-c output current $\diamond = 1.1$ ma; max peak current $\diamond = 80$ ma. Socket terminals 1 and 3 may be used as tie points for components at or near filament potential; do not connect to any other circuit. | | | | | | | | | | |
| Class A Amplifier | 90 | 90 | 9.0 | 6.0† | 1.4† | — | 1,550 | — | 8,000 | 0.24 | 3C5-GT |
| Class A Amplifier | 90 | 90 | 9.0 | 6.0† | 1.4† | — | 1,450 | — | 10,000 | 0.26 | |
| Class A Amplifier | 90 | — | 0 | 4.5 | — | 11,200 | 1,300 | 14.5 | — | — | 3C6 |
| | 90 | — | 0 | 4.5 | — | 11,200 | 1,300 | 14.5 | — | — | |
| | 90 | — | 0 | 4.5 | — | 11,200 | 1,300 | 14.5 | — | — | |
| | 90 | — | 0 | 3.2 | — | 12,800 | 1,100 | 14.1 | — | — | |
| Controlled Rectifier | Max d-c cathode current $\square = 1.5$ amperes; max peak inverse voltage $\square = 1,250$ volts; max peak cathode current $\square = 6.0$ amperes | | | | | | | | | | 3C23 |
| TV Flyback Rectifier | Max inverse voltage (d-c and peak) $\diamond = 30,000$ volts; max d-c output current $\diamond = 100$ ma; max peak current $\diamond = 100$ ma. Socket terminals 4 and 6 may be used as tie points for components at or near heater potential. | | | | | | | | | | 3CA3 ● |
| TV Flyback Rectifier | Max inverse voltage (d-c and peak) $\square = 38,000$ volts (d-c component $\square = 30,000$ volts); max d-c output current $\diamond = 2.0$ ma; max peak current $\diamond = 100$ ma. Socket terminals 4 and 6 may be used as tie points for components at or near heater potential. | | | | | | | | | | 3CA3-A ● |
| Class A Amplifier | 125 | 125 | $R_k = 56$ | 13 | 3.7 | 280,000 | 8,000 | — | — | — | 3CB6 ¶ |
| | 125 | 125 | 3.0 | 2.8 | — | — | — | — | — | — | |
| Class A Amplifier | 125 | 125 | 1.0 | 11 | 2.8 | 300,000 | 7,600 | — | — | — | 3CE5 ¶ |
| Class A Amplifier | 125 | 125 | $R_k = 56$ | 12.5 | 3.7 | 300,000 | 7,800 | — | — | — | 3CF6 ¶ |
| | 125 | 125 | 3.0 | 2.2 | — | — | — | — | — | — | |
| TV Flyback Rectifier | Max inverse voltage (d-c and peak) $\diamond = 38,000$ volts (d-c component $\diamond = 30,000$ volts); max d-c output current $\diamond = 2.2$ ma; max peak current $\diamond = 110$ ma. Socket terminals 4 and 6 may be used as tie points for components at or near heater potential. | | | | | | | | | | 3CN3 ● |
| TV Flyback Rectifier | Max inverse voltage (d-c and peak) $\diamond = 38,000$ volts (d-c component $\diamond = 30,000$ volts); max d-c output current $\diamond = 2.2$ ma; max peak current $\diamond = 110$ ma. Socket terminals 4 and 6 may be used as tie points for components at or near heater potential. | | | | | | | | | | 3CN3-A ● |
| TV Flyback Rectifier | Max inverse voltage (d-c and peak) $\square = 38,000$ volts (d-c component $\square = 30,000$ volts); max d-c output current $\diamond = 2.2$ ma; max peak current $\diamond = 110$ ma. Socket terminals 4 and 6 may be used as tie points for components at or near heater potential. | | | | | | | | | | 3CN3-B ● |

Metal tubes are shown in bold-face type, miniature tubes in italics.

♦ G3 and G5 are screen. G4 is signal-input grid.

¶ G2 and G4 are screen. G3 is signal-input grid.

1, 2, 3, etc. indicate tube sections.

* Maximum screen dissipation appears immediately below the screen voltage.

† Heater warm-up time controlled.

| Tube Type | Classification by Construction | X-Radiation Rating | Base Connections | Outline Dwg. | Filament Volts | Filament Amps | Max. Plate Watts | Max. Plate Volts | *Max. Screen Volts and Watts | Capacitance in Picofarads | | |
|-------------|----------------------------------|--------------------|------------------|--------------|----------------|---------------|------------------|---|---|---------------------------|--------|------------|
| | | | | | | | | | | Input | Output | Grid-Plate |
| 3CS6† | Dual Control Heptode | | 7CH ▼ | 5-2 | 3.15 | 0.6 | 1.0 | 300 | 300‡ 1.0 | 5.5 | 7.5 | 0.07 ♣ |
| 3CU3 ● | Half-Wave High-Voltage Rectifier | ⊕ | 8MK | T-X | 3.15 | 0.28 | — | Tube Voltage Drop: 50 volts at 7.0 ma d-c | | | | |
| 3CU3-A ● | Half-Wave High-Voltage Rectifier | 25.0 mR/hr ⊕ | 8MK | 9-153 | 3.15 | 0.28 | — | Tube Voltage Drop: 50 volts at 7.0 ma d-c | | | | |
| 3CV3 ● | Half-Wave High-Voltage Rectifier | ⊕ | 8EZ | 9-51 | 3.15 | 0.25 | — | Tube Voltage Drop: 100 volts at 9.5 ma d-c | | | | |
| 3CV3-A ● | Half-Wave High-Voltage Rectifier | 25.0 mR/hr ⊕ | 8EZ | 9-153 | 3.15 | 0.27 | — | Tube Voltage Drop: 100 volts at 9.5 ma d-c | | | | |
| 3CX3 ● | Half-Wave High-Voltage Rectifier | ⊕ | 8MT | T-X | 3.15 | 0.48 | — | Tube Voltage Drop: 60 volts at 7.0 ma d-c | | | | |
| 3CY3 ● | Half-Wave High-Voltage Rectifier | ⊕ | 8MX | 9-161 | 3.15 | 0.22 | — | Tube Voltage Drop: 60 volts at 7.0 ma d-c | | | | |
| 3CY6† | Sharp-Cutoff RF Tetrode | | 7EW | 5-2 | 2.9 | 0.45 | 2.0‡ | 180‡ | 180‡ 0.5‡ | 4.5 | 3.0 | 0.03 |
| 3CZ3 ● | Half-Wave High-Voltage Rectifier | ⊕ | 8EZ | T-X | 3.15 | 0.48 | — | Tube Voltage Drop: 60 volts at 7.0 ma d-c | | | | |
| 3CZ3-A ● | Half-Wave High-Voltage Rectifier | 25.0 mR/hr ⊕ | 8EZ | T-X | 3.15 | 0.48 | — | Tube Voltage Drop: 60 volts at 7.0 ma d-c | | | | |
| 3D6 | Beam Power Amplifier | | 6BA | 9-30 | 1.4 DC | 0.22 | 4.5 | 180 | 135 0.9 | 7.5 | 6.5 | 0.30 |
| 3DA3 ● | Half-Wave High-Voltage Rectifier | 25.0 mR/hr ⊕ | 8MY | 9-161 | 3.15 | 0.48 | — | Tube Voltage Drop: 60 volts at 7.0 ma d-c | | | | |
| 3DB3 ● | Half-Wave High-Voltage Rectifier | 25.0 mR/hr ⊕ | 8MX | 9-161 | 3.15 | 0.245 | — | Tube Voltage Drop: 60 volts at 7.0 ma d-c | | | | |
| 3DC3 ● | Half-Wave High-Voltage Rectifier | 25.0 mR/hr ⊕ | 8MZ | 9-153 | 3.15 | 0.280 | — | Tube Voltage Drop: 50 volts at 7.0 ma d-c | | | | |
| 3DF3 ● | Half-Wave High-Voltage Rectifier | 25.0 mR/hr ⊕ | 8MT | 9-161 | 3.15 | 0.48 | — | Tube Voltage Drop: 60 volts at 7.0 ma d-c | | | | |
| 3DF3-A ● | Half-Wave High-Voltage Rectifier | 8.0 mR/hr ⊕ | 8MT | T-X | 3.15 | 0.48 | — | Tube Voltage Drop: 60 volts at 7.0 ma d-c | | | | |
| 3DG4 | Full-Wave High-Vacuum Rectifier | | 5DE | 12-16 | 3.3 | 3.8 | — | — | Tube Voltage Drop:♣ 32 volts at 350 ma d-c | | | |

§See pages 20 and 21 for X-Radiation Rated Recommended Replacement Chart and Symbol Definitions—

⊕—X-Radiation Rated, and ⊕—No X-Radiation Rating.

■ Compactron.

‡ Plate-to-plate.

⊕ Subminiature type.

⊕ Total for all similar sections.

♣ Zero signal.

♣ Maximum.

▲ Without external shield.

⊕ Absolute maximum rating.

♣ Per section.

‡ Supply voltage.

⊕ Design maximum rating.

Conversion transconductance.

● See X-Radiation Warning, page 4.

| Service | Plate Volts | Screen Volts | Neg Grid Volts | Plate Milli-amperes | Screen Milli-amperes | R_p , Ohms | G_m , μ mhos | μ Factor | Load for Rated Output, Ohms | Power Output, Watts | Tube Type |
|----------------------|---|----------------|----------------|---------------------|----------------------|---------------------------|--------------------|---|-----------------------------|---------------------|--------------------|
| Gated Amplifier | 100 100 10 | 30 30 30 | 1.0 0 0 | 1.0 0.8 2.0 | 1.3 5.5 4.5 | 1,000,000 700,000 — | 1,100 — — | $E_{c3} = 0$ volts $E_{c3} = -1.0$ volts $E_{c3} = 0$ volts | | | 3CS6 $\frac{1}{2}$ |
| TV Flyback Rectifier | Max inverse voltage (d-c and peak) $\square = 33,000$ volts (d-c component $\square = 27,500$ volts); max d-c output current $\diamond = 2.0$ ma; max peak current $\diamond = 100$ ma. Socket terminals 4 and 6 may be used as tie points for components at or near filament potential. | | | | | | | | | | 3CU3 ● |
| TV Flyback Rectifier | Max inverse voltage (d-c and peak) $\square = 38,000$ volts (d-c component $\square = 30,000$ volts); max d-c output current $\diamond = 2.0$ ma; max peak current $\diamond = 100$ ma. Socket terminals 4 and 6 may be used as tie points for components at or near filament potential. | | | | | | | | | | 3CU3-A ● |
| TV Flyback Rectifier | Max inverse voltage (d-c and peak) $\square = 35,000$ volts (d-c component $\square = 27,500$ volts); max d-c output current $\diamond = 1.9$ ma; max peak current $\diamond = 100$ ma. Socket terminals 4 and 6 may be used as tie points for components at or near heater potential. | | | | | | | | | | 3CV3 ● |
| TV Flyback Rectifier | Max inverse voltage (d-c and peak) $\square = 35,000$ volts (d-c component $\square = 27,500$ volts); max d-c output current $\diamond = 1.9$ ma; max peak current $\diamond = 100$ ma. Socket terminals 4 and 6 may be used as tie points for components at or near heater potential. | | | | | | | | | | 3CV3-A ● |
| TV Flyback Rectifier | Max inverse voltage (d-c and peak) $\square = 38,000$ volts (d-c component $\square = 30,000$ volts); max d-c output current $\diamond = 2.2$ ma; max peak current $\diamond = 110$ ma. Socket terminals 1 and 7 may be used as tie points for components at or near heater potential. | | | | | | | | | | 3CX3 ● |
| TV Flyback Rectifier | Max inverse voltage (d-c and peak) $\square = 38,000$ volts (d-c component $\square = 30,000$ volts); max d-c output current $\diamond = 2.0$ ma; max peak current $\diamond = 110$ ma. Socket terminals 4 and 6 may be used as tie points for components at or near heater potential. | | | | | | | | | | 3CY3 ● |
| Class A Amplifier | 125 | 80 | 1.0 | 10 | 1.5 | 100,000 | 8,000 | — | — | — | 3CY5 $\frac{1}{2}$ |
| TV Flyback Rectifier | Max inverse voltage (d-c and peak) $\square = 38,000$ volts (d-c component $\square = 30,000$ volts); max d-c output current $\diamond = 2.2$ ma; max peak current $\diamond = 110$ ma. Socket terminals 4 and 6 may be used as tie points for components at or near heater potential. | | | | | | | | | | 3CZ3 ● |
| TV Flyback Rectifier | Max inverse voltage (d-c and peak) $\square = 38,000$ volts (d-c component $\square = 30,000$ volts); max d-c output current $\diamond = 2.2$ ma; max peak current $\diamond = 110$ ma. Socket terminals 4 and 6 may be used as tie points for components at or near heater potential. | | | | | | | | | | 3CZ3-A ● |
| Class A Amplifier | 150 | 90 | 4.5 | 9.8† | 1.0† | — | 2,400 | — | 14,000 | 0.60 | 3D6 |
| TV Flyback Rectifier | Max inverse voltage (d-c and peak) $\square = 38,000$ volts (d-c component $\square = 30,000$ volts); max d-c output current $\diamond = 2.2$ ma; max peak current $\diamond = 110$ ma. Socket terminals 1 and 7 may be used as tie points for components at or near heater potential. | | | | | | | | | | 3DA3 ● |
| TV Flyback Rectifier | Max inverse voltage (d-c and peak) $\square = 38,000$ volts (d-c component $\square = 30,000$ volts); max d-c output current $\diamond = 2.0$ ma; max peak current $\diamond = 100$ ma. Socket terminals 4 and 6 may be used as tie points for components at or near heater potential. | | | | | | | | | | 3DB3 ● |
| TV Flyback Rectifier | Max inverse voltage (d-c and peak) $\square = 38,000$ volts (d-c component $\square = 30,000$ volts); max d-c output current $\diamond = 2.2$ ma; max peak current $\diamond = 110$ ma. Socket terminals 4, 6 and 8 may be used as tie points for components at or near filament potential. | | | | | | | | | | 3DC3 ● |
| TV Flyback Rectifier | Max inverse voltage (d-c and peak) $\square = 38,000$ volts (d-c component $\square = 30,000$ volts); max d-c output current $\diamond = 2.2$ ma; max peak current $\diamond = 110$ ma. Socket terminals 1 and 7 may be used as tie points for components at or near heater potential. | | | | | | | | | | 3DF3 ● |
| TV Flyback Rectifier | Max inverse voltage (d-c and peak) $\square = 38,000$ volts (d-c component $\square = 30,000$ volts); max d-c output current $\diamond = 2.2$ ma; max peak current $\diamond = 110$ ma. Socket terminals 1 and 7 may be used as tie points for components at or near heater potential. | | | | | | | | | | 3DF3-A ● |
| Full-Wave Rectifier | Max d-c output current per plate $\diamond = 400$ ma; max peak inverse voltage $\diamond = 1050$ volts; max RMS supply voltage per plate $\diamond = 325$ volts; max peak current per plate $\diamond = 1200$ ma | | | | | | | | | | 3DG4 |

Metal tubes are shown in bold-face type, *miniature tubes in italics.*

♦ G3 and G5 are screen. G4 is signal-input grid.

♥ G2 and G4 are screen. G3 is signal-input grid.

1, 2, 3, etc. indicate tube sections.

* Maximum screen dissipation appears immediately below the screen voltage.

† Heater warm-up time controlled.

| Tube Type | Classification by Construction | § X-Radiation Rating | Base Connections | Out-line Dwg. | Filament Volts | Filament Amps | Max. Plate Watts | Max. Plate Volts | * Max. Screen Volts and Watts | Capacitance in PicoFarads | | |
|-----------|----------------------------------|----------------------|------------------|---------------|------------------|---------------|------------------|--|-------------------------------|---------------------------|---------|------------|
| | | | | | | | | | | Input | Out-put | Grid-Plate |
| 3DH3 ● | Half-Wave High-Voltage Rectifier | 25.0 mR/hr ▲ | 8NM | 9-161 | 3.15 | 0.48 | — | Tube Voltage Drop: 70 volts at 7.0 ma d-c | | | | |
| 3DJ ● | Half-Wave High-Voltage Rectifier | 25.0 mR/hr ▲ | 8MX | 9-169 | 3.15 | 0.3 | — | Tube Voltage Drop: 70 volts at 7.0 ma d-c | | | | |
| 3DK6¶ | Sharp-Cutoff Pentode | | 7CM | 5-2 | 3.15 | 0.6 | 2.3◆ | 330◆ | 330◆ 0.55◆ | 6.3▲ | 1.9▲ | 0.025▲◆ |
| 3DR3 ● | Half-Wave High-Voltage Rectifier | 0.5 mR/hr ▲ | 8NL | 12-141 | 3.15 | 0.3 | — | Tube Voltage Drop: 70 volts at 7.0 ma d-c | | | | |
| 3DS3 ● | Half-Wave High-Voltage Rectifier | 0.5 mR/hr ▲ | 8NL | T-X | 3.15 | 0.48 | — | Tube Voltage Drop: 70 volts at 7.0 ma d-c | | | | |
| 3DT6¶ | Sharp-Cutoff Pentode | | 7EN | 5-2 | 3.15 | 0.6 | 1.7◆ | 330◆ | 330◆ 1.1◆ | I _{c1} = 0.6 ma | | |
| 3DT6-A¶ | Sharp-Cutoff Pentode | | 7EN | 5-2 | 3.15 | 0.6 | 1.7◆ | 330◆ | 330◆ 1.1◆ | — | — | — |
| 3DX4¶ | UHF Triode Oscillator | | 7DK | 5-1 | 3.0 | 0.45 | 2.2◆ | 150◆ | — | 3.9 | 1.5 | 1.6 |
| 3DY4¶ | UHF Triode Oscillator | | 7DK | 5-2 | 2.9 | 0.3 | 1.5◆ | 135◆ | — | 3.5 | 1.15 | 2.0 |
| 3DY4-A¶ | UHF Triode Oscillator | | 7DK | 5-1 | 2.9 | 0.3 | 1.5◆ | 135◆ | — | 3.5 | 1.15 | 2.0 |
| 3DZ4¶ | UHF Triode Oscillator | | 7DK | 5-1 | 3.2 | 0.45 | 2.3◆ | 135◆ | — | 2.2 | 1.3 | 1.8 |
| 3E5 | Beam Power Amplifier | | 6BX | 5-2 | 1.4 2.8 DC | 0.05 0.025 | — | 135 | 90 | Parallel Filaments | | |
| 3E6 | Sharp-Cutoff RF Pentode | | 7CJ | 9-30 | 2.8 1.4 DC | 0.05 0.1 | — | 110 110 | 110 110 | Series Filaments | | |
| 3EA5¶ | Sharp-Cutoff RF Tetrode | | 7EW | 5-2 | 2.9 | 0.45 | 3.25◆ | 250◆ | 150◆ 0.5◆ | 4.5 | 3.0 | 0.05◆ |
| 3EH7 | Remote-Cutoff Pentode | | 9AQ | T-X | 3.4 | 0.6 | 2.5 | 250 | 250 0.65 | 9.5 | 3.0 | 0.005 |
| 3EJ7 | Sharp-Cutoff Pentode | | 9AQ | T-X | 3.4 | 0.6 | 2.5 | 250 | 250 0.9 | 10 | 3.0 | 0.005◆ |
| 3ER5 | High-Frequency Triode | | 7FP | 5-2 | 2.8 | 0.45 | 2.2 | 250 | — | 4.4 | 4.0 | 0.36 |
| 3ES5¶ | High-Frequency Triode | | 7FP | 5-2 | 3.0 | 0.45 | 2.2◆ | 250◆ | — | 3.2 | 4.0 | 0.5 |
| 3EV5¶ | Sharp-Cutoff RF Tetrode | | 7EW | 5-2 | 2.9 | 0.45 | 3.25◆ | 275◆ | 180◆ 0.2◆ | 4.5 | 2.9 | 0.035 |
| 3FH5¶ | High-Frequency Triode | | 7FP | 5-2 | 3.0 | 0.45 | 2.2◆ | 150◆ | — | 3.2 | 4.0 | 0.52◆ |
| 3FQ5¶ | High-Frequency Triode | | 7FP | 5-2 | 2.8 | 0.45 | 2.5◆ | 200◆ | — | 4.8 | 4.0 | 0.4 |
| 3FQ5-A¶ | High-Frequency Triode | | 7FP | 5-2 | 2.8 | 0.45 | 2.5◆ | 200◆ | — | 5.0 | 3.5 | 0.52 |
| 3FS5¶ | "Shadow Grid" Beam Pentode | | 7GA | 5-2 | 2.9 | 0.45 | 3.25◆ | 300◆ | 150◆ 0.15◆ | 4.8 | 2.8 | 0.016 |

§See pages 20 and 21 for X-Radiation Rated Recommended Replacement Chart and Symbol Definitions—

▲—X-Radiation Rated, and ○—No X-Radiation Rating.

■ Compactron.
‡ Zero signal.
◆ Per section.

‡ Plate-to-plate.
◆ Maximum.
‡ Supply voltage.

○ Subminiature type.
▲ Without external shield.
◆ Design maximum rating.

◆ Total for all similar sections.
◆ Absolute maximum rating.
Conversion transconductance.

● See X-Radiation Warning, page 4.

| Service | Plate Volts | Screen Volts | Neg Grid Volts | Plate Milli-amperes | Screen Milli-amperes | R_p Ohms | G_m μ mhos | μ Factor | Load for Rated Output, Ohms | Power Output, Watts | Tube Type |
|---|---|--------------|----------------------------|---------------------|----------------------|----------------------------------|------------------|--------------|-------------------------------|---------------------|-----------|
| TV Flyback Rectifier | Max inverse voltage (d-c and peak) $\square = 38,000$ volts (d-c component $\square = 30,000$ volts); max d-c output current $\diamond = 2.2$ ma; max peak current $\diamond = 110$ ma. Socket terminals 1, 2 and 7 may be used as tie points for components at or near heater potential. | | | | | | | | | | 3DH3 ● |
| TV Flyback Rectifier | Max inverse voltage (d-c and peak) $\square = 38,000$ volts (d-c component $\square = 30,000$ volts); max d-c output current $\diamond = 2.0$ ma; max peak current $\diamond = 100$ ma. Socket terminals 4 and 6 may be used as tie points for components at or near heater potential. | | | | | | | | | | 3DJ3 ● |
| Class A Amplifier | 125 | 125 | $R_k = 56$ | 12 | 3.8 | 350,000 | 9,800 | — | — | — | 3DK6¶ |
| TV Flyback Rectifier | Max inverse voltage (d-c and peak) $\square = 38,000$ volts (d-c component $\square = 30,000$ volts); max d-c output current $\diamond = 2.0$ ma; max peak current $\diamond = 100$ ma. Socket terminals 4 and 7 may be used as tie points for components at or near heater potential. | | | | | | | | | | 3DR3 ● |
| TV Flyback Rectifier | Max inverse voltage (d-c and peak) $\square = 38,000$ volts (d-c component $\square = 30,000$ volts); max d-c output current $\diamond = 2.2$ ma; max peak current $\diamond = 110$ ma. Socket terminals 4 and 7 may be used as tie points for components at or near heater potential. | | | | | | | | | | 3DS3 ● |
| Class A Amplifier FM Limiter-Discriminator | 150 250¶ | 100 100 | $R_k = 560$ $R_k = 560$ | 1.1 0.22 | 2.1 5.5 | 150,000 $E_{c3} = -6.0$ volts | 800 | — | $E_{c3} = 0$ volts 270-000 | — | 3DT6¶ |
| Class A Amplifier | 150 | 100 | $R_k = 560$ | 1.55 | 1.8 | 150,000 | 1,350 | — | $E_{c3} = 0$ volts | — | 3DT6-A¶ |
| Class A Amplifier | 85 | — | $R_k = 150$ | 10 | — | 2,700 | 11,000 | 30 | — | — | SDX4¶ |
| Class A Amplifier | 90 | — | $R_k = 180$ | 10.4 | — | — | 11,000 | 28 | — | — | SDY4¶ |
| Class A Amplifier | 90 | — | $R_k = 180$ | 10.4 | — | — | 11,000 | 28 | — | — | SDY4-A¶ |
| Class A Amplifier | 80 | — | — | 15 | — | 2,000 | 6,700 | 14 | — | — | 3DZ4¶ |
| With 2,700 ohm resistor in plate circuit | | | | | | | | | | | |
| Class A Amplifier | 90 | 90 | 7.0 | 8.0 | 1.6 | 100,000 | 1,550 | — | 8,000 | 0.250 | 3E5 |
| Class A Amplifier | 67.5 | 67.5 | 5.0 | 5.5 | 1.1 | 120,000 | 1,400 | — | 8,000 | 0.125 | |
| Class A Amplifier | 90 | 90 | 7.0 | 6.8 | 1.4 | 120,000 | 1,450 | — | 9,000 | 0.225 | |
| Class A Amplifier | 67.5 | 67.5 | 5.0 | 4.4 | 0.9 | 130,000 | 1,300 | — | 11,000 | 0.115 | |
| Class A Amplifier | 90 | 90 | $R_g = 2$ meg | 2.9 | 1.2 | 325,000 | 1,700 | — | — | — | 3E6 |
| Class A Amplifier | 90 | 90 | $R_g = 2$ meg | 4.2 | 1.7 | 250,000 | 2,000 | — | — | — | |
| Class A Amplifier | 250 | 140 | 1.0 | 10 | 0.95 | 150,000 | 8,000 | — | — | — | 3EA5¶ |
| Class A Amplifier | 200 | 90 | 2.0 | 12 | 4.5 | 500,000 | 12,500 | — | — | — | 3EH7 |
| Class A Amplifier | 200 | 200 | 2.5 | 10 | 4.1 | 350,000 | 15,000 | — | — | — | 3EJ7 |
| Class A Amplifier | 200 | — | 1.2 | 10 | — | — | 10,500 | 80 | — | — | 3ER5 |
| Class A Amplifier | 200 | — | 1.0 | 10 | — | 8,000 | 9,000 | 75 | — | — | 3ES5¶ |
| Class A Amplifier | 250 | 80 | 1.0 | 11.5 | 0.9 | 150,000 | 8,800 | — | — | — | 3EV5¶ |
| Class A Amplifier | 135 | — | 1.0 | 11 | — | 5,600 | 9,000 | 50 | — | — | 3FH5¶ |
| Class A Amplifier | 135 | — | 1.2 | 11.5 | — | 5,500 | 11,000 | 60 | — | — | 3FQ5¶ |
| Class A Amplifier | 135 | — | 1.2 | 8.9 | — | 6,300 | 12,000 | 74 | — | — | 3FQ5-A¶ |
| Class A Amplifier | 275 | 135 | 0.2 | 9.0 | 0.17 | 240,000 | 10,000 | — | — | — | 3FS5¶ |

Metal tubes are shown in bold-face type, miniature tubes in italics.

♦ G3 and G5 are screen. G4 is signal-input grid.

♥ G2 and G4 are screen. G3 is signal-input grid.

1, 2, 3, etc. indicate tube sections.

* Maximum screen dissipation appears immediately below the screen voltage.

¶ Heater warm-up time controlled.

| Tube Type | Classification by Construction | Base Connections | Out-line Dwg | Filament Volts | Filament Amp | Max Plate Watts | Max Plate Volts | Max Screen Volts and Watts | Capacitance in Picofarads | | |
|-----------|--------------------------------|------------------|--------------|----------------|--------------|-----------------|-----------------|----------------------------|--|--------|------------|
| | | | | | | | | | Input | Output | Grid-plate |
| 3FW7 | Double Triode | 8LM | T-X | 3.5 | 0.6 | — | 150 | — | Section 1 (Pins 6, 7, 8) Section 2 (Pins 1, 2, 3) | | |
| 3FX7 | Twin Triode | 8LK | T-X | 3.5 | 0.6 | 1.7 | 100 | — | — | — | — |
| 3GK6 | High-Frequency Triode | 7FP | 5-2 | 2.8 | 0.45 | 2.5 | 200 | — | 5.0 | 3.5 | 0.52 |
| 3GS8 | Twin Pentode | 9LW | 6-3 | 3.15 | 0.6 | 1.1 | 300 | 150 | — | — | — |
| 3GU5 | "Shadow-Grid" Beam Pentode | 7GA | 5-2 | 3.1 | 0.45 | 3.0 | 300 | 150 | 7.0 | 3.2 | 0.018 |
| 3GW5 | High-Mu Triode | 7GK | 5-2 | 3.0 | 0.45 | 2.5 | 200 | — | 5.5 | 4.0 | 0.6 |
| 3HA5 | High-Mu Triode | 7GM | 5-1 | 2.7 | 0.45 | 2.6 | 220 | — | 4.3 | 2.9 | 0.36 |
| 3HK5 | High-Frequency Triode | 7GM | 5-2 | 2.9 | 0.45 | 2.3 | 200 | — | 4.4 | 2.6 | 0.29 |
| 3HM5 | High-Mu Triode | 7GM | 5-2 | 2.9 | 0.45 | 2.6 | 200 | — | 4.5 | 3.0 | 0.34 |
| 3HM6 | Sharp-Cutoff RF Pentode | 9PM | 6-2 | 3.15 | 0.6 | 2.5 | 250 | 250 | 8.7 | 3.0 | 0.024 |
| 3HQ5 | Triode | 7GM | 5-2 | 3.0 | 0.45 | 2.5 | 200 | — | 5.0 | 3.5 | 0.52 |
| 3HS8 | Twin Pentode | 9FG | 6-3 | 3.15 | 0.6 | 1.1 | 300 | 150 | — | — | — |
| 3HT6 | Semi-Remote-Cutoff RF Pentode | 9PM | 6-2 | 3.15 | 0.6 | 2.5 | 250 | 250 | 8.7 | 3.0 | 0.024 |
| 3JC6 | Sharp-Cutoff Pentode | 9PM | 6-2 | 3.5 | 0.6 | 2.5 | 330 | 330 | 8.2 | 3.0 | 0.019 |
| 3JC6-A | Sharp Cutoff Pentode | 9PM | 6-2 | 3.5 | 0.6 | 3.1 | 330 | 330 | 8.5 | 3.0 | 0.019 |
| 3JD6 | Sharp-Cutoff Pentode | 9PM | 6-2 | 3.5 | 0.6 | 2.5 | 330 | 330 | 8.2 | 3.0 | 0.019 |
| 3KF8 | Twin Pentode | 9FG | 6-3 | 3.15 | 0.6 | 1.1 | 300 | 150 | — | — | — |
| 3KT6 | Semi-Remote-Cutoff Pentode | 9PM | 6-2 | 3.5 | 0.6 | 3.1 | 330 | 330 | 9.5 | 3.0 | 0.019 |
| 3LE4 | Power Amplifier Pentode | 6BA | 9-30 | 1.4 | 0.1 | — | 110 | 110 | Parallel Filaments | | |
| 3LF4 | Beam Power Amplifier | 6BB | 9-30 | 2.8 DC | 0.05 | — | 110 | 110 | Series Filaments | | |
| 3Q4 | Power Amplifier Pentode | 7BA | 5-2 | 1.4 DC | 0.1 | — | 90 | 90 | Parallel Filaments | | |
| 3Q5-GT | Beam Power Amplifier | 7AP | 9-11 or 9-41 | 1.4 DC | 0.1 | — | 110 | 110 | Parallel Filaments | | |
| 3S4 | Power Amplifier Pentode | 7BA | 5-2 | 2.8 DC | 0.05 | — | 110 | 110 | Series Filaments | | |
| 3V4 | Power Amplifier Pentode | 6BX | 5-2 | 1.4 DC | 0.1 | — | 100 | 100 | Parallel Filaments | | |
| | | | | 2.8 DC | 0.05 | — | 100 | 100 | Series Filaments | | |

■ Compactron.
† Zero signal.
♣ Per section.

‡ Plate-to-plate.
♣ Maximum.
‡ Supply voltage.

⊙ Subminiature type.
▲ Without external shield.
◆ Design maximum rating.

⊕ Total for all similar sections.
⊖ Absolute maximum rating.
Conversion transconductance.

● See X-Radiation Warning, page 4.

| Tube Type | Classification by Construction | Base Connections | Out-line Dwg | Filament Volts | Filament Amp | Max Plate Watts | Max Plate Volts | Max Screen Volts and Watts* | Capacitance in Picofarads | | |
|-----------|--------------------------------|------------------|--------------|------------------|---------------|-----------------|-----------------|-----------------------------|---|-------------------|------------------|
| | | | | | | | | | Input | Out-put | Grid-plate |
| 3W4 | Power Amplifier Pentode | 7BA | 5-2 | 1.4 2.8 DC | 0.05 0.025 | — | 90 | 90 | — | — | — |
| C3J | Thyratron same as 5632 | | | | | | | | | | |
| 4A6-G | Twin Triode Power Amplifier | 8L | 12-7 | 4.0 2.0 DC | 0.06 0.12 | — | 90 | — | — | — | — |
| 4AU6 | Sharp-Cutoff RF Pentode | 7BK | 5-2 | 4.2 | 0.45 | 3.0 | 300 | 150 0.65 | Pentode Connection | | |
| | | | | | | 3.2 | 250 | — | Triode Connection (G ₂ , G ₁ , and P tied) | | |
| 4AV6 | Duplex-Diode High-Mu Triode | 7BT | 5-2 | 4.2 | 0.45 | 0.55 | 330 | — | 2.2 | 1.2 | 2.0 |
| 4BA6 | Remote-Cutoff RF Pentode | 7BK | 5-2 | 4.2 | 0.45 | 3.0 | 300 | 300 0.6 | 5.5 | 5.5 | 0.0035 ♣ |
| 4BC6 | Sharp-Cutoff RF Pentode | 7BD | 5-2 | 4.2 | 0.45 | 2.0 | 300 | 300 0.5 | Pentode Connection | | |
| | | | | | | 2.5 | 300 | — | Triode Connection (G ₂ and P tied) | | |
| 4BC8 | High-Frequency Twin Triode | 9AJ | 6-2 | 4.2 | 0.6 | 2.2 | 250 | — | 5.5 ₂ | 2.4 ₂ | 1.2 |
| 4BE6 | Pentagrid Converter | 7CH ♥ | 5-2 | 4.2 | 0.45 | 1.1 | 330 | 110 1.1 | Osc. I _{g1} = 0.5 ma R _{g1} = 20,000 ohms | | |
| 4BL8 | Triode-Pentode | 9AE | 6-2 | 4.6 | 0.6 | 1.7 | 250 | 200 0.75 | Pentode Section | | |
| | | | | | | 1.5 | 250 | — | Triode Section | | |
| 4BN4 | High-Frequency Triode | 7EG | 5-2 | 4.2 | 0.3 | 2.2 | 275 | — | 3.2 | 1.4 | 1.2 |
| 4BN6 | Gated-Beam Discriminator | 7DF | 5-3 | 4.2 | 0.45 | — | 330 | 110 | E _{c1} = 1.25 volts RMS | | |
| 4BQ7-A | High-Frequency Twin Triode | 9AJ | 6-2 | 4.2 | 0.6 | 2.0 | 250 | — | 2.6 ₁ | 1.2 ₁ | 1.2 |
| 4BS8 | Medium-mu Twin Triode | 9AJ | 6-2 | 4.5 | 0.6 | 2.0 | 150 | — | 2.6 ₁ | 1.2 ₁ | 1.15 |
| 4BU8 | Twin Pentode | 9FG | 6-3 | 4.2 | 0.45 | 1.1 | 300 | 150 0.75 | — | — | — |
| 4BX8 | High-Frequency Twin Triode | 9AJ | 6-2 | 4.5 | 0.6 | 2.0 | 150 | — | 2.4 ₂ | 1.25 ₂ | 1.4 |
| 4BZ6 | Semi-Remote-Cutoff RF Pentode | 7CM | 5-2 | 4.2 | 0.45 | 2.3 | 330 | 330 0.55 | 7.0 | 3.0 | 0.015 ♣ |
| 4BZ7 | High-Frequency Twin Triode | 9AJ | 6-2 | 4.2 | 0.6 | 2.0 | 250 | — | 2.6 ₁ | 1.2 ₁ | 1.2 |
| 4BZ8 | High-Frequency Twin Triode | 9AJ | 6-2 | 4.2 | 0.6 | 2.2 | 250 | — | — | — | — |
| 4CB6 | Sharp-Cutoff RF Pentode | 7CM | 5-2 | 4.2 | 0.45 | 2.3 | 330 | 330 0.55 | 6.5 | 3.0 | 0.015 ♣ |
| 4CE6 | Sharp-Cutoff RF Pentode | 7BD | 5-2 | 4.2 | 0.45 | 2.0 | 300 | 300 0.5 | 6.5 | 1.9 | 0.03 ♣ |
| 4CS6 | Dual-Control Heptode | 7CH ♥ | 5-2 | 4.2 | 0.45 | 1.0 | 300 | 100 1.0 | 5.5 | 7.5 | 0.07 ♣ |
| 4CX7 | Medium-mu Twin Triode | 9FC | 6-2 | 4.2 | 0.6 | 2.0 | 250 | — | 2.4 ₁ | 1.3 ₁ | 1.2 ₁ |
| 4CY6 | Sharp-Cutoff RF Tetrode | 7EW | 5-2 | 4.5 | 0.3 | 2.0 | 180 | 180 0.5 | 4.5 | 3.0 | 0.03 |
| 4DE6 | Sharp-Cutoff RF Pentode | 7CM | 5-2 | 4.2 | 0.45 | 2.3 | 330 | 330 0.55 | 6.5 | 3.0 | 0.015 ♣ |
| 4DK6 | Sharp-Cutoff Pentode | 7CM | 5-2 | 4.2 | 0.45 | 2.3 | 330 | 330 0.55 | 6.3 | 1.9 | 0.025 ♣ |

■ Compactron. † Plate-to-plate.
 † Zero signal. ♣ Maximum.
 ♣ Per section. ‡ Supply voltage.

⊙ Subminiature type.
 ▲ Without external shield.
 ⬢ Design maximum rating.

⊕ Total for all similar sections.
 ⊖ Absolute maximum rating.
 # Conversion transconductance.

● See X-Radiation Warning, page 4.

| Service | Plate Volts | Screen Volts | Neg Grid Volts | Plate Milli-amperes | Screen Milli-amperes | R_p , Ohms | G_m , μ mhos | μ Factor | Load for Rated Output, Ohms | Power Output, Watts | Tube Type |
|---|-------------|--------------|-----------------------|---------------------|----------------------|--------------|--------------------|--------------|-----------------------------|-----------------------|-----------|
| Class A Amplifier | 85 | 85 | 5.2 | 6.8† | 1.4† | 150,000 | 1,700 | — | 11,000 | 0.25 | 3W4 |
| Class A Amplifier ♦ | 90 | — | 1.5 | 1.2 | — | 28,000 | 900 | 25 | — | — | 4A6-G |
| Class A Amplifier | 250 | 150 | $R_k = 68$ | 10.6 | 4.3 | 1,000,000 | 5,200 | — | — | — | 4AU6¶ |
| | 100 | 100 | $R_k = 150$ | 5.0 | 2.1 | 500,000 | 3,900 | — | — | — | |
| Class A Amplifier | 250 | — | $R_k = 330$ | 12.2 | — | — | 4,800 | 36 | — | — | |
| Class A Amplifier | 250 | — | 2.0 | 1.2 | — | 62,500 | 1,600 | 100 | — | — | 4AV6¶ |
| Class A Amplifier | 100 | — | 1.0 | 0.5 | — | 80,000 | 1,250 | 100 | — | — | |
| Class A Amplifier | 250 | 100 | $R_k = 68$ | 11 | 4.2 | 1,000,000 | 4,400 | — | — | — | 4BA6¶ |
| | 100 | 100 | $R_k = 68$ | 10.8 | 4.4 | 250,000 | 4,300 | — | — | — | |
| Class A Amplifier | 250 | 150 | $R_k = 180$ | 7.5 | 2.1 | 800,000 | 5,700 | — | — | — | 4BC5¶ |
| | 125 | 125 | $R_k = 100$ | 8.0 | 2.4 | 500,000 | 6,100 | — | — | — | |
| | 100 | 100 | $R_k = 180$ | 4.7 | 1.4 | 600,000 | 4,900 | — | — | — | |
| Class A Amplifier | 250 | — | $R_k = 820$ | 6.0 | — | 9,000 | 4,400 | 40 | — | — | |
| | 180 | — | $R_k = 330$ | 8.0 | — | 6,000 | 6,000 | 42 | — | — | |
| Class A Amplifier ♦ | 150 | — | $R_k = 220$ | 10 | — | 5,300 | 6,200 | 35 | — | — | 4BC8¶ |
| Converter | 250 | 100 | 1.5 | 2.9 | 6.8 | 1,000,000 | 475† | — | — | — | 4BE6¶ |
| | 100 | 100 | 1.5 | 2.6 | 7.0 | 400,000 | 455† | — | — | — | |
| Class A Amplifier | 170 | 170 | 2.0 | 10 | 2.8 | 400,000 | 6,200 | — | — | — | 4BL8 |
| Class A Amplifier | 100 | — | 2.0 | 14 | — | 4,000 | 5,000 | 20 | — | — | |
| Class A Amplifier | 150 | — | $R_k = 220$ | 9.0 | — | 6,300 | 6,800 | 43 | — | — | 4BN4 |
| FM Limiter-Discriminator | 285‡ | 100 | $R_k = 200$ to 400 | 0.49 | 9.8 | — | — | — | 330,000 | — | 4BN6¶ |
| Class A Amplifier ♦ | 150 | — | $R_k = 220$ | 9.0 | — | 5,900 | 6,400 | 38 | — | — | 4BQ7-A¶ |
| Class A Amplifier ♦ | 150 | — | $R_k = 220$ | 10 | — | 5,000 | 7,200 | 36 | — | — | 4BS8¶ |
| Sync Separator and AGC Keyer | 100 | 67.5 | $I_{c1} = 0.1$ ma | 2.2 | 5.0 | — | — | — | — | $E_{c3} = 0$ volts | 4BU8¶ |
| | 100 | 67.5 | 0 | — | — | — | 1,500 | — | — | $E_{c3} = 0$ volts | |
| (Characteristics given are for each section separately with plate and grid number 3 of opposite section grounded) | | | | | | | | | | | |
| Class A Amplifier ♦ | 65 | — | 1.0 | 9.0 | — | 3,750 | 6,700 | 25 | — | — | 4BX8¶ |
| Class A Amplifier | 125 | 125 | $R_k = 56$ | 14 | 3.6 | 260,000 | 8,000 | — | — | — | 4BZ6¶ |
| | 125 | 125 | 4.5 | — | — | — | 700 | — | — | — | |
| Class A Amplifier ♦ | 150 | — | $R_k = 220$ | 10 | — | 5,300 | 6,800 | 36 | — | — | 4BZ7¶ |
| Class A Amplifier ♦ | 125 | — | $R_k = 100$ | 10 | — | 5,600 | 8,000 | 45 | — | — | 4BZ8¶ |
| Class A Amplifier | 125 | 125 | $R_k = 56$ | 13 | 3.7 | 280,000 | 8,000 | — | — | — | 4CB6¶ |
| | 125 | 125 | 3.0 | 2.8 | — | — | — | — | — | — | |
| Class A Amplifier | 125 | 125 | 1.0 | 11 | 2.8 | 300,000 | 7,600 | — | — | — | 4CE5¶ |
| Gated Amplifier | 100 | 30 | 1.0 | 1.0 | 1.3 | 1,000,000 | 1,100 | — | — | $E_{c3} = 0$ volts | 4CS6¶ |
| | 100 | 30 | 0 | 0.8 | 5.5 | 700,000 | — | — | — | $E_{c3} = -1.0$ volts | |
| | 10 | 30 | 0 | 2.0 | 4.5 | — | — | — | — | $E_{c3} = 0$ volts | |
| Class A Amplifier ♦ | 150 | — | $R_k = 220$ | 9.0 | — | 6,100 | 6,400 | 39 | — | — | 4CX7¶ |
| Class A Amplifier | 125 | 80 | 1.0 | 10 | 1.5 | 100,000 | 8,000 | — | — | — | 4CY5¶ |
| Class A Amplifier | 125 | 125 | $R_k = 56$ | 15.5 | 4.2 | 250,000 | 8,000 | — | — | — | 4DE6¶ |
| | 125 | 125 | 5.5 | — | — | — | 700 | — | — | — | |
| Class A Amplifier | 125 | 125 | $R_k = 56$ | 12 | 3.8 | 350,000 | 9,800 | — | — | — | 4DK6¶ |

Metal tubes are shown in bold-face type, miniature tubes in italics.

♦ G3 and G5 are screen. G4 is signal-input grid.

‡ G2 and G4 are screen. G3 is signal-input grid.

1, 2, 3, etc. indicate tube sections.

* Maximum screen dissipation appears immediately below the screen voltage.

¶ Heater warm-up time controlled.

| Tube Type | Classification by Construction | Base Connections | Outline Dwg | Filament Volts | Filament Amp | Max Plate Watts | Max Plate Volts | Max Screen Volts and Watts * | Capacitance in Picofarads | | |
|---------------------------|--------------------------------|------------------|-------------|----------------|--------------|-------------------------------|-----------------|-----------------------------------|------------------------------|----------------------|---------------------------------------|
| | | | | | | | | | Input | Out-put | Grid-plate |
| 4DT6 ∇ | Sharp-Cutoff Pentode | 7EN | 5-2 | 4.2 | 0.45 | 1.7 \diamond | 330 \diamond | 330 \diamond 1.1 \diamond | — | — | — |
| I _{ct} = 0.6 ma | | | | | | | | | | | |
| 4DT6-A ∇ | Sharp-Cutoff Pentode | 7EN | 5-2 | 4.2 | 0.45 | 1.7 \diamond | 330 \diamond | 330 \diamond 1.1 \diamond | — | — | — |
| 4EH7 | Remote-Cutoff Pentode | 9AQ | T-X | 4.4 | 0.45 | 2.5 | 250 | 250 0.65 | 9.5 | 3.0 | 0.005 \clubsuit |
| 4EJ7 | Sharp-Cutoff Pentode | 9AQ | T-X | 4.4 | 0.45 | 2.5 | 250 | 250 0.9 | 10 | 3.0 | 0.005 \clubsuit |
| 4ES8 ∇ | High-Frequency Twin Triode | 9DE | 6-2 | 4.0 | 0.6 | 1.8 \clubsuit | 130 | — | — | — | — |
| 4EW6 ∇ | Sharp-Cutoff RF Pentode | 7CM | 5-2 | 4.2 | 0.6 | 3.1 \diamond | 330 \diamond | 330 \diamond 0.65 \diamond | 10 | 3.4 | 0.03 \clubsuit |
| 4FS7 | Triode-Pentode | 9MP | 6-2 | 4.6 | 0.6 | 2.0 | 250 | 150 0.5 | Pentode Section | | |
| Triode Section | | | | | | | | | | | |
| 4GJ7 | Triode-Pentode | 9QA | T-X | 4.1 | 0.6 | 2.4 \diamond | 275 \diamond | 275 \diamond 0.55 \diamond | Pentode Section | | |
| Triode Section | | | | | | | | | | | |
| 4GK5 ∇ | High-Frequency Triode | 7FP | 5-2 | 4.0 | 0.3 | 2.5 \diamond | 200 \diamond | — | 5.0 | 3.5 | 0.52 |
| 4GM6 ∇ | Semi-Remote-Cutoff Pentode | 7CM | 5-2 | 4.2 | 0.6 | 3.1 \diamond | 330 \diamond | 330 \diamond 0.65 \diamond | 10.0 \blacktriangle | 2.4 \blacktriangle | 0.036 \blacktriangle |
| 4GS7 | Triode-Pentode | 9GF | 6-2 | 4.0 | 0.6 | 2.0 | 250 | 150 0.5 | Pentode Section | | |
| Triode Section | | | | | | | | | | | |
| 4GS8 ∇ | Twin Pentode | 9LW | 6-3 | 4.2 | 0.45 | 1.1 \diamond \clubsuit | 300 \diamond | 150 0.75 \diamond | — | — | — |
| 4GW5 ∇ | High-Mu Triode | 7GK | 5-2 | 4.2 | 0.3 | 2.5 \diamond | 200 \diamond | — | 5.5 | 4.0 | 0.6 |
| 4GX7 ∇ | Triode-Pentode | 9QA | 6-2 | 4.2 | 0.6 | 2.2 \diamond | 275 \diamond | 275 \diamond 0.45 \diamond | Pentode Section | | |
| Triode Section | | | | | | | | | | | |
| 4GZ5 ∇ | Power Amplifier Pentode | 7CV | 5-2 | 4.0 | 0.6 | 4.8 \diamond | 300 \diamond | 300 \diamond 1.1 \diamond | 8.5 \blacktriangle | 3.8 \blacktriangle | 0.24 \blacktriangle |
| 4HA5 | High-Mu Triode | 7GM | 5-1 | 3.9 | 0.3 | 2.6 \diamond | 220 \diamond | — | 4.3 | 2.9 | 0.36 |
| 4HA7 ∇ ■ | Dissimilar Double Triode | 12FQ | 9-56 | 4.2 | 0.6 | 2.75 \diamond | 330 \diamond | — | Section 1 (Pins 4, 9, 10) | | |
| Section 2 (Pins 2, 3, 11) | | | | | | | | | | | |
| 4HC7 ∇ ■ | Dissimilar Double Triode | 12FR | 9-57 | 4.2 | 0.6 | 3.0 \diamond | 330 \diamond | — | Section 1 (Pins 4, 7, 9, 10) | | |
| Section 2 (Pins 2, 3, 11) | | | | | | | | | | | |
| 4HG8 ∇ | Triode-Pentode | 9MP | 6-2 | 4.5 | 0.6 | 2.0 | 250 | 150 0.5 | Pentode Section | | |
| Triode Section | | | | | | | | | | | |
| 4HK5 | High-Frequency Triode | 7GM | 5-2 | 4.0 | 0.3 | 2.3 \diamond | 200 \diamond | — | 4.4 | 2.6 | 0.29 |
| 4HM5 ∇ | High-Mu Triode | 7GM | 5-2 | 4.0 | 0.3 | 2.6 \diamond | 200 \diamond | — | 4.5 | 3.0 | 0.34 \clubsuit |
| 4HM6 ∇ | Sharp-Cutoff RF Pentode | 9PM | 6-2 | 4.2 | 0.45 | 2.5 \diamond | 250 \diamond | 250 \diamond 0.6 \diamond | 8.7 | 3.0 | 0.024 |
| 4HQ5 ∇ | Triode | 7GM | 5-2 | 4.2 | 0.3 | 2.5 \diamond | 200 \diamond | — | 5.0 | 3.5 | 0.52 |
| 4HR8 | Pentode | 9BJ | 6-2 | 4.5 | 0.3 | 1.0 | 300 | 200 0.2 | 3.5 \blacktriangle | 5.0 \blacktriangle | 0.05 \blacktriangle \clubsuit |
| 4HS8 ∇ | Twin Pentode | 9FG | 6-3 | 4.2 | 0.45 | 1.1 \diamond \clubsuit | 300 \diamond | 150 0.75 \diamond | — | — | — |
| 4HT6 ∇ | Semi-Remote-Cutoff RF Pentode | 9PM | 6-2 | 4.2 | 0.45 | 2.5 \diamond | 250 \diamond | 250 \diamond 0.6 \diamond | 8.7 | 3.0 | 0.024 |
| 4JC6 ∇ | Sharp-Cutoff Pentode | 9PM | 6-2 | 4.5 | 0.45 | 2.5 \diamond | 330 \diamond | 330 \diamond 0.6 \diamond | 8.2 \blacktriangle | 3.0 \blacktriangle | 0.019 \blacktriangle \clubsuit |

■ Compactron.

† Plate-to-plate.

◎ Subminiature type.

⊕ Total for all similar sections.

† Zero signal.

♣ Maximum.

▲ Without external shield.

⊖ Absolute maximum rating.

♣ Per section.

‡ Supply voltage.

⊖ Design maximum rating.

Conversion transconductance.

● See X-Radiation Warning, page 4.

| Service | Plate Volts | Screen Volts | Neg Grid Volts | Plate Milli-amperes | Screen Milli-amperes | R _p , Ohms | G _m , μmhos | μ Factor | Load for Rated Output, Ohms | Power Output, Watts | Tube Type |
|--|-------------|--------------|--------------------------|---------------------|----------------------|---|------------------------|---------------------------|-----------------------------|---------------------|-----------------|
| Class A Amplifier FM Limiter-Dist. | 150 | 100 | R _k = 560 | 1.1 | 2.1 | 150,000 | 800 | E _{c3} = 0 volts | — | — | <i>4DT6</i> ¶ |
| | 250‡ | 100 | R _k = 560 | 0.22 | 5.5 | E _{c3} = -6.0 volts | — | — | 270,000 | — | — |
| Class A Amplifier | 150 | 100 | R _k = 560 | 1.55 | 1.8 | 150,000 | 1,350 | E _{c3} = 0 volts | — | — | <i>4DT6-A</i> ¶ |
| Class A Amplifier | 200 | 90 | 2.0 | 12 | 4.5 | 500,000 | 12,500 | — | — | — | <i>4EH7</i> |
| Class A Amplifier | 200 | 200 | 2.5 | 10 | 4.1 | 350,000 | 15,000 | — | — | — | <i>4EJ7</i> |
| Class A Amplifier | 90 | — | 1.2 | 15 | — | — | 12,500 | — | — | — | <i>4ES8</i> ¶ |
| Class A Amplifier | 125 | 125 | R _k = 56 | 11 | 3.2 | 200,000 | 14,000 | — | — | — | <i>4EW6</i> ¶ |
| Class A Amplifier | 170 | 150 | 1.2 | 10 | 3.3 | 350,000 | 12,000 | — | — | — | <i>4FS7</i> |
| Class A Amplifier | 100 | — | 3.0 | 14 | — | 3,100 | 5,500 | 17 | — | — | — |
| Class A Amplifier | 170 | 120 | 1.2 | 10 | 3.0 | 350,000 | 11,000 | — | — | — | <i>4GJ7</i> |
| Class A Amplifier | 100 | — | 3.0 | 15 | — | — | 9,000 | 20 | — | — | — |
| Class A Amplifier | 135 | — | 1.0 | 11.5 | — | 5,400 | 15,000 | 78 | — | — | <i>4GK5</i> ¶ |
| Class A Amplifier | 125 | 125 | R _k = 56 | 14 | 3.4 | 200,000 | 13,000 | — | — | — | <i>4GM6</i> ¶ |
| Class A Amplifier | 170 | 150 | 1.2 | 10 | 3.3 | 350,000 | 12,000 | — | — | — | <i>4GS7</i> |
| Class A Amplifier | 100 | — | 3.0 | 14 | — | — | 5,500 | 17 | — | — | — |
| Sync Separator and AGC Keyer | 100 | 67.5 | I _{c1} = 0.1 ma | 2.0 | 3.6 | (Both sections Operating) E _{c3} = 0 Volts | | | — | — | <i>4GS8</i> ¶ |
| | 100 | 67.5 | 0 | — | — | — | 1,200 | — | E _{c3} = 0 Volts | — | — |
| (Plate and grid number 3 of opposite section grounded) | | | | | | | | | | | |
| Class A Amp | 135 | — | 1.0 | 12.5 | — | 5,800 | 15,000 | 70 | — | — | <i>4GW5</i> ¶ |
| Class A Amplifier | 125 | 125 | 1.0 | 8.0 | 2.5 | 200,000 | 11,000 | — | — | — | <i>4GX7</i> ¶ |
| Class A Amplifier | 125 | — | 1.0 | 13 | — | 4,700 | 8,500 | 40 | — | — | — |
| Class A Amplifier | 250 | 250 | R _k = 270 | 16† | 2.7† | 150,000 | 8,400 | — | 15,000 | 1.1 | <i>4GZ5</i> ¶ |
| Class A Amplifier | 135 | — | 1.0 | 11.5 | — | — | 14,500 | 72 | — | — | <i>4HA5</i> |
| Class A Amplifier | 250 | — | 8.5 | 10.5 | — | 7,700 | 2,200 | 17 | — | — | <i>4HA7</i> ¶■ |
| Class A Amplifier | 250 | — | 2.0 | 1.2 | — | 62,000 | 1,600 | 100 | — | — | — |
| Class A Amplifier | 150 | — | 1.0 | 18 | — | 5,200 | 4,400 | 23 | — | — | <i>4HC7</i> ¶■ |
| Class A Amplifier | 150 | — | 1.0 | 1.0 | — | 53,000 | 1,900 | 100 | — | — | — |
| Class A Amplifier | 170 | 150 | 1.2 | 10 | 3.3 | 350,000 | 12,000 | — | — | — | <i>4HG8</i> ¶ |
| Class A Amplifier | 100 | — | 3.0 | 14 | — | 3,100 | 5,500 | 17 | — | — | — |
| Class A Amplifier | 135 | — | 1.0 | 12.5 | — | 5,000 | 15,000 | 75 | — | — | <i>4HK5</i> |
| Class A Amplifier | 135 | — | 1.0 | 12.5 | — | — | 14,500 | 78 | — | — | <i>4HM5</i> ¶ |
| Class A Amplifier | 125 | 125 | R _k = 56 | 13 | 3.2 | 156,000 | 15,000 | — | — | — | <i>4HM6</i> ¶ |
| Class A Amplifier | 135 | — | 1.0 | 11.5 | — | 5,400 | 15,000 | 78 | — | — | <i>4HQ5</i> ¶ |
| Class A Amplifier | 250 | 140 | 2.0 | 3.0 | 0.6 | 2,500,000 | 2,000 | — | — | — | <i>4HR8</i> |
| Sync Separator and AGC Keyer | 100 | 67.5 | I _{c1} = 0.1 ma | 2.0 | 4.4 | (Both Sections Operating) E _{c3} = 0 Volts | | | — | — | <i>4HS8</i> ¶ |
| | 100 | 67.5 | 0 | — | — | — | 1,100 | — | E _{c3} = 0 Volts | — | — |
| (Plate and grid number 3 of opposite section grounded) | | | | | | | | | | | |
| Class A Amplifier | 125 | 125 | R _k = 56 | 15 | 4.0 | 143,000 | 14,000 | — | — | — | <i>4HT6</i> ¶ |
| Class A Amplifier | 125 | 125 | R _k = 56 | 13 | 3.2 | 180,000 | 15,000 | — | — | — | <i>4JC6</i> ¶ |

Metal tubes are shown in bold-face type, miniature tubes in italics.

‡ G3 and G5 are screen. G4 is signal-input grid.

‡ Maximum screen dissipation appears

¶ G2 and G4 are screen. G3 is signal-input grid.

immediately below the screen voltage.

1, 2, 3, etc. indicate tube sections.

¶ Heater warm-up time controlled.

| Tube Type | Classification by Construction | Base Connections | Out-line Dwg | Fila-ment Volts | Fila-ment Amp | Max Plate Watts | Max Plate Volts | Max Screen Volts and Watts | Capacitance in Picofarads | | |
|-----------|---------------------------------|------------------|--------------|-----------------|---------------|-----------------|-----------------|----------------------------|---|---------|------------|
| | | | | | | | | | Input | Out-put | Grid-plate |
| 4JC6-A | Sharp-Cutoff Pentode | 9PM | 6-2 | 4.5 | 0.45 | 3.1 | 330 | 330 0.7 | 8.5 | 3.0 | 0.019 |
| 4JD6 | Sharp-Cutoff Pentode | 9PM | 6-2 | 4.5 | 0.45 | 2.5 | 330 | 330 0.6 | 8.2 | 3.0 | 0.019 |
| 4JH6 | Semi-Remote-Cutoff Pentode | 7CM | 5-2 | 4.2 | 0.45 | 2.3 | 300 | 300 0.55 | 7.0 | 3.0 | 0.015 |
| 4JK6 | Sharp-Cutoff RF Pentode | 7CM | 5-2 | 3.7 | 0.6 | 2.5 | 275 | 275 0.6 | 9.5 | 2.7 | 0.02 |
| 4JL6 | Semi-Remote-Cut-off RF Pentode | 7CM | 5-2 | 3.7 | 0.6 | 2.5 | 275 | 275 0.6 | 9.3 | 2.7 | 0.02 |
| 4JW8 | Triode-Pentode | 9DC | 6-2 | 4.3 | 0.6 | 1.2 | 250 | 250 0.8 | Pentode Section | | |
| | | | | | | 1.4 | 250 | — | Triode Section | | |
| 4KE8 | Triode-Pentode | 9DC | 6-2 | 4.5 | 0.6 | 2.0 | 280 | 280 0.5 | Pentode Section | | |
| | | | | | | 2.0 | 280 | — | Triode Section | | |
| 4KF8 | Twin Pentode | 9FG | 6-3 | 4.2 | 0.45 | 1.1 | 300 | 150 0.75 | — | — | — |
| 4KN8 | Twin Triode | 9AJ | 6-2 | 4.2 | 0.6 | 2.2 | 220 | — | — | — | — |
| 4KT6 | Semi-Remote-Cutoff Pentode | 9PM | 6-2 | 4.5 | 0.45 | 3.1 | 330 | 330 0.6 | 9.5 | 3.0 | 0.019 |
| 4LJ8 | Triode-Pentode | 9GF | 6-2 | 4.3 | 0.6 | 2.0 | 280 | 280 0.5 | Pentode Section | | |
| | | | | | | 2.0 | 280 | — | Triode Section | | |
| 4LU6 | Semi-Remote-Cutoff RF Pentode | 7CM | 5-2 | 4.2 | 0.6 | 4.0 | 300 | 300 1.5 | 7.3 | 2.2 | 0.058 |
| 4MK8 | Twin Pentode | 9FG | 6-3 | 4.2 | 0.45 | 1.1 | 300 | 150 0.75 | — | — | — |
| 5AF4-A | UHF Triode Oscillator | 7DK | 5-1 | 4.7 | 0.3 | 2.5 | 150 | — | 2.2 | 1.4 | 1.9 |
| 5AM8 | Diode Sharp-Cutoff RF Pentode | 9CY | 6-2 | 4.7 | 0.6 | 3.2 | 330 | 330 0.55 | 6.5 | 2.6 | 0.015 |
| 5AN8 | Triode-Pentode | 9DA | 6-2 | 4.7 | 0.6 | 2.3 | 330 | 330 0.55 | Diode Section | | |
| | | | | | | 2.8 | 330 | — | Pentode Section | | |
| | | | | | | | | | Triode Section | | |
| 5AQ6 | Beam Power Amplifier | 7BZ | 5-3 | 4.7 | 0.6 | 12 | 275 | 275 2.0 | Pentode Connection | | |
| | | | | | | 10 | 275 | — | Triode Connection (G ₂ & P tied) | | |
| 5AR4 | Full-Wave High-Vacuum Rectifier | 5DA | T-X | 5.0 | 1.9 | — | — | — | — | — | — |
| 5AS4-A | Full-Wave High-Vacuum Rectifier | 5T | 12-15 | 5.0 | 3.0 | — | — | — | Tube Voltage Drop: 50 volts at 275 ma d-c | | |
| 5AS8 | Diode Sharp-Cutoff RF Pentode | 9DS | 6-2 | 4.7 | 0.6 | 2.5 | 300 | 300 0.5 | Pentode Section | | |
| | | | | | | | | | Diode Section | | |
| 5AT4 | Full-Wave High-Vacuum Rectifier | 5L | T-X | 5.0 | 5.5 | — | — | — | Tube Voltage Drop: 30 volts at 500 ma d-c | | |
| 5AT8 | Triode-Pentode | 9DW | 6-2 | 4.7 | 0.6 | 2.3 | 275 | 275 0.45 | Pentode Section | | |
| | | | | | | 1.7 | 275 | — | Triode Section | | |
| 5AU4 | Full-Wave High-Vacuum Rectifier | 5T | T-X | 5.0 | 3.75 | — | — | — | Tube Voltage Drop: 50 v at 350 ma d-c | | |
| 5AV8 | Triode-Pentode | 9DZ | 6-2 | 4.7 | 0.6 | 2.0 | 300 | 300 0.5 | Pentode Section | | |
| | | | | | | 2.5 | 300 | — | Triode Section | | |

■ Compactron.
† Zero signal.
◆ Per section.

‡ Plate-to-plate.
◆ Maximum.
‡ Supply voltage.

⊙ Subminiature type.
▲ Without external shield.
◆ Design maximum rating.

⊕ Total for all similar sections.
⊖ Absolute maximum rating.
Conversion transconductance.

● See X-Radiation Warning, page 4.

| Service | Plate Volts | Screen Volts | Neg Grid Volts | Plate Milli-amperes | Screen Milli-amperes | R _p , Ohms | G _m , μmhos | μ Factor | Load for Rated Output, Ohms | Power Output, Watts | Tube Type | |
|---|--|--------------|--------------------------|---------------------|----------------------|---------------------------|------------------------|---|-----------------------------|---------------------|-----------|-------|
| Class A Amplifier | 125 | 125 | R _k = 56 | 14 | 3.4 | 180,000 | 16,000 | (g ₃ connected to k at socket) | — | — | 4JC6-A | |
| Class A Amplifier | 125 | 125 | R _k = 56 | 15 | 4.0 | 160,000 | 14,000 | | — | — | — | 4JD6* |
| Class A Amplifier | 125 | 125 | R _k = 56 | 14 | 3.6 | 260,000 | 8,000 | | — | — | — | 4JH6* |
| Class A Amplifier | 125 | 125 | R _k = 68 | 11.5 | 3.9 | 150,000 | 18,000 | | — | — | — | 4JK6* |
| Class A Amplifier | 125 | 60 | R _k = 68 | 12.5 | 4.0 | 120,000 | 15,500 | | — | — | — | 4JL6† |
| Class A Amplifier | 100 | 100 | 1.0 | 6.0 | 1.7 | — | 5,500 | 70 | — | — | 4JW8† | |
| Class A Amplifier | 200 | — | 2.0 | 3.5 | — | — | 3,500 | | — | — | — | |
| Class A Amplifier | 125 | 125 | R _k = 33 | 10 | 2.8 | 125,000 | 12,000 | 40 | — | — | 4KE8† | |
| Class A Amplifier | 125 | — | R _k = 68 | 13 | — | 5,000 | 8,000 | | — | — | — | |
| Sync Separator and AGC Keyer | 100 | 67.5 | I _{c1} = 0.1 ma | 2.8 | — | — | 270 | — | E _{c1} = 0 Volts | — | 4KF8† | |
| | 100 | 67.5 | 0 | — | — | — | 1,750 | — | E _{c1} = 0 Volts | — | | |
| (Characteristics given are for each section separately with plate and grid number 3 of opposite section grounded) | | | | | | | | | | | | |
| Class A Amplifier † | 110 | — | 1.0 | 16 | — | 2,800 | 16,000 | 45 | — | — | 4KN8† | |
| Class A Amplifier | 125 | 125 | R _k = 56 | 17 | 4.2 | 160,000 | 18,000 | — | E _{c1} = 0 volts | — | 4KT6 | |
| Class A Amplifier | 125 | 125 | R _k = 33 | 12 | 3.5 | 125,000 | 13,000 | 40 | — | — | 4LJ8* | |
| Class A Amplifier | 125 | — | R _k = 68 | 13 | — | 5,000 | 8,000 | | — | — | — | |
| Class A Amplifier | 250 | 250 | R _k = 820 | 9.0 | 2.3 | 280,000 | 3,900 | — | — | — | 4LU6† | |
| Color Demodulator † | 100 | 67.5 | — | 2.0 | 4.4 | (Both sections operating) | | — | — | — | 4MK8† | |
| (Grid current adjusted for 100 microamperes d-c) | | | | | | | | | | | | |
| Class A Amplifier | 80 | — | R _k = 150 | 17.5 | — | 2,100 | 6,500 | 13.5 | — | — | 5AF4-A | |
| Class A Amplifier | 125 | 125 | R _k = 56 | 12.5 | 3.2 | 300,000 | 7,800 | — | — | — | 5AM8† | |
| Class A Amplifier Video Det. | Max d-c output current = 5 ma; voltage drop: 10 v at 50 ma d-c | | | | | | | | | | | |
| Class A Amplifier | 125 | 125 | R _k = 56 | 12 | 3.8 | 170,000 | 7,800 | — | — | — | 5AN8† | |
| Class A Amplifier | 150 | — | 3.0 | 15 | — | 4,700 | 4,500 | 21 | — | — | | |
| Class A Amplifier | 180 | 180 | 8.5 | 29† | 3.0† | 58,000 | 3,700 | — | 5,500 | 2.0 | 5AQ5† | |
| Class A Amplifier | 250 | 250 | 12.5 | 45† | 4.5† | 12,500 | 4,100 | — | 5,000 | 4.5 | | |
| Vertical Amplifier | 250 | — | 12.5 | 49.5 | — | 1,970 | 4,800 | 9.5 | — | — | | |
| Max positive pulse plate voltage ♦ = 1.100 v; max plate dissipation ♦ = 10 watts; max d-c cathode current ♦ = 40 ma | | | | | | | | | | | | |
| Full-Wave Rectifier | Max d-c output current = 250 ma; max peak inverse voltage = 1,500 volts; rms supply voltage per plate = 450 volts; max peak current per plate = 750 ma | | | | | | | | | | | |
| Full-Wave Rectifier | Max d-c output current = 275 ma; max peak inverse voltage = 1,550 volts; max rms supply voltage per plate = 450 volts; max peak current per plate = 1,000 ma | | | | | | | | | | | |
| Class A Amplifier Detector | 200 | 150 | R _k = 180 | 9.5 | 3.0 | 300,000 | 6,200 | — | — | — | 5AS8† | |
| Max d-c output current = 5.0 ma; max peak inverse voltage = 330 volts; max peak current = 50 ma | | | | | | | | | | | | |
| Full-Wave Rectifier | Max d-c output current = 800 ma; max peak inverse voltage = 1,550 volts; max RMS supply voltage per plate = 550 volts; max peak current per plate = 2,250 ma | | | | | | | | | | | |
| Class A Amplifier | 125 | 125 | 1.0 | 9.0 | 2.2 | 300,000 | 5,500 | — | — | — | 5AT8† | |
| Class A Amplifier | 125 | — | 1.0 | 12 | — | 6,000 | 6,500 | 40 | — | — | | |
| Full-Wave Rectifier | Max d-c output current = 325 ma; max peak inverse voltage = 1,400 volts; rms supply voltage per plate = 400 volts; max peak current per plate = 1,075 ma | | | | | | | | | | | |
| Class A Amplifier | 200 | 150 | R _k = 180 | 9.5 | 2.8 | 300,000 | 6,200 | — | — | — | 5AV8† | |
| Class A Amplifier | 200 | — | 6.0 | 13 | — | 5,750 | 3,300 | 19 | — | — | | |

Metal tubes are shown in bold-face type, miniature tubes in italics.

♦ G3 and G5 are screen. G4 is signal-input grid.

♥ G2 and G4 are screen. G3 is signal-input grid.

✦ Maximum screen dissipation appears immediately below the screen voltage.

‡ Heater warm-up time controlled.

1, 2, 3, etc. indicate tube sections.

| Tube Type | Classification by Construction | Base Connections | Out-line Dwg | Fila-ment Volts | Fila-ment Amp | Max Plate Watts | Max Plate Volts | Max Screen Volts and Watts | Capacitance in Picoferads | | |
|-----------|----------------------------------|------------------|--------------|-----------------|---------------|-----------------|-----------------|----------------------------|--|---------|------------|
| | | | | | | | | | Input | Out-put | Grid-plate |
| 5AW4 | Full-Wave High-Vacuum Rectifier | 5T | T-X | 5.0 | 3.7 | — | — | — | Tube Voltage Drop: ♦ 46 v at 250 ma d-c | | |
| 5AX4-GT | Full-Wave, High-Vacuum Rectifier | 5T | 9-13 | 5.0 | 2.5 | — | — | — | Tube Voltage Drop: ♦ 65 v at 175 ma d-c | | |
| 5AZ3 | Full-Wave High-Vacuum Rectifier | 12BR | 12-62 | 5.0 | 3.0 | — | — | — | Tube Voltage Drop: ♦ 44 volts at 225 ma d-c | | |
| 5AZ4 | Full-Wave High-Vacuum Rectifier | 5T | 9-31 | 5.0 | 2.0 | — | — | — | Tube Voltage Drop: ♦ 60 v at 125 ma d-c | | |
| 5B8 | Triode-Pentode | 9EC | 6-2 | 4.7 | 0.6 | 2.0 | 300 | 300 | Pentode Section | | |
| | | | | | | 2.5 | 300 | 0.5 | Triode Section | | |
| 5BC3 | Full-Wave High-Vacuum Rectifier | 9QJ | 12-66 | 5.0 | 3.0 | — | — | — | Tube Voltage Drop: ♦ 53 volts at 300 ma d-c | | |
| 5BC3-A | Full-Wave High-Vacuum Rectifier | 9QJ | 12-99 | 5.0 | 3.0 | — | — | — | Tube Voltage Drop: ♦ 53 volts at 300 ma d-c | | |
| 5BE8 | Triode-Pentode | 9EG | 6-2 | 4.7 | 0.6 | 2.8 | 300 | 300 | Pentode Section | | |
| | | | | | | 2.5 | 300 | 0.5 | Triode Section | | |
| 5BK7-A | High-Frequency Twin Triode | 9AJ | 6-2 | 4.7 | 0.6 | 2.7 | 300 | — | 3.0 | 1.0 | 1.8 |
| | | | | | | | | | 0.9 | 2.1 | 1.2 |
| 5BQ7-A | High-Frequency Twin Triode | 9AJ | 6-2 | 5.6 | 0.45 | 2.0 | 250 | — | 2.6 | 1.2 | 1.2 |
| 5BR8 | Triode-Pentode | 9FA | 6-2 | 4.7 | 0.6 | 3.0 | 330 | 330 | Pentode Section | | |
| | | | | | | 2.5 | 330 | 0.55 | Triode Section | | |
| 5BS8 | Medium- μ Twin Triode | 9AJ | 6-2 | 5.6 | 0.45 | 2.0 | 150 | — | 2.6 | 1.2 | 1.15 |
| 5BT8 | Duplex-Diode Pentode | 9FE | 6-2 | 4.7 | 0.6 | 2.0 | 300 | 300 | 7.0 | 2.3 | 0.04 |
| | | | | | | | | 0.5 | Diode Sections | | |
| 5BW8 | Duplex-Diode Pentode | 9HK | 6-2 | 4.7 | 0.6 | 3.0 | 330 | 330 | 4.8 | 2.6 | 0.02 |
| | | | | | | | | 0.55 | Diode Sections | | |
| 5BZ7 | High-Frequency Twin Triode | 9AJ | 6-2 | 5.6 | 0.45 | 2.5 | 250 | — | 2.6 | 1.2 | 1.2 |
| 5CG4 | Full-Wave High-Vacuum Rectifier | 5L | 9-13 | 5.0 | 2.0 | — | — | — | — | — | — |
| 5CG8 | Triode-Pentode | 9GF | 6-2 | 4.7 | 0.6 | 2.3 | 275 | 275 | Pentode Section | | |
| | | | | | | 1.7 | 275 | 0.45 | Triode Section | | |
| 5CL8 | Triode-Tetrode | 9FX | 6-2 | 4.7 | 0.6 | 2.8 | 300 | 300 | Tetrode Section | | |
| | | | | | | 2.7 | 300 | 0.5 | Triode Section | | |
| 5CL8-A | Triode-Tetrode | 9FX | 6-2 | 4.7 | 0.6 | 2.8 | 300 | 300 | Tetrode Section | | |
| | | | | | | 2.7 | 300 | 0.5 | Triode Section | | |
| 5CM6 | Beam Power Amplifier | 9CK | 6-3 | 4.7 | 0.6 | 12 | 315 | 285 | Pentode Connection | | |
| | | | | | | 9.0 | 315 | 2.0 | Triode (G ₂ and P tied) or Pentode Connection | | |
| | | | | | | 8.0 | 315 | 1.75 | | | |
| 5CM8 | Triode-Pentode | 9FZ | 6-2 | 4.7 | 0.6 | 2.0 | 300 | 300 | Pentode Section | | |
| | | | | | | 1.0 | 300 | 0.5 | Triode Section | | |
| 5CQ8 | Triode-Tetrode | 9GE | 6-2 | 4.7 | 0.6 | 3.2 | 330 | 330 | Tetrode Section | | |
| | | | | | | 3.1 | 330 | 0.7 | Triode Section | | |
| 5CR8 | Triode-Pentode | 9GJ | 6-2 | 4.7 | 0.6 | 2.3 | 330 | 330 | Pentode Section | | |
| | | | | | | 2.75 | 330 | 0.55 | Triode Section | | |

■ Compactron.

‡ Plate-to-plate.

⊙ Subminiature type.

⊕ Total for all similar sections.

† Zero signal.

♦ Maximum.

▲ Without external shield.

⊖ Absolute maximum rating.

◆ Per section.

⊕ Supply voltage.

⊖ Design maximum rating.

Conversion transconductance.

● See X-Radiation Warning, page 4.

| Service | Plate Volts | Screen Volts | Neg Grid Volts | Plate Milli-amperes | Screen Milli-amperes | R _p , Ohms | G _m , μmhos | μ Factor | Load for Rated Output, Ohms | Power Output, Watts | Tube Type |
|---------------------------|---|--------------|----------------------|---------------------|----------------------|-----------------------|------------------------|----------|-----------------------------|---------------------|-----------|
| Full-Wave Rectifier | Max d-c output current = 250 ma; max peak inverse voltage = 1550 volts; rms supply voltage per plate = 450 volts; max peak current per plate = 750 ma | | | | | | | | | | 5A W4 |
| Full-Wave Rectifier | Max d-c output current = 175 ma; max peak inverse voltage = 1400 volts; max rms supply voltage per plate = 350 volts; max peak current per plate = 525 ma | | | | | | | | | | 5AX4-GT |
| Full-Wave Rectifier | Max d-c output current ♦ = 275 ma; Max peak inverse voltage ♦ = 1,700 volts; RMS supply voltage per plate ♦ = 600 volts; Max peak current per plate ♦ = 1,000 ma. | | | | | | | | | | 5AZ3 ■ |
| Full-Wave Rectifier | Max d-c output current = 125 ma; max peak inverse voltage = 1400 volts; max rms supply voltage per plate = 350 volts; max peak current per plate = 375 ma | | | | | | | | | | 5AZ4 |
| Class A Amplifier | 200 | 150 | R _k = 180 | 9.5 | 2.8 | 300,000 | 6,200 | — | — | — | 5B8 ¶ |
| Class A Amplifier | 200 | — | 6.0 | 13 | — | 5,750 | 3,300 | 19 | — | — | |
| Full-Wave Rectifier | Max d-c output current ♦ = 300 ma; max peak inverse voltage ♦ = 1,700; RMS supply voltage per plate ♦ = 500; max peak current per plate ♦ = 1000 ma | | | | | | | | | | 5BC3 |
| Full-Wave Rectifier | Max d-c output current ♦ = 300 ma; max peak inverse voltage ♦ = 1,700; RMS supply voltage per plate ♦ = 500; max peak current per plate ♦ = 1000 ma | | | | | | | | | | 5BC3-A |
| Class A Amplifier | 250 | 110 | R _k = 68 | 10 | 3.5 | 400,000 | 5,200 | — | — | — | 5B8 ¶ |
| Class A Amplifier | 150 | — | R _k = 56 | 18 | — | 5,000 | 8,500 | 40 | — | — | |
| Class A Amplifier ♦ | 150 | — | R _k = 56 | 18 | — | 4,600 | 9,300 | 43 | — | — | 5BK7-A ¶ |
| Class A Amplifier ♦ | 150 | — | R _k = 220 | 9.0 | — | 5,900 | 6,400 | 38 | — | — | 5BQ7-A ¶ |
| Class A Amplifier | 125 | 110 | 1.0 | 9.5 | 3.5 | 200,000 | 5,000 | — | — | — | 5BR8 ¶ |
| Class A Amplifier | 125 | — | 1.0 | 13.5 | — | — | — | 40 | — | — | |
| Class A Amplifier ♦ | 150 | — | R _k = 220 | 10 | — | 5,000 | 7,200 | 36 | — | — | 5BS8 ¶ |
| Class A Amplifier | 200 | 150 | R _k = 180 | 9.5 | 2.8 | 300,000 | 6,200 | — | — | — | 5BT8 ¶ |
| Horizontal Phase Detector | Max d-c output current ♦ = 1.0 ma; voltage drop ♦: 10 volts at 8.0 ma d-c | | | | | | | | | | |
| Class A Amplifier | 250 | 110 | R _k = 68 | 10 | 3.5 | 250,000 | 5,200 | — | — | — | 5BW8 ¶ |
| Horizontal Phase Detector | Max d-c output current ♦ = 5.0 ma; voltage drop ♦: 5 volts at 20 ma d-c | | | | | | | | | | |
| Class A Amplifier ♦ | 150 | — | R _k = 220 | 10 | — | 5,300 | 6,800 | 36 | — | — | 5BZ7 ¶ |
| Full-Wave Rectifier | Max d-c output current = 125 ma; max peak inverse voltage = 1,400 volts; max peak current per plate = 400 ma | | | | | | | | | | 5CG4 |
| Class A Amp | 125 | 125 | 1.0 | 9.0 | 2.2 | 300,000 | 5,500 | — | — | — | 5CG8 ¶ |
| Class A Amp | 125 | — | 1.0 | 12 | — | 6,000 | 6,500 | 40 | — | — | |
| Class A Amplifier | 125 | 125 | 1.0 | 12 | 4.0 | 100,000 | 5,800 | — | — | — | 5CL8 ¶ |
| Class A Amplifier | 125 | — | R _k = 56 | 15 | — | 5,000 | 8,000 | 40 | — | — | |
| Class A Amplifier | 125 | 125 | 1.0 | 12 | 4.0 | 100,000 | 6,400 | — | — | — | 5CL8-A ¶ |
| Class A Amplifier | 125 | — | R _k = 56 | 15 | — | 5,000 | 8,000 | 40 | — | — | |
| Class A Amplifier | 250 | 250 | 12.5 | 45 † | 4.5 † | 50,000 | 4,100 | — | 5,000 | 4.5 | 5CM6 ¶ |
| Vertical Amplifier | Max positive pulse plate voltage □ = 2,000 volts; max d-c cathode current = 40 ma | | | | | | | | | | |
| Class A Amplifier | 200 | 150 | R _k = 180 | 9.5 | 2.8 | 600,000 | 6,200 | — | — | — | 5CM8 ¶ |
| Class A Amplifier | 250 | — | 2.0 | 1.8 | — | 50,000 | 2,000 | 100 | — | — | |
| Class A Amplifier | 125 | 125 | 1.0 | 12 | 4.2 | 140,000 | 5,800 | — | — | — | 5CQ8 ¶ |
| Class A Amplifier | 125 | — | R _k = 56 | 15 | — | 5,000 | 8,000 | 40 | — | — | |
| Class A Amplifier | 125 | 125 | R _k = 56 | 13 | 3.0 | 300,000 | 7,700 | — | — | — | 5CR8 ¶ |
| Class A Amplifier | 125 | — | 2.0 | 12 | — | 5,500 | 4,000 | 22 | — | — | |

Metal tubes are shown in bold-face type, *miniature tubes in italics.*

♦ G3 and G5 are screen. G4 is signal-input grid.

♥ G2 and G4 are screen. G3 is signal-input grid.

1, 2, 3, etc. indicate tube sections.

✱ Maximum screen dissipation appears immediately below the screen voltage.

¶ Heater warm-up-time controlled.

| Tube Type | Classification by Construction | Base Connections | Out-line Dwg | Filament Volts | Filament Amp | Max Plate Watts | Max Plate Volts | Max Screen Volts and Watts * | Capacitance in Picofarads | | |
|-----------|---------------------------------|------------------|--------------|----------------|--------------|-----------------|--|------------------------------|---|---------|------------|
| | | | | | | | | | Input | Out-put | Grid-plate |
| 5CU4 | Full-Wave High-Vacuum Rectifier | 8KD | 12-16 | 5.0 | 3.5 | — | Tube Voltage Drop: ♦ 27 volts at 425 ma d-c | | | | |
| 5CZ5† | Beam Power Amplifier | 9HN | 6-4 | 4.7 | 0.6 | 10♦ | 350♦ | 315♦ 2.2♦ | 9.0▲ | 6.0▲ | 0.04▲ |
| 5DH8† | Triode-Pentode | 9EG | 6-2 | 5.2 | 0.6 | 2.2♦ 2.0♦ | 300♦ 300♦ | 300♦ 0.55♦ | Pentode Section Triode Section | | |
| 5DJ4 | Full-Wave High-Vacuum Rectifier | 8KS | 12-16 | 5.0 | 3.0 | — | Tube Voltage Drop: ♦ 44 volts at 225 ma d-c | | | | |
| 5EA8† | Triode-Pentode | 9AE | 6-2 | 4.7 | 0.6 | 3.1♦ 2.5♦ | 330♦ 330♦ | 330♦ 0.55♦ | Pentode Section Triode Section | | |
| 5EH8† | Triode-Pentode | 9JG | 6-2 | 4.7 | 0.6 | 2.8♦ 2.5♦ | 300♦ 300♦ | 300♦ 0.5♦ | Pentode Section Triode Section | | |
| 5EU8† | Triode-Pentode | 9JF | 6-2 | 4.7 | 0.6 | 3.1♦ 3.0♦ | 330♦ 330♦ | 330♦ 0.55♦ | Pentode Section Triode Section | | |
| 5EW6† | Sharp-Cutoff RF Pentode | 7CM | 5-2 | 5.6 | 0.45 | 3.1♦ | 330♦ | 330♦ 0.65♦ | 10 | 3.4 | 0.03 |
| 5FG7† | Triode-Pentode | 9GF | 6-2 | 4.7 | 0.6 | 3.0♦ 2.5♦ | 330♦ 330♦ | 330♦ 0.55♦ | Pentode Section Triode Section | | |
| 5FV8† | Triode-Pentode | 9FA | 6-2 | 4.7 | 0.6 | 2.3♦ 2.0♦ | 330♦ 330♦ | 330♦ 0.55♦ | Pentode Section Triode Section | | |
| 5GH8† | Triode-Pentode | 9AE | 6-2 | 4.7 | 0.6 | 2.5♦ 2.5♦ | 350♦ 330♦ | 330♦ 0.55♦ | Pentode Section Triode Section | | |
| 5GH8-A* | Triode-Pentode | 9AE | 6-2 | 4.7 | 0.6 | 2.5♦ 2.5♦ | 350♦ 330♦ | 330♦ 0.55♦ | Pentode Section Triode Section | | |
| 5GJ7 | Triode-Pentode | 9QA | T-X | 5.6 | 0.45 | 2.4♦ 1.8♦ | 275♦ 140♦ | 275♦ 0.55♦ | Pentode Section Triode Section | | |
| 5GM6† | Semi-Remote-Cutoff-Pentode | 7CM | 5-2 | 5.6 | 0.45 | 3.1♦ | 330♦ | 330♦ 0.65♦ | 10.0▲ | 2.4▲ | 0.036▲ |
| 5GS7 | Triode-Pentode | 9GF | 6-2 | 5.4 | 0.45 | 2.0 1.5 | 250 125 | 150 0.5 | Pentode Section Triode Section | | |
| 5GX6† | Dual-Control Pentode | 7EN | 5-2 | 4.7 | 0.6 | 1.7♦ | 300♦ | 300♦ 1.0♦ | — | — | — |
| 5GX7† | Triode-Pentode | 9QA | 6-2 | 5.6 | 0.45 | 2.2♦ 1.5♦ | 275♦ 275♦ | 275♦ 0.45♦ | Pentode Section Triode Section | | |
| 5HA7† | Dissimilar Double Triode | 12PQ | 9-56 | 5.6 | 0.45 | 2.75♦ 0.3♦ | 330♦ 330♦ | — | Section 1 (Pins 4, 9, 10) Section 2 (Pins 2, 3, 11) | | |
| 5HB7† | Triode-Pentode | 9QA | 6-2 | 4.7 | 0.6 | 3.1♦ 2.5♦ | 330♦ 330♦ | 330♦ 0.55♦ | Pentode Section Triode Section | | |
| 5HC7† | Dissimilar Double Triode | 12FR | 9-57 | 5.6 | 0.45 | 3.0♦ 1.2♦ | 330♦ 330♦ | — | Section 1 (Pins 4, 7, 9, 10) Section 2 (Pins 2, 3, 11) | | |
| 5HG8† | Triode-Pentode | 9MP | 6-2 | 5.3 | 0.45 | 2.2♦ 1.9♦ | 250♦ 125♦ | 250♦ 0.55♦ | Pentode Section Triode Section | | |

■ Compactron.

† Zero signal.

♦ Per section.

‡ Plate-to-plate.

▲ Maximum.

‡ Supply voltage.

● Subminiature type.

▲ Without external shield.

♦ Design maximum rating.

◎ Total for all similar sections.

⊗ Absolute maximum rating.

Conversion transconductance.

● See X-Radiation Warning, page 4.

| Service | Plate Volts | Screen Volts | Neg Grid Volts | Plate Milli-am-peres | Screen Milli-am-peres | R _p Ohms | G _m μmhos | μ Factor | Load for Rated Output, Ohms | Power Output, Watts | Tube Type |
|---------------------|--|--------------|----------------------|----------------------|-----------------------|---------------------|----------------------|---------------------------|-----------------------------|---------------------|-----------|
| Full-Wave Rectifier | Max d-c output current ♦ = 425 ma; max peak inverse voltage ♦ = 800 volts; max RMS supply voltage per plate ♦ = 285 volts; max peak current per plate ♦ = 1,300 ma | | | | | | | | | | 5CU4 |
| Vertical Amplifier | 250 75 | 250 250 | 14 0 | 46 130 | 4.6 16 | 73,000 | 4,800 | — | — | — | 5CZ5¶ |
| | Max positive pulse plate voltage ♦ = 2,200 volts; max d-c cathode current ♦ = 45 ma | | | | | | | | | | |
| Class A Amplifier | 125 | 125 | R _k = 56 | 13.5 | 3.8 | 150,000 | 8,600 | — | — | — | 5DH8¶ |
| Class A Amplifier | 250 | — | R _k = 390 | 7.3 | — | 12,000 | 4,400 | 53 | — | — | |
| Full-Wave Rectifier | Max d-c output current ♦ = 300 ma; max peak inverse voltage ♦ = 1,700 volts; max RMS supply voltage per plate ♦ = 600 volts; max peak current per plate ♦ = 1,000 ma | | | | | | | | | | 5DJ4 |
| Class A Amplifier | 125 | 125 | 1.0 | 12 | 4.0 | 200,000 | 6,400 | — | — | — | 5EA8¶ |
| Class A Amplifier | 150 | — | R _k = 56 | 18 | — | 5,000 | 8,500 | 40 | — | — | |
| Class A Amplifier | 125 | 125 | 1.0 | 12 | 4.0 | 170,000 | 6,000 | — | — | — | 5EH8¶ |
| Class A Amplifier | 100 | 70 | 0 | — | — | — | 6,500 | — | — | — | |
| Class A Amplifier | 125 | — | 1.0 | 13.5 | — | — | 7,500 | 40 | — | — | |
| Class A Amplifier | 125 | 25 | 1.0 | 12 | 4.0 | 80,000 | 6,400 | — | — | — | 5EU8¶ |
| Class A Amplifier | 150 | — | R _k = 56 | 18 | — | 5,000 | 8,500 | 40 | — | — | |
| Class A Amplifier | 125 | 125 | R _k = 56 | 11 | 3.2 | 200,000 | 14,000 | — | — | — | 5EW6¶ |
| Class A Amplifier | 125 | 125 | 1.0 | 11 | 4.0 | 180,000 | 6,000 | — | — | — | 5FG7¶ |
| Class A Amplifier | 100 | 100 | 0 | — | — | — | 7,400 | — | — | — | |
| Class A Amplifier | 125 | — | 1.0 | 13 | — | 5,700 | 7,500 | 43 | — | — | |
| Class A Amplifier | 125 | 125 | 1.0 | 12 | 4.0 | 200,000 | 6,500 | — | — | — | 5FV8¶ |
| Class A Amplifier | 125 | — | 1.0 | 14 | — | 5,000 | 8,000 | 40 | — | — | |
| Class A Amplifier | 125 | 125 | 1.0 | 12 | 4.0 | 200,000 | 7,500 | — | — | — | 5GH8¶ |
| Class A Amplifier | 125 | — | 1.0 | 13.5 | — | 5,400 | 8,500 | 46 | — | — | |
| Class A Amplifier | 125 | 125 | 1.0 | 12 | 4.0 | 200,000 | 7,500 | — | — | — | 5GH8-A |
| Class A Amplifier | 125 | — | 1.0 | 13.5 | — | 5,400 | 8,500 | 46 | — | — | |
| Class A Amplifier | 170 | 120 | 1.2 | 10 | 3.0 | 350,000 | 11,000 | — | — | — | 5GJ7 |
| Class A Amplifier | 100 | — | 3.0 | 15 | — | — | 9,000 | 20 | — | — | |
| Class A Amplifier | 125 | 125 | R _k = 56 | 14 | 3.4 | 200,000 | 13,000 | — | — | — | 5GM6¶ |
| Class A Amplifier | 170 | 150 | 1.2 | 10 | 3.3 | 350,000 | 12,000 | — | — | — | 5GS7 |
| Class A Amplifier | 100 | — | 3.0 | 14 | — | — | 5,500 | 17 | — | — | |
| Class A Amplifier | 150 | 100 | R _k = 180 | 3.7 | 3.0 | 140,000 | 3,700 | E _{c3} = 0 volts | | — | 5GX6¶ |
| Class A Amplifier | 125 | 125 | 1.0 | 8.0 | 2.5 | 200,000 | 11,000 | — | — | — | 5GX7¶ |
| Class A Amplifier | 125 | — | 1.0 | 13 | — | 4,700 | 8,500 | 40 | — | — | |
| Class A Amplifier | 250 | — | 8.5 | 10.5 | — | 7,700 | 2,200 | 17 | — | — | 5HA7¶ ■ |
| Class A Amplifier | 250 | — | 2.0 | 1.2 | — | 62,500 | 1,600 | 100 | — | — | |
| Class A Amplifier | 125 | 125 | 1.0 | 12 | 4.0 | 200,000 | 6,400 | — | — | — | 5HB7¶ |
| Class A Amplifier | 150 | — | R _k = 56 | 18 | — | 5,000 | 8,500 | 40 | — | — | |
| Class A Amplifier | 150 | — | 1.0 | 18 | — | 5,200 | 4,400 | 23 | — | — | 5HC7¶ ■ |
| Class A Amplifier | 150 | — | 1.0 | 1.0 | — | 53,000 | 1,900 | 100 | — | — | |
| Class A Amplifier | 170 | 150 | 1.2 | 10 | 3.3 | 350,000 | 12,000 | — | — | — | 5HG8¶ |
| Class A Amp | 100 | — | 3.0 | 14 | — | 3,100 | 5,500 | 17 | — | — | |

Metal tubes are shown in bold-face type, miniature tubes in italics.

♦ G3 and G5 are screen. G4 is signal-input grid.
 ◆ G2 and G4 are screen. G3 is signal-input grid.

1, 2, 3, etc. indicate tube sections.

■ Maximum screen dissipation appears immediately below the screen voltage.

¶ Heater warm-up time controlled.

| Tube Type | Classification by Construction | Base Connections | Out-line Dwg | Fila-ment Volts | Fila-ment Amp | Max Plate Watts | Max Plate Volts | Max Screen Volts and Watts | Capacitance in Picofarads | | | |
|-----------------|---------------------------------|------------------|---------------|-----------------|---------------|-----------------|-----------------|--|---------------------------|------------------------------|--------------------------------------|------------------|
| | | | | | | | | | Input | Out-put | Grid-plate | |
| 5HZ6 \square | Dual-Control Pentode | 7EN | 5-2 | 4.75 | 0.6 | 1.7 \diamond | 300 \diamond | 300 \diamond | 1.0 \diamond | — | — | — |
| 5J6 \square | Medium-Mu Twin Triode | 7BF | 5-2 | 4.7 | 0.6 | 1.5 \clubsuit | 300 | — | — | 2.6 | 1.6 ₁ 1.0 ₂ | 1.5 |
| 5JK6 \square | Sharp-Cutoff RF Pentode | 7CM | 5-2 | 4.9 | 0.45 | 2.5 \diamond | 275 \diamond | 275 \diamond | 0.6 \diamond | (Both Sections in Push-Pull) | | |
| 5JL6 \square | Semi-Remote-Cut-off RF Pentode | 7CM | 5-2 | 4.9 | 0.45 | 2.5 \diamond | 274 \diamond | 275 \diamond | 0.6 \diamond | 9.5 \blacktriangle | 2.7 \blacktriangle | 0.02 \clubsuit |
| 5JW8 \square | Triode-Pentode | 9DC | 6-2 | 4.7 | 0.6 | 1.2 | 250 | 250 | 0.8 | Pentode Section | | |
| | | | | | | 1.4 | 250 | — | — | Triode Section | | |
| 5KD8 \square | Triode-Pentode | 9AE | 6-2 | 5.6 | 0.45 | 3.0 \diamond | 330 \diamond | 330 \diamond | 0.55 \diamond | Pentode Section | | |
| | | | | | | 2.5 \diamond | 330 \diamond | — | — | Triode Section | | |
| 5KE8 \square | Triode-Pentode | 9DC | 6-2 | 5.6 | 0.45 | 2.0 \diamond | 280 \diamond | 280 \diamond | 0.5 \diamond | Pentode Section | | |
| | | | | | | 2.0 \diamond | 280 \diamond | — | — | Triode Section | | |
| 5KZ8 \square | Triode-Pentode | 9FZ | 6-2 | 4.7 | 0.6 | 2.5 \diamond | 330 \diamond | 330 \diamond | 0.55 \diamond | Pentode Section | | |
| | | | | | | 2.5 \diamond | 330 \diamond | — | — | Triode Section | | |
| 5LJ5 \square | Triode-Pentode | 9GF | 6-2 | 5.6 | 0.45 | 2.0 \diamond | 280 \diamond | 280 \diamond | 0.5 \diamond | Pentode Section | | |
| | | | | | | 2.0 \diamond | 280 \diamond | — | — | Triode Section | | |
| 5MB8 \square | Triode-Pentode | 9FA | 6-2 | 5.6 | 0.45 | 2.0 \diamond | 280 \diamond | 280 \diamond | 0.5 \diamond | Pentode Section | | |
| | | | | | | 2.0 \diamond | 280 \diamond | — | — | Triode Section | | |
| 5MQ8 \square | Triode-Pentode | 9AE | 6-2 | 5.6 | 0.6 | 2.5 \diamond | 330 \diamond | 330 \diamond | 0.55 \diamond | Pentode Section | | |
| | | | | | | 2.7 \diamond | 330 \diamond | — | — | Triode Section | | |
| 5R4-G 5R4-GY | Full-Wave High-Vacuum Rectifier | 5T | 16-3 16-3 | 5.0 | 2.0 | — | — | Tube Voltage Drop: \clubsuit 67 v at 250 ma d-c | | | | |
| 5R4-GYA | Full-Wave High-Vacuum Rectifier | 5T | T-X | 5.0 | 2.0 | — | — | Tube Voltage Drop: \clubsuit 67 v at 250 ma d-c | | | | |
| 5R4-GYB | Full-Wave High-Vacuum Rectifier | 5T | 12-15 | 5.0 | 2.0 | — | — | Tube Voltage Drop: \clubsuit 63 volts at 250 ma d-c | | | | |
| 5T4 | Full-Wave High-Vacuum Rectifier | 5T | 10-1 | 5.0 | 2.0 | — | — | Tube Voltage Drop: \clubsuit 45 v at 225 ma d-c | | | | |
| 5T8 \square | Triple Diode High-Mu Triode | 9E | 6-2 | 4.7 | 0.6 | 1.1 \diamond | 330 \diamond | — | 1.7 | 2.4 | 1.7 | |
| 5U4-G | Full-Wave High-Vacuum Rectifier | 5T | 16-3 | 5.0 | 3.0 | — | — | Tube Voltage Drop: \clubsuit 44 v at 225 ma d-c | | | | |
| 5U4-GA | Full-Wave High-Vacuum Rectifier | 5T | T-X | 5.0 | 3.0 | — | — | Tube Voltage Drop: \clubsuit 44 v at 225 ma d-c | | | | |
| 5U4-GB | Full-Wave High-Vacuum Rectifier | 5T | 12-16 | 5.0 | 3.0 | — | — | Tube Voltage Drop: \clubsuit 50 v at 275 ma d-c | | | | |
| 5U8 \square | Triode-Pentode | 9AE | 6-2 | 4.7 | 0.6 | 3.0 \diamond | 330 \diamond | 330 \diamond | 0.55 \diamond | Pentode Section | | |
| | | | | | | 2.5 \diamond | 330 \diamond | — | — | Triode Section | | |
| 5U9 | Triode-Pentode | 10K | 6-2 | 5.9 | 0.45 | 2.1 | 250 | 250 | 0.7 | Pentode Section | | |
| | | | | | | 1.5 | 250 | — | — | Triode Section | | |
| 5V3 | Full-Wave High-Vacuum Rectifier | 5T | 12-16 | 5.0 | 3.8 | — | — | Tube Voltage Drop: \clubsuit 47 v at 350 ma d-c | | | | |
| 5V3-A | Full-Wave High-Vacuum Rectifier | 5T | 12-16 | 5.0 | 3.0 | — | — | Tube Voltage Drop: \clubsuit 42 volts at 350 ma d-c | | | | |
| 5V4-G 5V4-GA | Full-Wave High-Vacuum Rectifier | 5L | 14-3 12-14 | 5.0 | 2.0 | — | — | Tube Voltage Drop: \clubsuit 25 v at 175 ma d-c | | | | |

\blacksquare Compactron. † Plate-to-plate.
 \dagger Zero signal. \clubsuit Maximum.
 \blacklozenge Per section. ‡ Supply voltage.

\odot Subminiature type.
 \blacktriangle Without external shield.
 \diamond Design maximum rating.

\oplus Total for all similar sections.
 \ominus Absolute maximum rating.
 $\#$ Conversion transconductance.

● See X-Radiation Warning, page 4.

| Service | Plate Volts | Screen Volts | Neg Grid Volts | Plate Milli-amperes | Screen Milli-amperes | R_p , Ohms | G_m , μ mos | μ Factor | Load for Rated Output, Ohms | Power Output, Watts | Tube Type |
|---------------------|--|--------------|-------------------|---------------------|----------------------|---|-------------------|----------------------|-----------------------------|---------------------|-----------------|
| Class A Amplifier | 150 | 100 | $R_k = 180$ | 3.2 | 3.2 | 110,000 | 3,400 | $E_{c1} = 0$ volts | | | 5HZ6† |
| Class A Amplifier ♦ | 100 | — | $R_k = 50 \oplus$ | 8.5 | — | 7,100 | 5,300 | 38 | — | — | 5J6† |
| Class C Amplifier | 150 | — | 10.0 | 30 | — | Input Signal = 0.35 watt $I_s = 16$ ma d-c | | | — | 3.5 | — |
| Class A Amplifier | 125 | 125 | $R_k = 68$ | 11.5 | 3.9 | 150,000 | 18,000 | — | — | — | 5JK6† |
| Class A Amplifier | 125 | 60 | $R_k = 68$ | 12.5 | 4.0 | 120,000 | 15,500 | — | — | — | 5JL6† |
| Class A Amplifier | 100 | 100 | 1.0 | 6.0 | 1.7 | — | 5,500 | — | — | — | 5JW8† |
| Class A Amplifier | 200 | — | 2.0 | 3.5 | — | — | 3,500 | 70 | — | — | — |
| Class A Amplifier | 125 | 110 | 1.0 | 9.5 | 3.5 | 200,000 | 5,000 | — | — | — | 5KD8† |
| Class A Amp | 125 | — | 1.0 | 13.5 | — | — | 7,500 | 40 | — | — | — |
| Class A Amplifier | 125 | 125 | $R_k = 33$ | 10 | 2.8 | 125,000 | 12,000 | — | — | — | 5KE8† |
| Class A Amplifier | 125 | — | $R_k = 68$ | 13 | — | 5,000 | 8,000 | 40 | — | — | — |
| Class A Amplifier | 125 | 110 | 1.0 | 9.5 | 3.5 | 200,000 | 5,000 | — | — | — | 5KZ8† |
| Class A Amplifier | 125 | — | 1.0 | 13.5 | — | — | 7,500 | 40 | — | — | — |
| Class A Amplifier | 125 | 125 | $R_k = 33$ | 12 | 3.5 | 125,000 | 13,000 | — | — | — | 5LJ8† |
| Class A Amplifier | 125 | — | $R_k = 68$ | 13 | — | 5,000 | 8,000 | 40 | — | — | — |
| Class A Amplifier | 125 | 125 | $R_k = 33$ | 10 | 2.8 | 125,000 | 12,000 | — | — | — | 5MB8† |
| Class A Amplifier | 125 | — | $R_k = 68$ | 13 | — | 5,000 | 8,000 | 40 | — | — | — |
| Class A Amplifier | 125 | 125 | $R_k = 62$ | 12 | 4.5 | 150,000 | 10,000 | — | — | — | 5MQ8† |
| Class A Amplifier | 150 | — | $R_k = 56$ | 18 | — | 5,000 | 8,500 | 40 | — | — | — |
| Full-Wave Rectifier | Max d-c output current = 250 ma; max peak inverse voltage = 2800 volts; rms supply voltage per plate = 750 volts; max peak current per plate = 650 ma | | | | | | | | | | 5R4-G 5R4-GY |
| Full-Wave Rectifier | Max d-c output current = 250 ma; max peak inverse voltage = 2800 volts; rms supply voltage per plate = 750 volts; max peak current per plate = 650 ma | | | | | | | | | | 5R4-GYA |
| Full-Wave Rectifier | Max d-c output current \square = 250 ma; max peak inverse voltage \square = 3,100 volts; max RMS supply voltage per plate \square = 900 volts; max peak current per plate \square = 715 ma | | | | | | | | | | 5R4-GYB |
| Full-Wave Rectifier | Max d-c output current = 225 ma; max peak inverse voltage = 1550 volts; max rms supply voltage per plate = 450 volts; max peak current per plate = 675 ma | | | | | | | | | | 5T4 |
| Class A Amplifier | 250 | — | 3.0 | 1.0 | — | 58,000 | 1,200 | 70 | — | — | 5T8† |
| Class A Amplifier | 100 | — | 1.0 | 0.8 | — | 54,000 | 1,300 | 70 | — | — | — |
| Full-Wave Rectifier | Max d-c output current = 225 ma; max peak inverse voltage = 1550 volts; rms supply voltage per plate = 450 volts; max peak current per plate = 800 ma | | | | | | | | | | 5U4-G |
| Full-Wave Rectifier | Max d-c output current = 250 ma; max peak inverse voltage = 1550 volts; rms supply voltage per plate = 450 volts; max peak current per plate = 900 ma | | | | | | | | | | 5U4-GA |
| Full-Wave Rectifier | Max d-c output current = 275 ma; max peak inverse voltage = 1550 volts; rms supply voltage per plate = 450 volts; max peak current per plate = 1000 ma | | | | | | | | | | 5U4-GB |
| Class A Amplifier | 125 | 110 | 1.0 | 9.5 | 3.5 | 200,000 | 5,000 | — | — | — | 5U8† |
| Class A Amplifier | 125 | — | 1.0 | 13.5 | — | — | 7,500 | 40 | — | — | — |
| Class A Amplifier | 160 | 110 | 1.4 | 13 | 5.0 | — | 12,000 | $(E_{c3} = 0$ volts) | | | 5U9 |
| Class A Amplifier | 100 | — | 2.0 | 14 | — | — | 5,000 | 17 | — | — | — |
| Full-Wave Rectifier | Max d-c output current = 350 ma; max peak inverse voltage = 1,400 volts; rms supply voltage per plate = 425 volts; max peak current per plate = 1,200 ma | | | | | | | | | | 5V3 |
| Full-Wave Rectifier | Max d-c output current \diamond = 415 ma; max peak inverse voltage \diamond = 1,550 volts; max RMS supply voltage per plate \diamond = 550 volts; max peak current per plate \diamond = 1,400 ma | | | | | | | | | | 5V3-A |
| Full-Wave Rectifier | Max d-c output current = 175 ma; max peak inverse voltage = 1400 volts; rms supply voltage per plate = 375 volts; max peak current per plate = 525 ma | | | | | | | | | | 5V4-G 5V4-GA |

Metal tubes are shown in bold-face type, miniature tubes in italics.

♦ G3 and G5 are screen. G4 is signal-input grid.

▼ G2 and G4 are screen. G3 is signal-input grid.

1, 2, 3, etc. indicate tube sections.

✱ Maximum screen dissipation appears immediately below the screen voltage.

† Heater warm-up time controlled.

| Tube Type | Classification by Construction | Base Connections | Outline Dwg | Filament Volts | Filament Amp | Max Plate Watts | Max Plate Volts | Max Screen Volts and Watts | Capacitance in Picofarads | | |
|------------------------|---------------------------------|--------------------|-----------------------|----------------|--------------|---------------------|---|--|---|--------|------------|
| | | | | | | | | | Input | Output | Grid-plate |
| 5V6-GT | Beam Power Amplifier | 7AC | 9-11 or 9-41 | 4.7 | 0.6 | 12 | 315 | 285 | Single Tube | | |
| | | | | | | — | — | — | 2 Tubes, Push-Pull | | |
| | | | | | | 9.0 | 315 | — | Triode Connection (G2 & P tied) | | |
| 5W4 5W4-GT | Full-Wave High-Vacuum Rectifier | 5T | 8-6 9-13 | 5.0 | 1.5 | — | Tube Voltage Drop: \blacklozenge 45 v at 100 ma d-c | | | | |
| 5X4-G | Full-Wave High-Vacuum Rectifier | 5Q | 16-3 | 5.0 | 3.0 | — | Tube Voltage Drop: \blacklozenge 58 v at 225 ma d-c | | | | |
| 5X4-GA | Full-Wave High-Vacuum Rectifier | 5Q | 12-16 | 5.0 | 3.0 | — | Tube Voltage Drop: \blacklozenge 47 v at 250 ma d-c | | | | |
| 5X8 | Triode-Pentode Converter | 9AK | 6-2 | 4.7 | 0.6 | 2.3 \blacklozenge | 275 \blacklozenge | 275 \blacklozenge | Pentode Section | | |
| | | | | | | 1.7 \blacklozenge | 275 \blacklozenge | 0.45 \blacklozenge | Triode Section | | |
| 5X9 | Triode-Pentode | 10K | 6-2 | 5.9 | 0.45 | 2.1 | 250 | 250 | Pentode Section | | |
| | | | | | | 1.5 | 250 | 0.7 | Triode Section | | |
| 5Y3-G | Full-Wave High-Vacuum Rectifier | 5T | 14-3 | 5.0 | 2.0 | — | Tube Voltage Drop: \blacklozenge 60 v at 125 ma d-c | | | | |
| 5Y3-GA | Full-Wave High-Vacuum Rectifier | 5T | 12-16 9-13 | 5.0 | 2.0 | — | Tube Voltage Drop: \blacklozenge 60 v at 125 ma d-c | | | | |
| 5Y3-GT | Full-Wave High-Vacuum Rectifier | 5T | 9-13 or 9-42 | 5.0 | 2.0 | — | Tube Voltage Drop: \blacklozenge 50 volts at 125 ma d-c | | | | |
| 5Y4-G | Full-Wave High-Vacuum Rectifier | 5Q | 14-3 | 5.0 | 2.0 | — | Tube Voltage Drop: \blacklozenge 60 v at 125 ma d-c | | | | |
| 5Y4-GA | Full-Wave High-Vacuum Rectifier | 5Q | 12-16 9-13 9-42 | 5.0 | 2.0 | — | Tube Voltage Drop: \blacklozenge 60 v at 125 ma d-c | | | | |
| 5Y4-GT | Full-Wave High-Vacuum Rectifier | 5Q | 12-16 9-13 9-42 | 5.0 | 2.0 | — | Tube Voltage Drop: \blacklozenge 60 v at 125 ma d-c | | | | |
| 5Z3 | Full-Wave High-Vacuum Rectifier | 4C | 16-1 | 5.0 | 3.0 | — | Tube Voltage Drop: \blacklozenge 58 v at 225 ma d-c | | | | |
| 5Z4 | Full-Wave High-Vacuum Rectifier | 5L | 8-6 | 5.0 | 2.0 | — | Tube Voltage Drop: \blacklozenge 20 v at 125 ma | | | | |
| 5Z4-GT | Full-Wave High-Vacuum Rectifier | 5L | 9-11 | 5.0 | 2.0 | — | Tube Voltage Drop: \blacklozenge 20 v at 125 ma | | | | |
| 6A3 | Power Amplifier Triode | 4D | 16-1 | 6.3 | 1.0 | — | 325 | — | Single tube | | |
| | | | | | | | | | 2 tubes, push-pull | | |
| 6A4/LA | Power Amplifier Pentode | 5B | 14-1 | 6.3 | 0.3 | — | 180 | 180 | — | — | — |
| 6A5-G | Power Amplifier Triode | 6T | 16-3 | 6.3 | 1.25 | — | 250 | — | Single Tube | | |
| | | | | | | | | | 2 tubes, push-pull | | |
| 6A6 | Twin Triode Power Amplifier | 7B | 14-1 | 6.3 | 0.8 | 1.0 \blacklozenge | 300 | — | Both Sections in Push-pull | | |
| | | | | | | | | | Both Sections in Parallel | | |
| 6A7 | Pentagrid Converter | 7C \blacklozenge | 12-6 | 6.3 | 0.3 | 1.0 | 300 | 100 | Osc $I_{c1} = 0.4$ ma $R_{g1} = 50,000$ ohms | | |
| | | | | | | | | 0.3 | | | |
| 6A8 6A8-G 6A8-GT | Pentagrid Converter | 8A \blacklozenge | 8-4 12-8 9-18 | 6.3 | 0.3 | 1.0 | 300 | 100 | Osc $I_{c1} = 0.4$ ma $R_{g1} = 50,000$ ohms | | |
| | | | | | | | | 0.3 | | | |
| 6AB4 | High-Frequency Triode | 5CE | 5-2 | 6.3 | 0.15 | 2.5 | 300 | — | 2.2 | 1.4 | 1.5 |
| 6AB5/6N5 | Electron-Ray Indicator | 6R | 9-26 | 6.3 | 0.15 | — | 180 \blacklozenge | Max target voltage = 180 Min target voltage = 125 | | | |
| 6AB7/1853 | Remote-Cutoff RF Pentode | 8N | 8-1 | 6.3 | 0.45 | 3.75 | 300 | 200 | 8.0 | 5.0 | 0.015 |
| | | | | | | | | 0.65 | | | |
| 6AB9 | Twin Tetrode | 10N | T-X | 6.3 | 0.365 | 2.0 \blacklozenge | 250 \blacklozenge | 180 \blacklozenge | 5.7 | 2.7 | 0.055 |
| | | | | | | | | 0.5 \blacklozenge | | | |
| 6AC5-GT | Triode Power Amplifier | 6Q | 9-11 | 6.3 | 0.4 | 10 \blacklozenge | 250 | — | 2 tubes, Push-pull | | |
| 6AC6-GT | Dynamic-Coupled Power Amplifier | 7W | 9-11 | 6.3 | 1.1 | 8.5 1.3 | 180 | — | — | — | — |
| 6AC7 | RF Pentode | 8N | 8-1 | 6.3 | 0.45 | 3.0 | 300 | 300 \blacklozenge | 11 | 5 | 0.015 |
| | | | | | | | | 0.38 | | | |

\blacksquare Compactron.

† Zero signal.

\blacklozenge Per section.

‡ Plate-to-plate.

\blacklozenge Maximum.

\blacklozenge Supply voltage.

⊙ Subminiature type.

\blacktriangle Without external shield.

\blacklozenge Design maximum rating.

⊕ Total for all similar sections.

⊖ Absolute maximum rating.

$\#$ Conversion transconductance.

● See X-Radiation Warning, page 4.

| Service | Plate Volts | Screen Volts | Neg Grid Volts | Plate Milli-amperes | Screen Milli-amperes | R _{pp} Ohms | G _m μmhos | μ Factor | Load for Rated Output, Ohms | Power Output, Watts | Tube Type |
|---------------------------------|--|--------------|----------------------|---------------------|----------------------|--------------------------|----------------------|--|-----------------------------|---------------------|------------------------|
| Class A Amplifier | 315 | 225 | 13 | 34† | 2.2† | 80,000 | 3,750 | — | 8,500 | 5.5 | 5V6-GT† |
| | 250 | 250 | 12.5 | 45† | 4.5† | 50,000 | 4,100 | — | 5,000 | 4.5 | |
| | 180 | 180 | 8.5 | 29† | 3.0† | 50,000 | 3,700 | — | 5,500 | 2.0 | |
| Class AB ₁ Amplifier | 285 | 285 | 19 | 70† | 4.0† | — | — | — | 8,000† | 14 | 6X4 |
| | 250 | 250 | 15 | 70† | 5.0† | — | — | — | 10,000† | 10 | |
| Vertical Amplifier | 250 | — | 12.5 | 49.5 | — | 1,960 | 5,000 | 9.8 | — | — | — |
| | Max positive pulse plate voltage $\square = 1200$ v; max plate dissipation = 9 watts; max d-c cathode current = 35 ma | | | | | | | | | | |
| Full-Wave Rectifier | Max d-c output current = 100 ma; max peak inverse voltage = 1400 volts; max rms supply voltage per plate = 350 volts; max peak current per plate = 300 ma | | | | | | | | | | 5W4 5W4-GT |
| Full-Wave Rectifier | Max d-c output current = 225 ma; max peak inverse voltage = 1550 volts; max rms supply voltage per plate = 450 volts; max peak current per plate = 675 ma | | | | | | | | | | 5X4-G |
| Full-Wave Rectifier | Max d-c output current = 250 ma; max peak inverse voltage = 1550 volts; rms supply voltage per plate = 450 volts; max peak current per plate = 900 ma | | | | | | | | | | 5X4-GA |
| Class A Amplifier | 125 | 125 | 1.0 | 9.0 | 2.2 | 300,000 | 5,500 | — | — | — | 6X8† |
| Class A Amplifier | 125 | — | 1.0 | 12 | — | 6,000 | 6,500 | 40 | — | — | — |
| Class A Amplifier | 160 | 135 | 1.7 | 13 | 5.0 | — | 14,000 | — | — | — | 6X9 |
| Class A Amplifier | 170 | — | 1.0 | 8.5 | — | — | 4,800 | 55 | — | — | — |
| Full-Wave Rectifier | Max d-c output current = 125 ma; max peak inverse voltage = 1400 volts; max rms supply voltage per plate = 350 volts; max peak current per plate = 375 ma | | | | | | | | | | 5Y3-G |
| Full-Wave Rectifier | Max d-c output current = 125 ma; max peak inverse voltage = 1400 volts; rms supply voltage per plate = 350 volts; max peak current per plate = 440 ma | | | | | | | | | | 5Y3-GA |
| Full-Wave Rectifier | Max d-c output current = 125 ma; max peak inverse voltage = 1400 volts; rms supply voltage per plate = 350 volts; max peak current per plate = 440 ma | | | | | | | | | | 5Y3-GT |
| Full-Wave Rectifier | Max d-c output current = 125 ma; max peak inverse voltage = 1400 volts; rms supply voltage per plate = 350 volts; max peak current per plate = 375 ma | | | | | | | | | | 5Y4-G |
| Full-Wave Rectifier | Max d-c output current = 125 ma; max peak inverse voltage = 1400 volts; rms supply voltage per plate = 350 volts; max peak current per plate = 400 ma | | | | | | | | | | 5Y4-GA 5Y4-GT |
| Full-Wave Rectifier | Max d-c output current = 225 ma; max peak inverse voltage = 1550 volts; max rms supply voltage per plate = 450 volts; max peak current per plate = 675 ma | | | | | | | | | | 5Z3 |
| Full-Wave Rectifier | Max d-c output current = 125 ma; max peak inverse voltage = 1400 volts; max rms supply voltage per plate = 350 volts; max peak current per plate = 375 ma | | | | | | | | | | 5Z4 5Z4-GT |
| Class A Amplifier | 250 | — | 45 | 60† | — | 800 | 5,250 | 4.2 | 2,500 | 3.2 | 6A3 |
| | 325 | — | 68 | 80† | — | — | — | — | 3,000† | 15 | |
| Class AB ₁ Amplifier | 180 | 180 | 12 | 22† | 3.9† | 45,400 | 2,200 | — | 8,000 | 1.4 | 6A4/LA |
| Class A Amplifier | 250 | — | 45 | 60† | — | 800 | 5,250 | 4.2 | 2,500 | 3.75 | 6A5-G |
| | 325 | — | 68 | 80† | — | — | — | — | 3,000 | 15 | |
| Class B Amplifier | 300 | — | 0 | 35† | — | — | — | — | 8,000 | 10 | 6A6 |
| Class A Amplifier | 294 | — | 6.0 | 7.0 | — | 11,000 | 3,200 | 35 | † | — | — |
| Converter | 250 | 100 | 3.0 | 3.5 | 2.7 | 360,000 | 550 # | E _{cc} (Osc Plate) = 250 thru 20,000 ohms I _{cc} = 4.0 ma | | — | 6A7 |
| Converter | 250 | 100 | 3.0 | 3.5 | 2.7 | 360,000 | 550 # | E _{cc} (Osc Plate) = 250 thru 20,000 ohms I _{cc} = 4.0 ma | | — | 6A8 6A8-G 6A8-GT |
| Class A Amplifier | 250 | — | R _k = 200 | 10 | — | 10,900 | 5,500 | 60 | — | — | 6A B ₄ |
| | 100 | — | R _k = 270 | 3.7 | — | 15,000 | 4,000 | 60 | — | — | |
| Tuning Indicator | Plate voltage = 135 thru 0.25 meg; target voltage = 135 (E _c = -10, shadow = 0°) (E _c = 0 volt, shadow = 90°, plate current = 0.5 ma, target current = 2 ma) | | | | | | | | | | 6AB5/6N5 |
| Class A Amplifier | 300 | 200 | 3.0 | 12.5 | 3.2 | 700,000 | 5,000 | — | — | — | 6AB7/1853 |
| Class A Amplifier | 125 | 80 | 1.0 | 8.0 | 2.0 | 110,000 | 10,000 | — | — | — | 6A B ₉ |
| Class B Amplifier | 250 | — | 0 | 5.0† | — | Input signal = .950 watt | | — | 10,000 | 8.0 | 6AC5-GT |
| Class A Amplifier | 180 | 180 | 0 | 45.0 | 7.0 | 18,000 | 3,000 | — | 3,500 | 3.6 | 6AC6-GT |
| Class A Amplifier | 300 | 150 | R _k = 160 | 10 | 2.5 | 1,000,000 | 9,000 | — | — | — | 6AC7 |

Metal tubes are shown in bold-face type, miniature tubes in italics.

♦ G3 and G5 are screen. G4 is signal-input grid.
 † G2 and G4 are screen. G3 is signal-input grid.

* Maximum screen dissipation appears immediately below the screen voltage.

† Heater warm-up time controlled.

1, 2, 3, etc. indicate tube sections.

| Tube Type | Classification by Construction | Base Connections | Out-line Dwg | Filament Volts | Filament Amp | Max Plate Watts | Max Plate Volts | Max Screen Volts and Watts | Capacitance in Picofarads | | |
|-----------|-------------------------------------|------------------|--------------|----------------|--------------|-----------------|--|---|--|---------|------------|
| | | | | | | | | | Input | Out-put | Grid-plate |
| 6AC9 | Duplex-Diode Pentode | 12GN | 9-57 | 6.3 | 0.6 | 2.5 | 330 | 330 | Pentode Section | | |
| 6AC10 | Triple Triode | 12FE | 9-58 | 6.3 | 0.6 | 2.0 | 330 | 330 | Drop: 2.4▲, 10.22▲, 1.3▲, 2.6▲, 0.30▲, 1.2▲, 2.6▲, 0.44▲, 1.2▲ | | |
| 6AD4 | High-Mu Triode | 8DK | 3-1 | 6.3 | 0.15 | 0.3 | 150 | — | 1.9 | 2.2 | 0.7 |
| 6AD6-G | Twin Electron-Ray Indicator | 7AG | 9-3 | 6.3 | 0.15 | — | Max target voltage = 150 Min target voltage = 100 | | | | |
| 6AD7-G | Triode-Power Amplifier Pentode | 8AY | 14-3 | 6.3 | 0.85 | 1.0 | 285 | — | Triode section | | |
| | | | | | | 8.5 | 375 | 285 | Pentode section | | |
| 6AD10 | Dissimilar Double Pentode | 12EZ | 9-59 | 6.3 | 1.05 | 10 | 275 | 275 | Section 1 (Pins 8, 9, 10, 11) | | |
| | | | | | | 1.7 | 300 | 300 | Section 2 (Pins 2, 3, 5, 6, 7) | | |
| 6AD10-A | Dissimilar Double Pentode | 12EZ | 9-59 | 6.3 | 1.05 | 12 | 300 | 300 | Section 1 (Pins 8, 9, 10, 11) | | |
| | | | | | | 1.7 | 300 | 300 | Section 2 (Pins 2, 3, 5, 6, 7) | | |
| 6AE5-GT | Low-Mu Triode | 6Q | 9-11 | 6.3 | 0.3 | 2.5 | 300 | — | — | — | — |
| 6AE6-G | Single-Grid Twin-Plate Control Tube | 7AH | 12-7 | 6.3 | 0.15 | — | 250 | Remote-cut-off plate (Pin 3) Sharp-cut-off plate (Pin 4) | | | |
| 6AE7-GT | Twin-Input Triode | 7AX | 9-11 | 6.3 | 0.5 | 5.0 | 300 | — | — | — | — |
| 6AF3 | Half-Wave High-Vacuum Rectifier | 9CB | 6-8 | 6.3 | 1.2 | 6.0 | Tube Voltage Drop: 30 volts at 340 ma d-c | | | | |
| 6AF4 | UHF Triode Oscillator | 7DK | 5-2 | 6.3 | 0.225 | 2.5 | 150 | — | 2.2▲ | 1.4▲ | 1.9▲ |
| 6AF4-A | | | 5-1 | | | | | | | | |
| 6AF5-G | Low-Mu Triode | 6Q | 12-7 | 6.3 | 0.3 | — | 180 | — | — | — | — |
| 6AF6-G | Twin Electron-Ray Indicator | 7AG | 9-1 | 6.3 | 0.15 | — | — | Max target voltage = 250 Min target voltage = 125 | | | |
| 6AF10 | Dissimilar Double Pentode | 12GX | 9-58 | 6.3 | 1.2 | 3.0 | 300 | 300 | Section 1 (Pins 6, 8, 9, 10, 11) | | |
| | | | | | | 5.0 | 300 | 300 | Section 2 (Pins 2, 3, 4, 5, 6) | | |
| 6AF11 | Dissimilar-Double-Triode Pentode | 12DP | 9-58 | 6.3 | 1.05 | 5.0 | 330 | 330 | Pentode Section | | |
| | | | | | | 1.1 | 330 | — | Triode Section 1 (Pins 5, 6, 8) | | |
| | | | | | | 2.0 | 330 | — | Triode Section 2 (Pins 3, 4, 7) | | |
| 6AG5 | Sharp-Cutoff RF Pentode | 7BD | 5-2 | 6.3 | 0.3 | 2.0 | 300 | 300 | Pentode Connection | | |
| | | | | | | 2.5 | 300 | 0.5 | Triode Connection (G ₂ & P tied) | | |
| 6AG7 | Power Amplifier Pentode | 8Y | 8-6 | 6.3 | 0.65 | 9.0 | 300 | 300 | 13 | 7.5 | 0.06 |
| 6AG9 | Triode-Pentode | 12HE | 9-59 | 6.3 | 0.82 | 10 | 330 | 200 | Pentode Section | | |
| | | | | | | 1.1 | 330 | 1.5 | Triode Section | | |
| 6AG10 | Gated Twin Hexode | 12GT | 9-60 | 6.3 | 0.75 | 2.0 | 330 | 25 | — | | |
| | | | | | | | | g ₄ | — | | |
| | | | | | | | | 1.0 | — | | |
| | | | | | | | | g ₄ | — | | |
| | | | | | | | | 300 | — | | |
| | | | | | | | | g ₃ | — | | |
| | | | | | | | | 2.0 | — | | |
| | | | | | | | | g ₃ | — | | |
| | | | | | | | | 50 | — | | |
| | | | | | | | | g ₂ | — | | |
| | | | | | | | | 0.25 | — | | |
| | | | | | | | | g ₂ | — | | |
| 6AG11 | Duplex-Diode Twin Triode | 12DA | 9-56 | 6.3 | 0.75 | 2.0 | 330 | — | Triode Sections | | |
| 6AH4-GT | Low-Mu Triode | 8EL | 9-41 | 6.3 | 0.75 | 7.5 | 500 | — | 7.0▲ | 1.7▲ | 4.4▲ |

■ Compactron.
† Zero signal.
◆ Per section.

† Plate-to-plate.
▲ Maximum.
‡ Supply voltage.

⊙ Subminiature type.
▲ Without external shield.
◆ Design maximum rating.

⊙ Total for all similar sections.
▲ Absolute maximum rating.
Conversion transconductance

| Service | Plate Volts | Screen Volts | Neg Grid Volts | Plate Milli-amperes | Screen Milli-amperes | R_p , Ohms | G_m , μ hos | μ Factor | Load for Rated Output, Ohms | Power Output, Watts | Tube Type |
|-------------------------------|---|------------------------|----------------|---------------------|-------------------------|--------------|-------------------|-----------------------------|-----------------------------|---------------------|------------------------|
| Class A Amplifier | 125 | 125 | 1.0 | 12 | 4.5 | 150,000 | 10,000 | — | — | — | 6AC9 \ddagger |
| | Max d-c output current $\diamond = 5.0$ ma | | | | | | | | | | |
| Class A Amplifier \clubsuit | 200 | — | $R_k = 150$ | 9.0 | — | 10,700 | 5,800 | 62 | — | — | 6AC10 \ddagger |
| Class A Amplifier | 100 | — | $R_k = 820$ | 1.4 | — | 35,000 | 2,000 | 70 | — | — | 6AD4 \circ |
| Tuning Indicator \clubsuit | Target voltage = 150 (Ray control = +75 volts, shadow = 0°) (Ray control = +8 volts, shadow = 90°) | | | | | | | | | | |
| Class A Amplifier | 250 | — | 25 | 3.7 | — | 19,000 | 325 | 6.0 | — | — | 6AD7-G |
| Class A Amplifier | 250 | 250 | 16.5 | 34 \ddagger | 6.5 \ddagger | 80,000 | 2,500 | — | 7,000 | 3.2 | 6AD10 \blacksquare |
| Class A Amplifier | 250 | 250 | 8.0 | 35 \ddagger | 2.5 \ddagger | 100,000 | 6,500 | — | 5,000 | 4.2 | 6AD10 \blacksquare |
| Class A Amplifier | 150 | 100 | $R_k = 180$ | 2.8 | 3.4 | 110,000 | 2,500 | (E _{c3} = 0 volts) | | | 6AD10-A \blacksquare |
| Class A Amplifier | 250 | 250 | 8.0 | 35 | 2.5 | 100,000 | 6,500 | — | 5,000 | 4.2 | 6AD10-A \blacksquare |
| Class A Amplifier | 150 | 100 | $R_k = 180$ | 2.8 | 3.4 | 110,000 | 2,500 | E _{c3} = 0 volts | | | 6AD10-A \blacksquare |
| Class A Amplifier | 95 | — | 15 | 7.0 | — | 3,500 | 1,200 | 4.2 | — | — | 6AE5-GT |
| Class A Amplifier | 250 | — | 1.5 | 6.5 | — | 25,000 | 1,000 | 25 | — | — | 6AE6-G |
| Class A Amplifier | 250 | — | 1.5 | 4.5 | — | 35,000 | 950 | 33 | — | — | 6AE7-GT |
| Class A Amplifier \clubsuit | 250 | — | 13.5 | 5 | — | 9,300 | 1,500 | 14 | — | — | 6AF3 |
| TV Damper | Max d-c output current $\diamond = 185$ ma; max peak inverse voltage $\diamond = 4,500$ volts; max peak current $\diamond = 750$ ma | | | | | | | | | | |
| Class A Amplifier | 80 | — | $R_k = 150$ | 17.5 | — | 2,100 | 6,500 | 13.5 | — | — | 6AF4 6AF4-A |
| Class A Amplifier | 180 | — | 18 | 7.0 | — | 4,900 | 1,500 | 7.4 | — | — | 6AF5-G |
| Tuning Indicator \clubsuit | Target voltage = 250 (Ray control = +155 volts, shadow = 0°) (Ray control = 0 v, shadow = 100°, target current = 3.75 ma) | | | | | | | | | | |
| Class A Amplifier | 200 | 150 | 2.0 | 10 | 2.5 | — | 10,000 | — | — | — | 6AF10 \blacksquare |
| Class A Amplifier | 200 | 125 | $R_k = 68$ | 22 | 4.0 | 75,000 | 23,000 | — | — | — | 6AF11 \blacksquare |
| Class A Amplifier | 200 | 150 | $R_k = 100$ | 24 | 4.8 | 68,000 | 11,000 | — | — | — | 6AF11 \blacksquare |
| Class A Amp | 200 | — | 2.0 | 7.0 | — | 12,400 | 5,500 | 68 | — | — | 6AG5 |
| Class A Amplifier | 200 | — | $R_k = 220$ | 9.2 | — | 9,400 | 4,400 | 41 | — | — | 6AG5 |
| Class A Amplifier | 250 | 150 | $R_k = 180$ | 6.5 | 2.0 | 800,000 | 5,000 | — | — | — | 6AG7 |
| Class A Amplifier | 250 | — | $R_k = 820$ | 5.5 | — | 10,000 | 3,800 | 42 | — | — | 6AG7 |
| Class A Amplifier | 300 | 150 | 3.0 | 30 \ddagger | 7.0 \ddagger | 130,000 | 11,000 | — | 10,000 | 3.0 | 6AG9 \blacksquare |
| Class A Amplifier | 250 | 150 | $R_k = 56$ | 28 | 5.6 | 40,000 | 30,000 | — | — | — | 6AG9 \blacksquare |
| Class A Amplifier | 55 | 125 | 0 | 56 | 21 | — | — | — | — | — | 6AG10 \blacksquare |
| Class A Amplifier | 150 | — | $R_k = 350$ | 6.2 | — | 8,500 | 4,600 | 39 | — | — | 6AG10 \blacksquare |
| Color Demodulator | Sections in parallel unless otherwise indicated | | | | | | | | | | |
| Avg. Char. | 40 | 10g4 100g3 25g2 | $R_k = 120$ | 5.0 \clubsuit | 0.4g4 2.2g3 0.5g2 | — | 10,000 | — | — | — | 6AG10 \blacksquare |
| | 250 | —26g4 100g3 25g2 | $R_k = 120$ | 0.1 | — | — | — | — | — | — | 6AG10 \blacksquare |
| | 100 | 10g4 100g3 25g2 | 0 | 37 | 2.5g4 6.0g3 1.5g2 | — | — | — | — | — | 6AG10 \blacksquare |
| Class A Amplifier \clubsuit | 125 | — | 1.0 | 7.5 | — | 8,500 | 7,800 | 66 | — | — | 6AG11 \blacksquare |
| Detector \clubsuit | Max d-c output current $\diamond = 5.0$ ma | | | | | | | | | | |
| Vertical Amplifier | 250 | — | 23 | 130 | — | 1,780 | 4,500 | 8.0 | — | — | 6AH4-GT |
| | Max positive pulse plate voltage $\blacksquare = 2000$ v; max d-c cathode current = 60 ma | | | | | | | | | | |

Metal tubes are shown in bold-face type, *miniature tubes in italics.*

\clubsuit G3 and G5 are screen. G4 is signal-input grid.

\heartsuit G2 and G4 are screen. G3 is signal-input grid.

1, 2, 3, etc. indicate tube sections.

\circ Maximum screen dissipation appears

immediately below the screen voltage.

\ddagger Heater warm-up time controlled.

| Tube Type | Classification by Construction | Base Connections | Out-line Dwg | Fila-ment Volts | Fila-ment Amp | Max Plate Watts | Max Plate Volts | Max Screen Volts and Watts | Capacitance in Picofarads | | |
|-------------------|----------------------------------|------------------|-------------------|-----------------|---------------|--|---|---|---|---|--|
| | | | | | | | | | Input | Out-put | Grid-plate |
| 6AH6 | Sharp-Cutoff RF Pentode | 7BK | 5-2 | 6.3 | 0.45 | 3.2 | 300 | 300 $\frac{1}{2}$ 0.4 | Pentode Connection Triode Connection (G ₂ , G ₃ & P tied) | | |
| 6AH7-GT | Medium-Mu Twin-Triode | 8BE | 9-7 | 6.3 | 0.3 | 1.5 \clubsuit | 180 | — | — | — | — |
| 6AH9 | Triode-Pentode | 12HJ | 9-58 | 6.3 | 0.9 | 10 \diamond 2.0 \diamond | 400 \diamond 330 \diamond | 330 $\frac{1}{2}$ 1.0 \diamond — | Pentode Section Triode Section | | |
| 6AJ4 | UHF Medium-Mu Triode | 9BX | 6-1 | 6.3 | 0.225 | 2.0 | 150 | — | — | — | — |
| 6AJ6 | Sharp-Cutoff RF Pentode | 7BD | 5-1 | 6.3 | 0.175 | 1.7 | 180 | 180 $\frac{1}{2}$ 0.5 | 4.0 | 2.8 | 0.02 \clubsuit |
| 6AJ7 | RF Pentode | 8N | 8-1 | 6.3 | 0.45 | 3.0 | 300 | 300 $\frac{1}{2}$ 0.38 | 11 | 5 | 0.015 \clubsuit |
| 6AK4 | Medium-Mu Triode | 8DK | 3-1 | 6.3 | 0.15 | 3.0 | 250 | — | 2.2 | 2.2 | 1.3 \clubsuit |
| 6AK5 | Sharp-Cutoff RF Pentode | 7BD | 5-1 | 6.3 | 0.175 | 1.7 | 180 | 180 $\frac{1}{2}$ 0.5 | 4.0 | 2.8 | 0.02 \clubsuit |
| 6AK6 | Power Amplifier Pentode | 7BK | 5-2 | 6.3 | 0.15 | 2.75 | 300 | 250 0.75 | 3.6 \blacktriangle | 4.2 \blacktriangle | 0.12 \blacktriangle |
| 6AK7 | Power Amplifier Pentode | 8Y | 8-6 | 6.3 | 0.65 | 9.0 | 300 | 300 1.5 | 13 | 7.5 | 0.06 \clubsuit |
| 6AK9 | Dissimilar-Double-Triode Pentode | 12GZ | 12-56 | 6.3 | 1.6 | 10 \diamond 1.25 \diamond 1.0 \diamond | 350 \diamond 330 \diamond 330 \diamond | 250 \diamond 2.0 \diamond — | Pentode Section Triode Section 1 (Pins 7, 10, 11) Triode Section 2 (Pins 2, 3, 7) | | |
| 6AK10 | Triple Triode | 12FE | 9-59 | 6.3 | 0.9 | 2.0 \clubsuit | 330 \clubsuit | — | 4.2 \blacktriangle 4.2 \blacktriangle 4.2 \blacktriangle | 0.3 \blacktriangle 0.3 \blacktriangle 0.54 \blacktriangle | 3.2 \blacktriangle 3.0 \blacktriangle 3.0 \blacktriangle |
| 6AL3 | Half-Wave High-Vacuum Rectifier | 9CB | T-X | 6.3 | 1.55 | 5.0 | Tube Voltage Drop: 29 volts at 440 ma d-c | | | | |
| 6AL5 | Twin Diode | 6BT | 5-1 | 6.3 | 0.3 | — | Tube Voltage Drop: \clubsuit 10 v at 60 ma d-c | | | | |
| 6AL6-G | Beam Power Amplifier | 6AM | T-X | 6.3 | 0.9 | 18.5 | 350 | 300 2.7 | — | — | — |
| 6AL7-GT | Electron-Ray Indicator | 8CH | 9-7 or 9-39 | 6.3 | 0.15 | — | — | Max target voltage = 365 Min target voltage = 220 | | | |
| 6AL9 | Triode-Pentode | 12HE | 9-59 | 6.3 | 0.82 | 10 \diamond 1.5 \diamond | 330 \diamond 330 \diamond | 200 \diamond 1.5 \diamond — | Pentode Section Triode Section | | |
| 6AL11 | Dissimilar Double Pentode | 12BU | 9-59 | 6.3 | 0.9 | 10 \diamond 1.7 \diamond | 275 \diamond 330 \diamond | 275 \diamond 2.0 \diamond 330 $\frac{1}{2}$ 1.1 \diamond | Section 1 (Pins 8, 9, 10, 11) Section 2 (Pins 2, 3, 4, 6, 7) | | |
| 6AM4 | UHF High-Mu Triode | 9BX | 6-1 | 6.3 | 0.225 | 2.0 | 200 | — | — | — | — |
| 6AM8 | Diode Sharp-Cutoff RF Pentode | 9CY | 6-2 | 6.3 | 0.45 | 3.2 \diamond | 330 \diamond | 330 $\frac{1}{2}$ 0.55 \diamond | 6.5 | 2.6 | 0.015 \clubsuit |
| 6AM8-A \ddagger | | | | | | | | | Diode Section | | |
| 6AN4 | UHF High-Mu Triode | 7DK | 5-1 | 6.3 | 0.225 | 4.0 | 300 | — | — | — | — |
| 6AN5 | Beam Power Amplifier | 7BD | 5-2 | 6.3 | 0.45 | 4.2 | 120 | 120 1.4 | 9.0 | 4.8 | 0.075 \clubsuit |
| 6AN6 | Quadruple Diode | 7BJ | 5-2 | 6.3 | 0.2 | — | Tube Voltage Drop: \clubsuit 9.0 v at 6.6 ma | | | | |
| 6AN8 | Triode-Pentode | 9DA | 6-2 | 6.3 | 0.45 | 2.3 \diamond 2.8 \diamond | 330 \diamond 330 \diamond | 330 $\frac{1}{2}$ 0.55 \diamond — | Pentode Section Triode Section | | |
| 6AN8-A \ddagger | | | | | | | | | | | |
| 6AQ5 | Beam Power Amplifier | 7BZ | 5-3 | 6.3 | 0.45 | 12 \diamond 10 \diamond | 275 \diamond 275 \diamond | 275 \diamond 2.0 \diamond — | Pentode Connection Triode Connection (G ₂ & P tied) | | |
| 6AQ5-A \ddagger | | | | | | | | | | | |

■ Compactron.
† Zero signal.
◆ Per section.

‡ Plate-to-plate.
♣ Maximum.
‡ Supply voltage.

◎ Subminiature type.
▲ Without external shield.
◆ Design maximum rating.

⊕ Total for all similar sections.
⊖ Absolute maximum rating.
Conversion transconductance.

● See X-Radiation Warning, page 4.

| Service | Plate Volts | Screen Volts | Neg Grid Volts | Plate Milli-amperes | Screen Milli-amperes | R _p Ohms | G _m μmhos | μ Factor | Load for Rated Output, Ohms | Power Output, Watts | Tube Type |
|------------------------------|--|--------------|----------------------|---------------------|----------------------|---------------------|----------------------|----------------------------|-----------------------------|---------------------|-----------|
| Class A Amplifier | 300 | 150 | R _k = 160 | 10 | 2.5 | 500,000 | 9,000 | — | — | — | 6AH6 |
| Class A Amplifier | 150 | — | R _k = 160 | 12.5 | — | 3,600 | 11,000 | 40 | — | — | |
| Class A Amplifier ♦ | 180 | — | 6.5 | 7.6 | — | 8,400 | 1,900 | 16 | — | — | 6AH7-GT |
| Avg. Char. | 250 | 150 | R _k = 122 | 25 | 6.0 | 55,000 | 21,000 | — | — | — | 6AH9 ■ |
| Avg. Char. | 50 | 125 | 0 | 76 | 32 | — | — | — | — | — | |
| Avg. Char. | 250 | — | 9.0 | 8.0 | — | 7,300 | 2,750 | 20 | — | — | |
| Class A Amplifier | 125 | — | R _k = 68 | 16 | — | 4,200 | 10,000 | 42 | — | — | 6AJ4 |
| Class A Amplifier | 28 | 28 | 1.0 | 2.7 | 1.0 | 100,000 | 2,500 | — | — | — | 6AJ5 |
| Class A Amplifier | 300 | 150 | R _k = 160 | 10 | 2.5 | 1,000,000 | 9,000 | — | — | — | 6AJ7 |
| Class A Amplifier | 200 | — | R _k = 680 | 9.5 | — | 5,300 | 3,800 | 20 | — | — | 6AK4 ● |
| Class A Amplifier | 180 | 120 | R _k = 180 | 7.7 | 2.4 | 500,000 | 5,100 | — | — | — | 6AK6 |
| Class A Amplifier | 120 | 120 | R _k = 180 | 7.5 | 2.5 | 300,000 | 5,000 | — | — | — | |
| Class A Amplifier | 180 | 180 | 9.0 | 15† | 2.5† | 200,000 | 2,300 | — | 10,000 | 1.1 | 6AK8 |
| Class A Amplifier | 300 | 150 | 3.0 | 30† | 7.0† | 130,000 | 11,000 | — | 10,000 | 3.0 | 6AK7 |
| Avg. Char. | 150 | 150 | 14 | 49 | 3.5 | 16,400 | 6,200 | — | — | — | 6AK9 ■ |
| Avg. Char. | 60 | 125 | 0 | 140 | 18 | — | — | — | — | — | |
| Avg. Char. | 150 | — | 2.0 | 5.4 | — | 11,000 | 3,900 | 43 | — | — | |
| Avg. Char. | 150 | — | 5.0 | 5.5 | — | 8,500 | 2,350 | 20 | — | — | |
| Color Difference Amplifier ♦ | 200 | — | R _k = 230 | 10 | — | 7,500 | 7,000 | 53 | — | — | 6AK10 ■ |
| TV Damper | Max d-c output current = 220 ma; max peak inverse voltage □ = 7,500 volts; max peak current = 550 ma | | | | | | | | | | 6AL3 |
| Half-Wave Rectifier | Max d-c output current per plate ♦ = 9 ma; max peak inverse voltage ♦ = 330 volts; max rms supply voltage per plate ♦ = 117 volts; max peak current per plate ♦ = 54 ma | | | | | | | | | | 6AL5 |
| Class A Amplifier | 250 | 250 | 14 | 72† | 5.0† | 22,500 | 6,000 | — | 2,500 | 6.5 | 6AL6-G |
| FM/AM Tuning Indicator | Target voltage = 315 volts; cathode resistor = 3,300 ohms; grid voltage = 0 volts; pin 6 electrode controls top left quarter of fluorescent area, pin 4 electrode controls top right quarter of fluorescent area, and pin 5 electrode controls bottom half of fluorescent area when the tube is mounted horizontally with a plane passing through pins 4 and 8 vertical and with pin 4 on top. | | | | | | | | | | 6AL7-GT |
| Video Amplifier | 250 | 150 | R _k = 56 | 28 | 5.6 | 40,000 | 30,000 | — | — | — | 6AL9 ■ |
| General Purpose Amplifier | 55 | 125 | 0 | 56 | 21 | — | — | — | — | — | |
| General Purpose Amplifier | 200 | — | R _k = 270 | 7.6 | — | 9,200 | 6,300 | 59 | — | — | |
| Class A Amplifier | 250 | 250 | 8.0 | 35† | 2.5† | 100,000 | 6,500 | — | 5,000 | 4.2 | 6AL11 ■ |
| Class A Amplifier | 150 | 100 | R _k = 560 | 1.3 | 2.1 | 150,000 | 1,000 | E _{cat} = 0 volts | — | — | |
| Class A Amplifier | 200 | — | R _k = 100 | 10 | — | 8,700 | 9,800 | 85 | — | — | 6AM4 |
| Class A Amplifier | 125 | 125 | R _k = 56 | 12.5 | 3.2 | 300,000 | 7,800 | — | — | — | 6AM8 |
| Video Det. | Max d-c output current = 5 ma; voltage drop: 10 v at 50 ma d-c | | | | | | | | | | 6AM8-A ¶ |
| Class A Amplifier | 200 | — | R _k = 100 | 13 | — | 7,000 | 10,000 | 70 | — | — | 6AN4 |
| Class A Amplifier | 120 | 120 | R _k = 120 | 35 | 12 | 12,500 | 8,000 | — | 2,500 | 1.3 | 6AN5 |
| Half-Wave Rectifier | Max d-c output current per plate = 8.0 ma; max peak inverse voltage = 210; rms supply voltage per plate = 75; max peak current per plate = 45 ma | | | | | | | | | | 6AN6 |
| Class A Amplifier | 125 | 125 | R _k = 56 | 12 | 3.8 | 170,000 | 7,800 | — | — | — | 6AN8 |
| Class A Amplifier | 150 | — | 3.0 | 15 | — | 4,700 | 4,500 | 21 | — | — | 6AN8-A ¶ |
| Class A Amplifier | 180 | 180 | 8.5 | 29† | 3.0† | 58,000 | 3,700 | — | 5,500 | 2.0 | 6AQ6 |
| Class A Amplifier | 250 | 250 | 12.5 | 45† | 4.5† | 52,000 | 4,100 | — | 5,000 | 4.5 | |
| Vertical Amplifier | 250 | — | 12.5 | 49.5 | — | 1,970 | 4,800 | 9.5 | — | — | 6AQ6-A ¶ |
| Vertical Amplifier | Max positive pulse voltage ♦ = 1100 v; max d-c cathode current ♦ = 40 ma | | | | | | | | | | |

Metal tubes are shown in bold-face type, miniature tubes in italics.

♦ G3 and G5 are screens. G4 is signal-input grid.

■ Maximum screen dissipation appears

♥ G2 and G4 are screens. G3 is signal-input grid.

immediately below the screen voltage.

1, 2, 3, etc. indicate tube sections.

¶ Heater warm-up time controlled.

| Tube Type | Classification by Construction | Base Connections | Out-line Dwg | Fila-ment Volts | Fila-ment Amp | Max Plate Watts | Max Plate Volts | Max Screen Volts and Watts | Capacitance in Picofarads | | |
|-----------|----------------------------------|------------------|--------------------|-----------------|---------------|-------------------------|--|----------------------------|---|--------------------------------------|------------|
| | | | | | | | | | Input | Out-put | Grid-plate |
| 6AQ6 | Duplex-Diode High-Mu Triode | 7BT | 5-2 | 6.3 | 0.15 | — | 300 | — | 1.7 | 1.5 | 1.8 |
| 6AQ7-GT | Duplex-Diode High-Mu Triode | 8CK | 9-11 9-41 | 6.3 | 0.3 | 1.0 | 250 | — | — | — | — |
| 6AQ8 | Twin Triode | 9AJ | 6-2 | 6.3 | 0.435 | 2.5 ⬆ 4.5 ⬆ | 300 | — | 3.0 ▲ | 1.2 ▲ | 1.5 ▲ |
| 6AR5 | Power Amplifier Pentode | 6CC | 5-3 | 6.3 | 0.4 | 8.5 | 250 | 250 2.5 | — | — | — |
| 6AR6 | Beam Power Amplifier | 6BQ | T.X | 6.3 | 1.2 | 21 □ | 630 □ | 315 □ 3.5 □ | 11.0 ▲ | 7.0 ▲ | 0.8 ▲ |
| 6AR8 | Double Plate Sheet-Beam Tube | 9DP | 6-3 | 6.3 | 0.3 | 2.0 ⬆ | 300 | 300 | — | — | — |
| 6AR11 ■ | Twin Pentode | 12DM | 9-58 | 6.3 | 0.8 | 3.1 ⬆ ⬆ | 330 ⬆ | 330 ⬆ ⬆ 0.65 ⬆ ⬆ | 10 | 2.8 ₁ 3.0 ₂ | 0.026 |
| 6AS5 | Beam Power Amplifier | 7CV | 5-3 | 6.3 | 0.8 | 5.5 | 150 | 117 1.0 | 12 ▲ | 9.0 ▲ | 0.6 ▲ |
| 6AS6 | Dual-Control RF Pentode | 7CM | 5-1 | 6.3 | 0.175 | 1.7 | 180 | 140 0.75 | 4.0 | 3.0 | 0.02 ⬆ |
| 6AS7-G | Low-Mu Twin Triode | 8BD | 16-3 | 6.3 | 2.5 | 13 ⬆ | 250 | — | — | — | — |
| 6AS7-GA | Low-Mu Twin Triode | 8BD | 12-16 | 6.3 | 2.5 | 13 ⬆ | 250 | — | — | — | — |
| 6AS7-GYB | Low-Mu Twin Triode | 8BD | 12-16 | 6.3 | 2.5 | 13 ⬆ | 250 | — | — | — | — |
| 6AS8 | Diode Sharp-Cutoff RF Pentode | 9DS | 6-2 | 6.3 | 0.45 | 2.5 | 300 | 300 ⬆ 0.5 | Pentode Section Diode Section | | |
| 6AS11 ■ | Dissimilar-Double-Triode Pentode | 12DP | 9-58 | 6.3 | 1.05 | 5.0 ⬆ 1.5 ⬆ 2.0 ⬆ | 330 ⬆ 330 ⬆ 330 ⬆ | 330 ⬆ 1.1 — | Pentode Section Triode Section 1 (Pins 5, 6, 8) Triode Section 2 (Pins 3, 4, 7) | | |
| 6AT6 | Duplex-Diode High-Mu Triode | 7BT | 5-2 | 6.3 | 0.3 | 0.5 | 300 | — | 2.2 ▲ | 0.8 ▲ | 2.0 ▲ |
| 6AT8 | Triode-Pentode Converter | 9DW | 6-2 | 6.3 | 0.45 | 2.3 ⬆ 1.7 ⬆ | 275 ⬆ 275 ⬆ | 275 ⬆ 0.45 ⬆ — | Pentode Section Triode Section | | |
| 6AU4-GT | Half-Wave High-Vacuum Rectifier | 4CG | 9-44 | 6.3 | 1.8 | 6.0 | Tube Voltage Drop: 25 v at 350 ma d-c | | | | |
| 6AU4-GTA | Half-Wave High-Vacuum Rectifier | 4CG | 9-44 | 6.3 | 1.8 | 6.5 | Tube Voltage Drop: 25 v at 350 ma d-c | | | | |
| 6AU5-GT | Beam Power Amplifier | 6CK | 9-11 or 9-41 | 6.3 | 1.25 | 10 | 550 ⬆ | 200 | 11.3 ▲ | 7.0 ▲ | 0.5 ▲ |
| 6AU6 | Sharp-Cutoff RF Pentode | 7BK | 5-2 | 6.3 | 0.3 | 3.5 ⬆ 3.5 ⬆ | 300 ⬆ 275 ⬆ | 330 ⬆ 0.75 ⬆ — | Pentode Connection Triode Connection (G ₂ , G ₁ , & P tied) | | |

■ Compactron.

‡ Plate-to-plate.

⊙ Subminiature type.

⊕ Total for all similar sections.

† Zero signal.

⬆ Maximum.

▲ Without external shield.

⊖ Absolute maximum rating.

⬆ Per section.

‡ Supply voltage.

⬆ Design maximum rating.

Conversion transconductance.

● See X-Radiation Warning, page 4.

| Service | Plate Volts | Screen Volts | Neg Grid Volts | Plate Milli-amperes | Screen Milli-amperes | R _p Ohms | G _m μmhos | μ Factor | Load for Rated Output, Ohms | Power Output, Watts | Tube |
|---|--|--------------|----------------------|---------------------|----------------------|---------------------|----------------------|---|-----------------------------|---------------------|----------|
| Class A Amplifier | 250 100 | — | 3.0 1.0 | 1.0 0.8 | — | 58,000 61,000 | 1,200 1,150 | 70 70 | — | — | 6AQ6 |
| Class A Amplifier | 250 100 | — | 2.0 1.0 | 2.3 1.1 | — | 44,000 64,000 | 1,600 1,250 | 70 79 | — | — | 6AQ7-GT |
| Class A Amplifier | 250 | — | 2.3 | 10 | — | 9,700 | 5,900 | 57 | — | — | 6AQ8 |
| Class A Amplifier | 250 250 | 250 250 | 18 16.5 | 32† 34† | 5.5† 5.7† | 68,000 65,000 | 2,300 2,400 | — | 7,600 7,000 | 3.4 3.2 | 6AR6 |
| Class A Amplifier | 300 | 300 | 36.0 | 58 | 4.0 | 22,000 | 4,300 | — | — | — | 6AR6 |
| Color TV Synchronous Detector | 250 | 250 | R _k = 300 | 10 | 0.4 | — | 4,000 | — | — | — | 6AR8 |
| [With plates tied together and deflectors (pins 1 and 2) grounded] Total voltage change on either deflector with an equal and opposite change on the other deflector required to switch the plate current from one plate to the other = 20 volts maximum | | | | | | | | | | | |
| Class A Amplifier | 125 | 125 | R _k = 56 | 11 | 3.5 | 200,000 | 10,500 | — | — | — | 6AR11 ■ |
| Class A Amplifier | 150 | 110 | 8.5 | 35† | 2.0† | — | 5,600 | — | 4,500 | 2.2 | 6AS6 |
| Class A Amplifier | 120 120 | 120 120 | 2.0 2.0 | 5.2 3.6 | 3.5 4.8 | 110,000 — | 3,200 1,850 | E _{cs} = 0 volts E _{cs} = -3 volts | | — | 6AS6 |
| DC Amplifier | 135 | — | R _k = 250 | 125 | — | 280 | 7,000 | 2.0 | — | — | 6AS7-G |
| DC Amplifier | 135 | — | R _k = 250 | 125 | — | 280 | 7,000 | 2.0 | — | — | 6AS7-GA |
| DC Amplifier | 135 | — | R _k = 250 | 125 | — | 280 | 7,000 | 2.0 | — | — | 6AS7-GYB |
| Class A Amplifier Detector | 200 | 150 | R _k = 180 | 9.5 | 3.0 | 300,000 | 6,200 | — | — | — | 6AS8 |
| Max d-c output current = 5 ma; max peak inverse voltage = 330 volts; max peak current = 50 ma | | | | | | | | | | | |
| Class A Amplifier | 200 | 125 | R _k = 68 | 24 | 5.2 | 70,000 | 10,500 | — | — | — | 6AS11 ■ |
| Class A Amp | 200 | — | 2.0 | 7.0 | — | 12,400 | 5,500 | 68 | — | — | |
| Class A Amplifier | 200 | — | R _k = 220 | 9.2 | — | 9,400 | 4,400 | 41 | — | — | |
| Class A Amplifier | 250 100 | — | 3.0 1.0 | 1.0 0.8 | — | 58,000 54,000 | 1,200 1,300 | 70 70 | — | — | 6AT6 |
| Class A Amplifier | 125 | 125 | 1.0 | 9.0 | 2.2 | 300,000 | 5,500 | — | — | — | 6AT8 |
| Class A Amplifier | 125 | — | 1.0 | 12 | — | 6,000 | 6,500 | 40 | — | — | 6AT8-A ¶ |
| TV Damper | Max d-c output current = 175 ma; max peak inverse voltage = 4,500 volts; max peak current = 1050 ma | | | | | | | | | | 6AU4-GT |
| TV Damper | Max d-c output current = 210 ma; max peak inverse voltage = 4,500 volts; max peak current = 1,300 ma | | | | | | | | | | 6AU4-GTA |
| Horizontal Amplifier | 115 60 | 175 175 | 0 20 | 60 210 | 6.8 25 | 6,000 — | 5,600 — | — — | — — | — — | 6AU5-GT |
| Max positive pulse plate voltage = 5,500 v; max screen dissipation = 2.5 watts; max d-c cathode current = 110 ma | | | | | | | | | | | |
| Class A Amplifier | 250 | 150 | R _k = 68 | 10.6 | 4.3 | 1,000,000 | 5,200 | — | — | — | 6AU6 |
| Class A Amplifier | 100 | 100 | R _k = 150 | 5.0 | 2.1 | 500,000 | 3,900 | — | — | — | 6AU6-A ¶ |
| Class A Amplifier | 250 | — | R _k = 330 | 12.2 | — | — | 4,800 | 36 | — | — | |

Metal tubes are shown in bold-face type, *miniature tubes in italics.*

♦ G3 and G5 are screen. G4 is signal-input grid.

⊠ Maximum screen dissipation appears immediately below the screen voltage.

♥ G2 and G4 are screen. G3 is signal-input grid.

¶ Heater warm-up time controlled.

1, 2, 3, etc. indicate tube sections.

| Tube Type | Classification by Construction | Base Connections | Outline Dwg | Fila-ment Volts | Fila-ment Amp | Max Plate Watts | Max Plate Volts | Max Screen Volts and Watts | Capacitance in Picofarads | | |
|-----------|---------------------------------|------------------|--------------------|-----------------|---------------|--------------------|--|----------------------------|---------------------------|----------------------|------------|
| | | | | | | | | | Input | Out-put | Grid-plate |
| 6AU7† | Medium-Mu Twin Triode | 9A | 6-2 | 6.3 3.15 | 0.3 0.6 | 2.75♣ | 390 | — | 1.8 | 2.0 | 1.5 |
| 6AU8† | Triode-Pentode | 9DX | 6-3 | 6.3 | 0.6 | 3.0 2.5 | 300 300 | 300‡ 1.0 — | Pentode Section | | |
| 6AU8-A† | Triode-Pentode | 9DX | 6-3 | 6.3 | 0.6 | 3.3⊕ 2.8⊕ | 330⊕ 330⊕ | 330‡ 1.0 — | Pentode Section | | |
| 6AV5-GA | Beam Power Amplifier | 6CK | T-X | 6.3 | 1.2 | 11 | 550‡ | 175 2.5 | 14▲ | 7.0▲ | 0.5▲ |
| 6AV5-GT | Beam Power Amplifier | 6CK | 9-11 or 9-41 | 6.3 | 1.2 | 11 | 550‡ | 175 2.5 | 14▲ | 7.0▲ | 0.7▲ |
| 6AV6 | Duplex-Diode High-Mu Triode | 7BT | 5-2 | 6.3 | 0.3 | 0.5 | 300 | — | 2.2 | 1.2 | 2.0 |
| 6AV11■ | Triple Triode | 12BY | 9-56 | 6.3 | 0.6 | 2.75⊕ 6.0⊕ ⊕ | 330⊕ ♣ | — | 1.9▲ | 1.8▲ 0.7▲ 2.0▲ | 1.2▲ |
| 6AW7-GT | Duplex-Diode, High-Mu Triode | 8CQ | 9-16 | 6.3 | 0.3 | — | 300 | — | — | — | — |
| 6AW8† | Triode-Pentode | 9DX | 6-3 | 6.3 | 0.6 | 3.25 1.0 | 300 300 | 300‡ 1.0 — | Pentode Section | | |
| 6AW8-A† | Triode-Pentode | 9DX | 6-3 | 6.3 | 0.6 | 3.75⊕ 1.1⊕ | 330⊕ 330⊕ | 330‡ 1.1⊕ — | Pentode Section | | |
| 6AX3■ | Half-Wave High-Vacuum Rectifier | 12BL | 9-59 | 6.3 | 1.2 | 5.3⊕ | Tube Voltage Drop: 32 volts at 250 ma d-c | | | | |
| 6AX4-GT | Half-Wave High-Vacuum Rectifier | 4CG | 9-11 9-41 | 6.3 | 1.2 | 5.0⊕ | Tube Voltage Drop: 32 v at 250 ma d-c | | | | |
| 6AX4-GTA | Half-Wave High-Vacuum Rectifier | 4CG | 9-11 | 6.3 | 1.2 | 5.3⊕ | Tube Voltage Drop: 32 volts at 250 ma d-c | | | | |
| 6AX4-GTB | Half-Wave High-Vacuum Rectifier | 4CG | 9-11 | 6.3 | 1.2 | 5.3⊕ | Tube Voltage Drop: 32 volts at 250 ma d-c | | | | |
| 6AX5-GT | Full-Wave High-Vacuum Rectifier | 6S | 9-41 | 6.3 | 1.2 | — | Tube Voltage Drop:♣ 50 v at 125 ma d-c | | | | |
| 6AX6-G | Full-Wave High-Vacuum Rectifier | 7Q | 14-3 | 6.3 | 2.5 | — | Tube Voltage Drop:♣ 21 v at 250 ma d-c | | | | |
| 6AX7† | High-Mu Twin Triode | 9A | 6-2 | 6.3 3.15 | 0.3 0.6 | 1.0♣ | 300 | — | 1.8 | 1.9 | 1.7 |
| 6AX8 | Triode-Pentode | 9AE | 6-2 | 6.3 | 0.45 | 2.8 2.7 | 300 300 | 300‡ 0.5 — | Pentode Section | | |
| 6AY3 | Half-Wave High-Vacuum Rectifier | 9HP | 9-86 | 6.3 | 1.2 | 6.5⊕ | Tube Voltage Drop: 32 volts at 350 ma d-c | | | | |

■ Compactron.
† Zero signal.
♣ Per section.

‡ Plate-to-plate.
▲ Maximum.
♠ Supply voltage.

⊕ Subminiature type.
▲ Without external shield.
⊕ Design maximum rating.

⊕ Total for all similar sections.
⊕ Absolute maximum rating.
Conversion transconductance.

| Service | Plate Volts | Screen Volts | Neg Grid Volts | Plate Milli-amperes | Screen Milli-amperes | R _p , Ohms | G _m , μmhos | μ Factor | Load for Rated Output, Ohms | Power Output, Watts | Tube Type |
|--|---|--------------|-----------------------------|---------------------|----------------------|-----------------------|------------------------|----------|-----------------------------|---------------------|-----------------|
| Class A Amplifier Vertical Amplifier | 250 | — | 8.5 | 10.5 | — | 7,700 | 2,200 | 17 | — | — | <i>6AU7</i> ¶ |
| | 100 | — | 0 | 11.8 | — | 6,500 | 3,100 | 20 | — | — | |
| Max positive pulse plate voltage ⊕ = 1,200 volts; max d-c cathode current = 20 ma | | | | | | | | | | | |
| Class A Amplifier Class A Amplifier | 200 | 125 | R _k = 15 | 3.4 | 150,000 | 7,000 | — | — | — | — | <i>6AU8</i> ¶ |
| | 150 | — | 82 R _k = 150 | 9.0 | — | 8,200 | 4,900 | 40 | — | — | |
| Class A Amplifier | 200 | 125 | R _k = 17 | 3.4 | 100,000 | 8,000 | — | — | — | — | <i>6AU8-A</i> ¶ |
| | 40 | 125 | 82 R _k = 0 | 28 | 10 | — | — | — | — | — | |
| Class A Amplifier | 150 | — | 150 R _k = 150 | 9.5 | — | 8,100 | 5,300 | 43 | — | — | |
| Horizontal Amplifier | 250 | 150 | 22.5 | 57 | 2.1 | 14,500 | 5,900 | — | — | — | <i>6AV5-GA</i> |
| | 60 | 150 | 0 | 260 | 26 | — | — | — | — | — | |
| Max positive pulse plate voltage ⊕ = 5,500 volts; max screen dissipation = 2.5 watts; max d-c cathode current = 110 ma | | | | | | | | | | | |
| Horizontal Amplifier | 250 | 150 | 22.5 | 55 | 2.1 | 20,000 | 5,500 | — | — | — | <i>6AV5-GT</i> |
| | 60 | 150 | 0 | 225 | 25 | — | — | — | — | — | |
| Max positive pulse plate voltage ⊕ = 5,500 v; max screen dissipation = 2.5 watts; max d-c cathode current = 110 ma | | | | | | | | | | | |
| Class A Amplifier | 250 | — | 2.0 | 1.2 | — | 62,500 | 1,600 | 100 | — | — | <i>6AV6</i> |
| | 100 | — | 1.0 | 0.5 | — | 80,000 | 1,250 | 100 | — | — | |
| Class A Amplifier | 250 | — | 8.5 | 10.5 | — | 7,700 | 2,200 | 17 | — | — | <i>6AV11</i> ■ |
| Class A Amplifier | 100 | — | 0 | 1.4 | — | — | 1,200 | 80 | — | — | <i>6AW7-GT</i> |
| Class A Amplifier Class A Amplifier | 200 | 150 | R _k = 13 | 3.5 | 400,000 | 9,000 | — | — | — | — | <i>6AW8</i> ¶ |
| | 200 | — | 180 R _k = 2.0 | 4.0 | — | 17,500 | 4,000 | 70 | — | — | |
| Class A Amplifier Class A Amplifier | 150 | 150 | R _k = 15 | 3.5 | 200,000 | 9,500 | — | — | — | — | <i>6AW8-A</i> ¶ |
| | 65 | 150 | 150 R _k = 0 | 46 | 15 | — | — | — | — | — | |
| Class A Amplifier | 200 | — | 2.0 | 4.0 | — | 17,500 | 4,000 | 70 | — | — | |
| TV Damper | Max d-c output current ⊕ = 165 ma; max peak inverse voltage ⊖ = 5,000 volts; max peak current ⊕ = 1,000 ma | | | | | | | | | | <i>6AX3</i> ■ |
| TV Damper | Max d-c output current ⊕ = 137 ma; max peak inverse voltage ⊖ = 4,400 volts; max peak current ⊕ = 825 ma. | | | | | | | | | | <i>6AX4-GT</i> |
| TV Damper | Max d-c output current ⊕ = 165 ma; max peak inverse voltage ⊖ = 4,400 volts; max peak current ⊕ = 1,000 ma | | | | | | | | | | <i>6AX4-GTA</i> |
| TV Damper | Max d-c output current ⊕ = 165 ma; max peak inverse voltage ⊖ = 5,000 volts; max peak current ⊕ = 1,000 ma | | | | | | | | | | <i>6AX4-GTB</i> |
| Full-Wave Rectifier | Max d-c output current = 125 ma; max peak inverse voltage = 1250 volts; rms supply voltage per plate = 350 volts; max peak current per plate = 375 ma | | | | | | | | | | <i>6AX5-GT</i> |
| Full-Wave Rectifier | Max d-c output current = 250 ma; max peak inverse voltage = 1250 volts; rms supply voltage per plate = 350 volts; max peak current per plate = 600 ma | | | | | | | | | | <i>6AX6-G</i> |
| TV Damper | Max d-c output current per plate = 125 ma; max peak inverse voltage = 2000 volts; max peak current per plate = 600 ma | | | | | | | | | | |
| Class A Amplifier | 100 | — | 1.0 | 0.5 | — | 80,000 | 1,250 | 100 | — | — | <i>6AX7</i> ¶ |
| | 250 | — | 2.0 | 1.2 | — | 62,500 | 1,600 | 100 | — | — | |
| Class A Amplifier Class A Amplifier | 250 | 110 | R _k = 10 | 3.5 | 400,000 | 4,800 | — | — | — | — | <i>6AX8</i> |
| | 150 | — | 120 R _k = 56 | 18 | — | 5,000 | 8,500 | 40 | — | — | |
| TV Damper | Max d-c output current ⊕ = 175 ma; max peak inverse voltage ⊖ = 5000 volts; max peak current ⊕ = 1,100 ma | | | | | | | | | | <i>6AY3</i> |

Metal tubes are shown in bold-face type, miniature tubes in italics.

◆ G3 and G5 are screen. G4 is signal-input grid. ⊕ Maximum screen dissipation appears immediately below the screen voltage.
 ◆ G2 and G4 are screen. G3 is signal-input grid. ¶ Heater warm-up time controlled.
 1, 2, 3, etc. indicate tube sections.

| Tube Type | Classification by Construction | Base Connections | Out-line Dwg | Fila-ment Volts | Fila-ment Amp | Max Plate Watts | Max Plate Volts | Max Screen Volts and watts* | Capacitance in Picofarads | | |
|-----------|---------------------------------------|------------------|--------------|-----------------|---------------|-----------------|-----------------|-----------------------------|---|---------|------------|
| | | | | | | | | | Input | Out-put | Grid-plate |
| 6AY3-A | Half-Wave High-Vacuum Rectifier | 9HP | 9-85 | 6.3 | 1.2 | 6.5 | 32 | 300 | Tube Voltage Drop: 32 volts at 350 ma d-c | | |
| 6AY3-B | Half-Wave High-Vacuum Rectifier | 9HP | T-X | 6.3 | 1.2 | 6.5 | 32 | 300 | Tube Voltage Drop: 32 volts at 350 ma d-c | | |
| 6AY11 | Duplex-Diode Twin Triode | 12DA | 9-56 | 6.3 | 0.69 | 1.0 | 330 | — | Triode Sections | | |
| 6AZ5 | Twin Diode | 8DF | 3-1 | 6.3 | 0.15 | — | — | — | Diode Sections | | |
| 6AZ6 | Twin Diode | 8EH | 3-11 | 6.3 | 0.15 | — | — | — | Tube Voltage Drop: 10 v at 15 ma d-c | | |
| 6AZ8 | Triode-Pentode | 9ED | 6-2 | 6.3 | 0.45 | 2.0 | 300 | 300 | Pentode Section | | |
| 6B4-G | Power Amplifier Triode | 5S | 16-3 | 6.3 | 1.0 | 15 | 325 | — | Triode Section | | |
| 6B5 | Direct-Coupled Power Amplifier Triode | 6AS | 14-1 | 6.3 | 0.8 | 13.5 | 300 | 300 | Single tube | | |
| 6B6-G | Duplex Diode High-Mu Triode | 7V | 12-8 | 6.3 | 0.3 | — | 250 | — | 2 tubes, Push-pull | | |
| 6B7 | Duplex-Diode Remote-Cutoff Pentode | 7D | 12-6 | 6.3 | 0.3 | 2.25 | 300 | 125 | 3.5 | 9.5 | .007 |
| 6B8 | Duplex-Diode Remote-Cutoff Pentode | 8E | 8-4 | 6.3 | 0.3 | 3.0 | 300 | 125 | 6.0 | 7.5 | .005 |
| 6B8-G | Duplex-Diode Remote-Cutoff Pentode | 8E | 12-8 | 6.3 | 0.3 | 2.25 | 300 | 0.3 | 3.6 | 9.5 | .01 |
| 6B8-GT | Duplex-Diode Remote-Cutoff Pentode | 8E | 9-20 | 6.3 | 0.3 | 3.0 | 300 | 0.3 | 4.5 | 10.0 | .005 |
| 6B10 | Duplex-Diode Medium-Mu Twin Triode | 12BF | 9-56 | 6.3 | 0.6 | 2.5 | 330 | — | 1.7 | 1.6 | 1.5 |
| 6BA3 | Half-Wave High-Vacuum Rectifier | 9HP | T-X | 6.3 | 1.2 | 5.3 | 32 | 300 | Diode Sections | | |
| 6BA4 | High-Mu Planar Triode (Planar) | 6BA4 | T-X | 6.3 | 0.4 | 2.0 | 200 | — | Tube Voltage Drop: 32 volts at 250 ma d-c | | |
| 6BA5 | Sharp-Cutoff Pentode | 8DY | 3-1 | 6.3 | 0.15 | 0.7 | 150 | 140 | 3.4 | 3.6 | 0.065 |
| 6BA6 | Remote-Cutoff RF Pentode | 7BK | 5-2 | 6.3 | 0.3 | 3.4 | 330 | 330 | 5.5 | 5.5 | 0.0035 |
| 6BA7 | Pentagrid Converter | 8CT | 6-3 | 6.3 | 0.3 | 2.0 | 300 | 100 | Osc I _{cl} = 0.35 ma | | |
| 6BA8 | Triode-Pentode | 9DX | 6-3 | 6.3 | 0.6 | 3.25 | 300 | 300 | R _{gt} = 20,000 ohms | | |
| 6BA8-A | Triode-Pentode | 9DX | 6-3 | 6.3 | 0.6 | 2.0 | 300 | — | Pentode Section | | |
| 6BA11 | Triode-Twin Pentode | 12ER | 9-58 | 6.3 | 0.6 | 1.1 | 300 | 150 | Triode Section | | |
| | | | | | | 1.5 | 300 | 0.75 | Pentode Sections | | |
| | | | | | | 1.5 | 300 | — | Triode Section | | |

■ Compactron.
‡ Zero signal.
♣ Per section.

‡ Plate-to-plate.
♣ Maximum.
‡ Supply voltage.

● Subminiature type.
▲ Without external shield.
◆ Design maximum rating.

⊕ Total for all similar sections.
⊖ Absolute maximum rating.
Conversion transconductance.

| Service | Plate Volts | Screen Volts | Neg Grid Volts | Plate Milli-am-peres | Screen Milli-am-peres | R_p , Ohms | C_m , μ mhos | μ Factor | Load for Rated Out-put, Ohms | Power Out-put, Watts | Tube Type |
|--|---|--------------|-------------------|----------------------|-----------------------|--|--------------------|--------------|------------------------------|----------------------|------------------------|
| TV Damper | Max d-c output current $\diamond = 175$ ma; max peak inverse voltage $\diamond = 5,000$ volts; max peak current $\diamond = 1,100$ ma | | | | | | | | | 6AY3-A | |
| TV Damper | Max d-c output current $\diamond = 175$ ma; max peak inverse voltage $\diamond = 5,000$ volts; max peak current $\diamond = 1,100$ ma | | | | | | | | | 6AY3-B | |
| Class A Amplifier \diamond Detector \diamond | 250 | — | 2.0 | 1.2 | — | 52,700 | 1,900 | 100 | — | — | 6AY11■ |
| Half-Wave Rectifier | Max d-c output current $\diamond = 5.0$ ma | | | | | | | | | 6AZ5 \odot | |
| Full-Wave Rectifier | Max d-c output current per plate = 4 ma; max peak inverse voltage = 420 volts; max rms supply voltage per plate = 150 volts; max peak current per plate = 24 ma | | | | | | | | | 6AZ6 \odot | |
| Class A Amplifier | 200 | 150 | $R_k = 180$ | 9.5 | 3.0 | 300,000 | 6,000 | — | — | — | 6AZ8 |
| Class A Amplifier | 200 | — | 6.0 | 13 | — | 5,750 | 3,300 | 19 | — | — | |
| Class A Amplifier | 250 | — | 45 | 60† | — | 800 | 5,250 | 4.2 | 2,500 | 3.2 | 6B4-G |
| Class A ₁ Amplifier | 325 | — | 68 | 80† | — | — | — | — | 3,000 | 15.0 | |
| Class A Amplifier | 300 | 300 | 0 | 45 | 8.0 | 24,000 | 2,400 | — | 7,900 | 4.0 | 6B5 |
| Class A Amplifier | 250 | — | 2.0 | 0.9 | — | 91,000 | 1,100 | 100 | — | — | 6B6-G |
| Class A Amplifier | 250 | 125 | 3.0 | 9.0 | 2.3 | 600,000 | 1,125 | — | — | — | 6B7 |
| Class A Amplifier | 250 | 125 | 3.0 | 10 | 2.3 | 600,000 | 1,325 | — | — | — | 6B8 6B8-G 6B8-GT |
| Class A Amplifier | 250 | — | 9.5 | 7.0 | — | 9,750 | 1,850 | 18 | — | — | 6B10¶■ |
| Class A Amplifier Horizontal Phase Det. | Max d-c output current $\diamond = 5.0$ ma; voltage drop: $\diamond = 5$ volts at 20 ma d-c | | | | | | | | | | |
| TV Damper | Max d-c output current $\diamond = 165$ ma; max peak inverse voltage $\diamond = 5,000$ volts; max peak current $\diamond = 1,000$ ma | | | | | | | | | 6BA3 | |
| Class A Amplifier | 150 | — | $R_k = 100$ | 10 | — | 8,700 | 8,000 | 70 | — | — | 6BA4 |
| Class A Amplifier | 100 | 100 | $R_k = 270$ | 5.5 | 2.0 | 175,000 | 2,150 | — | — | — | 6BA5 \odot |
| Class A Amplifier | 250 | 100 | $R_k = 68$ | 11 | 4.2 | 1,000,000 | 4,400 | — | — | — | 6BA6 |
| Class A Amplifier | 100 | 100 | $R_k = 68$ | 10.8 | 4.4 | 250,000 | 4,300 | — | — | — | |
| Converter | 250 | 100 | 1.0 | 3.8 | 10.0 | 1,000,000 | 950 # | — | — | — | 6BA7 |
| Class A Amplifier | 200 | 150 | $R_k = 180$ | 13 | 3.5 | 400,000 | 9,000 | — | — | — | 6BA8¶ |
| Class A Amplifier | 200 | — | 8.0 | 8.0 | — | 6,700 | 2,700 | 18 | — | — | |
| Class A Amplifier | 200 | 150 | $R_k = 180$ | 13 | 3.5 | 400,000 | 9,000 | — | — | — | 6BA8-A¶ |
| Class A Amplifier | 65 | 150 | 0 | 42 | 12.5 | — | — | — | — | — | |
| Class A Amplifier | 200 | — | 8.0 | 8.0 | — | 6,700 | 2,700 | 18 | — | — | |
| Sync Separator and AGC Keyer | 100 | 67.5 | $I_{c1} = 0.1$ ma | 2.5 | 4.4 | (Both sections operating) $E_{c3} = 0$ volts | | | | | 6BA11¶■ |
| Class A Amplifier | 100 | 67.5 | 0 | — | — | — | 1,700 | — | $E_{c3} = 0$ volts | — | |
| Class A Amplifier | 250 | — | 11 | 5.0 | — | — | 1,800 | 18 | — | — | |

Metal tubes are shown in bold-face type, miniature tubes in italics.

♦ G3 and G5 are screen. G4 is signal-input grid.

♥ G2 and G4 are screen. G3 is signal-input grid.

1, 2, 3, etc. indicate tube sections.

‡ Maximum screen dissipation appears

immediately below the screen voltage.

¶ Heater warm-up time controlled.

| Tube Type | Classification by Construction | § X-Radiation Rating | Base Connections | Out-line Dwg. | Fila-ment Volts | Fila-ment Amps | Max. Plate Watts | Max. Plate Volts | * Max. Screen Volts and Watts | Capacitance in Picofarads | | |
|-----------|----------------------------------|----------------------|------------------|---------------|-----------------|----------------|------------------|--|--|---|-------------------------|------------|
| | | | | | | | | | | Input | Out-put | Grid-Plate |
| 6BC4 | UHF Triode | | 9DR | 6-1 | 6.3 | 0.225 | 2.5 | 250 | — | 2.9▲ | 0.26▲ | 1.6 |
| 6BC6 | Sharp-Cutoff RF Pentode | | 7BD | 5-2 | 6.3 | 0.3 | 2.3◆ | 330◆ | 330◆ 0.55◆ | Pentode Connection | | |
| | | | | | | | 2.9◆ | 330◆ | — | Triode Connection (G ₂ & P tied) | | |
| 6BC7 | Triple Diode | | 9AX | 6-2 | 6.3 | 0.45 | — | Avg Diode Current: (Diode 1 or 3 35 ma @ +5 v d-c) | | | | |
| 6BC8 | High-Frequency Twin Triode | | 9AJ | 6-2 | 6.3 | 0.4 | 2.2◆ | 250◆ | — | 2.6 5.52 | 1.3 2.42 | 1.2 |
| 6BD4 | Sharp-Cutoff Beam Triode | Ⓐ | 8FU | T-X | 6.3 | 0.6 | 20◆ | 20,000 | — | 3.8▲ | 0.04▲ | 1.0▲ |
| 6BD4-A | Sharp-Cutoff Beam Triode | Ⓐ | 8FU | T-X | 6.3 | 0.6 | 25 | 27,000 | — | 3.8▲ | 0.04▲ | 1.0▲ |
| 6BD5-GT | Beam Power Amplifier | | 6CK | T-X | 6.3 | 0.9 | 10 | 325 | 325 3.0 | — | — | — |
| 6BD6 | Remote-Cutoff RF Pentode | | 7BK | 5-2 | 6.3 | 0.3 | 3.0 | 300 | 125 0.65 | 4.3 | 5.0 | 0.005▲ |
| 6BD11 | Dissimilar Double Triode Pentode | | 12DP | 9-58 | 6.3 | 1.05 | 4.0◆ | 330◆ | 330◆ 1.1◆ | Pentode Section | | |
| | | | | | | | 1.5◆ | 330◆ | — | Triode Section 1 (Pins 5, 6, 8) | | |
| | | | | | | | 2.0◆ | 330◆ | — | Triode Section 2 (Pins 3, 4, 7) | | |
| 6BE3 | Half-Wave High-Vacuum Rectifier | | 12GA | 9-60 | 6.3 | 1.2 | 6.5◆ | Tube Voltage Drop: 25 volts at 350 ma d-c | | | | |
| 6BE3-A | Half-Wave High-Vacuum Rectifier | | 12GA | 9-60 | 6.3 | 1.2 | 6.5◆ | Tube Voltage Drop: 22.5 volts at 350 ma d-c | | | | |
| 6BE6 | Pentagrid Converter | | 7CH | 5-2 | 6.3 | 0.3 | 1.1◆ | 330◆ | 110◆ 1.1◆ | Osc I _{cl} = 0.5 ma R _{g1} = 20,000 ohms | | |
| 6BE8 | Triode-Pentode | | 9EG | 6-2 | 6.3 | 0.45 | 2.8 | 300 | 300◆ 0.5 | Pentode Section | | |
| | | | | | | | 2.5 | 300 | — | Triode Section | | |
| 6BE8-A | Triode-Pentode | | 9EG | 6-2 | 6.3 | 0.45 | 2.8 | 300 | 300◆ 0.5 | Pentode Section | | |
| | | | | | | | 2.5 | 300 | — | Triode Section | | |
| 6BF5 | Beam Power Amplifier | | 7BZ | 5-3 | 6.3 | 1.2 | 5.5 | 250 | 117 1.25 | Pentode Connection | | |
| | | | | | | | 5.0 | 250 | — | Triode Connection (G ₂ & P tied) | | |
| 6BF6 | Duplex-Diode Medium-Mu Triode | | 7BT | 5-2 | 6.3 | 0.3 | 2.5 | 300 | — | 1.8 | 0.7 | 1.9 |
| 6BF7 | Medium-Mu Twin Triode | | 8DG | 3-2 | 6.3 | 0.3 | 1.0◆ | 110 | — | 2.0 | 1.6 2.0 ₂ | 1.5 |
| 6BF7-A | Medium-Mu Twin Triode | | 8DG | 3-2 | 6.3 | 0.3 | 1.1◆ | 120 | — | 2.0 | 1.6 2.0 ₂ | 1.5 |
| 6BF8 | Sextuple Diode | | 9NX | 6-2 | 6.3 | 0.45 | — | — | Tube Voltage Drop: 1.4 volts at 5.0 ma d-c | | | |
| 6BF11 | Dissimilar Double Pentode | | 12EZ | 9-59 | 6.3 | 1.2 | 6.5◆ | 165◆ | 150◆ 1.8◆ | Section 1 (Pins 8, 9, 10, 11) | | |
| | | | | | | | 1.7◆ | 330◆ | 330◆ 1.1◆ | Section 2 (Pins 2, 3, 5, 6, 7) | | |

§ See pages 20 and 21 for X-Radiation Rated Recommended Replacement Chart and Symbol Definitions—

Ⓐ—X-Radiation Rated, and Ⓐ—No X-Radiation Rating.

■ Compactron.

† Plate-to-plate.

● Subminiature type.

⊕ Total for all similar sections.

◆ Per section.

‡ Supply voltage.

▲ Without external shading.

Ⓜ Absolute maximum rating.

Ⓜ Absolute maximum rating.

‡ Supply voltage.

◆ Design maximum rating.

Conversion transconductance.

● See X-Radiation Warning, page 4.

| Service | Plate Volts | Screen Volts | Neg Grid Volts | Plate Milli-amperes | Screen Milli-amperes | R _p , Ohms | G _m , μmhos | μ Factor | Load for Rated Output, Ohms | Power Output, Watts | Tube Type |
|----------------------|--|--------------|----------------------|---------------------|----------------------|-----------------------|------------------------|---------------------------|-----------------------------|---------------------|-----------------|
| Class A Amplifier | 150 | — | R _k = 100 | 14.5 | — | 4,800 | 10,000 | 48 | — | — | 6BC4 |
| Class A Amplifier | 250 | 150 | R _k = 180 | 7.5 | 2.1 | 800,000 | 5,700 | — | — | — | 6BC6 |
| | 125 | 125 | R _k = 100 | 8.0 | 2.4 | 500,000 | 6,100 | — | — | — | |
| | 100 | 100 | R _k = 180 | 4.7 | 1.4 | 600,000 | 4,900 | — | — | — | |
| Class A Amplifier | 250 | — | R _k = 820 | 6.0 | — | 9,000 | 4,400 | 40 | — | — | |
| | 180 | — | R _k = 330 | 8.0 | — | 6,000 | 6,000 | 42 | — | — | |
| Half-Wave Rectifier | Max d-c output current per plate = 12 ma | | | | | | | | | | 6BC7 |
| Class A Amplifier | 150 | — | R _k = 220 | 10 | — | 5,300 | 6,200 | 35 | — | — | 6BC8 |
| HV Shunt Regulator | Max unregulated d-c supply voltage = 40,000 volts; max d-c plate current = 1.5 ma. | | | | | | | | | | 6BD4 |
| HV Shunt Regulator | Max unregulated d-c supply voltage = 55,000 volts; max d-c plate current = 1.5 ma. | | | | | | | | | | 6BD4-A |
| Horizontal Amplifier | Max positive pulse plate voltage = 4,000 volts; max screen dissipation = 3.0 watts; max d-c cathode current = 100 ma | | | | | | | | | | 6BD5-GT |
| Class A Amplifier | 250 | 100 | 3.0 | 9 | 3 | 800,000 | 2,000 | — | — | — | 6BD6 |
| | 100 | 100 | 1.0 | 13 | 5 | 150,000 | 2,550 | — | — | — | |
| Class A Amplifier | 135 | 135 | R _k = 100 | 17 | 4.0 | 45,000 | 10,400 | — | — | — | 6BD11 |
| Class A Amplifier | 200 | — | 2.0 | 7.0 | — | 12,400 | 5,500 | 68 | — | — | |
| Class A Amplifier | 200 | — | R _k = 220 | 9.2 | — | 9,400 | 4,400 | 41 | — | — | |
| TV Damper | Max d-c output current ♦ = 200 ma; max peak inverse voltage ♦ = 5,000 volts; max peak current ♦ = 1,200 ma | | | | | | | | | | 6BE3 |
| TV Damper | Max d-c output current ♦ = 200 ma; max peak inverse voltage ♦ = 5,000 volts; max peak current ♦ = 1,200 ma. | | | | | | | | | | 6BE3-A |
| Converter | 250 | 100 | 1.5 | 2.9 | 6.8 | 1,000,000 | 475 # | — | — | — | 6BE8 |
| Class A Amplifier | 100 | 100 | 1.5 | 2.6 | 7.0 | 400,000 | 455 # | — | — | — | |
| | 250 | 110 | R _k = 68 | 10 | 3.5 | 400,000 | 5,200 | — | — | — | 6BE8 |
| Class A Amplifier | 150 | — | R _k = 56 | 18 | — | 5,000 | 8,500 | 40 | — | — | |
| Class A Amplifier | 250 | 110 | R _k = 68 | 10 | 3.5 | 400,000 | 5,200 | — | — | — | 6BE8-A † |
| Class A Amplifier | 150 | — | R _k = 56 | 18 | — | 5,000 | 8,500 | 40 | — | — | |
| Class A Amplifier | 110 | 110 | 7.5 | 36† | 4† | 12,000 | 7,500 | — | 2,500 | 1.9 | 6BF5 |
| Vertical Amplifier | 225 | — | 30 | 10 | — | 2,500 | 2,700 | 6.7 | — | — | |
| Class A Amplifier | Max positive pulse plate voltage □ = 900 volts; max d-c cathode current = 40 ma | | | | | | | | | | |
| Class A Amplifier | 250 | — | 9.0 | 9.5 | — | 8,500 | 1,900 | 16 | 10,000 | 0.3 | 6BF6 |
| Class A Amplifier | 100 | — | R _k = 100 | 8.0 | — | 7,000 | 4,800 | 35 | — | — | 6BF7 ● |
| Class A Amplifier | 100 | — | R _k = 100 | 8.0 | — | 7,300 | 4,800 | 35 | — | — | 6BF7-A ● |
| Detector | Max d-c output current ♦ = 2.2 ma; max peak inverse voltage ♦ = 165 volts; max peak current ♦ = 11 ma | | | | | | | | | | 6BF8 |
| Class A Amplifier | 145 | 110 | 6.0 | 36† | 3.0† | 30,000 | 8,600 | — | 3,000 | 2.4 | 6BF11 ■ |
| | 150 | 100 | R _k = 560 | 1.3 | 2.0 | 150,000 | 1,000 | E _{c3} = 0 volts | — | — | |

Metal tubes are shown in bold-face type, *miniature tubes in italics.*

♦ G3 and G5 are screen. G4 is signal-input grid.

▼ G2 and G4 are screen. G3 is signal-input grid.

1, 2, 3, etc. indicate tube sections.

● Maximum screen dissipation appears immediately below the screen voltage.

† Heater warm-up time controlled.

| Tube Type | Classification by Construction | § X-Radiation Rating | Base Connections | Outline Dwg. | Filament Volts | Filament Amps | Max. Plate Watts | Max. Plate Volts | * Max. Screen Volts and Watts | Capacitance in Picofarads | | |
|-------------------|---------------------------------|----------------------|------------------|----------------------|----------------|---------------|------------------|--|-------------------------------|---|--|------------|
| | | | | | | | | | | Input | Output | Grid-Plate |
| 6BG6-G 6BG6-GA | Beam Power Amplifier | | 5BT | 16-5 12-21 | 6.3 | 0.9 | 20 | 700 | 350 3.2 | 12▲ | 6.5▲ | 0.34▲ |
| 6BG7● | Medium-Mu Twin Triode | | 8DG | 3-5 | 6.3 | 0.3 | 1.0♣ | 110 | — | 2.0 | 1.6 ₁ 2.0 ₂ | 1.5 |
| 6BH3 | Half-Wave High-Vacuum Rectifier | | 9HP | 9-86 | 6.3 | 1.6 | 6.5◆ | Tube Voltage Drop: 33 volts at 360 ma d-c | | | | |
| 6BH3-A | Half-Wave High-Vacuum Rectifier | | 9HP | T-X | 6.3 | 1.6 | 6.5◆ | Tube Voltage Drop: 33 volts at 360 ma d-c | | | | |
| 6BH6 | Sharp-Cutoff RF Pentode | | 7CM | 5-2 | 6.3 | 0.15 | 3.0 | 300 | 300 0.5 | 5.4 | 4.4 | 0.0035♣ |
| 6BH8♣ | Triode-Pentode | | 9DX | 6-3 | 6.3 | 0.6 | 3.0 | 300 | 300 0.6 | Pentode Section | | |
| | | | | | | | 2.5 | 300 | — | Triode Section | | |
| 6BH11■ | Twin-Triode Pentode | | 12FP | 9-58 | 6.3 | 0.8 | 2.5◆ 2.5◆♣ | 350◆ 330◆ | 330◆ 0.55◆ | Pentode Section | | |
| | | | | | | | | 330◆ | — | Triode Sections | | |
| 6BJ3■ | Half-Wave High-Vacuum Rectifier | | 12BL | 9-59 | 6.3 | 1.2 | 4.0◆ | Tube Voltage Drop: 21 volts at 250 ma d-c | | | | |
| 6BJ6 | Remote-Cutoff RF Pentode | | 7CM | 5-2 | 6.3 | 0.15 | 3.0 | 300 | 300 0.6 | 4.5 | 5.5 | 0.0035♣ |
| 6BJ6-A | Remote-Cutoff RF Pentode | | 7CM | 5-2 | 6.3 | 0.15 | 3.0 | 300 | 300 0.6 | 4.5 | 5.5 | 0.0035♣ |
| 6BJ7 | Triple Diode | | 9AX | 6-2 | 6.3 | 0.45 | — | Tube Voltage Drop:♣ 2.7 v at 10 ma d-c | | | | |
| 6BJ8♣ | Duplex-Diode Triode | | 9ER | 6-3 | 6.3 | 0.6 | 4.0◆ | 330◆ | — | 2.8▲ | 0.31▲ | 2.6▲ |
| | | | | | | | | | | Diode Sections | | |
| 6BK4● | Sharp-Cutoff Beam Triode | ▲ | 8GC | 12-21 or 12-36 | 6.3 | 0.2 | 25 | 25,000 | — | 2.6▲ | 1.0▲ | 0.03▲ |
| 6BK4-A● | Sharp-Cutoff Beam Triode | ▲ | 8GC | 12-36 | 6.3 | 0.2 | 30◆ | 27,000◆ | — | 2.6▲ | 1.0▲ | 0.03▲ |
| 6BK4-B● | Sharp-Cutoff Beam Triode | ▲ | 8GC | 12-36 | 6.3 | 0.2 | 40◆ | 27,000◆ | — | 2.6▲ | 1.0▲ | 0.03▲ |
| 6BK4-C● | Sharp-Cutoff Beam Triode | 1.5 mR/hr ▲ | 8GC | 12-36 | 6.3 | 0.2 | 40◆ | 27,000◆ | — | 2.6▲ | 1.0▲ | 0.03▲ |
| 6BK5 | Beam Power Amplifier | | 9BQ | 6-3 | 6.3 | 1.2 | 9.0 | 250 | 250 2.5 | 13▲ | 5.0▲ | 0.6▲ |
| 6BK6 | Duplex-Diode High-Mu Triode | | 7BT | 5-3 | 6.3 | 0.3 | — | 300 | — | — | — | — |
| 6BK7 | High-Frequency Twin Triode | | 9AJ | 6-2 | 6.3 | 0.45 | 2.7♣ | 300 | — | 3.0▲ | 1.1 ₁ 1.0 ₂ ▲ | 1.9▲ |
| 6BK7-A 6BK7-B♣ | High-Frequency Twin Triode | | 9AJ | 6-2 | 6.3 | 0.45 | 2.7♣ | 300 | — | 3.0▲ | 1.0 ₁ 0.9 ₂ ▲ | 1.8▲ |
| 6BK11■ | Three Section Triode | | 12BY | 9-56 | 6.3 | 0.6 | 0.4◆ 0.4◆ | 330◆ 330◆ | — | Section 1 (Pins 4, 9, 10) Sections 2 and 3 (Pins 5, 6, 7 and 2, 3, 11) | | |
| 6BL4 | Half-Wave High-Vacuum Rectifier | | 8GB | 12-26 | 6.3 | 3.0 | 8.0 | Tube Voltage Drop: 20 v at 400 ma d-c | | | | |
| 6BL7-GT | Medium-Mu Twin Triode | | 8BD | 9-41 | 6.3 | 1.5 | 10♣ 12♣ | 500 | — | 4.2 ₁ ▲ 4.6 ₂ ▲ | 0.9▲ | 6.0▲ |

§ See pages 20 and 21 for X-Radiation Rated Recommended Replacement Chart and Symbol Definitions—

▲ — X-Radiation Rated, and ● — No X-Radiation Rating.

■ Compactor.

♣ Plate-to-plate.

◆ Subminiature type.

♣ Total for all similar sections.

⊕ Zero signal.

♣ Maximum.

♣ Without external shield.

♣ Absolute maximum rating.

♣ Per section.

♣ Supply voltage.

◆ Design maximum rating.

Conversion transconductance.

● See X-Radiation Warning, page 4.

| Service | Plate Volts | Screen Volts | Neg Grid Volts | Plate Milli-amperes | Screen Milli-amperes | R _p , Ohms | G _m , μmhos | μ Factor | Load for Rated Output, Ohms | Power Output, Watts | Tube Type |
|-----------------------|---|--------------|-------------------------------|---------------------|----------------------|-----------------------|------------------------|------------|-----------------------------|---------------------|--------------------|
| Horizontal Amplifier | 250 60 | 250 250 | 15 0 | 75 180 | 4.0 18 | 25,000 | 6,000 | — | — | — | 6BG6-G 6BG6-GA |
| Class A Amplifier ♦ | 100 | — | R _k = 100 | 8.0 | — | 7,000 | 4,800 | 35 | — | — | 6BG7 ● |
| TV Damper | Max d-c output current ♦ = 180 ma; max peak inverse voltage ♦ = 5500 volts; max peak current ♦ = 1100 ma | | | | | | | | | | 6BH3 |
| TV Damper | Max d-c output current ♦ = 180 ma; max peak inverse voltage ♦ = 5,500 volts; max peak current ♦ = 1,100 ma | | | | | | | | | | 6BH3-A |
| Class A Amplifier | 100 250 | 100 150 | 1.0 1.0 | 3.6 7.4 | 1.4 2.9 | 700,000 1,400,000 | 3,400 4,600 | — | — | — | 6BH6 |
| Class A Amplifier | 200 | 125 | R _k = 82 | 15 | 3.4 | 150,000 | 7,000 | — | — | — | 6BH8 ¶ |
| Class A Amplifier | 150 | — | 5.0 | 9.5 | — | 5,150 | 3,300 | 17 | — | — | |
| Class A Amplifier | 125 | 125 | 1.0 | 12 | 4.0 | 200,000 | 7,500 | — | — | — | 6BH11 ■ |
| Class A Amplifier | 120 | — | 1.0 | 13.5 | — | 5,400 | 8,500 | 46 | — | — | |
| TV Damper | Max d-c output current ♦ = 140 ma; max peak inverse voltage ♦ = 3,300; max peak current ♦ = 840 ma | | | | | | | | | | 6BJ3 ■ |
| Class A Amplifier | 250 100 | 100 100 | 1.0 1.0 | 9.2 9.0 | 3.3 3.5 | 1,300,000 250,000 | 3,600 3,650 | — | — | — | 6BJ6 |
| Class A Amplifier | 250 100 | 100 100 | 1.0 1.0 | 9.2 9.0 | 3.3 3.5 | 1,300,000 250,000 | 3,600 3,650 | — | — | — | 6BJ6-A |
| DC Restorer Service | Max d-c output current per plate = 1.0 ma; max peak inverse voltage = 330 volts; max peak current per plate = 10 ma | | | | | | | | | | 6BJ7 |
| Class A Amplifier | 250 90 | — | 9.0 0 | 8.0 13.5 | — | 7,150 4,700 | 2,800 4,700 | 20 22 | — | — | 6BJ8 ¶ |
| Vertical Amplifier | Max positive pulse plate voltage ♦ = 1,200 volts; max d-c cathode current ♦ = 22 ma | | | | | | | | | | |
| Horizontal Phase Det. | Max d-c output current ♦ ♦ = 9.0 ma; voltage drop ♣: 2.6 volts at 9.0 ma d-c | | | | | | | | | | |
| HV Shunt Regulator | Unregulated d-c supply voltage = 36,000 volts; max d-c plate current = 1.5 ma; amplification factor = 2,000. | | | | | | | | | | 6BK4 ● |
| HV Shunt Regulator | Unregulated d-c supply voltage = 36,000 volts; max d-c plate current = ♦ 1.6 ma. | | | | | | | | | | 6BK4-A ● |
| HV Shunt Regulator | Unregulated d-c supply voltage = 36,000 volts; max d-c plate current = ♦ 1.6 ma. | | | | | | | | | | 6BK4-B ● |
| HV Shunt Regulator | Unregulated d-c supply voltage = 36,000 volts; max d-c plate current = ♦ 1.5 ma. | | | | | | | | | | 6BK4-C ● |
| Class A Amplifier | 250 | 250 | 5.0 | 35† | 3.5† | 100,000 | 8,500 | — | 6,500 | 3.5 | 6BK5 |
| Class A Amplifier | 250 100 | — | 2.0 1.0 | 1.2 0.5 | — | 62,500 80,000 | 1,600 1,250 | 100 100 | — | — | 6BK6 |
| Class A Amplifier ♦ | 150 100 | — | R _k = 56 120 | 18 9.0 | — | 4,700 6,100 | 8,500 6,100 | 40 37 | — | — | 6BK7 |
| Class A Amplifier ♦ | 150 | — | R _k = 56 | 18 | — | 4,600 | 9,300 | 43 | — | — | 6BK7-A 6BK7-B ¶ |
| Class A Amplifier | 250 | — | 2.5 | 1.6 | — | 45,000 | 1,550 | 70 | — | — | 6BK11 ¶ ■ |
| Class A Amplifier | 250 | — | 2.0 | 1.2 | — | 62,500 | 1,600 | 100 | — | — | |
| TV Damper | Max d-c output current = 200 ma; max peak inverse voltage □ = 4500 volts; max peak current = 1200 | | | | | | | | | | 6BL4 |
| Vertical Amplifier ♦ | 250 250 | — | 9.0 17 | 40 4.0 | — | 2,150 | 7,000 | 15 | — | — | 6BL7-GT |
| | Max positive pulse plate voltage □ = 2,000; max d-c cathode current = 60 ma | | | | | | | | | | |

Metal tubes are shown in bold-face type, miniature tubes in italics.

♦ G3 and G5 are screen. G4 is signal-input grid.

★ Maximum screen dissipation appears immediately below the screen voltage.

♥ G2 and G4 are screen. G3 is signal-input grid.

¶ Heater warm-up time controlled.

1, 2, 3, etc. indicate tube sections.

| Tube Type | Classification by Construction | Base Connections | Out-line Dwg | Filament Volts | Filament Amp | Max Plate Watts | Max Plate Volts | Max Screen Volts and Watts* | Capacitance in Picofarads | | |
|---------------------|---------------------------------|------------------|----------------------|----------------|--------------|-----------------|--|-----------------------------|--|-------------------|--|
| | | | | | | | | | Input | Output | Grid-plate |
| 6BL7-GTA | Medium-mu Twin Triode | 8BD | 9-41 | 6.3 | 1.5 | 10♣ 12⊕ | 500 | — | 4.2 ₁ ▲ 4.6 ₂ ▲ | 0.9▲ | 6.0▲ |
| 6BL8 | Triode-Pentode | 9AE | 6-2 | 6.3 | 0.45 | 1.7 | 250 | 200 0.75 | Pentode Section | | |
| | | | | | | 1.5 | 250 | — | Triode Section | | |
| 6BM8 | Triode-Pentode | 9EX | 6-4 | 6.3 | 0.78 | 5.0 | 600 | 300 1.8 | Pentode Section | | |
| | | | | | | 1.0 | 300 | — | Triode Section | | |
| 6BN4 | High-Frequency Triode | 7EG | 5-2 | 6.3 | 0.2 | 2.2♣ | 275♣ | — | 3.2 | 1.4 | 1.2 |
| 6BN4-A | High-Frequency Triode | 7EG | 5-2 | 6.3 | 0.2 | 2.2 | 275 | — | 3.2 | 1.4 | 1.2 |
| 6BN6 | Gated-Beam Discriminator | 7DF | 5-3 | 6.3 | 0.3 | — | 330♣ | 110♣ | E _{c1} = 1.25 volts RMS | | |
| 6BN7 | Double Triode | 9BT | 6-3 | 6.3 | 0.75 | 7.5 | 400 | — | Section 1 (Pins 6, 7, 9) | | |
| | | | | | | 1.5 | 400 | — | Section 2 (Pins 1, 2, 3) | | |
| 6BN8□ | Duplex-Diode High-mu Triode | 9ER | 6-3 | 6.3 | 0.6 | 1.7♣ | 330♣ | — | 3.6▲ | 0.25▲ | 2.5▲ |
| | | | | | | | | | Diode Sections | | |
| 6BN11■ | Twin Pentode | 12GF | 9-58 | 6.3 | 0.8 | 3.1♣ ♣ | 330♣ | 330♣ 0.65♣ | 12 | 2.8 | 0.04 ₁ 0.03 ₂ |
| 6BQ5 | Beam Power Amplifier | 9CV | 6-4 | 6.3 | 0.76 | 12 | 300 | 300 2.0 | — | — | — |
| 6BQ6-G 6BQ6-GTA | Beam Power Amplifier | 6AM | 12-8 9-49 9-50 | 6.3 | 1.2 | 11 | 600♣ | 175 2.5 | — | — | — |
| 6BQ6-GA 6BQ6-GTB | Beam Power Amplifier | 6AM | T-X 9-49 9-50 | 6.3 | 1.2 | 11 | 600♣ | 200 2.5 | 15▲ | 7.0▲ | 0.6▲ |
| 6BQ6-GT | Beam Power Amplifier | 6AM | 9-49 9-50 | 6.3 | 1.2 | 11 | 550♣ | 175 2.5 | 15▲ | 7.5▲ | 0.0▲ |
| 6BQ7 | High-Frequency Twin Triode | 9AJ | 6-2 | 6.3 | 0.4 | 2.0♣ | 250 | — | 2.85 ₁ | 1.35 ₁ | 1.15 |
| 6BQ7-A | High-Frequency Twin Triode | 9AJ | 6-2 | 6.3 | 0.4 | 2.0♣ | 250 | — | 2.6 ₁ | 1.2 ₁ | 1.2 |
| 6BR3 | Half-Wave High-Vacuum Rectifier | 9CB | T-X | 6.3 | 1.2 | 6.5♣ | Tube Voltage Drop: 19 volts at 250 ma d-c | | | | |
| 6BR8 | Triode-Pentode | 9FA | 6-2 | 6.3 | 0.45 | 2.8 | 300 | 300♣ 0.5 | Pentode Section | | |
| | | | | | | 2.7 | 300 | — | Triode Section | | |
| 6BR8-A□ | Triode-Pentode | 9FA | 6-2 | 6.3 | 0.45 | 3.0♣ | 330♣ | 330♣ 0.55♣ | Pentode Section | | |
| | | | | | | 2.5♣ | 330♣ | — | Triode Section | | |
| 6BS3 | Half-Wave High-Vacuum Rectifier | 9HP | 9-86 | 6.3 | 1.2 | 6.0♣ | Tube Voltage Drop: 12 volts at 140 ma d-c | | | | |

■ Compactron.
† Zero signal.
♣ Per section.

‡ Plate-to-plate.
♣ Maximum.
‡ Supply voltage.

⊕ Subminiature type.
▲ Without external shield.
♣ Design maximum rating.

⊕ Total for all similar sections.
⊕ Absolute maximum rating.
Conversion transconductance.

| Service | Plate Volts | Screen Volts | Neg Grid Volts | Plate Milli-amperes | Screen Milli-amperes | R _p , Ohms | G _m , μmhos | μ Factor | Load for Rated Output, Ohms | Power Output, Watts | Tube Type |
|--|---|--------------|-----------------------------|---------------------|----------------------|-----------------------|------------------------|-------------------------------|-----------------------------|---------------------|-----------|
| Vertical Amplifier ♣ | 250 250 150 | — — — | 9.0 17 0 | 40 4.0 65 | — — — | 2,150 — — | 7,000 — — | 15 — — | — — — | — — — | 6BL7-GTA |
| Max positive pulse plate voltage ⊠ = 2,000; max d-c cathode current = 60 ma | | | | | | | | | | | |
| Class A Amplifier | 170 | 170 | 2.0 | 10 | 2.8 | 400,000 | 6,200 | — | — | — | 6BL8 |
| Class A Amplifier | 100 | — | 2.0 | 14 | — | 4,000 | 5,000 | 20 | — | — | |
| Class A Amplifier | 200 | 200 | 16 | 35 | 7.0 | 20,000 | 6,400 | — | 5,600 | 3.5 | 6BM8 |
| Class A Amplifier | 100 | 100 | 6.0 | 26 | 5.0 | 15,000 | 6,800 | — | 3,900 | 1.05 | |
| Class A Amplifier | 100 | — | 0 | 3.5 | — | — | 2,500 | 70 | — | — | |
| Class A Amplifier | 150 | — | R _k = 220 | 9.0 | — | 6,300 | 6,800 | 43 | — | — | 6BN4 |
| Class A Amplifier | 150 | — | R _k = 220 | 9.0 | — | 5,400 | 7,700 | 43 | — | — | 6BN4-A |
| FM Limiter-Discriminator | 285♠ | 100 | R _k = 200 to 400 | 0.49 | 9.8 | — | — | — | 330000 | — | 6BN6 |
| Vertical Amplifier | 250 | — | 15.0 | 24 | — | 2,200 | 5,500 | 12 | — | — | 6BN7 |
| Class A Amplifier | 120 | — | 1.0 | 5 | — | 14,000 | 2,000 | 28 | — | — | |
| Max positive pulse plate voltage = 1,500 volts | | | | | | | | | | | |
| Class A Amplifier | 250 | — | 3.0 | 1.6 | — | 28,000 | 2,500 | 70 | — | — | 6BN8¶ |
| Class A Amplifier | 100 | — | 1.0 | 1.5 | — | 21,000 | 3,500 | 75 | — | — | |
| Max d-c output current ♣ = 9.0 ma; voltage drop: ♣ 2.6 volts at 9.0 ma d-c | | | | | | | | | | | |
| Class A Amplifier ♣ | 125 | 125 | R _k = 56 | 11 | 3.8 | 200,000 | 13,000 | (g3 connected to k at socket) | | — | 6BN11■ |
| Class A Amplifier | 250 | 250 | R _k = 135 | 48† | 5.5† | 38,000 | 11,300 | — | 5,200 | 6.0 | 6BQ5 |
| Horizontal Amplifier | 250 | 150 | 22.5 | 55 | 2.1 | 20,000 | 5,500 | — | — | — | 6BQ6-G |
| Horizontal Amplifier | 60 | 150 | 0 | 225 | 25 | — | — | — | — | — | 6BQ6-GTA |
| Max positive pulse plate voltage ⊠ = 6000 volts; max screen dissipation = 2.5 watts; max d-c cathode current = 110 ma | | | | | | | | | | | |
| Horizontal Amplifier | 250 | 150 | 22.5 | 57 | 2.1 | 14,500 | 5,900 | — | — | — | 6BQ6-GA |
| Horizontal Amplifier | 60 | 150 | 0 | 260 | 26 | — | — | — | — | — | 6BQ6-GTB |
| Max positive pulse plate voltage ⊠ = 6,000 volts; max screen dissipation = 2.5 watts; max d-c cathode current = 110 ma | | | | | | | | | | | |
| Horizontal Amplifier | 250 | 150 | 22.5 | 55 | 2.1 | 20,000 | 5,550 | — | — | — | 6BQ6-GT |
| Horizontal Amplifier | 60 | 150 | 0 | 225 | 25 | — | — | — | — | — | |
| Max positive pulse plate voltage ⊠ = 5500 volts; max screen dissipation = 2.5 watts; max d-c cathode current = 110 ma | | | | | | | | | | | |
| Class A Amplifier ♣ | 150 | — | R _k = 220 | 9 | — | 5,800 | 6,000 | 35 | — | — | 6BQ7 |
| Class A Amplifier ♣ | 150 | — | R _k = 220 | 9.0 | — | 5,900 | 6,400 | 38 | — | — | 6BQ7-A |
| TV Damper | Max d-c output current ♣ = 200 ma; max peak inverse voltage ♣ = 5,500; max peak current ♣ = 1,200 ma. | | | | | | | | | | |
| Class A Amplifier | 250 | 110 | R _k = 68 | 10 | 3.5 | 400,000 | 5,200 | — | — | — | 6BR8 |
| Class A Amplifier | 150 | — | R _k = 56 | 18 | — | 5,000 | 8,500 | 40 | — | — | |
| Class A Amplifier | 125 | 110 | 1.0 | 9.5 | 3.5 | 200,000 | 5,000 | — | — | — | 6BR8-A¶ |
| Class A Amplifier | 125 | — | 1.0 | 13.5 | — | 5,300 | 7,500 | 40 | — | — | |
| TV Damper | Max d-c output current ♣ = 200 ma; max peak inverse voltage ♣ = 5,000; max peak current ♣ = 1,100 ma. | | | | | | | | | | |

Metal tubes are shown in bold-face type, *miniature tubes in italics.*

♣ G3 and G5 are screen. G4 is signal-input grid.

♥ G2 and G4 are screen. G3 is signal-input grid.

1, 2, 3, etc. indicate tube sections.

■ Maximum screen dissipation appears immediately below the screen voltage.

¶ Heater warm-up time controlled.

| Tube Type | Classification by Construction | § X-Radiation Rating | Base Connections | Out-line Dwg. | Fila-ment Volts | Fila-ment Amps | Max. Plate Watts | Max. Plate Volts | * Max. Screen Volts and Watts | Capacitance in Picofarads | | |
|----------------|---------------------------------|----------------------|------------------|---------------|-----------------|----------------|--------------------------|---|---|--|------------------------------|------------------------------|
| | | | | | | | | | | Input | Out-put | Grid-Plate |
| 6BS3-A | Half-Wave High-Vacuum Rectifier | | 9HP | T-X | 6.3 | 1.2 | 6.0 | Tube Voltage Drop: 12 volts at 140 ma d-c | | | | |
| 6BS8 | Medium- μ Twin Triode | | 9AJ | 6-2 | 6.3 | 0.4 | 2.0 | 150 | — | 2.6 Δ | 1.2 Δ | 1.15 |
| 6BT6 | Duplex-Diode High-Mu Triode | | 7BT | 5-3 | 6.3 | 0.3 | — | 300 | — | — | — | — |
| 6BT8 | Duplex-Diode Pentode | | 9FE | 6-2 | 6.3 | 0.45 | 2.0 | 300 | 300 Φ 0.5 | 7.0 Δ | 2.3 Δ | 0.04 Φ Δ |
| Diode Sections | | | | | | | | | | | | |
| 6BU4 | Sharp-Cutoff Beam Triode | Ⓐ | 8GC | T-X | 6.3 | 0.45 | 25 | 25,000 | — | — | — | — |
| 6BU5 | Sharp-Cutoff Beam Pentode | Ⓐ | 6BU5 | T-X | 6.3 | 0.15 | 20 | 20,000 | 100 0.1 | 3.0 Δ | 0.9 Δ | 0.024 Δ |
| 6BU6 | Duplex-Diode Medium-Mu Triode | | 7BT | 5-3 | 6.3 | 0.3 | — | 300 | — | — | — | — |
| 6BU8 | Twin Pentode | | 9FG | 6-3 | 6.3 | 0.3 | 1.1 Φ Φ | 300 Φ | 150 Φ 0.75 Φ | — | — | — |
| 6BU8-A* | Twin Pentode | | 9FG | 6-3 | 6.3 | 0.3 | 1.1 Φ Φ | 300 Φ | 150 Φ 0.75 Φ | — | — | — |
| 6BV8 | Duplex-Diode Triode | | 9FJ | 6-2 | 6.3 | 0.6 | 2.7 Φ | 330 Φ | — | 3.6 | 0.4 | 2.0 |
| Diode Sections | | | | | | | | | | | | |
| 6BV11 | Twin Pentode | | 12HB | 9-59 | 6.3 | 0.9 | 1.7 Φ Φ | 300 Φ | 300 Φ 0.1 Φ | — | — | — |
| 6BW3 | Half-Wave High-Vacuum Rectifier | | 12FX | 9-60 | 6.3 | 1.6 | 6.5 Φ | Tube Voltage Drop: 32 volts at 350 ma d-c | | | | |
| 6BW4 | Full-Wave High-Vacuum Rectifier | | 9DJ | 6-3 | 6.3 | 0.9 | — | Tube Voltage Drop: 40 v at 100 ma d-c | | | | |
| 6BW6 | Beam Power Amplifier | | 9AM | 6-3 | 6.3 | 0.45 | 12 | 315 | 285 2.0 | — | — | — |
| 6BW8 | Duplex-Diode Pentode | | 9HK | 6-2 | 6.3 | 0.45 | 3.0 Φ | 330 Φ | 330 Φ 0.55 Φ | 4.8 Δ | 2.6 Δ | 0.02 Δ Φ |
| Diode Sections | | | | | | | | | | | | |
| 6BW11 | Dissimilar Double Pentode | | 12HD | 9-58 | 6.3 | 0.8 | 4.0 Φ 3.1 Φ | 330 Φ 330 Φ | 330 Φ 0.8 Φ 330 Φ 0.65 Φ | Section 1 (Pins 7, 8, 9, 10, 11) Section 2 (Pins 2, 3, 4, 5, 6) | | |
| 6BX7-GT | Medium-Mu Twin Triode | | 8BD | 9-41 | 6.3 | 1.5 | 10 Φ 12 Φ | 500 | — | 4.4 Δ 4.8 Δ | 1.1 Δ 1.2 Δ | 4.2 Δ 4.0 Δ |
| 6BX8 | High-Frequency Twin Triode | | 9AJ | 6-2 | 6.3 | 0.4 | 2.0 Φ Φ | 150 Φ | — | 2.4 Δ | 1.25 Δ | 1.4 |
| 6BY4 | High- μ Triode (Planar) | | 6BY4 | T-X | 6.3 | 0.2 | 1.1 Φ | 300 Φ | — | — | — | — |
| 6BY5-G | Full-Wave High-Vacuum Rectifier | | 6CN | 14-3 | 6.3 | 1.6 | — | Tube Voltage Drop: 32 volts at 175 ma d-c | | | | |
| 6BY5-GA | Full-Wave High-Vacuum Rectifier | | 6CN | 12-14 | 6.3 | 1.6 | — | Tube Voltage Drop: 32 volts at 175 ma d-c | | | | |

§ See pages 20 and 21 for X-Radiation Rated Recommended Replacement Chart and Symbol Definitions—

Ⓐ—X-Radiation Rated, and Ⓐ—No X-Radiation Rating.

■ Compactron.

† Plate-to-plate.

⊙ Subminiature type.

⊕ Total for all similar sections.

† Zero signal.

♣ Maximum.

▲ Without external shield.

⊕ Absolute maximum rating.

♣ Per section.

♣ Supply voltage.

⊕ Design maximum rating.

Conversion transconductance.

● See X-Radiation Warning, page 4

| Service | Plate Volts | Screen Volts | eg rid Volts | Plate Milli- am- peres | Screen Milli- am- peres | R _p , Ohms | G _m , μmhos | μ Fac- tor | Load for Rated Out- put, Ohms | Power Out- put, Watts | Tube Type |
|--|--|-----------------|--------------------------|---------------------------------|----------------------------------|--------------------------|---------------------------|-----------------------------|--|--------------------------------|--------------|
| TV Damper | Max d-c output current ⬠ = 200 ma; max peak inverse voltage ⬠ = 5,000; max peak current ⬠ = 1,100 ma | | | | | | | | | | 6BS3-A |
| Class A Amplifier ⬠ | 150 | — | R _k = 220 | 10 | — | 5,000 | 7,200 | 36 | — | — | 6BS8 |
| Class A Amplifier | 250 | — | 3.0 | 1.0 | — | 58,000 | 1,200 | 70 | — | — | 6BT6 |
| | 100 | — | 1.0 | 0.8 | — | 54,000 | 1,300 | 70 | — | — | 6BT8 |
| Class A Amplifier Horizontal Phase Det. | 200 | 150 | R _k = 180 | 9.5 | 2.8 | 300,000 | 6,200 | — | — | — | 6BT8 |
| | Max d-c output current ⬠ = 1.0 ma; voltage drop ⬠: 10 volts at 8.0 ma d-c | | | | | | | | | | |
| HV Shunt Regulator | Max unregulated d-c supply voltage = 55,000 volts; max d-c cathode current = 10 ma. | | | | | | | | | | 6BU4 ● |
| HV Shunt Regulator | 20000 | 70 | 2.4 | 1.0 | 0.4 | — | — | — | E _{c3} = 0 volts | — | 6BU5 ● |
| | Max screen dissipation = 0.1 watt; d-c cathode current = 2.5 ma. | | | | | | | | | | |
| Class A Amplifier | 250 | — | 9.0 | 9.5 | — | 8,500 | 1,900 | 16 | 10,000 | 0.30 | 6BU6 |
| Sync Separ- ator and AGC Keyer | 100 | 67.5 | I _{c1} = 0.1 ma | 2.2 | 5.0 | — | — | — | E _{c3} = 0 volts | — | 6BU8 |
| | 100 | 67.5 | 0 | — | — | — | 1,500 | — | E _{c3} = 0 volts | — | |
| | (Characteristics given are for each section separately with plate and grid number 3 of opposite section grounded) | | | | | | | | | | |
| Sync Separ- ator and AGC Keyer | 100 | 67.5 | I _{c1} = 0.1 ma | 2.2 | 3.3 | — | — | — | E _{c3} = 0 volts | — | 6BU8-A |
| | 100 | 67.5 | 0 | — | — | — | 1,500 | — | E _{c3} = 0 volts | — | |
| | (Characteristics given are for each section separately with plate and grid number 3 of opposite section grounded) | | | | | | | | | | |
| Class A Amplifier | 200 | — | R _k = 330 | 11 | — | 5,900 | 5,600 | 33 | — | — | 6BV8¶ |
| | 75 | — | 0 | 14 | — | — | — | — | — | — | |
| Synchronous Detector | Max d-c output current ⬠ = 10 ma; voltage drop ⬠: 5.0 volts at 23 ma d-c | | | | | | | | | | |
| Avg. Char. ⬠ | 150 | 100 | R _k = 180 | 3.6 | 2.0 | 200,000 | 3,700 | (E _{c3} = 0 volts) | — | — | 6BV11■ |
| TV Damper | Max d-c output current ⬠ = 175 ma; max peak inverse voltage ⬠ = 5,000 volts; max peak current ⬠ = 1,100 ma. | | | | | | | | | | 6BW3■ |
| Full-Wave Rectifier | Max d-c output current = 100 ma; max peak inverse voltage = 1,275 volts; rms supply voltage per plate = 325 volts; max peak current per plate = 350 ma | | | | | | | | | | 6BW4 |
| Class A Amplifier | 315 | 225 | 13.0 | 34† | 2.2† | 77,000 | 3,750 | — | 8,500 | 5.5 | 6BW6 |
| | 250 | 250 | 12.5 | 45† | 4.5† | 52,000 | 4,100 | — | 5,000 | 4.5 | |
| | 180 | 180 | 8.5 | 29† | 3† | 58,000 | 3,700 | — | 5,500 | 2.0 | |
| Class A Amplifier Horizontal Phase Det. | 250 | 110 | R _k = 68 | 10 | 3.5 | 250,000 | 5,200 | — | — | — | 6BW8 |
| | Max d-c output current ⬠ = 5.0 ma; voltage drop ⬠: 5 volts at 20 ma d-c | | | | | | | | | | |
| Avg. Char. | 125 | 125 | R _k = 56 | 22 | 4.8 | 120,000 | 8,500 | — | — | — | 6BW11■ |
| Avg. Char. | 125 | 125 | R _k = 56 | 11 | 3.8 | 200,000 | 13,000 | — | — | — | |
| Vertical Amplifier ⬠ | 250 | — | R _k = 390 | 42 | — | 1,300 | 7,600 | 10 | — | — | 6BX7-GT |
| | 100 | — | 0 | 80 | — | — | — | — | — | — | |
| | Max positive pulse plate voltage ⊠ = 2000; max d-c cathode current = 60 ma | | | | | | | | | | |
| Class A Amplifier ⬠ | 65 | — | 1.0 | 9.0 | — | 3,750 | 6,700 | 25 | — | — | 6BX8 |
| Class A Amplifier | 200 | — | R _k = 200 | 5.0 | — | 16,700 | 6,000 | 100 | — | — | 6BY4 |
| Full-Wave Rectifier TV Damper | Max d-c output current = 175 ma; max peak inverse voltage = 1400 volts; rms supply voltage per plate = 375 volts; max peak current per plate = 525 ma; Max d-c output current = 175 ma; max peak inverse voltage = 3000 volts; max peak current per plate = 525 ma | | | | | | | | | | 6BY5-G |
| Full-Wave Rectifier TV Damper | Max d-c output current = 175 ma; max peak inverse voltage ⊠ = 1400 volts; max peak current per plate = 525 ma; Max d-c output current = 175 ma; max peak inverse voltage ⊠ = 3000 volts; max peak current per plate = 525 ma | | | | | | | | | | 6BY5-GA |

Metal tubes are shown in bold-face type, miniature tubes in italics.

● G3 and G5 are screen. G4 is signal-input grid.

♥ G2 and G4 are screen. G3 is signal-input grid.

1, 2, 3, etc. indicate tube sections.

⬠ Maximum screen dissipation appears immediately below the screen voltage.

¶ Heater warm-up time controlled.

| Tube Type | Classification by Construction | Base Connections | Out-line Dwg | Fila-ment Volts | Fila-ment Amp | Max Plate Watts | Max Plate Volts | Max Screen Volts and W†ts | Capacitance in Picofarads | | |
|---------------|----------------------------------|------------------|--------------|-----------------|---------------|---------------------|--|------------------------------------|---|----------------------------|---------------------------------------|
| | | | | | | | | | Input | Out-put | Grid-plate |
| 6BY6 | Dual-Control Heptode | 7CH ♥ | 5-2 | 6.3 | 0.3 | 2.3 ♦ | 330 ♦ | 330 ♦ 1.1 ♦ | — | — | — |
| 6BY8 | Diode-Pentode | 9FN | 6-3 | 6.3 | 0.6 | 3.0 | 300 | 300 0.65 | 5.5 | 5.0 | 0.0035 ♣ |
| Diode Section | | | | | | | | | | | |
| 6BY11 | Dissimilar Double Pentode | 12EZ | 9-59 | 6.3 | 1.2 | 10 ♦ 1.7 ♦ | 200 ♦ 300 ♦ | 150 ♦ 1.8 ♦ 300 ♦ 1.0 ♦ | Section 1 (Pins 8, 9, 10, 11) Section 2 (Pins 2, 3, 5, 6, 7) | | |
| 6BZ3 | Half-Wave High-Vacuum Rectifier | 12FX | 9-60 | 6.3 | 1.2 | 6.5 ♦ | Tube Voltage Drop: 21 volts at 350 ma d-c | | | | |
| 6BZ6 | Semi-Remote-Cutoff RF Pentode | 7CM | 5-2 | 6.3 | 0.3 | 2.3 ♦ | 330 ♦ | 330 ♦ 0.55 ♦ | 7.0 | 3.0 | 0.015 ♣ |
| 6BZ7 | High-Frequency Twin Triode | 9AJ | 6-2 | 6.3 | 0.4 | 2.0 ♣ | 250 | — | 2.6 ₁ | 1.2 ₁ | 1.2 |
| 6BZ8 | High-Frequency Twin Triode | 9AJ | 6-2 | 6.3 | 0.4 | 2.2 ♣ | 250 | — | — | — | — |
| 6C4 | Medium-Mu Triode | 6BG | 5-2 | 6.3 | 0.15 | 3.5 5.0 | 300 300 | — | 1.8 ▲ | 1.3 ▲ | 1.6 ▲ |
| 6C5 | Medium-Mu Triode | 6Q | 8-1 9-12 | 6.3 | 0.3 | 2.5 | 300 | — | 3.0 | 11.0 | 2.0 |
| 6C5-GT | | | | | | | | | 4.4 | 12.0 | 2.2 |
| 6C6 | Sharp-Cutoff Pentode | 6F | 12-2 | 6.3 | 0.3 | 0.75 | 300 | 125 0.75 | 5.0 ▲ | 6.5 ▲ | 0.007 ♣ |
| 6C7 | Duplex-Diode Medium-Mu Triode | 7G | 12-2 | 6.3 | 0.3 | — | 250 | — | — | — | — |
| 6C8-G | Medium-Mu Twin Triode | 8G | 12-8 | 6.3 | 0.3 | 1.0 ♣ | 250 | — | — | — | — |
| 6C9 | Twin Tetrode | 10F | 6-13 | 6.3 | 0.4 | 1.5 ♦ 2.5 ♦ ⊕ | 250 ♦ | 180 ♦ 0.5 ♦ | 4.4 ₁ | 2.2 | .055 ₁ .06 ₂ |
| 6C10 | Triple-Triode | 12BQ | 9-56 | 6.3 | 0.6 | 1.0 ♦ ♣ | 330 ♦ | — | 1.8 ▲ | 0.24 ▲ 0.34 ▲ 0.48 ▲ | 1.4 ▲ |
| 6CA4 | Full-Wave High-Vacuum Rectifier | 9M | 6-4 | 6.3 | 1.0 | — | — | — | — | — | — |
| 6CA5 | Beam Power Amplifier | 7CV | 5-3 | 6.3 | 1.2 | 5.0 | 130 | 130 1.4 | 15 ▲ | 9 ▲ | 0.5 ▲ |
| 6CA7 | Power Amplifier Pentode | 8EP | T-X | 6.3 | 1.5 | 25 | 800 | 425 8.0 | — | — | — |
| 6CA11 | Dissimilar-Double-Triode Pentode | 12HN | 9-58 | 6.3 | 1.02 | 5.0 ♦ | 330 ♦ | 330 ♦ 1.0 ♦ | Pentode Section | | |
| 1.5 ♦ | | | | | | 330 ♦ | — | Triode Section 1 (Pins 4, 5, 6) | | | |
| 1.5 ♦ | | | | | | 330 ♦ | — | Triode Section 2 (Pins 2, 3, 7) | | | |
| 6CB5 | Beam Power Amplifier | 8GD | T-X | 6.3 | 2.5 | 23 | 700 | 200 3.6 | 24 ▲ | 10 ▲ | 0.8 ▲ |
| 6CB5-A | Beam Power Amplifier | 8GD | 12-36 | 6.3 | 2.5 | 26 ♦ | 880 ♦ | 220 ♦ 4.0 ♦ | 22 ▲ | 10 ▲ | 0.4 ▲ |
| 6CB6 | Sharp-Cutoff RF Pentode | 7CM | 5-2 | 6.3 | 0.3 | 2.3 ♦ | 330 ♦ | 330 ♦ 0.55 ♦ | 6.5 | 3.0 | 0.015 ♣ |
| 6CD3 | Half-Wave High-Vacuum Rectifier | 12FX | 9-62 | 6.3 | 2.5 | 12 ♦ | Tube Voltage Drop: 18 volts at 350 ma d-c | | | | |
| 6CD6-G | Beam Power Amplifier | 5BT | 16-5 | 6.3 | 2.5 | 15 | 700 | 175 3.0 | 24 ▲ | 9.5 ▲ | 0.8 ▲ |

■ Compactron.
† Zero signal.
♣ Per section.

‡ Plate-to-plate.
♣ Maximum.
‡ Supply voltage.

⊕ Subminiature type.
▲ Without external shield.
♦ Design maximum rating.

⊕ Total for all similar sections.
⊕ Absolute maximum rating.
Conversion transconductance.

| Service | Plate Volts | Screen Volts | Neg Grid Volts | Plate Milli-amperes | Screen Milli-amperes | R_p , Ohms | G_m , μ mhos | μ Factor | Load for Rated Output, Ohms | Power Output, Watts | Tube Type |
|---|---|--------------|----------------|---------------------|----------------------|------------------|--------------------|--------------|---|---------------------|---------------|
| Gated Amplifier | 250 10 | 100 25 | 2.5 0 | 6.5 1.4 | 9 3.5 | — | 1,900 | — | $E_{c3} = -2.5$ volts $E_{c5} = 0$ volts | — | 6BY6 |
| Class A Amplifier | 250 | 150 | $R_k = 68$ | 10.6 | 4.3 | 1,000,000 | 5,200 | — | G_3 tied to K | — | 6BY8† |
| Video Detector | 100 | 100 | $R_k = 150$ | 5.0 | 2.1 | 500,000 | 3,900 | — | G_3 tied to K | — | 6BY8† |
| Max d-c output current = 45 ma; voltage drop: 10 volts at 60 ma d-c | | | | | | | | | | | |
| Class A Amplifier | 170 | 140 | $R_k = 82$ | 74† | 3.9† | 33,000 | 4,900 | — | 2,500 | 4.0 | 6BY11■ |
| Avg. Char. | 150 | 100 | $R_k = 180$ | 2.8 | 3.4 | 110,000 | 2,500 | — | ($E_{c3} = 0$ volts) | — | 6BY11■ |
| TV Damper | Max d-c output current $\diamond = 200$ ma; max peak inverse voltage $\diamond = 4,500$ volts; max peak current $\diamond = 1,200$ ma | | | | | | | | | | 6BZ3■ |
| Class A Amplifier | 125 | 125 | $R_k = 56$ | 14 | 3.6 | 260,000 | 8,000 | — | — | — | 6BZ6 |
| | 125 | 125 | 4.5 | — | — | — | 700 | — | — | — | 6BZ6 |
| Class A Amplifier \blacklozenge | 150 | — | $R_k = 220$ | 10 | — | 5,300 | 6,800 | 36 | — | — | 6BZ7 |
| Class A Amplifier \blacklozenge | 125 | — | $R_k = 100$ | 10 | — | 5,600 | 8,000 | 45 | — | — | 6BZ8 |
| Class A Amplifier | 250 | — | 8.5 | 10.5 | — | 7,700 | 2,200 | 17 | — | — | 6C4 |
| Class C Amplifier | 100 | — | 0 | 11.8 | — | 6,250 | 3,100 | 19.5 | — | — | 6C4 |
| Class C Amplifier | 300 | — | 27 | 25 | — | — | — | — | — | 5.5 | 6C4 |
| Class A Amplifier | 250 | — | 8.0 | 8.0 | — | 10,000 | 2,000 | 20 | — | — | 6C5 6C5-GT |
| Class A Amplifier | 250 | 100 | 3.0 | 2.0 | 0.5 | 1,000,000 | 1,225 | — | — | — | 6C6 |
| Class A Amplifier | 250 | — | 9.0 | 5.5 | — | 16,000 | 1,250 | 20 | — | — | 6C7 |
| Class A Amplifier \blacklozenge | 250 | — | 4.5 | 3.2 | — | 22,500 | 1,600 | 36 | — | — | 6C8-G |
| Class A Amplifier \blacklozenge | 125 | 80 | 1.0 | 10 | 1.5 | 100,000 | 8,000 | — | — | — | 6C9 |
| Class A Amplifier \blacklozenge | 250 | — | 2.0 | 1.2 | — | 62,500 | 1,600 | 100 | — | — | 6C10†■ |
| | 100 | — | 1.0 | 0.5 | — | 80,000 | 1,250 | 100 | — | — | 6C10†■ |
| Full-Wave Rectifier | Max d-c output current = 150 ma; max peak inverse voltage = 1,000 volts; max peak current per plate = 450 ma | | | | | | | | | | 6CA4 |
| Class A Amplifier | 125 110 | 125 110 | 4.5 4.0 | 37† 32† | 4.0† 3.5† | 15,000 16,000 | 9,200 8,100 | — | 4,500 3,500 | 1.5 1.1 | 6CA5 |
| Class A Amplifier | 250 | 250 | 13.5 | 100† | 15† | 15,000 | 11,000 | — | 2,000 | 11 | 6CA7 |
| Avg. Char. | 200 | 120 | $R_k = 65$ | 27.5 | 4.9 | 490,000 | 21,200 | — | — | — | 6CA11■ |
| Avg. Char. | 200 | — | $R_k = 270$ | 7.1 | — | 10,000 | 6,300 | 63 | — | — | 6CA11■ |
| Avg. Char. | 200 | — | $R_k = 270$ | 7.1 | — | 12,400 | 5,500 | 69 | — | — | 6CA11■ |
| Horizontal Amplifier | 175 | 175 | 30 | 90 | 6.0 | 5,000 | 8,800 | — | — | — | 6CB5 |
| Max positive pulse plate voltage $\square = 6,800$ volts; max screen dissipation = 3.6 watts; max d-c plate current = 200 ma | | | | | | | | | | | |
| Horizontal Amplifier | 175 75 | 175 150 | 30 0 | 90 460 | 6.0 42 | 5,000 | 8,800 | — | — | — | 6CB5-A |
| Max positive pulse plate voltage $\diamond = 6,800$ volts; max screen dissipation $\diamond = 4.0$ watts; max d-c cathode current $\diamond = 240$ ma | | | | | | | | | | | |
| Class A Amplifier | 125 | 125 | $R_k = 56$ | 13 | 3.7 | 280,000 | 8,000 | — | — | — | 6CB6 |
| | 125 | 125 | 3.0 | 2.8 | — | — | — | — | — | — | 6CB6-A† |
| TV Damper | Max d-c output current $\diamond = 350$ ma; max peak inverse voltage $\diamond = 6,000$ volts; max peak current $\diamond = 1,500$ ma | | | | | | | | | | 6CD3■ |
| Horizontal Amplifier | 175 60 | 175 100 | 30 0 | 75 230 | 5.5 21 | 7,200 | 7,700 | — | — | — | 6CD6-G |
| Max positive pulse plate voltage $\square = 6,600$ volts; max screen dissipation = 3.0 watts; max d-c cathode current = 200 ma | | | | | | | | | | | |

Metal tubes are shown in bold-face type, miniature tubes in italics.

‡ G3 and G5 are screen. G4 is signal-input grid.

♥ G2 and G4 are screen. G3 is signal-input grid.

1, 2, 3, etc. indicate tube sections.

‡ Maximum screen dissipation appears immediately below the screen voltage.

† Heater warm-up time controlled.

| Tube Type | Classification by Construction | Base Connections | Out-line Dwg | Fila-ment Volts | Fila-ment Amp | Max Plate Watts | Max Plate Volts | Max Screen Volts and Watts | Capacitance in Picofarads | | |
|-----------|----------------------------------|------------------|---------------------|-----------------|---------------|-----------------|--|----------------------------|---|------------------|------------------|
| | | | | | | | | | Input | Out-put | Grid-plate |
| 6CD6-GA | Beam Power Amplifier | 5BT | 12-21 | 6.3 | 2.5 | 20 | 700 | 175 3.0 | 22▲ | 8.5▲ | 1.1▲ |
| 6CE3■ | Half-Wave, High-Vacuum Rectifier | 12GK | 9-62 | 6.3 | 2.5 | — | Tube Voltage Drop: 20 volts at 680 ma d-c | | | | |
| 6CE6¶ | Sharp-Cutoff RF Pentode | 7BD | 5-2 | 6.3 | 0.3 | 2.0 | 300 | 150 0.5 | 6.5▲ | 1.9▲ | 0.03♣ |
| 6CF6 | Sharp-Cutoff RF Pentode | 7CM | 5-2 | 6.3 | 0.3 | 2.3◆ | 330◆ | 330◆ 0.55◆ | 6.5 | 3.0 | 0.015♣ |
| 6CG3■ | Half-Wave, High-Vacuum Rectifier | 12HF | 9-62 | 6.3 | 1.8 | 6.5◆ | Tube Voltage Drop: 25 volts at 700 ma d-c | | | | |
| 6CG6 | Remote-Cutoff Pentode | 7BK | 5-2 | 6.3 | 0.3 | 4.0 | 300 | 150 0.75 | 5.0 | 5.0 | 0.008♣ |
| 6CG7¶ | Medium- μ Twin Triode | 9AJ | 6-3 | 6.3 | 0.6 | 4.0◆◆ 5.7◆◆ | 330◆ | — | 2.3▲ | 2.2▲ | 4.0▲ |
| 6CG8 | Triode-Pentode | 9GF | 6-2 | 6.3 | 0.45 | 2.3◆ | 275◆ | 275◆◆ 0.45◆ | Pentode Section | | |
| 6CG8-A¶ | | | | | | 1.7◆ | 275◆ | — | Triode Section | | |
| 6CH3 | Half-Wave, High-Vacuum Rectifier | 9HP | 9-86 | 6.3 | 2.5 | 11◆ | Tube Voltage Drop: 20 volts at 680 ma d-c | | | | |
| 6CH7 | High-Frequency Twin Triode | 9FC | 6-2 | 6.3 | 0.4 | 2.0♣ | 250 | — | 2.4 ₁ | 0.8 ₁ | 1.1 ₁ |
| 6CH8 | Triode Pentode | 9FT | 6-2 | 6.3 | 0.45 | 2.0 | 300 | 300◆ 0.5 | Pentode Section | | |
| | | | | | | 2.6 | 300 | — | Triode Section | | |
| 6CJ3 | Half-Wave High-Vacuum Rectifier | 9SD | 9-111 or 9-87 | 6.3 | 1.8 | 6.5 | Tube Voltage Drop: 25 volts at 700 ma d-c | | | | |
| 6CK3 | Half-Wave, High-Vacuum Rectifier | 9HP | T-X or 9-86 | 6.3 | 1.2 | 6.5◆ | Tube Voltage Drop: 16 volts at 350 ma d-c | | | | |
| 6CK4 | Low- μ Triode | 8JB | 9-43 | 6.3 | 1.25 | 12◆ | 550◆ | — | 8.0▲ | 1.8▲ | 6.5▲ |
| 6CL3 | Half-Wave, High-Vacuum Rectifier | 9HP | T-X or 9-86 | 6.3 | 1.2 | 8.5◆ | Tube Voltage Drop: 16 volts at 350 ma d-c | | | | |
| 6CL5 | Beam Power Amplifier | 8GD | 12-21 | 6.3 | 2.5 | 25 | 700 | 200 4.0 | 20▲ | 11.5▲ | 0.7▲ |
| 6CL6 | Power Amplifier Pentode | 9BV | 6-3 | 6.3 | 0.65 | 7.5 | 300 | 150 1.7 | 11▲ | 5.5▲ | 0.12♣▲ |
| 6CL8¶ | Triode-Tetrode | 9FX | 6-2 | 6.3 | 0.45 | 3.0◆ | 330◆ | 330◆◆ 0.55◆ | Tetrode Section | | |
| | | | | | | 2.5◆ | 330◆ | — | Triode Section | | |
| 6CL8-A¶ | Triode-Tetrode | 9FX | 6-2 | 6.3 | 0.45 | 3.0◆ | 330◆ | 330◆◆ 0.55◆ | Tetrode Section | | |
| | | | | | | 2.5◆ | 330◆ | — | Triode Section | | |
| 6CM3 | Half-Wave, High-Vacuum Rectifier | 9HP | T-X | 6.3 | 2.4 | 12◆ | Tube Voltage Drop: 10 volts at 350 ma d-c | | | | |
| 6CM6 | Beam Power Amplifier | 9CK | 6-3 | 6.3 | 0.45 | 12 | 315 | 285 2.0 | Pentode Connection | | |
| | | | | | | 9.0 | 315 | — | Triode (G ₂ & P tied) or Pentode Connection | | |
| | | | | | | 8.0 | 315 | 285 2.0 | | | |

■ Compactron.

‡ Plate-to-plate.

◎ Subminiature type.

⊕ Total for all similar sections.

† Zero signal.

♣ Maximum.

▲ Without external shield.

⊖ Absolute maximum rating.

♠ Per section.

‡ Supply voltage.

◆ Design maximum rating.

Conversion transconductance.

● See X-Radiation Warning, page 4.

| Service | Plate Volts | Screen Volts | Neg Grid Volts | Plate Milli-amperes | Screen Milli-amperes | R _p , Ohms | G _m , μmhos | μ Factor | Load for Rated Output, Ohms | Power Output, Watts | Tube Type |
|---|---|-----------------|--------------------------------|---------------------|----------------------|-----------------------|-------------------------|---------------|-----------------------------|---------------------|------------------|
| Horizontal Amplifier | 175 60 | 175 100 | 30 0 | 75 230 | 5.5 21 | 7,200 | 7,700 | — | — | — | 6CD6-GA |
| | Max positive pulse plate voltage ⊠ = 7,000 volts; max screen dissipation = 3.0 watts; max d-c cathode current = 200 ma | | | | | | | | | | |
| TV Dampener | Max d-c output current ⊕ = 350 ma; max peak inverse voltage ⊕ = 6,000 volts; max peak current ⊕ = 1,500 ma | | | | | | | | | | 6CE3 ■ |
| Class A Amplifier | 125 | 125 | 1.0 | 11 | 2.8 | 300,000 | 7,600 | — | — | — | 6CE5 ¶ |
| Class A Amplifier | 125 | 125 | R _k = 56 | 12.5 | 3.7 | 300,000 | 7,800 | — | — | — | 6CF6 |
| | 125 | 125 | 3.0 | 2.2 | — | — | — | — | — | — | |
| TV Dampener | Max d-c output current ⊕ = 350 ma; max peak inverse voltage ⊕ = 5,000 volts; max peak current ⊕ = 2,100 ma | | | | | | | | | | 6CG3 ■ |
| Class A Amplifier | 250 | 150 | 8.0 | 9.0 | 2.3 | 720,000 | 2,000 | — | — | — | 6CG6 |
| Class A Amplifier ♠ | 250 250 90 | — — — | 8.0 12.5 0 | 9.0 1.3 10 | — — — | 7,700 — 6,700 | 2,600 — 3,000 | 20 — 20 | — — — | — — — | 6CG7 ¶ |
| Class A Amplifier Class A Amplifier | 125 125 | 125 — | 1.0 1.0 | 9.0 12 | 2.2 — | 300,000 6,000 | 5,500 6,500 | — 40 | — — | — — | 6CG8 6CG8-A ¶ |
| TV Dampener | Max d-c output current ⊕ = 350 ma; max peak inverse voltage ⊕ = 6,000 volts; max peak current ⊕ = 1,500 ma | | | | | | | | | | 6CH3 |
| Class A Amplifier ♠ | 150 | — | R _k = 220 | 10 | — | 5,300 | 6,800 | 36 | — | — | 6CH7 |
| Class A Amplifier Class A Amplifier | 200 200 | 150 — | R _k = 180 6.0 | 9.5 13 | 2.8 — | 300,000 5,750 | 6,200 3,300 | — 19 | — — | — — | 6CH8 |
| TV Dampener | Max d-c output current ⊕ = 350 ma; max peak inverse voltage ⊕ = 5,500 volts; max peak current ⊕ = 2,100 ma | | | | | | | | | | 6CJ3 |
| TV Dampener | Max d-c output current ⊕ = 250 ma; max peak inverse voltage ⊕ = 5,200 volts; max peak current ⊕ = 1,200 ma | | | | | | | | | | 6CK3 |
| Vertical Amplifier | 250 100 | — — | 28.0 0 | 40 125 | — — | 1,200 | 5,500 | 6.6 | — | — | 6CK4 |
| | Max positive pulse plate voltage ⊠ = 2,000 volts; max d-c cathode current = 100 ma | | | | | | | | | | |
| TV Dampener | Max d-c output current ⊕ = 250 ma; max peak inverse voltage ⊕ = 5,500 volts; max peak current ⊕ = 1,300 ma | | | | | | | | | | 6CL3 |
| Horizontal Amplifier | 175 80 | 175 100 | 40 0 | 90 280 | 7.0 20 | 6,000 | 6,500 | — | — | — | 6CL5 |
| | Max positive pulse plate voltage ⊠ = 7,000 volts; max screen dissipation = 4.0 watts; max d-c cathode current = 240 ma | | | | | | | | | | |
| Class A Amplifier | 250 | 150 | 3.0 | 30 † | 7.0 † | 150,000 | 11,000 | — | 7,500 | 2.8 | 6CL6 |
| Class A Amplifier Class A Amplifier | 125 125 | 125 — | 1.0 1.0 | 12 14 | 4.0 — | 120,000 5,000 | 6,000 8,000 | — 40 | — — | — — | 6CL8 ¶ |
| Class A Amplifier Class A Amplifier | 125 100 125 | 125 100 — | 1.0 0 1.0 | 12 — 14 | 4.0 — — | 200,000 — 5,000 | 6,500 8,200 8,000 | — — 40 | — — — | — — — | 6CL8-A ¶ |
| TV Dampener | Max d-c output current ⊕ = 400 ma; max peak inverse voltage ⊕ = 5,500 volts; max peak current ⊕ = 1,700 ma | | | | | | | | | | 6CM3 |
| Class A Amplifier Vertical Amplifier | 250 | 250 | 12.5 | 45 † | 4.5 † | 50,000 | 4,100 | — | 5,000 | 4.5 | 6CM6 |
| | Max positive pulse plate voltage ⊠ = 2000 volts; max screen dissipation (pentode connection only) = 1.75 watts; max d-c cathode current = 40 ma | | | | | | | | | | |

Metal tubes are shown in bold-face type, miniature tubes in italics.

♠ G3 and G5 are screen. G4 is signal-input grid.

¶ G2 and G4 are screen. G3 is signal-input grid.

1, 2, 3, etc. indicate tube sections.

⊕ Maximum screen dissipation appears immediately below the screen voltage.

¶ Heater warm-up time controlled.

| Tube Type | Classification by Construction | Base Connections | Out-line Dwg | Filament Volts | Filament Amp | Max Plate Watts | Max Plate Volts | Max Screen Volts and Watts * | Capacitance in Picofarads | | |
|-----------|----------------------------------|------------------|--------------|-----------------|----------------|-----------------|---|------------------------------|---|------------------|------------------|
| | | | | | | | | | Input | Out-put | Grid-plate |
| 6CM7† | Double Triode | 9ES | 6-3 | 6.3 | 0.6 | 1.45 Ⓢ | 550 Ⓢ | — | Section 1 (Pins 3, 6, 7) | | |
| | | | | | | 6.0 Ⓢ | 550 Ⓢ | — | Section 2 (Pins 1, 8, 9) | | |
| 6CM8† | Triode-Pentode | 9FZ | 6-2 | 6.3 | 0.45 | 2.0 | 300 | 300 ‡ | Pentode Section | | |
| | | | | | | 1.0 | 300 | 0.5 | Triode Section | | |
| 6CN7† | Duplex-Diode Triode | 9EN | 6-2 | { 6.3 3.15 } | { 0.3 0.6 } | 1.1 Ⓢ | 330 Ⓢ | — | 1.5 ▲ | 0.5 ▲ | 1.8 ▲ |
| 6CQ4 | Half-Wave High-Vacuum Rectifier | 4CG | 9-44 | 6.3 | 1.6 | 6.5 Ⓢ | — | — | Tube Voltage Drop: 25 volts at 250 ma d-c | | |
| 6CQ8† | Triode-Tetrode | 9GE | 6-2 | 6.3 | 0.45 | 3.2 Ⓢ | 330 Ⓢ | 330 Ⓢ | Tetrode Section | | |
| | | | | | | 3.1 Ⓢ | 330 Ⓢ | — | Triode Section | | |
| 6CR6 | Diode Remote-Cutoff Pentode | 7EA | 5-2 | 6.3 | 0.3 | 2.5 | 300 | 150 | — | — | — |
| 6CR8† | Triode-Pentode | 9GJ | 6-2 | 6.3 | 0.45 | 2.3 Ⓢ | 330 Ⓢ | 330 Ⓢ | Pentode Section | | |
| | | | | | | 2.75 Ⓢ | 330 Ⓢ | — | Triode Section | | |
| 6CS5 | Beam Power Amplifier | 9GR | 6-3 | 6.3 | 1.2 | 10 | 300 | 300 ‡ | 15 ▲ | 9.0 ▲ | 0.5 ▲ |
| 6CS6 | Dual-Control Heptode | 7CH ▼ | 5-2 | 6.3 | 0.3 | 1.0 | 300 | 100 | 5.5 | 7.5 | 0.07 ♣ |
| 6CS7† | Double Triode | 9EF | 6-3 | 6.3 | 0.6 | 1.25 | 500 | — | Section 1 (Pins 6, 7, 8) | | |
| | | | | | | 6.5 | 500 | — | Section 2 (Pins 1, 3, 9) | | |
| 6CS8† | Triode-Pentode | 9FZ | 6-2 | 6.3 | 0.45 | 2.3 Ⓢ | 330 Ⓢ | 330 Ⓢ | Pentode Section | | |
| | | | | | | 2.75 Ⓢ | 330 Ⓢ | — | Triode Section | | |
| 6CT3 | Half-Wave, High-Vacuum Rectifier | 9RX | T-X | 6.3 | 1.2 | 4.75 Ⓢ | Tube Voltage Drop: 16 volts at 350 ma d-c | | | | |
| 6CU5 | Beam Power Amplifier | 7CV | 5-3 | 6.3 | 1.2 | 7.0 Ⓢ | 150 Ⓢ | 130 Ⓢ | 13 ▲ | 8.5 ▲ | 0.6 ▲ |
| 6CU6 | Beam Power Amplifier | 6AM | T-X | 6.3 | 1.2 | 11 | 600 ‡ | 200 | 15 ▲ | 7.0 ▲ | 0.6 ▲ |
| 6CU8† | Triode-Pentode | 9GM | 6-2 | 6.3 | 0.45 | 2.3 Ⓢ | 330 Ⓢ | 330 Ⓢ | Pentode Section | | |
| | | | | | | 2.8 Ⓢ | 330 Ⓢ | — | Triode Section | | |
| 6CW4 | High-Mu Triode (Nuvistor) | 12AQ | 4-4 | 6.3 | 0.135 | 1.5 Ⓢ | 135 Ⓢ | — | 4.3 ▲ | 1.8 ▲ | 0.92 ▲ |
| 6CW5 | Power Amplifier Pentode | 9CV | 6-4 | 6.3 | 0.76 | 14 Ⓢ | 275 Ⓢ | 220 | Single Tube | | |
| 6CX7 | Medium-mu Twin Triode | 9FC | 6-2 | 6.3 | 0.4 | 2.0 ♣ | 250 | — | Two Tubes, Push-Pull | | |
| | | | | | | | | | 2.4 ₁ | 1.3 ₁ | 1.2 ₁ |
| 6CX8 | Triode-Pentode | 9DX | 6-3 | 6.3 | 0.75 | 5.0 Ⓢ | 330 Ⓢ | 330 Ⓢ | Pentode Section | | |
| | | | | | | 2.0 Ⓢ | 330 Ⓢ | — | Triode Section | | |

■ Compactron.
† Zero signal.
♣ Per section.

‡ Plate-to-plate.
♣ Maximum.
‡ Supply voltage.

Ⓢ Subminiature type.
▲ Without external shield.
♣ Design maximum rating.

‡ Total for all similar sections.
♣ Absolute maximum rating.
Conversion transconductance.

| Service | Plate Volts | Screen Volts | Neg Grid Volts | Plate Milli-amperes | Screen Milli-amperes | R _p , Ohms | G _m , μmhos | μ Factor | Load for Rated Out-put, Ohms | Power Out-put, Watts | Tube Type |
|---------------------------------|--|--------------|----------------------|---------------------|----------------------|-----------------------|------------------------|------------------------------|------------------------------|----------------------|---------------|
| Vertical Oscillator | 200 | — | 7.0 | 5.0 | — | 10,500 | 2,000 | 21 | — | — | <i>6CM7</i> † |
| Vertical Amplifier | 250 | — | 8.0 | 20 | — | 4,100 | 4,400 | 18 | — | — | |
| | Max d-c cathode current ♦ = 17 ma; Max positive pulse plate voltage ⊕ = 2,200 volts; max d-c cathode current ♦ = 22 ma | | | | | | | | | | |
| Class A Amplifier | 200 | 150 | R _k = 180 | 9.5 | 2.8 | 600,000 | 6,200 | — | — | — | <i>6CM8</i> † |
| Class A Amplifier | 250 | — | 2.0 | 1.8 | — | 50,000 | 2,000 | 100 | — | — | |
| Class A Amplifier | 250 | — | 3.0 | 1.0 | — | 58,000 | 1,200 | 70 | — | — | <i>6CN7</i> † |
| Horizontal Phase Det. | 100 | — | 1.0 | 0.8 | — | 54,000 | 1,300 | 70 | — | — | |
| | Max d-c output current ♦ ⊕ = 5.5 ma; voltage drop ⊕: 5 volts at 20 ma d-c | | | | | | | | | | |
| TV Damper | Max d-c output current ♦ = 190 ma; max peak inverse voltage ♦ = 5,500 volts; max peak current ♦ = 1,200 ma | | | | | | | | | | |
| Class A Amplifier | 125 | 125 | 1.0 | 12 | 4.2 | 140,000 | 5,800 | — | — | — | <i>6CQ4</i> |
| Class A Amplifier | 125 | — | R _k = 56 | 15 | — | 5,000 | 8,000 | 40 | — | — | <i>6CQ8</i> † |
| Class A Amplifier | 250 | 100 | 2.0 | 9.6 | 2.6 | 800,000 | 2,200 | — | — | — | <i>6CR6</i> |
| Class A Amplifier | 125 | 125 | R _k = 56 | 13 | 3.0 | 300,000 | 7,700 | — | — | — | <i>6CR8</i> † |
| Class A Amplifier | 125 | — | 2.0 | 12 | — | 5,500 | 4,000 | 22 | — | — | |
| Class A Amplifier | 200 | 125 | R _k = 180 | 46† | 2.2† | 28,000 | 8,000 | — | 4,000 | 3.8 | <i>6CS5</i> |
| | 110 | 110 | 7.5 | 49† | 4.0† | 13,000 | 8,000 | — | 2,000 | 2.1 | |
| Gated Amplifier | 100 | 30 | 1.0 | 1.0 | 1.3 | 1,000,000 | 1,100 | E _{cs} = 0 volts | — | — | <i>6CS6</i> |
| | 100 | 30 | 0 | 0.8 | 5.5 | 700,000 | — | E _{cs} = -1.0 volts | — | — | |
| | 10 | 30 | 0 | 2.0 | 4.5 | — | — | E _{cs} = 0 volts | — | — | |
| Vertical Oscillator | 250 | — | 8.5 | 10.5 | — | 7,700 | 2,200 | 17 | — | — | <i>6CS7</i> † |
| Vertical Amplifier | 250 | — | 10.5 | 19 | — | 3,450 | 4,500 | 15.5 | — | — | |
| | Max d-c cathode current = 20 ma; Max positive pulse plate voltage ⊕ = 2,200; max d-c cathode current = 30 ma | | | | | | | | | | |
| Class A Amplifier | 125 | 125 | R _k = 56 | 13 | 3.0 | 300,000 | 7,700 | — | — | — | <i>6CS8</i> † |
| Class A Amplifier | 125 | — | 2.0 | 12 | — | 5,500 | 4,000 | 22 | — | — | |
| TV Damper | Max d-c output current ♦ = 250 ma; max peak inverse voltage ♦ = 5,000 volts; max peak current ♦ = 1,200 ma | | | | | | | | | | |
| Class A Amplifier | 120 | 110 | 8.0 | 49† | 4.0† | 10,000 | 7,500 | — | 2,500 | 2.3 | <i>6CU5</i> |
| Horizontal Amplifier | 250 | 150 | 22.5 | 57 | 2.1 | 14,500 | 5,900 | — | — | — | <i>6CU6</i> |
| | 60 | 150 | 0 | 260 | 26 | — | — | — | — | — | |
| | Max positive pulse plate voltage ⊕ = 6000 volts; max screen dissipation = 2.5 watts; max d-c cathode current = 110 ma | | | | | | | | | | |
| Class A Amplifier | 125 | 125 | R _k = 56 | 12 | 3.8 | 170,000 | 7,800 | — | — | — | <i>6CU8</i> † |
| Class A Amplifier | 125 | — | 1.0 | 17 | — | 4,100 | 5,800 | 24 | — | — | |
| Class A Amplifier | 110 | — | R _k = 130 | 7.6 | — | 6,300 | 9,800 | 62 | — | — | <i>6CW4</i> |
| Class A Amplifier | 170 | 170 | 12.5 | 70† | 3.5† | 26,000 | 11,000 | — | 2,400 | 5.6 | <i>6CW5</i> |
| Class AB ₁ Amplifier | 250 | 200 | 18.5 | 91† | 4.0† | — | — | — | 3,000† | 25 | |
| Class A Amplifier ♦ | 150 | — | R _k = 220 | 9.0 | — | 6,100 | 6,400 | 39 | — | — | <i>6CX7</i> |
| Class A Amplifier | 200 | 125 | R _k = 68 | 24 | 5.2 | 70,000 | 10,000 | — | — | — | <i>6CX8</i> |
| | 40 | 125 | 0 | 40 | 15.5 | — | — | — | — | — | |
| Class A Amplifier | 150 | — | R _k = 150 | 9.2 | — | 8,700 | 4,600 | 40 | — | — | |

Metal tubes are shown in bold-face type, miniature tubes in italics.

♦ G3 and G5 are screen. G4 is signal-input grid.

‡ Maximum screen dissipation appears immediately below the screen voltage.

♥ G2 and G4 are screen. G3 is signal-input grid.

† Heater warm-up time controlled.

1, 2, 3, etc. indicate tube sections.

| Tube Type | Classification by Construction | Base Connections | Out-line Dwg | Filament Volts | Filament Amp | Max Plate Watts | Max Plate Volts | Max Screen Volts and Watts | Capacitance in Picofarads | | |
|-----------|---------------------------------|------------------|--------------------|----------------|--------------|-----------------|-----------------|--|---|--------|--------------|
| | | | | | | | | | Input | Output | Grid-plate |
| 6CY6 | Sharp-Cutoff RF Tetrode | 7EW | 5-2 | 6.3 | 0.2 | 2.0◆ | 180◆ | 180◆ 0.5◆ | 4.5 | 3.0 | 0.03 |
| 6CY7 | Double Triode | 9LG | 6-3 | 6.3 | 0.75 | 1.0◆ 5.5◆ | 350◆ 350◆ | — | Section 1 (Pins 6, 7, 8) Section 2 (Pins 1, 3, 9) | | |
| 6CZ6† | Beam Power Amplifier | 9HN | 6-4 | 6.3 | 0.45 | 10◆ | 350◆ | 315◆ 2.2◆ | 9.0▲ | 6.0▲ | 0.04▲ ♣ |
| 6D4 | Thyratron | 5AY | 5-2 | 6.3 | 0.25 | — | — | Tube Voltage Drop: 16 v at 25 ma d-c | | | |
| 6D6 | Remote-Cutoff RF Pentode | 6F | 12-2 | 6.3 | 0.3 | 2.25 | 300 | 300◆ 0.25 | 4.7▲ | 6.5▲ | 0.007 ♣ |
| 6D7 | Sharp-Cutoff RF Pentode | 7H | 12-2 | 6.3 | 0.3 | — | 300 | 125 | 5.2▲ | 6.8▲ | 0.01▲ ♣ |
| 6D8-G | Pentagrid Converter | 8A♠ | 12-8 | 6.3 | 0.15 | 1.0 | 300 | 100 0.3 | Osc I _{ct} = 0.4 ma R _{gt} = 50,000 ohms | | |
| 6D10■ | Triple-Triode | 12BY | 9-56 | 6.3 | 0.45 | 2.0◆ ♣ | 330◆ | — | 2.8▲ | 1.4▲ | 1.5▲ |
| 6DA4 | Half-Wave High-Vacuum Rectifier | 4CG | 9-11 or 9-41 | 6.3 | 1.2 | 5.5◆ | — | — | — | — | — |
| 6DA4-A | Half-Wave High-Vacuum Rectifier | 4CG | 9-41 | 6.3 | 1.2 | 8.0◆ | — | — | Tube Voltage Drop: 30 volts at 340 ma d-c | | |
| 6DA6 | Electron-Ray Indicator | 9DB | 6-3 | 6.3 | 0.3 | 0.2 | 300 | — | Max Target Voltage = 300 Min Target Voltage = 165 | | |
| 6DA7 | Double Triode | 9EF | 6-3 | 6.3 | 1.0 | 2.0 6.0 | 300 500 | — | Section 1 (Pins 6, 7, 8) Section 2 (Pins 1, 3, 9) | | |
| 6DB6 | Beam Power Amplifier | 9GR | T-X | 6.3 | 1.2 | 10 | 300 | 150 1.25 | 13▲ | 8.0▲ | 0.2▲ |
| 6DB6 | Dual-Control Pentode | 7CM | 5-2 | 6.3 | 0.3 | 3.0 | 300 | 300◆ 1.0 | 6.0▲ | 5.0▲ | 0.0035 ♣ |
| 6DC6 | Semi-Remote-Cutoff Pentode | 7CM | 5-2 | 6.3 | 0.3 | 2.0 | 300 | 300◆ 0.5 | 6.5▲ | 2.0▲ | 0.02 ♣ |
| 6DC8 | Duplex-Diode-Pentode | 9HE | 6-3 | 6.3 | 0.3 | 2.25 | 300 | 125 0.45 | 5.0▲ | 5.2▲ | 0.0025 ▲♣ |
| 6DE4 | Half-Wave High-Vacuum Rectifier | 4CG | 9-44 | 6.3 | 1.6 | 6.5◆ | — | Tube Voltage Drop: 32 volts at 350 ma d-c | | | |
| 6DE6 | Sharp-Cutoff RF Pentode | 7CM | 5-2 | 6.3 | 0.3 | 2.3◆ | 330◆ | 330◆ 0.55◆ | 6.5 | 3.0 | 0.015 ♣ |
| 6DE7 | Double Triode | 9HF | 6-3 | 6.3 | 0.90 | 1.5◆ 7.0◆ | 330◆ 275◆ | — | Section 1 (Pins 6, 7, 8) Section 2 (Pins 1, 2, 3, 9) | | |

■ Compactron.
† Zero signal.
♣ Per section.

‡ Plate-to-plate.
♠ Maximum.
♣ Supply voltage.

⊙ Subminiature type.
▲ Without external shield.
◆ Design maximum rating.

⊙ Total for all similar sections.
▣ Absolute maximum rating.
Conversion transconductance.

| Service | Plate Volts | Screen Volts | Neg Grid Volts | Plate Milli-amperes | Screen Milli-amperes | R _p , Ohms | G _m , μmhos | μ Factor | Load for Rated Output, Ohms | Power Output, Watts | Tube Type |
|---------------------|---|--------------|--|---------------------|----------------------|-----------------------|------------------------|--|-----------------------------|---------------------|-----------|
| Class A Amplifier | 125 | 80 | 1.0 | 10 | 1.5 | 100,000 | 8,000 | — | — | — | 6CY6 |
| Vertical Oscillator | 250 | — | 3.0 | 1.2 | — | 52,000 | 1,300 | 68 | — | — | 6CY7 |
| Vertical Amplifier | 150 | — | R _k =620 | 30 | — | 920 | 5,400 | 5.0 | — | — | 6CZ5† |
| Vertical Amplifier | 60 | — | 0 | 80 | — | — | — | — | — | — | |
| Vertical Amplifier | 250 | 250 | 14 | 46 | 4.6 | 73,000 | 4,800 | — | — | — | 6D4 |
| Relay Control | 75 | 250 | 0 | 130 | 16 | — | — | — | — | — | |
| Class A Amplifier | 250 | 100 | 3.0 | 8.2 | 2.0 | 800,000 | 1,600 | — | — | — | 6D6 |
| Class A Amplifier | 250 | 100 | 3.0 | 2.0 | 0.5 | 1,000,000 | 1,225 | — | — | — | 6D7 |
| Converter | 250 | 100 | 3.0 | 3.5 | 2.6 | 400,000 | 550 # | E _{cs} (Osc Plate) = 250 thru 20,000 ohms I _{cs} = 4.3 ma | — | — | 6D8-G |
| Class A Amplifier ♦ | 125 | — | 1.0 | 4.2 | — | 13,600 | 4,200 | 57 | — | — | 6D10■ |
| TV Damper | Max d-c output current ♦ = 155 ma; max peak inverse voltage ♦ = 4,400 volts; max peak current ♦ = 900 ma | | | | | | | | | | 6DA4 |
| TV Damper | Max d-c output current ♦ = 185 ma; max peak inverse voltage ♦ = 5,000 volts max peak current ♦ = 900 ma | | | | | | | | | | 6DA4-A |
| Tuning Indicator | Plate voltage = 250 thru 0.5 meg; Target voltage = 250; (E _c = -4 volts, shadow angle = 5°) (E _c = -1 volt, shadow angle = 65°, Plate current = 0.37 ma, Target current = 2.0 ma) | | | | | | | | | | 6DA5 |
| Vertical Oscillator | 250 | — | 8.0 | 9.0 | — | 7,700 | 2,600 | 20 | — | — | 6DA7 |
| Vertical Amplifier | 150 | — | 17.5 | 4.0 | — | 1,100 | 5,700 | 6.3 | — | — | 6DB5 |
| Vertical Amplifier | 60 | — | 0 | 80 | — | — | — | — | — | — | |
| Class A Amplifier | 200 | 125 | R _k = 180 | 46† | 2.2† | 28,000 | 8,000 | — | 4,900 | 3.8 | 6DB6 |
| Vertical Amplifier | 110 | 110 | 7.5 | 49† | 4.0† | 13,000 | 8,000 | — | 2,000 | 2.1 | |
| Class A Amplifier | 150 | 150 | 1.0 | 5.8 | 6.6 | 50,000 | 2,050 | E _{cs} = -3.0 volts | — | — | 6DC6 |
| Class A Amplifier | 200 | 150 | R _k = 180 | 9.0 | 3.0 | 500,000 | 5,500 | — | — | — | 6DC8 |
| Class A Amplifier | 250 | 100 | E _{cs} = 0 E _{ct} = 2.0 | 19.0 | 2.7 | 1,000,000 | 3,800 | — | — | — | AM Det. |
| TV Damper | Max d-c output current ♦ = 0.8 ma | | | | | | | | | | 6DE4 |
| Class A Amplifier | 125 | 125 | R _k = 56 | 15.5 | 4.2 | 250,000 | 8,000 | — | — | — | 6DE6 |
| Vertical Oscillator | 125 | 125 | 5.5 | — | — | — | 700 | — | — | — | 6DE7 |
| Vertical Oscillator | 250 | — | 11 | 5.5 | — | 8,750 | 2,000 | 17.5 | — | — | |
| Vertical Amplifier | 150 | — | 17.5 | 35 | — | 925 | 6,500 | 6.0 | — | — | 6DE7 |
| Vertical Amplifier | 60 | — | 0 | 80 | — | — | — | — | — | — | |
| | Max positive pulse plate voltage ♦ = 1,500 volts; max d-c cathode current ♦ = 50 ma | | | | | | | | | | |

Metal tubes are shown in bold-face type, miniature tubes in italics.

♦ G3 and G5 are screen. G4 is signal-input grid.

▼ G2 and G4 are screen. G3 is signal-input grid.

1, 2, 3, etc. indicate tube sections.

■ Maximum screen dissipation appears immediately below the screen voltage.

† Heater warm-up time controlled.

| Tube Type | Classification by Construction | Base Connections | Out-line Dwg | Filament Volts | Filament Amp | Max Plate Watts | Max Plate Volts | Max Screen Volts and Watts | Capacitance in Picofarads | | |
|-----------|---------------------------------|------------------|--------------------|----------------|--------------|-----------------|-----------------|--|---------------------------|-----------------------------|------------|
| | | | | | | | | | Input | Output | Grid-plate |
| 6DG6-GT | Beam Power Amplifier | 7S | 9-11 or 9-41 | 6.3 | 1.2 | 10 | 200 | 125 1.25 | — | — | — |
| 6DJ8 | Twin Triode | 9DE | 6-2 | 6.3 | 0.365 | 1.8 | 130 | — | — | — | — |
| 6DK3 | Half-Wave High-Vacuum Rectifier | 9SG | 9-117 | 6.3 | 1.8 | 9.0 | ◆ | Tube Voltage Drop: 16 volts at 400 ma d-c 25 volts at 800 ma d-c | — | — | — |
| 6DK6 | Sharp-Cutoff Pentode | 7CM | 5-2 | 6.3 | 0.3 | 2.3 | ◆ | 330 ◆ 330 ◆ 0.55 ◆ | 6.3 ▲ | 1.9 ▲ | 0.025 ▲ |
| 6DL3 | Half-Wave High-Vacuum Rectifier | 9GD | 9-135 | 6.3 | 2.3 | 11 | ◆ | Tube Voltage Drop: 25 volts at 800 ma d-c | — | — | — |
| 6DL4 | Triode | 9NY | T-X | 6.3 | 0.165 | 2.0 | ◆ | 230 — | 3.8 | 0.055 | 1.7 |
| 6DM4 | Half-Wave High-Vacuum Rectifier | 4CG | 9-44 | 6.3 | 1.2 | 6.5 | ◆ | Tube Voltage Drop: 35 volts at 400 ma d-c | — | — | — |
| 6DM4A | Half-Wave High-Vacuum Rectifier | 4CG | 9-44 | 6.3 | 1.2 | 6.5 | ◆ | Tube Voltage Drop: 35 volts at 400 ma d-c | — | — | — |
| 6DN3 | Half-Wave High-Vacuum Rectifier | 9HP | 9-111 | 6.3 | 2.4 | 9.0 | ◆ | Tube Voltage Drop: 14 volts at 350 ma d-c | — | — | — |
| 6DN6 | Beam Power Amplifier | 5BT | 12-21 | 6.3 | 2.5 | 15 | ◆ | 700 ◆ 175 3.0 | 22 ▲ | 11.5 ▲ | 0.8 ▲ |
| 6DN7 | Double Triode | 8BD | 9-5 | 6.3 | 0.9 | 1.0 | ◆ | 350 ◆ 10 ◆ | — | — | — |
| | | | | | | | | | Section 1 (Pins 4, 5, 6) | Section 2 (Pins 1, 2, 3) | |
| 6DQ3 ■ | Half-Wave High-Vacuum Rectifier | 12HF | 9-62 | 6.3 | 1.8 | 9.0 | ◆ | Tube Voltage Drop: 16 volts at 400 ma d-c 25 volts at 800 ma d-c | — | — | — |
| 6DQ3-A ■ | Half-Wave High-Vacuum Rectifier | 12HF | 9-62 | 6.3 | 1.8 | 10 | ◆ | Tube Voltage Drop: 17 volts at 450 ma d-c 27 volts at 900 ma d-c | — | — | — |
| 6DQ4 | Half-Wave High-Vacuum Rectifier | 4CG | 9-43 | 6.3 | 1.2 | 6.0 | ◆ | Tube Voltage Drop: 32 volts at 250 ma d-c | — | — | — |
| 6DQ5 | Beam Power Amplifier | 8JC | 12-21 | 6.3 | 2.5 | 24 | ◆ | 990 ◆ 190 3.2 ◆ | 23 ▲ | 11 ▲ | 0.5 ▲ |
| 6DQ6 | Beam Power Amplifier | 6AM | T-X | 6.3 | 1.2 | 15 | ◆ | 550 ◆ 175 2.5 | 15 ▲ | 7.0 ▲ | 0.55 ▲ |
| 6DQ6-A | Beam Power Amplifier | 6AM | 12-51 | 6.3 | 1.2 | 18 | ◆ | 770 ◆ 220 3.6 ◆ | 15 ▲ | 7.0 ▲ | 0.5 ▲ |
| 6DQ6-B | Beam Power Amplifier | 6AM | 12-51 | 6.3 | 1.2 | 18 | ◆ | 770 ◆ 220 3.6 ◆ | 15 ▲ | 7.0 ▲ | 0.5 ▲ |
| 6DR4 | High-Mu Triode | 6BG | 5-2 | 6.3 | 0.15 | 1.2 | ◆ | 330 ◆ — | 1.6 ▲ | 0.46 ▲ | 1.7 ▲ |
| 6DR7 | Double Triode | 9HF | 6-3 | 6.3 | 0.9 | 1.0 | ◆ | 330 ◆ — | — | — | — |
| | | | | | | | | | Section 1 (Pins 6, 7, 8) | Section 2 (Pins 1, 2, 3, 9) | |
| | | | | | | | | | 7.0 ◆ | 275 ◆ | |
| 6DS4 | High-Mu Triode (Nuvistor) | 12AQ | 4-4 | 6.3 | 0.135 | 1.5 | ◆ | 135 ◆ — | 4.3 ▲ | 1.8 ▲ | 0.92 ▲ |
| 6DS5 | Beam Power Amplifier | 7BZ | 5-3 | 6.3 | 0.8 | 9.0 | ◆ | 275 ◆ 275 2.2 ◆ | 9.5 ▲ | 6.3 ▲ | 0.19 ▲ |
| 6DT3 ■ | Half-Wave High-Vacuum Rectifier | 12HF | 9-62 | 6.3 | 2.4 | 9.0 | ◆ | Tube Voltage Drop: 14 volts at 350 ma d-c | — | — | — |
| 6DT4 | Half-Wave High-Vacuum Rectifier | 4CG | 9-33 | 6.3 | 1.2 | 7.5 | ◆ | Tube Voltage Drop: 28 volts at 350 ma d-c | — | — | — |
| 6DT5 | Beam Power Pentode | 9HN | 6-3 | 6.3 | 1.2 | 9.0 | ◆ | 315 ◆ 285 2.0 ◆ | 12.5 ▲ | 4.9 ▲ | 0.57 ▲ |

■ Compactron.
† Zero signal.
◆ Per section.

‡ Plate-to-plate.
◆ Maximum.
◆ Supply voltage.

◆ Subminiature type.
▲ Without external shield.
◆ Design maximum rating.

◆ Total for all similar sections.
◆ Absolute maximum rating.
Conversion transconductance.

| Service | Plate Volts | Screen Volts | Neg Grid Volts | Plate Milli- am- peres | Screen Milli- am- peres | R _p , Ohms | G _m , μmhos | μ Fac- tor | Load for Rated Out- put, Ohms | Power Out- put, Watts | Tube Type |
|--|---|-----------------|-------------------------|---------------------------------|----------------------------------|--------------------------|---------------------------|------------------|--|--------------------------------|--------------|
| Class A Amplifier | 200 | 125 | R _k = 180 | 46† | 2.2† | 28,000 | 8,000 | — | 4,000 | 3.8 | 6DG6-GT |
| | 110 | 110 | 7.5 | 49† | 4.0† | 13,000 | 8,000 | — | 2,000 | 2.1 | |
| Class A Amplifier ♦ | 90 | — | 1.3 | 15 | — | — | 12,500 | 33 | — | — | 6DJ8 |
| TV Damper | Max d-c output current ♦ = 400 ma; max peak inverse voltage ♦ = 6,500 volts; max peak current ♦ = 1,200 ma. | | | | | | | | | | 6DK3 |
| Class A Amplifier | 125 | 125 | R _k = 56 | 12 | 3.8 | 350,000 | 9,800 | — | — | — | 6DK6 |
| TV Damper | Max d-c output current ♦ = 400 ma; max peak inverse voltage ♦ = 6,500 volts; max peak current ♦ = 1,800 ma. | | | | | | | | | | 6DL3 |
| Class A Amplifier | 160 | — | R _k = 100 | 12.5 | — | — | 13,500 | 65 | — | — | 6DL4 |
| TV Damper | Max d-c output current ♦ = 175 ma; max peak inverse voltage ♦ = 5,000 volts; max peak current ♦ = 1,100 ma | | | | | | | | | | 6DM4 |
| TV Damper | Max d-c output current ♦ = 200 ma; max peak inverse voltage ♦ = 5,000 volts; max peak current ♦ = 1,200 ma | | | | | | | | | | 6DM4A |
| TV Damper | Max d-c output current ♦ = 350 ma; max peak inverse voltage ♦ = 5,500 volts; max peak current ♦ = 2,100 ma. | | | | | | | | | | 6DN3 |
| Horizontal Amplifier | 125 | 125 | 18 | 70 | 6.3 | 4,000 | 9,000 | — | — | — | 6DN6 |
| | 50 | 100 | 0 | 240 | 30 | — | — | — | — | — | |
| Max positive pulse plate voltage □ = 6,600 volts; max screen dissipation = 3.0 watts; max d-c cathode current = 200 ma | | | | | | | | | | | |
| Vertical Oscillator | 250 | — | 8.0 | 8.0 | — | 9,000 | 2,500 | 22.5 | — | — | 6DN7 |
| Vertical Amplifier | 250 | — | 9.5 | 41 | — | 2,000 | 7,700 | 15.4 | — | — | 6DQ3 ■ |
| | 150 | — | 0 | 68 | — | — | — | — | — | — | |
| Max positive pulse plate voltage ♦ = 2,500; max d-c cathode current ♦ = 50 ma | | | | | | | | | | | |
| TV Damper | Max d-c output current ♦ = 400 ma; max peak inverse voltage ♦ = 6,500 volts; max peak current ♦ = 1,200 ma. | | | | | | | | | | 6DQ3 ■ |
| TV Damper | Max d-c output current ♦ = 450 ma; max peak inverse voltage ♦ = 6,500 volts; max peak current ♦ = 1,200 ma. | | | | | | | | | | 6DQ3-A ■ |
| TV Damper | Max d-c output current ♦ = 175 ma; max peak inverse voltage ♦ = 5,500 volts; max peak current ♦ = 1,000 ma | | | | | | | | | | 6DQ4 |
| Horizontal Amplifier | 175 | 125 | 25 | 110 | 5.0 | 5,500 | 10,500 | — | — | — | 6DQ5 |
| | 70 | 125 | 0 | 550 | 42 | — | — | — | — | — | |
| Max positive pulse plate voltage ♦ = 6,500; max d-c cathode current ♦ = 315 ma | | | | | | | | | | | |
| Horizontal Amplifier | 250 | 150 | 22.5 | 75 | 2.4 | 20,000 | 6,000 | — | — | — | 6DQ6 |
| | 60 | 150 | 0 | 300 | 27 | — | — | — | — | — | |
| Max positive pulse plate voltage □ = 6,000 volts; max screen dissipation = 2.5 watts; max d-c cathode current = 120 ma | | | | | | | | | | | |
| Horizontal Amplifier | 250 | 150 | 22.5 | 55 | 1.5 | 20,000 | 6,600 | — | — | — | 6DQ6-A |
| | 60 | 150 | 0 | 315 | 25 | — | — | — | — | — | |
| Max positive pulse plate voltage ♦ = 6,000 volts; max screen dissipation ♦ = 3.6 watts; max d-c cathode current ♦ = 155 ma | | | | | | | | | | | |
| Horizontal Amplifier | 250 | 150 | 22.5 | 65 | 1.8 | 18,000 | 7,300 | — | — | — | 6DQ6-B |
| | 60 | 150 | 0 | 345 | 27 | — | — | — | — | — | |
| Max positive pulse plate voltage ♦ = 6,500 volts; max d-c cathode current ♦ = 175 ma | | | | | | | | | | | |
| Class A Amplifier | 250 | — | 2.0 | 1.2 | — | 62,500 | 1,600 | 100 | — | — | 6DR4 |
| Vertical Oscillator | 100 | — | 1.0 | 0.5 | — | 80,000 | 1,250 | 100 | — | — | 6DR7 |
| | 250 | — | 3.0 | 1.4 | — | 40,000 | 1,600 | 64 | — | — | |
| Vertical Amplifier | 250 | — | — | — | — | — | — | — | — | — | 6DS4 |
| | 150 | — | 17.5 | 35 | — | 925 | 6,500 | 6.0 | — | — | |
| Max positive pulse plate voltage □ = 1,500; max d-c cathode current ♦ = 50 ma | | | | | | | | | | | |
| Class A Amplifier | 110 | — | R _k = 130 | 6.5 | — | 7,000 | 9,000 | 63 | — | — | 6DS4 |
| Class A Amplifier | 250 | 200 | 8.5 | 29† | 3.0† | 28,000 | 5,800 | — | 8,000 | 3.8 | 6DS5 |
| | 200 | 200 | 7.5 | 35† | 3.0† | 28,000 | 6,000 | — | 6,000 | 3.0 | |
| TV Damper | Max d-c output current ♦ = 350 ma; max peak inverse voltage ♦ = 6,500 volts; max peak current ♦ = 2,100 ma. | | | | | | | | | | 6DT3 ■ |
| TV Damper | Max d-c output current ♦ = 235 ma; max peak inverse voltage ♦ = 5,500 volts; max peak current ♦ = 1,450 ma | | | | | | | | | | 6DT4 |
| Vertical Amplifier | 250 | 250 | 16.5 | 44 | 1.5 | — | 6,200 | — | — | — | 6DT5 |
| | 80 | 250 | 0 | 195 | 19 | — | — | — | — | — | |
| Max positive pulse plate voltage □ = 2,200; max d-c cathode current ♦ = 55 ma | | | | | | | | | | | |

Metal tubes are shown in bold-face type, miniature tubes in italics.

♦ G3 and G5 are screen. G4 is signal-input grid.

♥ G2 and G4 are screen. G3 is signal-input grid.

1, 2, 3, etc. indicate tube sections.

■ Maximum screen dissipation appears immediately below the screen voltage.

† Heater warm-up time controlled.

| Tube Type | Classification by Construction | § X-Radiation Rating | Base Connections | Out-line Dwg. | Filament Volts | Filament Amps | Max. Plate Watts | Max. Plate Volts | * Max. Screen Volts and Watts | Capacitance in Picofarads | | |
|-----------|---------------------------------|----------------------|------------------|---------------|----------------|---------------|------------------|------------------|--|--|---------|------------|
| | | | | | | | | | | Input | Out-put | Grid-Plate |
| 6DT6 | Sharp-Cutoff Pentode | | 7EN | 5-2 | 6.3 | 0.3 | 1.7 ♦ | 330 ♦ | 330 ♦ 1.1 ♦ | — | — | — |
| 6DT6-A | Sharp-Cutoff Pentode | | 7EN | 5-2 | 6.3 | 0.3 | 1.7 ♦ | 330 ♦ | 330 ♦ 1.1 ♦ | — | — | — |
| 6DT8 | High-Mu Twin Triode | | 9DE | 6-2 | 6.3 | 0.3 | 2.5 ♦ | 300 | — | 2.7 | 1.6 | 1.6 |
| 6DV4 | Medium-Mu Triode (Nuvistor) | | 12EA | 4-4 | 6.3 | 0.135 | 1.0 ♦ | 125 ♦ | — | 4.4 ▲ | 1.9 ▲ | 1.8 ▲ |
| 6DW4 | Half-Wave High-Vacuum Rectifier | | 9HP | 9-86 | 6.3 | 1.2 | 8.5 ♦ | — | Tube Voltage Drop: 25 volts at 350 ma d-c | | | |
| 6DW4-A | Half-Wave High-Vacuum Rectifier | | 9HP | T-X | 6.3 | 1.2 | 8.5 ♦ | — | Tube Voltage Drop: 25 volts at 350 ma d-c | | | |
| 6DW4-B | Half-Wave High-Vacuum Rectifier | | 9HP | T-X | 6.3 | 1.2 | 8.5 ♦ | — | Tube Voltage Drop: 25 volts at 350 ma d-c | | | |
| 6DW5 | Beam Power Amplifier | | 9CK | 6-4 | 6.3 | 1.2 | 11 ♦ | 330 ♦ | 220 ♦ 2.5 ♦ | 14 ▲ | 9.0 ▲ | 0.5 ▲ |
| 6DX4 | UHF Triode Oscillator | | 7DK | 5-1 | 6.3 | 0.2 | 2.2 ♦ | 150 ♦ | — | 3.9 | 1.5 | 1.6 |
| 6DX8 | Triode-Pentode | | 9HX | 6-3 | 6.3 | 0.72 | 4.0 | 300 | 300 1.7 | Pentode Section | | |
| | | | | | | | 1.0 | 300 | — | Triode Section | | |
| 6DY4 | UHF Triode Oscillator | | 7DK | 5-2 | 6.3 | 0.125 | 1.5 ♦ | 135 ♦ | — | 3.5 | 1.15 | 2.0 |
| 6DY4-A | UHF Triode Oscillator | | 7DK | 5-1 | 6.3 | 0.125 | 1.5 ♦ | 135 ♦ | — | 3.5 | 1.15 | 2.0 |
| 6DY7 | Twin Pentode | | 8JP | 12-14 | 6.3 | 1.2 | 15 ♦ ♦ | 400 ♦ | 300 ♦ 4.0 ♦ ⊕ | Two Sections, Push-Pull | | |
| 6DZ4 | UHF Triode Oscillator | | 7DK | 5-1 | 6.3 | 0.225 | 2.3 ♦ | 135 ♦ | — | 2.2 | 1.3 | 1.8 |
| 6DZ7 | Twin Pentode | | 8JP | 12-14 | 6.3 | 1.52 | 13.2 ♦ ♦ | 440 ♦ | 300 ♦ 4.0 ♦ ⊕ | Two Sections, Push-Pull | | |
| 6DZ8 | Triode-Pentode | | 9JE | T-X | 6.3 | 0.9 | 6.5 | 150 | 135 1.5 | Pentode Section | | |
| | | | | | | | 0.75 | 150 | — | Triode Section | | |
| 6E5 | Electron-Ray Indicator | | 6R | 9-26 | 6.3 | 0.3 | — | 250 ♦ | Max target voltage = 250 Min target voltage = 125 | | | |
| 6E6 | Twin-Triode Power Amplifier | | 7B | 14-1 | 6.3 | 0.6 | — | 250 | — | Both Sections in Push-pull | | |
| 6E7 | Remote-Cutoff RF Pentode | | 7H | 12-2 | 6.3 | 0.3 | — | 300 | 100 | 5.2 ▲ | 6.8 ▲ | 0.01 ▲ |
| 6EA4 | Beam Triode | ⊙ | 12FA | 12-90 | 6.3 | 0.2 | 30 ♦ | 27,000 ♦ | — | 1.9 ▲ | 0.63 ▲ | 0.036 ▲ |
| 6EA5 | Sharp-Cutoff RF Tetrode | | 7EW | 5-2 | 6.3 | 0.2 | 3.25 ♦ | 250 ♦ | 150 ♦ 0.5 ♦ | 4.5 | 3.0 | 0.05 ♦ |
| 6EA7 | Double Triode | | 8BD | 9-5 | 6.3 | 1.05 | 1.0 ♦ | 350 ♦ | — | Section 1 (Pins 4, 5, 6) Section 2 (Pins 1, 2, 3) | | |
| | | | | | | | 10 ♦ | 550 ♦ | — | | | |

§ See pages 20 and 21 for X-Radiation Rated Recommended Replacement Chart and Symbol Definitions—

▲ — X-Radiation Rated, and ⊙ — No X-Radiation Rating.

■ Compactron.

† Zero signal.

♣ Per section.

‡ Plate-to-plate.

♠ Maximum.

♣ Supply voltage.

⊙ Subminiature type.

▲ Without external shield.

♦ Design maximum rating.

⊕ Total for all similar sections.

▲ Absolute maximum rating.

Conversion transconductance.

● See X-Radiation Warning, page 4.

| Service | Plate Volts | Screen Volts | Neg Grid Volts | Plate Milli-am-peres | Screen Milli-am-peres | R _p Ohms | G _m μmhos | μ Factor | Load for Rated Output, Ohms | Power Output, Watts | Tube Type |
|---|--|--------------|-----------------------|----------------------|-----------------------|------------------------------|----------------------|---------------------------|-----------------------------|---------------------|-----------|
| Class A Amplifier FM Limiter Discriminator | 150 | 100 | R _k = 560 | 1.1 | 2.1 | 150,000 | 800 | E _{c3} = 0 volts | — | — | 6DT6 |
| | 250 | 100 | R _k = 560 | 0.22 | 5.5 | E _{c3} = -6.0 volts | — | — | 270,000 | — | |
| Class A Amplifier | 150 | 100 | R _k = 560 | 1.55 | 1.8 | 150,000 | 1,350 | E _{c3} = 0 volts | — | — | 6DT6-A |
| Class A Amplifier | 250 | — | R _k = 200 | 10 | — | 10,900 | 5,500 | 60 | — | — | 6DT8 |
| | 100 | — | R _k = 270 | 3.7 | — | 15,000 | 4,000 | 60 | — | — | |
| Class A Amplifier | 75 | — | R _k = 100 | 10.5 | — | 3,100 | 11,500 | 35 | — | — | 6DV4 |
| TV Damper | Max d-c output current ♦ = 250 ma; max peak inverse voltage ♦ = 4,500 volts; max peak current ♦ = 1,300 ma | | | | | | | | | | 6DW4 |
| TV Damper | Max d-c output current ♦ = 250 ma; max peak inverse voltage ♦ = 5,500 volts; max peak current ♦ = 1,300 ma | | | | | | | | | | 6DW4-A |
| TV Damper | Max d-c output current ♦ = 250 ma; max peak inverse voltage ♦ = 5,500 volts; max peak current ♦ = 1,300 ma | | | | | | | | | | 6DW4-B |
| Vertical Amplifier | 200 | 150 | 22.5 | 55 | 2.0 | 15,000 | 5,500 | — | — | — | 6DW6 |
| | 60 | 150 | 0 | 260 | 20 | — | — | — | — | — | |
| Max positive pulse plate voltage □ = 2,200; max d-c cathode current ♦ = 65 ma | | | | | | | | | | | |
| Class A Amplifier | 85 | — | R _k = 150 | 10 | — | 2,700 | 11,000 | 30 | — | — | 6DX4 |
| Class A Amplifier | 220 | 220 | 3.4 | 18 | 3.0 | 150,000 | 10,000 | — | — | — | 6DX8 |
| Class A Amp | 200 | — | 1.7 | 3.0 | — | — | 4,000 | 65 | — | — | 6DY4 |
| Class A Amplifier | 90 | — | R _k = 180 | 10.4 | — | — | 11,000 | 28 | — | — | |
| Class A Amplifier | 90 | — | R _k = 180 | 10.4 | — | — | 11,000 | 28 | — | — | 6DY4-A |
| Characteristics | 250 | 250 | 12.5 | 50 | 3.0 | 28,000 | 6,000 | — | — | — | 6DY7 |
| Class AB ₁ Amplifier | 400 | 250 | 20 | 58† | 1.7† | — | — | — | 14,000 | 20 | |
| Class A Amplifier | 250 | 250 | 16 | 77† | 3.5† | — | — | — | 9,000† | 11 | 6DZ4 |
| | 80 | — | — | 15 | — | 2,000 | 6,700 | 14 | — | — | |
| With 2,700 ohm resistor in plate circuit | | | | | | | | | | | |
| Characteristics | 250 | 250 | 7.3 | 48 | 5.5 | 38,000 | 11,300 | — | — | — | 6DZ7 |
| Class AB ₁ Amplifier | 400 | 250 | 11 | 40† | 4.0† | — | — | — | 9,000† | 18 | |
| Class A Amplifier | 300 | 250 | R _k = 120 | 66† | 7.0† | — | — | — | 9,000† | 12 | 6DZ8 |
| | 145 | 120 | R _k = 180 | 45† | 6.0† | — | 7,500 | — | 2,500 | 2.0 | |
| Class A Amplifier | 120 | — | R _k = 1500 | 0.8 | — | — | 1,400 | 100 | — | — | |
| Tuning Indicator | Plate voltage = 250 thru 1 meg. Target voltage = 250 (E _c = -8 v, Shadow = 0°) (E _c = 0 v, Shadow = 90°. Plate current = 0.24 ma. Target current = 4 ma) | | | | | | | | | | 6E5 |
| Class A Amplifier | 250 | — | 27.5 | 18† | — | 3,500 | 1,700 | 6.0 | 14,000 | 1.6 | 6E6 |
| Class A Amplifier | 250 | 100 | 3.0 | 8.2 | 2.0 | 800,000 | 1,600 | — | — | — | 6E7 |
| HV Shunt Regulator | Unregulated d-c supply voltage = 36,000 volts; max d-c plate current ♦ = 1.6 ma. | | | | | | | | | | 6EA4 |
| Class A Amplifier | 250 | 140 | 1.0 | 10 | 0.95 | 150,000 | 8,000 | — | — | — | 6EA5 |
| Vertical Oscillator | 250 | — | 3.0 | 2.0 | — | 30,000 | 2,200 | 66 | — | — | 6EA7 |
| | 60 | — | 0 | 100 | — | — | — | — | — | — | |
| Vertical Amplifier | 175 | — | 25 | 40 | — | 920 | 6,000 | 5.5 | — | — | 6EA7 |
| | Max positive pulse plate voltage ♦ = 1,500 volts; max d-c cathode current ♦ = 50 ma | | | | | | | | | | |

Metal tubes are shown in bold-face type, miniature tubes in italics.

♦ G3 and G5 are screen. G4 is signal-input grid.

♥ G2 and G4 are screen. G3 is signal-input grid.

1, 2, 3, etc. indicate tube sections.

✱ Maximum screen dissipation appears immediately below the screen voltage.

† Heater warm-up time controlled.

| Tube Type | Classification by Construction | § X-Radiation Rating | Base Connections | Outline Dwg. | Filament Volts | Filament Amps | Max. Plate Watts | Max. Plate Volts | * Max. Screen Volts and Watts | Capacitance in Picofarads | | |
|---------------------|--------------------------------|----------------------|------------------|--------------------|----------------|---------------|--------------------------------------|--------------------------------------|---|--|-------------------|-------------------------|
| | | | | | | | | | | Input | Output | Grid-Plate |
| 6EA8 [⊕] | Triode-Pentode | | 9AE | 6-2 | 6.3 | 0.45 | 3.1 [⊕] 2.5 [⊕] | 330 [⊕] 330 [⊕] | 330 [⊕] 0.55 [⊕] | Pentode Section Triode Section | | |
| 6EB5 | Twin Diode | | 6BT | 5-2 | 6.3 | 0.3 | — | — | Tube Voltage Drop: [⬆] 10 volts at 11 ma d-c | | | |
| 6EB8 | Triode-Pentode | | 9DX | 6-3 | 6.3 | 0.75 | 5.0 [⊕] 1.0 [⊕] | 330 [⊕] 330 [⊕] | 330 [⊕] 1.1 [⊕] | Pentode Section Triode Section | | |
| 6EF4 [■] | Beam Triode | Ⓐ | 12HC | 12-90 | 6.3 | 0.2 | 40 [⊕] | 27,000 [⊕] | — | 2.0 [▲] | 0.8 [▲] | 0.03 [▲] |
| 6EF6 | Beam Power Amplifier | | 7S | 9-13 or 9-42 | 6.3 | 0.9 | 10 | 250 | 250 2.0 | 11.5 [▲] | 9.0 [▲] | 0.8 [▲] |
| 6EH4 [■] | Beam Triode | 0.5 mR/hr Ⓐ | 12FA | 12-90 | 6.3 | 0.2 | 30 [⊕] | 27,000 [⊕] | — | 1.9 [▲] | 0.63 [▲] | 0.036 [▲] |
| 6EH4-A [■] | Beam Triode | 0.5 mR/hr Ⓐ | 12FA | 12-135 | 6.3 | 0.2 | 40 [⊕] | 27,000 [⊕] | — | 1.9 [▲] | 0.63 [▲] | 0.036 [▲] |
| 6EH5 | Power Amplifier Pentode | | 7CV | 5-3 | 6.3 | 1.2 | 5.5 [⊕] | 150 [⊕] | 130 [⊕] 2.0 [⊕] | 17 [▲] | 9.0 [▲] | 0.65 [▲] |
| 6EH7 | Remote-Cutoff Pentode | | 9AQ | T-X | 6.3 | 0.3 | 2.5 | 250 | 250 0.65 | 9.5 | 3.0 | 0.005 [⬆] |
| 6EH8 [⊕] | Triode-Pentode | | 9JG | 6-2 | 6.3 | 0.45 | 2.8 [⊕] 2.5 [⊕] | 360 [⊕] 300 [⊕] | 300 [⊕] 0.5 [⊕] | Pentode Section Triode Section | | |
| 6EJ4 [■] | Beam Triode | 0.5 mR/hr Ⓐ | 12HC | 12-90 | 6.3 | 0.2 | 40 [⊕] | 27,000 [⊕] | — | 2.0 [▲] | 0.8 [▲] | 0.03 [▲] |
| 6EJ4-A [■] | Beam Triode | 0.5 mR/hr Ⓐ | 12HC | 12-135 | 6.3 | 0.2 | 40 [⊕] | 27,000 [⊕] | — | 2.0 [▲] | 0.8 [▲] | 0.03 [▲] |
| 6EJ7 | Sharp-Cutoff Pentode | | 9AQ | T-X | 6.3 | 0.3 | 2.5 | 250 | 250 0.9 | 10 | 3.0 | 0.005 [⬆] |
| 6EL4 [●] | Beam Triode | 1.5 mR/hr Ⓐ | 8MW | 12-36 | 6.3 | 0.2 | 40 [⊕] | 27,000 [⊕] | — | 2.6 [▲] | 1.0 [▲] | 1.0 [▲] |
| 6EL4-A [●] | Beam Triode | 0.5 mR/hr Ⓐ | 8MW | 12-21 | 6.3 | 0.2 | 40 [⊕] | 27,000 [⊕] | — | 2.6 [▲] | 1.0 [▲] | 1.0 [▲] |
| 6EM5 | Beam Power Amplifier | | 9HN | 6-4 | 6.3 | 0.8 | 10 | 315 | 285 1.5 | 10 [▲] | 5.1 [▲] | 0.7 [▲] ⬆ |
| 6EM7 | Double Triode | | 8BD | 9-37 | 6.3 | 0.925 | 1.5 [⊕] 10 [⊕] | 330 [⊕] 330 [⊕] | — | Section 1 (Pins 4, 5, 6) Section 2 (Pins 1, 2, 3) | | |
| 6EN4 [●] | Beam Triode | 0.5 mR/hr Ⓐ | 8NJ | 12-21 | 6.3 | 0.2 | 40 [⊕] | 30,000 [⊕] | — | 2.6 [▲] | 1.0 [▲] | 1.0 [▲] |
| 6EQ7 | Diode-Pentode | | 9LQ | 6-3 | 6.3 | 0.3 | 3.0 [⊕] | 300 [⊕] | 300 [⊕] 0.6 [⊕] | 5.5 [▲] | 5.0 [▲] | 0.002 [▲] ⬆ |
| 6ER5 | High-Frequency Triode | | 7FP | 5-2 | 6.3 | 0.18 | 2.2 | 250 | — | 4.4 | 4.0 | 0.36 |
| 6ES5 | High-Frequency Triode | | 7FP | 5-2 | 6.3 | 0.2 | 2.2 [⊕] | 250 [⊕] | — | 3.2 | 4.0 | 0.5 |
| 6ES8 | Twin Triode | | 9DE | 6-2 | 6.3 | 0.365 | 1.8 [⬆] | 130 | — | — | — | — |
| 6ET7 | Duplex-Diode Pentode | | 9LT | 6-3 | 6.3 | 0.75 | 5.0 [⊕] | 330 [⊕] | 330 [⊕] 1.1 [⊕] | 10 [▲] | 4.2 [▲] | 0.1 [▲] ⬆ |

§ See pages 20 and 21 for X-Radiation Rated Recommended Replacement Chart and Symbol Definitions—

Ⓐ—X-Radiation Rated, and Ⓜ—No X-Radiation Rating.

■ Compactron. † Zero signal. ‡ Plate-to-plate. ⊕ Subminiature type. ⊕ Total for all similar sections.
[⬆] Per section. ⬆ Maximum. ⬆ Without external shield. ⊕ Absolute maximum rating.

● See X-Radiation Warning, page 4. † Supply voltage. ⊕ Design maximum rating. # Conversion transconductance.

| Service | Plate Volts | Screen Volts | Neg Grid Volts | Plate Milli-am-peres | Screen Milli-am-peres | R _p , Ohms | G _m , μmhos | μ Factor | Load for Rated Out-put, Ohms | Power Out-put, Watts | Tube Type |
|---|---|--------------|----------------------|----------------------|-----------------------|-----------------------|------------------------|----------------------------|------------------------------|----------------------|-----------------|
| Class A Amplifier | 125 | 125 | 1.0 | 12 | 4.0 | 200,000 | 6,400 | — | — | — | 6EA8 ¶ |
| | 150 | — | R _k = 56 | 18 | — | 5,000 | 8,500 | 40 | — | — | |
| Voltage Doubler | Max d-c output current per plate ⬠ = 5.5 ma; max peak inverse voltage ⬠ = 550 volts; max peak current per plate ⬠ = 40 ma | | | | | | | | | | 6EB5 |
| Class A Amplifier | 200 | 125 | R _k = 68 | 25 | 7.0 | 75,000 | 12,500 | — | — | — | 6EB8 |
| | 250 | — | 2.0 | 2.0 | — | 37,000 | 2,700 | 100 | — | — | |
| HV Shunt Regulator | Unregulated d-c supply voltage = 36,000 volts; max d-c plate current ⬠ = 1.6 ma. | | | | | | | | | | 6EF4 ■ |
| Vertical Amplifier | 250 | 250 | 18 | 50 | 2.0 | — | 5,000 | — | — | — | 6EF6 |
| | 75 | 250 | 0 | 170 | 17 | — | — | — | — | — | |
| HV Shunt Regulator | Max positive pulse plate voltage ⬠ = 2,000; max d-c cathode current = 60 ma Unregulated d-c supply voltage = 36,000 volts; max d-c plate current ⬠ = 1.6 ma. | | | | | | | | | | 6EH4 ■ |
| HV Shunt Regulator | Unregulated d-c supply voltage = 36,000 volts; max d-c plate current ⬠ = 1.5 ma. | | | | | | | | | | 6EH4-A ■ |
| Class A Amplifier | 110 | 115 | R _k = 62 | 42† | 11.5† | 11,000 | 14,600 | — | 8,000 | 1.4 | 6EH5 |
| | 200 | 90 | 2.0 | 12 | 4.5 | 500,000 | 12,500 | — | — | — | 6EH7 |
| Class A Amplifier | 125 | 125 | 1.0 | 12 | 4.0 | 170,000 | 6,000 | — | — | — | 6EH8 ¶ |
| | 100 | 70 | 0 | — | — | — | 6,500 | — | — | — | |
| | 125 | — | 1.0 | 13.5 | — | — | 7,500 | 40 | — | — | |
| HV Shunt Regulator | Unregulated d-c supply voltage = 36,000 volts; max d-c plate current ⬠ = 1.6 ma. | | | | | | | | | | 6EJ4 ■ |
| HV Shunt Regulator | Unregulated d-c supply voltage = 36,000 volts; max d-c plate current ⬠ = 1.5 ma. | | | | | | | | | | 6EJ4-A ■ |
| Class A Amplifier | 200 | 200 | 2.5 | 10 | 4.1 | 350,000 | 15,000 | — | — | — | 6EJ7 |
| HV Shunt Regulator | Unregulated d-c supply voltage = 36,000 volts; max d-c plate current ⬠ = 1.6 ma. | | | | | | | | | | 6EL4 ■ |
| HV Shunt Regulator | Unregulated d-c supply voltage = 36,000 volts; max d-c plate current ⬠ = 1.5 ma. | | | | | | | | | | 6EL4-A ■ |
| Vertical Amplifier | 250 | 250 | 18 | 40 | 3.0 | 50,000 | 5,100 | — | — | — | 6EM5 |
| | 60 | 250 | 0 | 180 | 30 | — | — | — | — | — | |
| Vertical Oscillator | Max positive pulse plate voltage ⬠ = 2,200; max d-c cathode current = 60 ma | | | | | | | | | | 6EM7 |
| | 250 | — | 3.0 | 1.4 | — | 40,000 | 1,600 | 64 | — | — | |
| Vertical Amplifier | Max d-c cathode current ⬠ = 22 ma | | | | | | | | | | |
| | 150 | — | 20 | 50 | — | 750 | 7,200 | 5.4 | — | — | |
| Max positive pulse plate voltage ⬠ = 1,500 volts; max d-c cathode current ⬠ = 50 ma | | | | | | | | | | | |
| HV Shunt Regulator | Unregulated d-c supply voltage = 36,000 volts; max d-c plate current ⬠ = 1.6 ma. | | | | | | | | | | 6EN4 ■ |
| Class A Amplifier | 100 | 100 | E _{cc1} = 0 | 9.0 | 3.5 | 250,000 | 3,800 | R _{g1} = 2.2 Meg. | — | — | 6EQ7 |
| Class A Amplifier | 200 | — | 1.2 | 10 | — | — | 10,500 | 80 | E _{cc3} = 0 volts | — | 6ER5 |
| Class A Amplifier | 200 | — | 1.0 | 10 | — | 8,000 | 9,000 | 75 | — | — | 6ES5 |
| Class A Amplifier ⬠ | 90 | — | 1.2 | 15 | — | — | 12,500 | — | — | — | 6ES8 |
| Class A Amplifier | 200 | 150 | R _k = 100 | 25 | 5.5 | 60,000 | 11,500 | — | — | — | 6ET7 |
| | 60 | 150 | 0 | 55 | 18 | — | — | — | — | — | |
| Average Diode current at 10 volts = 1.5 ma | | | | | | | | | | | |

Metal tubes are shown in bold-face type, miniature tubes in italics.

⬠ G3 and G5 are screen. G4 is signal-input grid.

¶ G2 and G4 are screen. G3 is signal-input grid.

1, 2, 3, etc. indicate tube sections.

■ Maximum screen dissipation appears

immediately below the screen voltage.

¶ Heater warm-up time controlled.

| Tube Type | Classification by Construction | Base Connections | Out-line Dwg | Filament Volts | Filament Amp | Max Plate Watts | Max Plate Volts | Max Screen Volts and Watts * | Capacitance in Picofarads | | |
|------------------------|--------------------------------|------------------|--------------------------------|----------------|--------------|---------------------|-----------------|------------------------------|--|--|---|
| | | | | | | | | | Input | Out-put | Grid-plate |
| 6EU7 | High-Mu Twin Triode | 9LS | 6-2 | 6.3 | 0.3 | 1.2 ⬥ | 330 ⬥ | — | 1.6 ▲ | 0.2 ▲ | 1.5 ▲ |
| 6EU8 ¶ | Triode-Pentode | 9JF | 6-2 | 6.3 | 0.45 | 3.1 ⬥ 3.0 ⬥ | 330 ⬥ 330 ⬥ | 330 ⬥ 0.55 ⬥ | Pentode Section Triode Section | | |
| 6EV5 | Sharp-Cutoff RF Tetrode | 7EW | 5-2 | 6.3 | 0.2 | 3.25 ⬥ | 275 ⬥ | 180 ⬥ 0.2 ⬥ | 4.5 | 2.9 | 0.035 ♣ |
| 6EV7 | High-Mu Twin Triode | 9LP | 6-3 | 6.3 | 0.6 | 2.5 ⬥ | 300 ⬥ | — | 3.0 ▲ | 0.33 ▲ 0.23 ▲ | 3.4 ▲ |
| 6EW6 | Sharp-Cutoff RF Pentode | 7CM | 5-2 | 6.3 | 0.4 | 3.1 ⬥ | 330 ⬥ | 330 ⬥ 0.65 ⬥ | 10 | 3.4 | 0.03 ♣ |
| 6EW7 | Double Triode | 9HF | 9-70 | 6.3 | 0.9 | 1.5 ⬥ 10 ⬥ | 330 ⬥ 330 ⬥ | — | Section 1 (Pins 6, 7, 8) Section 2 (Pins 1, 2, 3, 9) | | |
| 6EX6 | Beam-Power Amplifier | 5BT | 12-21 | 6.3 | 2.25 | 22 ⬥ | 770 ⬥ | 195 ⬥ 3.5 ⬥ | 22 ▲ | 8.5 ▲ | 1.1 ▲ |
| 6EY6 | Beam-Pentode | 7AC | 9-15 | 6.3 | 0.68 | 11 ⬥ | 350 ⬥ | 300 ⬥ 2.75 ⬥ | 8.5 ▲ | 7.0 ▲ | 0.7 ▲ |
| 6EZ5 | Beam-Pentode | 7AC | 9-15 | 6.3 | 0.8 | 12 ⬥ | 350 ⬥ | 300 ⬥ 2.75 ⬥ | 9.0 ▲ | 7.0 ▲ | 0.6 ▲ |
| 6EZ8 | Triple-Triode | 9KA | 6-2 | 6.3 | 0.45 | 2.0 ⬥ 5.0 ⬥ ⊕ | 330 ⬥ | — | 2.6 | 1.4 ₁ 1.2 ₂ 1.2 ₃ | 1.5 |
| 6F4 | High-Frequency Triode (Acorn) | 7BR | 4-2 | 6.3 | 0.225 | 2.0 | 150 | — | 1.9 ▲ | 0.6 ▲ | 1.8 ▲ |
| 6F5 6F5-G 6F5-GT | High-Mu Triode | 5M | 8-4 12-8 9-17 or 9-47 | 6.3 | 0.3 | — | 300 | — | — | — | — |
| 6F6 6F6-G 6F6-GT | Power Amplifier Pentode | 7S | 8-6 14-3 9-15 | 6.3 | 0.7 | 11 | 375 | 285 3.75 | Single Tube 2 Tubes, Push-pull | | |
| 6F7 | Triode-Remote-Cutoff Pentode | 7E | 12-6 | 6.3 | 0.3 | 1.7 0.4 | 250 100 | 100 0.2 | Pentode section Triode section | | |
| 6F8-G | Medium-Mu Twin Triode | 8G | 12-8 | 6.3 | 0.6 | 2.5 ♣ | 300 | — | — | — | — |
| 6FA7 | Diode Twin-Plate Tetrode | 9MR | 6-3 | 6.3 | 0.3 | 1.5 ⬥ ♣ | 330 ⬥ | 330 ⬥ 0.65 ⬥ | — | — | — |
| 6FD6 | RF Pentode | 7BK | 5-2 | 6.3 | 0.33 | — | 30 ⬥ | 30 ⬥ | 5.5 | 4.8 | 0.006 ♣ |
| 6FD7 | Double Triode | 9HF | 9-77 | 6.3 | 0.925 | 1.5 ⬥ 10.0 ⬥ | 330 ⬥ 330 ⬥ | — | Section 1 (Pins 6, 7, 8) Section 2 (Pins 1, 2, 3, 9) | | |
| 6FE5 | Beam-Power Amplifier | 8KB | 9-33 | 6.3 | 1.2 | 14.5 ⬥ | 175 ⬥ | 175 ⬥ 2.4 ⬥ | 15 ▲ | 9.0 ▲ | 0.44 ▲ Single Tube 2-Tubes, Push-Pull |
| 6FG5 | "Shadow-Grid" Beam Pentode | 7GA | 5-2 | 6.3 | 0.2 | 2.75 ⬥ | 275 ⬥ | 275 ⬥ 0.15 ⬥ | 4.2 ▲ | 2.8 ▲ | 0.02 ▲ ♣ |
| 6FG6 | Electron-Ray Indicator | 9GA | T-X | 6.3 | 0.27 | 0.5 | — | — | Max Target Voltage = 300 volts Min Target Voltage = 150 volts | | |
| 6FG7 ¶ | Triode-Pentode | 9GF | 6-2 | 6.3 | 0.45 | 3.0 ⬥ 2.5 ⬥ | 330 ⬥ 330 ⬥ | 330 ⬥ 0.55 ⬥ | Pentode Section Triode Section | | |
| 6FH5 | High-Frequency Triode | 7FP | 5-2 | 6.3 | 0.2 | 2.2 ⬥ | 150 ⬥ | — | 3.2 | 4.0 | 0.52 |

■ Compactron.

† Zero signal.

♣ Per section.

‡ Plate-to-plate.

♣ Maximum.

‡ Supply voltage.

⊕ Subminiature type.

▲ Without external shield.

⬥ Design maximum rating.

⊕ Total for all similar sections.

⬥ Absolute maximum rating.

‡ Conversion transconductance.

● See X-Radiation Warning, page 4.

| Service | Plate Volts | Screen Volts | Neg Grid Volts | Plate Milli-amperes | Screen Milli-amperes | R _p , Ohms | G _m , μmhos | μ Factor | Load for Rated Out-put, Ohms | Power Out-put, Watts | Tube Type |
|----------------------|--|-------------------|----------------------|---------------------|----------------------|-----------------------|------------------------|---------------------------|------------------------------|----------------------|------------------------|
| Class A Amplifier | 250 100 | — | 2.0 1.0 | 1.2 0.5 | — | 62,500 80,000 | 1,600 1,250 | 100 100 | — | — | 6EU7 |
| Class A Amplifier | 125 | 125 | 1.0 | 12 | 4.0 | 80,000 | 6,400 | — | — | — | 6EU8† |
| Class A Amplifier | 150 | — | R _k = 56 | 18 | — | 5,000 | 8,500 | 40 | — | — | 6EV5 |
| Class A Amplifier | 250 | 80 | 1.0 | 11.5 | 0.9 | 150,000 | 8,800 | — | — | — | 6EV5 |
| Relay Control | 250 | — | 2.0 | 9.2 | — | 11,500 | 5,200 | 60 | — | — | 6EV7 |
| Class A Amplifier | 125 | 125 | R _k = 56 | 11 | 3.2 | 200,000 | 14,000 | — | — | — | 6EW6 |
| Vertical Oscillator | 250 | — | 11 | 5.5 | — | 8,750 | 2,000 | 17.5 | — | — | 6EW7 |
| Vertical Amplifier | 150 | — | 17.5 | 45 | — | 800 | 7,500 | 6.0 | — | — | 6EW7 |
| Vertical Amplifier | Max d-c cathode current ⚡ = 22 ma; Max positive pulse plate voltage ⚡ = 1,500 volts; max d-c cathode current ⚡ = 50 ma | | | | | | | | | | |
| Horizontal Amplifier | 175 60 60 | 175 150 125 | 30 0 0 | 67 460 360 | 3.3 45 30 | 8,500 | 7,700 | — | — | — | 6EX6 |
| Horizontal Amplifier | Max positive pulse plate voltage ⚡ = 7,000; max d-c cathode current ⚡ = 220 ma | | | | | | | | | | |
| Vertical Amplifier | 250 50 | 250 250 | 17.5 0 | 44 153 | 3.0 21 | 60,000 | 4,400 | — | — | — | 6EY6 |
| Vertical Amplifier | 250 60 | 250 250 | 20 0 | 43 180 | 3.5 26 | 50,000 | 4,100 | — | — | — | 6EY6 |
| Vertical Amplifier | Max positive pulse plate voltage ⚡ = 2,500; max d-c cathode current ⚡ = 60 ma | | | | | | | | | | |
| Vertical Amplifier | 250 60 | 250 250 | 20 0 | 43 180 | 3.5 26 | 50,000 | 4,100 | — | — | — | 6EZ5 |
| Vertical Amplifier | Max positive pulse plate voltage ⚡ = 2,500; max d-c cathode current ⚡ = 75 ma | | | | | | | | | | |
| Class A Amplifier | 125 | — | 1.0 | 4.2 | — | 13,600 | 4,200 | 57 | — | — | 6EZ8 |
| Class A Amplifier | 80 | — | R _k = 105 | 13 | — | 2,900 | 5,800 | 17 | — | — | 6F4 |
| Class A Amplifier | 250 100 | — | 2.0 1.0 | 0.9 0.4 | — | 66,000 85,000 | 1,500 1,150 | 100 100 | — | — | 6F5 6F5-G 6F5-GT |
| Class A Amplifier | 285 250 315 | 285 250 285 | 20 16.5 24 | 38† 34† 62† | 7.0† 6.5† 12† | 78,000 80,000 — | 2,550 2,500 — | — — — | 7,000 7,000 10,000 | 4.8 3.2 11 | 6F6 6F6-G 6F6-GT |
| Class A Amplifier | 250 | 100 | 3.0 | 6.5 | 1.5 | 850,000 | 1,100 | — | — | — | 6F7 |
| Class A Amplifier | 100 | — | 3.0 | 3.5 | — | 16,000 | 500 | 8.0 | — | — | 6F7 |
| Class A Amplifier | 250 | — | 8.0 | 9.0 | — | 7,700 | 2,600 | 20 | — | — | 6F8-G |
| Class A Amplifier | 100 | 100 | E _{cc1} = 0 | 2.2 | 3.0 | 130,000 | 1,900 | R _{g1} = 2.2 Meg | — | — | 6FA7 |
| Class A Amplifier | For operation with other plate grounded | | | | | | | | | | |
| Class A Amplifier | 12.6 | 12.6 | E _{cc1} = 0 | 1.4 | 0.5 | 500,000 | 1,450 | R _{g1} = 2.2 Meg | — | — | 6FD6 |
| Vertical Oscillator | 250 | — | 3.0 | 1.4 | — | 40,000 | 1,600 | 64 | — | — | 6FD7 |
| Vertical Amplifier | 150 | — | 17.5 | 40 | — | 800 | 7,500 | 6.0 | — | — | 6FD7 |
| Vertical Amplifier | Max d-c cathode current ⚡ = 20 ma; Max positive pulse plate voltage ⚡ = 1,500; max d-c cathode current ⚡ = 50 ma | | | | | | | | | | |
| Class A Amplifier | 130 | 130 | R _k = 120 | 88† | 5.0† | 8,000 | 9,500 | — | 1,000 | 3.5 | 6FE5 |
| Class A Amplifier | 130 | 130 | R _k = 75 | 150† | 7.2† | — | — | — | 1,600† | 7.0 | 6FE5 |
| Class A Amplifier | 250 | 250 | 0.2 | 9.0 | 0.42 | 250,000 | 9,500 | — | — | — | 6FG5 |
| Tuning Indicator | Plate voltage = 250 thru 0.47 Meg; Target voltage = 250; (E _c = 0; Pattern length, dark portion = 0.8"; Target current = 1.1 ma; Plate current = 0.45 ma) (E _c = -22 volts; Pattern length, dark portion = 0.0"; Target current = 1.6 ma; Plate current = 0.06 ma) | | | | | | | | | | |
| Class A Amplifier | 125 | 125 | 1.0 | 11 | 4.0 | 180,000 | 6,000 | — | — | — | 6FG7† |
| Class A Amplifier | 100 | 100 | 0 | — | — | — | 7,400 | — | — | — | 6FG7† |
| Class A Amplifier | 125 | — | 1.0 | 13 | — | 5,700 | 7,500 | 43 | — | — | 6FG7† |
| Class A Amplifier | 135 | — | 1.0 | 11 | — | 5,600 | 9,000 | 50 | — | — | 6FH5 |

Metal tubes are shown in bold-face type, miniature tubes in italics.

‡ G3 and G5 are screen. G4 is signal-input grid.

♥ G2 and G4 are screen. G3 is signal-input grid.

1, 2, 3, etc. indicate tube sections.

‡ Maximum screen dissipation appears immediately below the screen voltage.

† Heater warm-up time controlled.

| Tube Type | Classification by Construction | Base Connections | Outline Dwg | Filament Volts | Filament Amp | Max Plate Watts | Max Plate Volts | Max Screen Volts and Watts | Capacitance in Picofarads | | |
|-----------|--------------------------------|------------------|-------------|----------------|--------------|---|---|----------------------------|---|--------|------------|
| | | | | | | | | | Input | Output | Grid-plate |
| 6FH6 | Beam Power Amplifier | 6AM | 12-19 | 6.3 | 1.2 | 17 | 770 | 220 3.6 | 33 | 8.0 | 0.4 |
| 6FH8 | Triode-Three Plate Tetrode | 9KP | 6-2 | 6.3 | 0.45 | 2.3 (Main Plate) 0.3 (Other Plates) 1.7 | 275 (Main Plate) 200 (Other Plates) 275 | 275 0.45 | Tetrode Section (Plates 2, 3 tied to cathode) | | |
| 6FJ7 | Double Triode | 12BM | 9-58 | 6.3 | 0.9 | 1.0 10 | 350 550 | — | Section 1 (Pins 9, 10, 11) Section 2 (Pins 3, 5, 7) | | |
| 6FM7 | Dissimilar Double Triode | 12EJ | 9-58 | 6.3 | 1.05 | 1.0 10 | 350 550 | — | Section 1 (Pins 9, 10, 11) Section 2 (Pins 3, 5, 7, 8) | | |
| 6FM8 | Duplex-Diode Triode | 9KR | 6-2 | 6.3 | 0.45 | 1.1 | 330 | — | 1.5 0.16 1.8 Diode Sections | | |
| 6FQ5 | High-Frequency Triode | 7FP | 5-2 | 6.3 | 0.18 | 2.5 | 200 | — | 4.8 | 4.0 | 0.4 |
| 6FQ5-A | High-Frequency Triode | 7FP | 5-2 | 6.3 | 0.18 | 2.5 | 200 | — | 5.0 | 3.5 | 0.52 |
| 6FQ7 | Medium-Mu Twin Triode | 9LP | 6-3 | 6.3 | 0.6 | 4.0 5.7 ⊕ | 330 | — | 2.4 | 0.34 | 3.6 |
| 6FR7 | Double-Triode | 9HF | 9-70 | 6.3 | 0.925 | 1.5 10 | 330 330 | — | Section 1 (Pins 6, 7, 8) Section 2 (Pins 1, 2, 3, 9) | | |
| 6FS5 | "Shadow Grid" Beam Pentode | 7GA | 5-2 | 6.3 | 0.2 | 3.25 | 300 | 150 0.15 | 4.8 | 2.8 | 0.016 |
| 6FV6 | Sharp-Cutoff RF Tetrode | 7FQ | 5-2 | 6.3 | 0.2 | 2.0 | 275 | 180 0.5 | 4.5 | 3.0 | 0.03 |
| 6FV8 | Triode-Pentode | 9FA | 6-2 | 6.3 | 0.45 | 2.3 2.0 | 330 330 | 330 0.55 | Pentode Section Triode Section | | |
| 6FV8-A | Triode-Pentode | 9FA | 6-2 | 6.3 | 0.45 | 2.3 2.0 | 330 330 | 330 0.55 | Pentode Section Triode Section | | |
| 6FW5 | Beam-Power Amplifier | 6CK | 12-14 | 6.3 | 1.2 | 18 | 770 | 220 3.6 | 17 | 7.0 | 0.5 |
| 6FW7 | Double Triode | 8LM | T-X | 6.3 | 0.3 | — | 150 150 | — | Section 1 (Pins 6, 7, 8) Section 2 (Pins 1, 2, 3) | | |
| 6FW8 | High-Frequency Twin Triode | 9AJ | 6-2 | 6.3 | 0.4 | 2.2 | 250 | — | 3.4 | 2.4 | 1.9 |
| 6FX7 | Twin Triode | 8LK | T-X | 6.3 | 0.3 | 1.7 3.2 Total | 100 | — | — | — | — |

■ Compactron.
† Zero signal.
♣ Per section.

‡ Plate-to-plate.
♣ Maximum.
‡ Supply voltage.

● Subminiature type.
▲ Without external shield.
◆ Design maximum rating.

⊕ Total for all similar sections.
⊗ Absolute maximum rating.
Conversion transconductance.

| Service | Plate Volts | Screen Volts | Neg Grid Volts | Plate Milli-am-peres | Screen Milli-am-peres | R _p ' Ohms | G _m ' μmhos | μ Factor | Load for Rated Out-put, Ohms | Power Out-put, Watts | Tube Type |
|--|-------------|--------------|----------------|---|-----------------------|-----------------------|---|-----------|------------------------------|----------------------|-----------|
| Horizontal Amplifier | 250 60 | 150 150 | 22.5 0 | 75 300 | 1.7 15 | 12,000 — | 6,000 — | — — | — — | — — | 6FH6 |
| Max positive pulse plate voltage ♦ = 6,000; max d-c cathode current ♦ = 155 ma | | | | | | | | | | | |
| Class A Amplifier | 100 | 50 | 1.0 | 1.6 (Main Plate) 0.04 ♦ (Other Plates) | 0.3 | — | 2,500 (Main Plate) 70 ♦ (Other Plates) | — | — | — | 6FH8 |
| Class A Amplifier | 100 | — | 1.0 | 7.9 | — | 7,400 | 5,400 | 40 | — | — | |
| Vertical Oscillator | 250 | — | 8.0 | 8.0 | — | 9,000 | 2,500 | 22.5 | — | — | 6FJ7 ■ |
| Max peak negative grid voltage ♦ = 400 volts | | | | | | | | | | | |
| Vertical Amplifier | 250 150 | — — | 9.5 0 | 41 68 | — — | 2,000 — | 7,700 — | 15.4 — | — — | — — | |
| Max positive pulse plate voltage ♦ = 2,500; max d-c cathode current ♦ = 50 ma | | | | | | | | | | | |
| Vertical Oscillator | 250 | — | 3.0 | 2.0 | — | 30,000 | 2,200 | 66 | — | — | 6FM7 ■ |
| Max peak negative grid voltage ♦ = 400 volts | | | | | | | | | | | |
| Vertical Amplifier | 175 60 | — — | 25 0 | 40 95 | — — | 920 — | 6,000 — | 5.5 — | — — | — — | |
| Max positive pulse plate voltage ♦ = 1,500; max d-c cathode current ♦ = 50 ma | | | | | | | | | | | |
| Class A Amplifier FM Detector | 250 | — | 3.0 | 1.0 | — | 58,000 | 1,200 | 70 | — | — | 6FM8 |
| Max d-c output current ♦ = 5.0 ma; voltage drop: ♦ 5.0 volts at 20 ma d-c | | | | | | | | | | | |
| Class A Amplifier | 135 | — | 1.2 | 11.5 | — | 5,500 | 11,000 | 60 | — | — | 6FQ5 |
| Class A Amplifier | 135 | — | 1.2 | 8.9 | — | 6,300 | 12,000 | 74 | — | — | 6FQ5-A |
| Class A Amplifier ♦ | 250 | — | 8.0 | 9.0 | — | 7,700 | 2,600 | 20 | — | — | 6FQ7 ¶ |
| Vertical Oscillator | 90 | — | 0 | 10 | — | 6,700 | 3,000 | 20 | — | — | |
| Max peak negative grid voltage ♦ = 400; max d-c cathode current ♦ = 22 ma | | | | | | | | | | | |
| Vertical Amplifier | 150 | — | 20.0 | 50 | — | 750 | 7,200 | 5.4 | — | — | 6FR7 |
| Max positive pulse plate voltage ♦ = 1,500; max d-c cathode current ♦ = 50 ma | | | | | | | | | | | |
| Class A Amplifier | 275 | 135 | 0.2 | 9.0 | 0.17 | 240,000 | 10,000 | — | — | — | 6FS5 |
| Class A Amplifier | 125 | 80 | 1.0 | 10 | 1.5 | 100,000 | 8,000 | — | — | — | 6FV6 |
| Class A Amplifier | 125 | 125 | 1.0 | 12 | 4.0 | 200,000 | 6,500 | — | — | — | 6FV8 ¶ |
| Class A Amplifier | 125 | — | 1.0 | 14 | — | 5,000 | 8,000 | 40 | — | — | |
| Class A Amplifier | 125 | 125 | 1.0 | 12 | 4.0 | 200,000 | 6,500 | — | — | — | 6FV8-A ¶ |
| Class A Amplifier | 125 | — | 1.0 | 12 | — | 5,600 | 8,000 | 45 | — | — | |
| Horizontal Amplifier | 250 60 | 150 150 | 22.5 — | 65 345 | 1.8 27 | 18,000 — | 7,300 — | — — | — — | — — | 6FW5 |
| Max positive pulse plate voltage ♦ = 6,500; max d-c cathode current ♦ = 175 ma | | | | | | | | | | | |
| Class A Amplifier | 90 | — | 1.0 | 7.0 | — | 6,000 | 6,000 | 36 | — | — | 6FW7 ● |
| Class A Amplifier | 90 | — | 1.0 | 9.0 | — | 3,800 | 9,500 | 36 | — | — | |
| Class A Amplifier ♦ | 100 | — | 1.2 | 15 | — | 2,500 | 13,000 | 33 | — | — | 6FW8 |
| Class A Amplifier | 90 | — | 1.0 | 9.0 | — | 3,800 | 9,500 | 36 | — | — | 6FX7 ● |

Metal tubes are shown in bold-face type, miniature tubes in italics.

♦ G3 and G5 are screen. G4 is signal-input grid.

◆ G2 and G4 are screen. G3 is signal-input grid.

1, 2, 3, etc. indicate tube sections.

◆ Maximum screen dissipation appears immediately below the screen voltage.

¶ Heater warm-up time controlled.

| Tube Type | Classification by Construction | Base Connections | Out-line Dwg | Filament Volts | Filament Amp | Max Plate Watts | Max Plate Volts | Max Screen Volts and Watts* | Capacitance in Picofarads | | |
|-----------------|--------------------------------|------------------|----------------------------|----------------|--------------|-----------------|----------------------|------------------------------|--|--------|------------|
| | | | | | | | | | Input | Output | Grid-plate |
| 6FY5 | High-Mu Triode | 7FP | 5-2 | 6.3 | 0.2 | 2.2⊞ | 200⊞ | — | 4.75 | 4.3 | 0.48 |
| 6FY7■ | Dissimilar Double Triode | 12EO | 9-60 | 6.3 | 1.05 | 1.0⊞ 7.0⊞ | 330⊞ 275⊞ | — | Section 1 (Pins 9, 10, 11) Section 2 (Pins 3, 5, 7) | | |
| 6FY8 | Triode-Pentode | 9EX | 6-4 | 6.3 | 1.2 | 8.0⊞ 1.0⊞ | 150⊞ 150⊞ | 150⊞ 2.0⊞ — | Pentode Section Triode Section | | |
| 6G6-G 6G6-GT | Power Amplifier Pentode | 7S | 12-7 9-11 or 9-41 | 6.3 | 0.15 | 2.75 | 300 300 | 300 0.75 — | Pentode connection Triode connection (G ₂ & P tied) | | |
| 6G11■ | Dissimilar Double Pentode | 12BU | 9-58 | 6.3 | 1.2 | 6.5⊞ 1.7⊞ | 150⊞ 330⊞ | 135⊞ 1.8⊞ 330⊞ 1.1⊞ | Section 1 (Pins 8, 9, 10, 11) Section 2 (Pins 2, 3, 4, 6, 7) | | |
| 6GA7■ | Diode-Pentode | 12EB | 12-58 | 6.3 | 2.26 | 15⊞ 5.0⊞ | 770⊞ | 220⊞ 3.6⊞ | Pentode Section Diode Section Tube Voltage Drop: 32 volts at 250 ma d-c | | |
| 6GB5 | Beam Power Amplifier | 9NH | T-X | 6.3 | 1.38 | 17⊞ | 275⊞ 275⊞ 6.0⊞ | — | — | — | — |
| 6GC5 | Beam-Power Amplifier | 9EU | 9-71 | 6.3 | 1.2 | 12⊞ | 220⊞ | 140⊞ 1.4⊞ | 18▲ | 7.0▲ | 0.9▲ |
| 6GC6 | Beam Power Amplifier | 8JX | 12-51 | 6.3 | 1.2 | 17.5⊞ | 770⊞ | 220⊞ 4.5⊞ | 15▲ | 7.0▲ | 0.55▲ |
| 6GD7 | Triode-Pentode | 9GF | 6-2 | 6.3 | 0.38 | 2.2⊞ 2.2⊞ | 250⊞ 125⊞ | 250⊞ 0.55⊞ — | Pentode Section Triode Section | | |
| 6GE5■ | Beam Power Amplifier | 12BJ | 12-56 | 6.3 | 1.2 | 17.5⊞ | 770⊞ | 220⊞ 3.5⊞ | 16▲ | 7.0▲ | 0.34▲ |
| 6GE8 | Triode-Pentode | 9LC | 6-3 | 6.3 | 0.9 | 1.0⊞ 7.0⊞ | 330⊞ 275⊞ | 275⊞ 0.5⊞ — | Pentode Section Triode Section | | |
| 6GF5■ | Beam Power Amplifier | 12BJ | 9-60 | 6.3 | 1.2 | 9.0⊞ | 770⊞ | 220⊞ 2.5⊞ | 16▲ | 7.5▲ | 0.2▲ |
| 6GF7 | Dissimilar Double Triode | 9QD | T-X | 6.3 | 0.985 | 1.5⊞ 11⊞ | 330⊞ 330⊞ | — | Section 1 (Pins 1, 8, 9) Section 2 (Pins 2, 3, 6) | | |
| 6GF7-A | Dissimilar Double Triode | 9QD | 9-107 | 6.3 | 0.985 | 1.5⊞ 11⊞ | 330⊞ 330⊞ | — | Section 1 (Pins 1, 8, 9) Section 2 (Pins 2, 3, 6) | | |
| 6GH8¶ | Triode-Pentode | 9AE | 6-2 | 6.3 | 0.45 | 2.5⊞ 2.5⊞ | 350⊞ 330⊞ | 330⊞ 0.55⊞ — | Pentode Section Triode Section | | |

■ Compactron.

† Zero signal.

● Per section.

‡ Plate-to-plate.

⊞ Maximum.

‡ Supply voltage.

⊞ Subminiature type.

▲ Without external shield.

⊞ Design maximum rating.

⊞ Total for all similar sections.

⊞ Absolute maximum rating.

Conversion transconductance.

● See X-Radiation Warning, page 4.

| Service | Plate Volts | Screen Volts | Neg Grid Volts | Plate Milli-amperes | Screen Milli-amperes | R _p , Ohms | C _m , μmhos | μ Factor | Load for Rated Output, Ohms | Power Output, Watts | Tube Type |
|----------------------|---|--------------|----------------------|---------------------|----------------------|------------------------|------------------------|---------------------------|-----------------------------|---------------------|---------------|
| Class A Amplifier | 135 | — | 1.0 | 11 | — | — | 13,000 | 70 | — | — | <i>6FY5</i> |
| Vertical Oscillator | 250 | — | 3.0 | 1.4 | — | 40,500 | 1,600 | 65 | — | — | 6FY7 |
| Vertical Amplifier | 150 | — | 17.5 | 35 | — | 920 | 6,500 | 6.0 | — | — | |
| | 60 | — | 0 | 95 | — | — | — | — | — | — | |
| | Max positive pulse plate voltage ⬠ = 2,000; max d-c cathode current ⬠ = 50 ma | | | | | | | | | | |
| Class A Amplifier | 125 | 125 | 13.5 | 50† | 10† | — | 7,500 | — | 2,000 | 2.7 | <i>6FY8</i> |
| Class A Amplifier | 125 | — | 1.5 | 2.5 | — | — | 2,000 | — | — | — | |
| Class A Amplifier | 180 | 180 | 9.0 | 15† | 2.5† | 175,000 | 2,300 | — | 10,000 | 1.1 | 6G6-G |
| Class A Amplifier | 180 | — | 12 | 11† | — | 4,750 | 2,000 | 9.5 | 12,000 | 0.25 | 6G6-GT |
| Class A Amplifier | 120 | 110 | 8.0 | 49† | 4.0† | 10,000 | 7,500 | — | 2,500 | 2.3 | 6G11 |
| Class A Amplifier | 150 | 100 | R _k = 560 | 1.3 | 2.0 | 150,000 | 1,000 | E _{c3} = 0 Volts | | | |
| Horizontal Amplifier | 250 | 150 | 22.5 | 75 | 2.4 | 20,000 | 6,600 | — | — | — | 6GA7 |
| TV Damper | 60 | 150 | 0 | 345 | 27 | — | — | — | — | — | |
| | Max positive pulse plate voltage ⬠ = 6,500; max d-c cathode current ⬠ = 150 ma Max d-c output current ⬠ = 140 ma; max peak inverse voltage ⬠ = 5,500 volts; max peak current ⬠ = 325 ma | | | | | | | | | | |
| Horizontal Amplifier | 75 | 200 | 10 | 440 | 37 | (Instantaneous Values) | | | | | 6GB5 |
| | Max pos. pulse plate volt. ⬠ = 7,700; Max d-c cath. current ⬠ = 275 ma | | | | | | | | | | |
| Class A Amplifier | 200 | 125 | R _k = 180 | 46† | 2.2† | 28,000 | 8,000 | — | 4,000 | 3.8 | 6GC5 |
| | 110 | 110 | 7.5 | 49† | 4.0† | 13,000 | 8,000 | — | 2,000 | 2.1 | |
| Horizontal Amplifier | 250 | 150 | 22.5 | 75 | 2.4 | 20,000 | 6,600 | — | — | — | 6GC6 |
| | 60 | 150 | 0 | 345 | 30 | — | — | — | — | — | |
| | Max positive pulse plate voltage ⬠ = 6,500 volts; max d-c cathode current ⬠ = 175 ma | | | | | | | | | | |
| Class A Amplifier | 170 | 150 | R _k = 82 | 10 | 3.3 | 350,000 | 12,000 | — | — | — | <i>6GD7</i> |
| Class A Amp | 125 | — | 1.0 | 15 | — | 4,700 | 10,000 | 47 | — | — | |
| Horizontal Amplifier | 250 | 150 | 22.5 | 65 | 1.8 | 18,000 | 7,300 | — | — | — | 6GE5 |
| | 60 | 150 | 0 | 345 | 27 | — | — | — | — | — | |
| | Max pos. pulse plate voltage ⬠ = 6,500; max d-c cathode current ⬠ = 175 ma | | | | | | | | | | |
| Class A Amp | 150 | 150 | 2.0 | 5.5 | 1.7 | 340,000 | 3,200 | — | — | — | <i>6GE8</i> |
| Series Regulator | 150 | — | 21 | 35 | — | 1,080 | 5,000 | 5.4 | — | — | |
| Horizontal Amplifier | 250 | 150 | 26.5 | 34 | 1.6 | 260,000 | 4,700 | — | — | — | 6GF5 |
| | 60 | 150 | 0 | 345 | 27 | — | — | — | — | — | |
| | Max positive pulse plate voltage ⬠ = 5,000; max d-c cathode current ⬠ = 160 ma | | | | | | | | | | |
| Vertical Oscillator | 250 | — | 3.0 | 1.4 | — | 40,000 | 1,600 | 64 | — | — | <i>6GF7</i> |
| | Max d-c cathode current ⬠ = 22 ma | | | | | | | | | | |
| Vertical Amplifier | 150 | — | 20 | 50 | — | 750 | 7,200 | 5.4 | — | — | |
| | 60 | — | 0 | 95 | — | — | — | — | — | — | |
| | Max positive pulse plate voltage ⬠ = 1,500; max d-c cathode current ⬠ = 50 ma | | | | | | | | | | |
| Vertical Oscillator | 250 | — | 3.0 | 1.4 | — | 40,000 | 1,600 | 64 | — | — | <i>6GF7-A</i> |
| | Max d-c cathode current ⬠ = 22 ma | | | | | | | | | | |
| Vertical Amplifier | 150 | — | 20 | 50 | — | 750 | 7,200 | 5.4 | — | — | |
| | 60 | — | 0 | 95 | — | — | — | — | — | — | |
| | Max positive pulse plate voltage ⬠ = 1,500; max d-c cathode current ⬠ = 50 ma | | | | | | | | | | |
| Class A Amplifier | 125 | 125 | 1.0 | 12 | 4.0 | 200,000 | 7,500 | — | — | — | <i>6GH8</i> † |
| Class A Amp | 125 | — | 1.0 | 13.5 | — | 5,400 | 8,500 | 46 | — | — | |

Metal tubes are shown in bold-face type, *miniature tubes in italics.*

⬠ G3 and G5 are screen. G4 is signal-input grid.

♥ G2 and G4 are screen. G3 is signal-input grid.

1, 2, 3, etc. indicate tube sections.

⊛ Maximum screen dissipation appears immediately below the screen voltage.

† Heater warm-up time controlled.

| Tube Type | Classification by Construction | Base Connections | Outline Dwg | Filament Volts | Filament Amp | Max Plate Watts | Max Plate Volts | Max Screen Volts and Watts* | Capacitance in Picofarads | | | |
|-----------|--------------------------------|------------------|-------------|----------------|--------------|-----------------|---|-----------------------------|---|--------|------------|--|
| | | | | | | | | | Input | Output | Grid-plate | |
| 6GH8-A† | Triode-Pentode | 9AE | 6-2 | 6.3 | 0.45 | 2.5⊕ 2.5⊕ | 350⊕ 330⊕ | 330⊕⊕ 0.55⊕ | Pentode Section Triode Section | | | |
| 6GJ5 | Beam Power Amplifier | 9QK | T-X | 6.3 | 1.2 | 17.5⊕ | 770⊕ | 220⊕ 3.5⊕ | 15▲ | 6.5▲ | 0.26▲ | |
| 6GJ5-A | Beam Power Amplifier | 9QK | T-X | 6.3 | 1.2 | 17.5⊕ | 770⊕ | 220⊕ 3.5⊕ | 15▲ | 6.5▲ | 0.26▲ | |
| 6GJ7 | Triode-Pentode | 9QA | T-X | 6.3 | 0.41 | 2.4⊕ 1.8⊕ | 275⊕ 140⊕ | 275⊕ 0.55⊕ | Pentode Section Triode Section | | | |
| 6GJ8‡ | Triode-Pentode | 9AE | 6-2 | 6.3 | 0.6 | 2.5⊕ 2.5⊕ | 330⊕ 200⊕ | 330⊕⊕ 0.55⊕ | Pentode Section Triode Section | | | |
| 6GK5 | High-Frequency Triode | 7FP | 5-2 | 6.3 | 0.18 | 2.5⊕ | 200⊕ | — | 5.0 | 3.5 | 0.52 | |
| 6GK6 | Beam-Power Amplifier | 9GK | 6-4 | 6.3 | 0.76 | 13.2⊕ | 330⊕ | 330⊕ 2.0⊕ | Single Tube 2 Tubes, Push-Pull 2 Tubes, Push-Pull | | | |
| 6GK7 | RF Pentode | 9AQ | T-X | 6.3 | 0.3 | 2.8⊕ | 330⊕ | 330⊕ 1.1⊕ | 8.5▲ | 3.3▲ | 0.005▲ | |
| 6GL7 | Dissimilar Double Triode | 8BD | 9-5 | 6.3 | 1.05 | 1.0⊕ 10⊕ | 350⊕ 550⊕ | — | Section 1 (Pins 4, 5, 6) Section 2 (Pins 1, 2, 3) | | | |
| 6GM5 | Beam Power Amplifier | 9MQ | 9-71 | 6.3 | 0.8 | 19⊕ | 550⊕ | 440⊕ 3.3⊕ | Single Tube 2 Tubes, Push-Pull | | | |
| 6GM6 | Semi-Remote-Cutoff Pentode | 7CM | 5-2 | 6.3 | 0.4 | 3.1⊕ | 330⊕ | 330⊕⊕ 0.65⊕ | 10.0▲ | 2.4▲ | 0.036▲ | |
| 6GM8 | Twin Triode | 9DE | 6-2 | 6.3 | 0.33 | 0.6 | 30 | — | 3.0▲ | 1.8▲ | 1.3▲ | |
| 6GN8 | Triode-Pentode | 9DX | 6-3 | 6.3 | 0.75 | 5.0⊕ 1.0⊕ | 330⊕ 330⊕ | 330⊕⊕ 1.1⊕ | Pentode Section Triode Section | | | |
| 6GQ7 | Triple Diode | 9QM | 6-2 | 6.3 | 0.45 | — | Tube Voltage Drop: ♣ 10 volts at 60 ma d-c | | | | | |
| 6GS8 | Twin Pentode | 9LW | 6-3 | 6.3 | 0.3 | 1.1⊕ ♣ | 300⊕ | 150⊕ 0.75⊕ | — | — | — | |
| 6GT5 | Beam Power Amplifier | 9NZ | 12-64 | 6.3 | 1.2 | 17.5⊕ | 770⊕ | 220⊕ 3.5⊕ | 15▲ | 6.5▲ | 0.26▲ | |
| 6GT5-A | Beam Power Amplifier | 9NZ | 12-95 | 6.3 | 1.2 | 17.5⊕ | 770⊕ | 220⊕ 3.5⊕ | 15▲ | 6.5▲ | 0.26▲ | |

■ Compactron.

† Zero signal.

♣ Per section.

‡ Plate-to-plate.

♣ Maximum.

‡ Supply voltage.

⊕ Subminiature type.

▲ Without external shield.

⊕ Design maximum rating.

⊕ Total for all similar sections.

⊕ Absolute maximum rating.

Conversion transconductance

| Service | Plate Volts | Screen Volts | Neg Grid Volts | Plate Milli-amperes | Screen Milli-amperes | R_p , Ohms | G_m , μ mhos | μ Factor | Load for Rated Output, Ohms | Power Output, Watts | Tube Type |
|---|---|--------------|-------------------|---------------------|----------------------|---------------------------|--------------------|---------------------|-----------------------------|---------------------|-----------------|
| Class A Amplifier | 125 | 125 | 1.0 | 12 | 4.0 | 200,000 | 7,500 | — | — | — | 6GH8-A † |
| Class A Amplifier | 125 | — | 1.0 | 13.5 | — | 5,400 | 8,500 | 46 | — | — | |
| Horizontal Amplifier | 250 60 | 150 150 | 22.5 0 | 70 390 | 2.1 32 | 15,000 | 7,100 | — | — | — | 6GJ5 |
| Max positive pulse plate voltage $\diamond = 6,500$; max d-c cathode current $\diamond = 175$ ma | | | | | | | | | | | |
| Horizontal Amplifier | 250 60 | 150 150 | 22.5 0 | 70 390 | 2.1 32 | 15,000 | 7,100 | — | — | — | 6GJ5-A |
| Max positive pulse plate voltage $\diamond = 6,500$; max d-c cathode current $\diamond = 175$ ma | | | | | | | | | | | |
| Class A Amplifier | 170 | 120 | 1.2 | 10 | 3.0 | 350,000 | 11,000 | — | — | — | 6GJ7 |
| Class A Amplifier | 100 | — | 3.0 | 15 | — | — | 9,000 | 20 | — | — | |
| Class A Amplifier | 125 | 125 | 1.0 | 12 | 4.5 | 150,000 | 7,500 | — | — | — | 6GJ8 † |
| Class A Amp | 125 | — | 1.0 | 13.5 | — | 5,000 | 8,500 | 40 | — | — | |
| Class A Amp | 135 | — | 1.0 | 11.5 | — | 5,400 | 15,000 | 78 | — | — | 6GK5 |
| Class A Amplifier | 250 | 250 | 7.3 | 48† | 5.5† | 38,000 | 11,300 | — | 5,200 | 5.7 | 6GK6 |
| Class AB Amplifier | 300 | 300 | $R_k = 130$ | 72† | 8.0† | — | — | — | 8,000† | 17 | |
| Class AB Amplifier | 250 | 250 | $R_k = 130$ | 62† | 7.0† | — | — | — | 8,000† | 11 | |
| Class B Amplifier | 300 250 | 300 250 | 14.7 11.6 | 15† 20† | 1.6† 2.2† | — | — | — | 8,000† 8,000† | 17 11 | |
| Class A Amplifier | 135 | 135 | $R_k = 82$ | 7.0 | 3.5 | 275,000 | 9,500 | $E_{c3} = 15$ volts | | — | 6GK7 |
| Vertical Oscillator | 250 | — | 3.0 | 2.0 | — | 30,000 | 2,200 | 66 | — | — | 6GL7 |
| Vertical Amplifier | 175 60 | — — | 25 0 | 46 100 | — — | 780 | 6,400 | 5.0 | — | — | |
| Max peak negative grid voltage $\diamond = 400$ volts | | | | | | | | | | | |
| Max positive pulse plate voltage $\diamond = 1,500$; max d-c cathode current $\diamond = 50$ ma | | | | | | | | | | | |
| Class A Amp | 300 | 300 | 10 | 60† | 8.0† | 29,000 | 10,200 | — | 3,000 | 11 | 6GM5 |
| Class AB ₁ Amp. | 450 | 400 | 21 | 66† | 9.4† | — | — | — | 6,600† | 45 | |
| Class A Amplifier | 125 | 125 | $R_k = 56$ | 14 | 3.4 | 200,000 | 13,000 | — | — | — | 6GM6 |
| Class A Amp | 6.3 | — | 0.4 | 0.9 | — | 5,400 | 2,600 | 14 | — | — | 6GM8 |
| Class A Amplifier | 200 | 150 | $R_k = 100$ | 25 | 5.5 | 60,000 | 11,500 | — | — | — | 6GN8 |
| Class A Amplifier | 250 | — | 2.0 | 2.0 | — | 37,000 | 2,700 | 100 | — | — | |
| Half-Wave Rectifier | Max d-c output current per plate $\diamond = 9$ ma; max peak inverse voltage $\diamond = 330$ volts; max RMS supply voltage per plate $\diamond = 117$ volts; max peak current per plate $\diamond = 54$ ma | | | | | | | | | | 6GQ7 |
| Sync Separator and AGC Keyer | 100 | 67.5 | $I_{c1} = 0.1$ ma | 2.0 | 3.6 | (Both Sections operating) | | — | $E_{c3} = 0$ volts | | 6GS8 |
| | 100 | 67.5 | 0 | — | — | — | 1,200 | — | $E_{c3} = 0$ volts | | |
| (Plate and grid number 3 of opposite section grounded) | | | | | | | | | | | |
| Horizontal Amplifier | 250 60 | 150 150 | 22.5 0 | 70 390 | 2.1 32 | 15,000 | 7,100 | — | — | — | 6GT5 |
| Max positive pulse plate voltage $\diamond = 6,500$; max d-c cathode current $\diamond = 175$ ma | | | | | | | | | | | |
| Horizontal Amplifier | 250 60 | 150 150 | 22.5 0 | 70 390 | 2.1 32 | 15,000 | 7,100 | — | — | — | 6GT5-A |
| Max positive pulse plate voltage $\diamond = 6,500$; max d-c cathode current $\diamond = 175$ ma | | | | | | | | | | | |

Metal tubes are shown in bold-face type, miniature tubes in italics.

♦ G3 and G5 are screen. G4 is signal-input grid.

♥ G2 and G4 are screen. G3 is signal-input grid.

1, 2, 3, etc. indicate tube sections.

✱ Maximum screen dissipation appears immediately below the screen voltage.

† Heater warm-up time controlled.

| Tube Type | Classification by Construction | Base Connections | Out-line Dwg | Filament Volts | Filament Amp | Max Plate Watts | Max Plate Volts | Max Screen Volts and Watts* | Capacitance in Picofarads | | |
|---------------|--------------------------------|------------------|--------------|----------------|--------------|-------------------|---|-----------------------------|--|----------------|------------|
| | | | | | | | | | Input | Out-put | Grid-plate |
| 6GU6 | "Shadow-Grid" Beam Pentode | 7GA | 5-2 | 6.3 | 0.22 | 3.0◆ | 300◆ | 150◆ 0.15◆ | 7.0▲ | 3.2▲ | 0.018▲ |
| 6GU7† | Medium-Mu Twin Triode | 9LP | 6-3 | 6.3 | 0.6 | 3.0◆ ♣ | 330◆ | — | 3.4▲ 3.6▲ | 0.44▲ 0.34▲ | 3.0▲ |
| 6GV5■ | Beam Power Amplifier | 12DR | 12-79 | 6.3 | 1.2 | 17.5◆ | 770◆ | 220◆ 3.5◆ | 16▲ | 7.0▲ | 0.6▲ |
| 6GV7 | Triode-Pentode | 9KN | T-X | 6.3 | 0.35 | 2.0 2.0 | 250 250 | 230 0.5 — | Pentode Section Triode Section | | |
| 6GV8 | Triode-Pentode | 9LY | 6-4 | 6.3 | 0.9 | 7.0□ 0.5□ | 250□ 250□ | 250□ 2.0□ | Pentode Section Triode Section | | |
| 6GW5 | High-Mu Triode | 7GK | 5-2 | 6.3 | 0.19 | 2.5◆ | 200◆ | — | 5.5 | 4.0 | 0.6 |
| 6GW6 | Beam-Power Amplifier | 6AM | 12-51 | 6.3 | 1.2 | 17.5◆ | 770◆ | 220◆ 3.5◆ | 17▲ | 7.0▲ | 0.5▲ |
| 6GW8 | Triode-Pentode | 9LZ | 6-4 | 6.3 | 0.7 | 9.0 0.5 | 300 300 | 300 1.5 | Pentode Section Triode Section | | |
| 6GX6† | Dual-Control Pentode | 7EN | 5-2 | 6.3 | 0.45 | 1.7◆ | 300◆ | 300◆ 1.0◆ | — | — | — |
| 6GX7 | Triode-Pentode | 9QA | 6-2 | 6.3 | 0.4 | 2.2◆ 1.5◆ | 275◆ 275◆ | 275◆ 0.45◆ — | Pentode Section Triode Section | | |
| 6GY5■ | Beam Power Amplifier | 12DR | 12-79 | 6.3 | 1.5 | 18◆ | 770◆ | 220◆ 3.5◆ | 22▲ | 9.0▲ | 0.7▲ |
| 6GY6† | Dual-Control Pentode | 7EN | 5-2 | 6.3 | 0.45 | 1.7◆ | 300◆ | 300◆ 1.0◆ | — | — | — |
| 6GY8 | Triple-Triode | 9MB | 6-2 | 6.3 | 0.45 | 2.0◆ 5.0◆ ⊕ | 330◆ | — | Section 1 (Pins 4, 6, 7) Section 2 (Pins 3, 8, 9) Section 3 (Pins 1, 2, 4) | | |
| 6GZ5 | Power Amplifier Pentode | 7CV | 5-2 | 6.3 | 0.38 | 4.8◆ | 300◆ | 300◆ 1.1◆ | 8.5▲ | 3.8▲ | 0.24▲ |
| 6H4-GT | Diode | 5AF | 9-11 | 6.3 | 0.15 | — | — | — | — | — | — |
| 6H6 6H6-GT | Twin Diode | 7Q | 8-5 9-11 | 6.3 | 0.3 | — | Tube Voltage Drop: ♣ 11 v at 16 ma d-c | | | | |
| 6HA5 | High-Mu Triode | 7GM | 5-1 | 6.3 | 0.18 | 2.6◆ | 220◆ | — | 4.3 | 2.9 | 0.36 |
| 6HA6 | Pentode | 9NW | 6-4 | 6.3 | 0.71 | 8.0◆ | 300◆ | 250◆ 1.5◆ | 13▲ | 8.0▲ | 0.18▲ |
| 6HB5■ | Beam Power Amplifier | 12BJ | 12-58 | 6.3 | 1.5 | 18◆ | 770◆ | 220◆ 3.5◆ | 22▲ | 9.0▲ | 0.4▲ |
| 6HB6 | Power Amplifier Pentode | 9NW | 6-4 | 6.3 | 0.76 | 10◆ | 350◆ | 300◆ 2.0◆ | 13▲ | 8.0▲ | 0.18▲ |

■ Compactron.
† Zero signal.
♣ Per section.

‡ Plate-to-plate.
♣ Maximum.
‡ Supply voltage.

⊕ Subminiature type.
▲ Without external shield.
◆ Design maximum rating.

⊕ Total for all similar sections.
⊕ Absolute maximum rating.
Conversion transconductance.

| Service | Plate Volts | Screen Volts | Neg Grid Volts | Plate Milli-am-peres | Screen Milli-am-peres | R_p , Ohms | G_m , μ mhos | μ Factor | Load for Rated Output, Ohms | Power Output, Watts | Tube Type |
|--|---|--------------|----------------|----------------------|-----------------------|--------------|--------------------|--------------------|-----------------------------|---------------------|-----------------------------|
| Class A Amplifier | 275 | 135 | 0.4 | 10 | 0.17 | 165,000 | 15,500 | — | — | — | 6GU6 |
| Class A Amplifier ♦ | 250 | — | 10.5 | 11.5 | — | 5,500 | 3,100 | 17 | — | — | 6GU7 ¶ |
| Horizontal Amplifier | 250 60 | 150 150 | 22.5 0 | 65 345 | 1.8 27 | 18,000 | 7,300 | — | — | — | 6GV5 ■ |
| Max positive pulse plate voltage ♦ = 6,500; max d-c cathode current ♦ = 175 ma | | | | | | | | | | | |
| Class A Amplifier | 125 | 125 | 1.5 | 10 | 3.1 | — | 11,000 | — | — | — | 6GV7 |
| Class A Amplifier | 100 | — | 3.0 | 14 | — | — | 5,500 | 17 | — | — | |
| Class A Amplifier Class A Amp | 170 | 170 | 15 | 41 | 2.7 | 25,000 | 7,500 | — | — | — | 6GV8 |
| Class A Amp | 100 | — | 0.8 | 5.0 | — | 7,600 | 6,500 | 50 | — | — | |
| Class A Amp | 135 | — | 1.0 | 12.5 | — | 5,800 | 15,000 | 70 | — | — | 6GW5 |
| Horizontal Amplifier | 250 60 | 150 150 | 22.5 0 | 70 390 | 2.1 32 | 15,000 | 7,100 | — | — | — | 6GW6 |
| Max positive pulse plate voltage ♦ = 6,500; max d-c cathode current ♦ = 175 ma | | | | | | | | | | | |
| Class A Amplifier Class A Amp | 250 | 250 | 7.0 | 36† | 5.5† | 45,000 | 10,000 | — | 7,000 | 4.2 | 6GW8 |
| Class A Amplifier | 250 | — | 1.7 | 1.2 | — | 62,500 | 1,600 | 100 | — | — | |
| Class A Amplifier | 150 | 100 | $R_k = 180$ | 3.7 | 3.0 | 140,000 | 3,700 | $E_{c2} = 0$ volts | | | 6GX6 ¶ |
| Class A Amplifier Class A Amplifier | 125 | 125 | 1.0 | 8.0 | 2.5 | 200,000 | 11,000 | — | — | — | 6GX7 |
| Class A Amplifier | 125 | — | 1.0 | 13 | — | 4,700 | 8,500 | 40 | — | — | |
| Horizontal Amplifier | 130 60 | 130 130 | 20 0 | 50 410 | 1.75 24 | 11,000 | 9,100 | — | — | — | 6GY5 ■ |
| Max positive pulse plate voltage ♦ = 6,500; max d-c cathode current ♦ = 230 ma | | | | | | | | | | | |
| Class A Amplifier | 150 | 100 | $R_k = 180$ | 3.7 | 3.0 | 140,000 | 3,700 | $E_{c3} = 0$ volts | | | 6GY6 ¶ |
| Max peak positive pulse plate voltage ♦ = 600 volts | | | | | | | | | | | |
| Class A Amplifier Class A Amplifier (Sections 2 and 3) | 125 | — | $R_k = 220$ | 4.5 | — | 14,000 | 4,500 | 63 | — | — | 6GY8 |
| Class A Amplifier | 125 | — | 1.0 | 4.5 | — | 14,000 | 4,500 | 63 | — | — | |
| Class A Amplifier | 250 | 250 | $R_k = 270$ | 16† | 2.7† | 150,000 | 8,400 | — | 15,000 | 1.1 | 6GZ5 |
| Half-Wave Rectifier | Max d-c output current = 4 ma; max rms supply voltage = 100 volts; max peak current = 18 ma | | | | | | | | | | 6H4-GT |
| Half-Wave Rectifier | Max d-c output current per plate = 8 ma; max peak inverse voltage = 420 volts; max rms supply voltage per plate = 150 volts; max peak current per plate = 48 ma | | | | | | | | | | 6H6 6H6-GT |
| Class A Amplifier | 135 | — | 1.0 | 11.5 | — | — | 14,500 | 72 | — | — | 6HA5 |
| Class A Amplifier | 150 | 100 | $R_k = 33$ | 28 | 3.5 | 20,000 | 20,000 | — | — | — | 6HA6 |
| Class A Amplifier | 60 | 100 | 0 | 45 | 9.0 | — | — | — | — | — | |
| Horizontal Amplifier | 130 60 | 130 130 | 20 0 | 50 410 | 1.75 24 | 11,000 | 9,100 | — | — | — | 6HB5 ■ |
| Max positive pulse plate voltage ♦ = 6,000; max d-c cathode current ♦ = 230 ma | | | | | | | | | | | |
| Class A Amplifier | 250 | 250 | $R_k = 100$ | 40 | 6.2 | 24,000 | 20,000 | — | — | — | 6HB6 |

Metal tubes are shown in bold-face type, miniature tubes in italics.

♦ G3 and G5 are screen. G4 is signal-input grid.

♥ G2 and G4 are screen. G3 is signal-input grid.

1, 2, 3, etc. indicate tube sections.

■ Maximum screen dissipation appears

immediately below the screen voltage.

¶ Heater warm-up time controlled.

| Tube Type | Classification by Construction | Base Connections | Out-line Dwg | Fila-ment Volts | Fila-ment Amp | Max Plate Watts | Max Plate Volts | Max Screen Volts and Watts* | Capacitance in Picofarads | | |
|-------------------|--------------------------------|------------------|--------------|-----------------|---------------|-----------------|-----------------|-----------------------------|--|---------|------------|
| | | | | | | | | | Input | Out-put | Grid-plate |
| 6HB7 [†] | Triode-Pentode | 9QA | 6-2 | 6.3 | 0.45 | 3.1 ⬠ | 330 ⬠ | 330 ⬠ | Pentode Section | | |
| | | | | | | 2.5 ⬠ | 330 ⬠ | 0.55 ⬠ | Triode Section | | |
| 6HC8 | Triode-Pentode | 9EX | 9-70 | 6.3 | 1.2 | 11 ⬠ | 350 ⬠ | 315 ⬠ | Pentode Section | | |
| | | | | | | 1.0 ⬠ | 330 ⬠ | 1.5 ⬠ | Triode Section | | |
| 6HD5 [■] | Beam Power Amplifier | 12ES | 12-59 | 6.3 | 2.25 | 24 ⬠ | 770 ⬠ | 220 ⬠ | — | — | — |
| 6HD7 [†] | Triode-Pentode | 9QA | 6-2 | 6.3 | 0.45 | 2.2 ⬠ | 275 ⬠ | 275 ⬠ | Pentode Section | | |
| | | | | | | 1.5 ⬠ | 275 ⬠ | 0.45 ⬠ | Triode Section | | |
| 6HE5 [■] | Beam Power Amplifier | 12EY | 9-60 | 6.3 | 0.8 | 12 ⬠ | 350 ⬠ | 300 ⬠ | 9.5 ⬠ | 7.0 ⬠ | 0.50 ⬠ |
| 6HE7 [■] | Diode-Pentode | 12FS | 12-57 | 6.3 | 2.7 | 10 ⬠ | 500 ⬠ | 150 ⬠ | Pentode Section | | |
| | | | | | | | | 3.5 ⬠ | Diode Section | | |
| 6HF5 [■] | Beam Power Amplifier | 12FB | 12-89 | 6.3 | 2.25 | 28 ⬠ | 990 ⬠ | 190 ⬠ | 24 ⬠ | 10 ⬠ | 0.56 ⬠ |
| | | | | | | | | 5.5 ⬠ | Tube Voltage Drop: 21 volts at 350 ma d-c | | |
| 6HF8 | Triode-Pentode | 9DX | 6-3 | 6.3 | 0.75 | 5.0 ⬠ | 330 ⬠ | 330 ⬠ | Pentode Section | | |
| | | | | | | 1.0 ⬠ | 330 ⬠ | — | Triode Section | | |
| 6HG5 | Beam Power Amplifier | 7BZ | 5-3 | 6.3 | 0.45 | 12 ⬠ | 275 ⬠ | 275 ⬠ | 8.0 ⬠ | 8.5 ⬠ | 0.4 ⬠ |
| 6HG8 | Triode-Pentode | 9MP | 6-2 | 6.3 | 0.34 | 2.0 | 250 | 150 | Pentode Section | | |
| | | | | | | 1.5 | 125 | 0.5 | Triode Section | | |
| 6HJ5 [■] | Beam Power Amplifier | 12FL | 12-59 | 6.3 | 2.25 | 24 ⬠ | 770 ⬠ | 220 ⬠ | — | | |
| | | | | | | | | 6.0 ⬠ | — | | |
| 6HJ7 [†] | Triode-Pentode | 9QA | 6-2 | 6.3 | 0.45 | 2.2 ⬠ | 275 ⬠ | 275 ⬠ | Pentode Section | | |
| | | | | | | 1.5 ⬠ | 275 ⬠ | — | Triode Section | | |
| 6HJ8 [†] | Diode-Pentode | 9CY | 6-2 | 6.3 | 0.45 | 3.2 ⬠ | 330 ⬠ | 330 ⬠ | 7.0 | 3.2 | 0.015 ⬠ |
| | | | | | | | | | Diode Section | | |
| 6HK5 | High-Frequency Triode | 7GM | 5-2 | 6.3 | 0.19 | 2.3 ⬠ | 200 ⬠ | — | 4.4 | 2.6 | 0.29 |
| 6HL5 | Beam Power Amplifier | 9QW | 6-4 | 6.3 | 0.95 | 12 ⬠ | 330 ⬠ | 250 ⬠ | — | — | — |
| 6HL8 [†] | Triode-Pentode | 9AE | 6-2 | 6.3 | 0.6 | 2.5 ⬠ | 330 ⬠ | 330 ⬠ | Pentode Section | | |
| | | | | | | 2.5 ⬠ | 330 ⬠ | — | Triode Section | | |

■ Compactron.
† Zero signal.
⬠ Per section.

† Plate-to-plate.
⬠ Maximum.
⬠ Supply voltage.

⊙ Subminiature type.
▲ Without external shield.
⬠ Design maximum rating.

⊙ Total for all similar sections.
⬠ Absolute maximum rating.
Conversion transconductance.

| Service | Plate Volts | Screen Volts | Neg Grid Volts | Plate Milli- am- peres | Screen Milli- am- peres | R _p , Ohms | G _m , μmhos | μ Fac- tor | Load for Rated Out- put, Ohms | Power Out- put, Watts | Tube Type |
|-------------------------|----------------|-----------------|--------------------------------|---------------------------------|----------------------------------|--------------------------|---------------------------|------------------|--|--------------------------------|---------------|
| Class A Amplifier | 125 | 125 | 1.0 | 12 | 4.0 | 200,000 | 6,400 | — | — | — | 6HB7 † |
| Class A Amplifier | 150 | — | R _k = 56 | 18 | — | 5,000 | 8,500 | 40 | — | — | |
| Vertical Amplifier | 250 60 | 250 250 | 18 0 | 38 180 | 3.0 30 | 55,000 | 5,100 | — | — | — | 6HC8 |
| Vertical Oscillator | 250 | — | 3 | 1.4 | — | 34,000 | 2,000 | 68 | — | — | |
| Horizontal Amplifier | 135 60 | 135 135 | 22 0 | 65 540 | 4.0 48 | 5,000 | 10,000 | — | — | — | 6HD5 ■ |
| Class A Amplifier | 125 | 125 | 1.0 | 12 | 3.5 | — | 7,000 | — | — | — | 6HD7 † |
| Class A Amplifier | 100 | — | R _k = 0.1 meg | 14 | — | 4,880 | 8,200 | 40 | — | — | |
| Vertical Amplifier | 250 60 | 250 250 | 20 0 | 43 180 | 3.5 20 | 50,000 | 4,100 | — | — | — | 6HE5 ■ |
| Horizontal Amplifier | 130 50 | 130 130 | 22 0 | 60 450 | 2.8 40 | 6,200 | 8,800 | — | — | — | 6HE7 ■ |
| TV Damper | — | — | — | — | — | — | — | — | — | — | |
| Horizontal Amplifier | 175 70 | 125 120 | 25 0 | 125 570 | 4.5 34 | 5,600 | 11,300 | — | — | — | 6HF5 ■ |
| Class A Amplifier | 200 | 125 | R _k = 68 | 25 | 7.0 | 75,000 | 12,500 | — | — | — | 6HF8 |
| Class A Amplifier | 45 | 125 | 0 | 40 | 15 | — | — | — | — | — | |
| Class A Amplifier | 200 | — | 2.0 | 4.0 | — | 17,500 | 4,000 | 70 | — | — | |
| Class A Amplifier | 250 | 250 | 12.5 | 45† | 4.5† | 52,000 | 4,100 | — | 5,000 | 4.5 | 6HG5 |
| Class A Amplifier | 170 | 150 | 1.2 | 10 | 3.3 | 350,000 | 12,000 | — | — | — | 6HG8 |
| Class A Amplifier | 100 | — | 3.0 | 14 | — | 3,100 | 5,500 | 17 | — | — | |
| Horizontal Amplifier | 135 60 | 135 135 | 22 0 | 80 540 | 5.5 48 | 5,000 | 10,000 | — | — | — | 6HJ3 ■ |
| Class A Amplifier | 125 | 125 | 1.0 | 9.5 | 2.3 | — | 12,300 | — | — | — | 6HJ7 † |
| Class A Amplifier | 100 | — | R _k = 0.1 meg | 14 | — | 4,880 | 8,200 | 40 | — | — | |
| Class A Amplifier | 125 | 125 | R _k = 56 | 11.5 | 3.6 | 200,000 | 9,300 | — | — | — | 6HJ8 † |
| Class A Amplifier | 135 | — | 1.0 | 12.5 | — | 5,000 | 15,000 | 75 | — | — | 6HK6 |
| Class A Amplifier | 130 | 130 | R _k = 56 | 70† | 5.0† | 7,500 | 17,000 | — | 2,000 | 3.0 | 6HL5 |
| Class A Amplifier | 125 | 125 | 1.0 | 12 | 4.5 | 150,000 | 10,000 | — | — | — | 6HL8 † |
| Class A Amplifier | 125 | — | 1.0 | 12.5 | — | 5,000 | 7,000 | 40 | — | — | |

Metal tubes are shown in bold-face type, miniature tubes in italics.

♦ G3 and G5 are screen. G4 is signal-input grid.

♥ G2 and G4 are screen. G3 is signal-input grid.

1, 2, 3, etc. indicate tube sections.

■ Maximum screen dissipation appears immediately below the screen voltage.

† Heater warm-up time controlled.

| Tube Type | Classification by Construction | Base Connections | Out-line Dwg | Fila-ment Volts | Fila-ment Amp | Max Plate Watts | Max Plate Volts | Max Screen Volts and Watts * ‡ | Capacitance in Picofarads | | |
|-----------|--------------------------------|------------------|---------------------|-----------------|---------------|----------------------------|-----------------|-----------------------------------|---|----------------------------|------------|
| | | | | | | | | | Input | Out-put | Grid-plate |
| 6HM5 | High-Mu Triode | 7GM | 5-2 | 6.3 | 0.185 | 2.6◆ | 200◆ | — | 4.5 | 3.0 | 0.34♣ |
| 6HM6 | Sharp-Cutoff RF Pentode | 9PM | 6-2 | 6.3 | 0.3 | 2.5◆ | 250◆ | 250◆ 0.6◆ | 8.7 | 3.0 | 0.024 |
| 6HQ5 | Triode | 7GM | 5-2 | 6.3 | 0.2 | 2.5◆ | 200◆ | — | 5.0 | 3.5 | 0.52 |
| 6HQ6 | Semi-Remote-Cutoff RF Pentode | 7CM | 5-2 | 6.3 | 0.3 | 2.4◆ | 330◆ | 330◆ 0.65◆ | 7.8 | 3.0 | 0.016 |
| 6HR5† | Beam Pentode | 7BZ | 5-3 | 6.3 | 0.45 | 8.0◆ | 260◆ | 270◆ 2.0◆ | 8.3▲ | 8.2▲ | 0.35▲ |
| 6HR6† | Semi-Remote-Cutoff RF Pentode | 7BK | 5-2 | 6.3 | 0.45 | 3.0◆ | 300◆ | 300◆ 1.0◆ | 8.8▲ | 5.2▲ | 0.006▲♣ |
| 6HS5■ | Beam Triode | 12GY | 12-60 | 6.3 | 1.5 | 30◆ | 5500 Peak | — | 24▲ | 6.5▲ | 1.6▲ |
| 6HS6† | Sharp-Cutoff RF Pentode | 7BK | 5-2 | 6.3 | 0.45 | 3.0◆ | 300◆ | 300◆ 1.0◆ | 8.8▲ | 5.2▲ | 0.006▲♣ |
| 6HS8 | Twin Pentode | 9FG | 6-3 | 6.3 | 0.3 | 1.1◆ ♣ | 300◆ | 150◆ 0.75◆ | — | — | — |
| 6HT6 | Semi-Remote-Cutoff RF Pentode | 9PM | 6-2 | 6.3 | 0.3 | 2.5◆ | 250◆ | 250◆ 0.6◆ | 8.7 | 3.0 | 0.024 |
| 6HU6 | Electron-Ray Indicator | 9GA | T-X | 6.3 | 0.3 | 0.6 | — | — | Max Target Voltage = 300 Volts Min. Target Voltage = 170 Volts | | |
| 6HV5■ | Beam Triode | 12GY | T-X | 6.3 | 1.8 | 30◆ | 5,500 peak◆ | — | 19▲ | 7.0▲ | 1.5▲ |
| 6HV5-A■ | Beam Triode | 12GY | T-X | 6.3 | 1.8 | 35◆ | 5,500 peak◆ | — | 22▲ | 11▲ | 1.8▲ |
| 6HW8 | Double-Plate Sheet-Beam Tube | 9NQ | 6-3 | 6.3 | 0.3 | 2.0◆ ♣ | 330◆ ♣ | 330◆ | — | — | — |
| 6HZ5■ | Beam Triode | 12GY | 12-62 | 6.3 | 2.4 | 30◆ | 6,000 ◆ | — | 22▲ | 10▲ | 2.2▲ |
| 6HZ6† | Dual-Control Pentode | 7EN | 5-2 | 6.3 | 0.45 | 1.7◆ | 300◆ | 300◆ 1.0◆ | — | — | — |
| 6HZ8 | Triode-Pentode | 9DX | 9-77 | 6.3 | 1.125 | 8.0◆ 1.0◆ | 330◆ 300◆ | 330◆ 2.0◆ | Pentode Section Triode Section | | |
| 6J4 | High-Frequency Triode | 7BQ | 5-2 | 6.3 | 0.4 | 2.25 | 150 | — | — | — | — |
| 6J5 | Medium-Mu Triode | 6Q | 8-1 | 6.3 | 0.3 | 2.5 | 300 | — | 3.4 | 3.6 | 3.4 |
| 6J5-GT | | | 9-12 | 0.3 | 2.5 | 300 | — | 4.2 | 5.0 | 3.8 | |
| 6J6 | Medium-Mu Twin Triode | 7BF | 5-2 | 6.3 | 0.45 | 1.5◆♣ | 300 | — | 2.6 | 1.6 ₁ | 1.5 |
| 6J6-A† | | | | | | | | | — | Both Sections in Push-pull | |
| 6J7 | Sharp-Cutoff Pentode | 7R | 8-4 12-8 9-18 | 6.3 | 0.3 | 0.75 | 300 | 300◆ 0.1 | Pentode connection | | |
| 6J7-G | | | | | | 1.75 | 250 | — | Triode connection (G ₂ , G ₃ & P tied) | | |
| 6J7-GT | | | | | | — | — | — | Triode Section | | |
| 6J8-G | Triode-Heptode Converter | 8H | 12-8 | 6.3 | 0.3 | 0.4 0.75 | 300 150 | 100 0.3 | Osc I _{e1} = 0.4 ma R _{e1} = 50,000 ohms Triode Section | | |
| 6J9† | Triple Triode | 10G | 6-13 | 6.3 | 0.45 | 2.0◆ ♣ 5.0◆ Total | 330◆ | — | — | — | — |

■ Compactron.
† Zero signal.
♣ Per section.

‡ Plate-to-plate.
♣ Maximum.
‡ Supply voltage.

● Subminiature type.
▲ Without external shield.
◆ Design maximum rating.

⊙ Total for all similar sections.
⊙ Absolute maximum rating.
Conversion transconductance.

| Service | Plate Volts | Screen Volts | Neg Grid Volts | Plate Milli-amperes | Screen Milli-amperes | R _p , Ohms | G _m , μmhos | μ Factor | Load for Rated Out-put, Ohms | Power Out-put, Watts | Tube Type |
|------------------------------|---|--------------|--------------------------|---------------------|----------------------|---|------------------------|----------|--|----------------------|-----------------|
| Class A Amplifier | 135 | — | 1.0 | 12.5 | — | — | 14,500 | 78 | — | — | 6HM5 |
| Class A Amplifier | 125 | 125 | R _k = 56 | 13 | 3.2 | 156,000 | 15,000 | — | — | — | 6HM6 |
| Class A Amplifier | 135 | — | 1.0 | 11.5 | — | 5,400 | 15,000 | 78 | — | — | 6HQ5 |
| Class A Amplifier | 125 | 125 | R _k = 56 | 15 | 3.8 | 220,000 | 10,500 | — | — | — | 6HQ6 |
| Class A Amplifier | 260 | 270 | 19 | 30 | 2.3 | — | 3,600 | — | — | — | 6HR5 ¶ |
| Class A Amplifier | 200 | 115 | R _k = 68 | 13.2 | 4.3 | 500,000 | 8,500 | — | — | — | 6HR6 ¶ |
| Avg. Char. | 3500 | — | 4.4 | 300 Peak | — | 4,600 | 65,000 | 300 | (b.p. connected to k at socket) | — | 6HS5 ■ |
| Class A Amplifier | 150 | 75 | R _k = 68 | 8.8 | 2.8 | 500,000 | 9,500 | — | — | — | 6HS6 ¶ |
| Sync Separator and AGC Keyer | 100 | 67.5 | I _{e1} = 0.1 ma | 2.0 | 4.4 | (Both Sections Operating) | 1,100 | — | E _{c3} = 0 volts | — | 6HS8 |
| | 100 | 67.5 | 0 | — | — | (Plate and grid number 3 of opposite section grounded) | — | — | E _{c3} = 0 volts | — | |
| Class A Amplifier | 125 | 125 | R _k = 56 | 15 | 4.0 | 143,000 | 14,000 | — | — | — | 6HT6 |
| Level Indicator | Plate voltage = 250 thru 0.1 Meg; Target voltage = 250; (E _c = 0; Pattern length, dark portion = 0.83"; Target current = 1.0 ma; Plate current = 20 ma) E _c = -10 volts; Pattern length, dark portion = 0.0"; Target current = 1.8 ma; Plate current = 0.5 ma | | | | | | | | | | 6HU6 |
| Pulse Regulator | 3,500 | — | 4.4 | 300 peak | — | 4,600 | 65,000 | 300 | (b.p. connected to k at socket) | — | 6HV5 ■ |
| Pulse Regulator | 3,500 | — | 4.4 | 300 peak | — | 4,600 | 65,000 | 300 | (b.p. connected to k at socket) | — | 6HV5-A ■ |
| Synchronous Detector | 250 | 250 | R _k = 270 | 13 | 1.4 | — | 4,000 | — | — | — | 6HW8 |
| | (With plates tied together and deflectors grounded) Total voltage on either deflector with an equal and opposite change on the other deflector required to switch the plate current from one plate to the other = 40 volts maximum | | | | | | | | | | |
| Pulse Regulator | 500 | — | -1.25 | 5.4 | — | — | 1,500 | 235 | (b.p. connected to k at socket) | — | 6HZ5 ■ |
| Class A Amplifier | 150 | 100 | R _k = 180 | 3.2 | 3.2 | 110,000 | 3,400 | — | E _{c3} = 0 volts | — | 6HZ6 ¶ |
| Class A Amplifier | 250 | 170 | R _k = 100 | 29 | 6.0 | 140,000 | 12,600 | — | — | — | 6HZ8 |
| Class A Amp | 200 | — | 2.0 | 3.5 | — | 17,500 | 4,000 | 70 | — | — | |
| Class A Amplifier | 150 | — | R _k = 100 | 15 | — | 4,500 | 12,000 | 55 | — | — | 6J4 |
| Class A Amplifier | 250 | — | 8.0 | 9.0 | — | 7,700 | 2,600 | 20 | — | — | 6J5 |
| | 90 | — | 0 | 10 | — | 6,700 | 3,000 | 20 | — | — | 6J5-GT |
| Class A Amplifier | 100 | — | R _k = 50 | 8.5 | — | 7,100 | 5,300 | 38 | — | — | 6J6 |
| Class C Amplifier | 150 | — | 10 | 30 | — | Input Signal = 0.35 watt I _{e1} = 16 ma d-c | | | — | 3.5 | 6J6-A ¶ |
| Class A Amplifier | 250 | 100 | 3.0 | 2.0 | 0.5 | 1,000,000 | 1,225 | — | — | — | 6J7 |
| Class A Amplifier | 100 | 100 | 3.0 | 2.0 | 0.5 | 1,000,000 | 1,185 | — | — | — | 6J7-G |
| Class A Amp | 250 | — | 8.0 | 6.5 | — | 10,500 | 1,900 | 20 | — | — | 6J7-GT |
| Converter | 250 | 100 | 3.0 | 1.3 | 3.5 | 2,500,000 | 290 # | — | E _b (Triode Osc) = 250 thru 20,000 ohms I _b (Triode) = 5.8 ma | — | 6J8-G |
| Class A Amplifier | 125 | — | 1.0 | 6.0 | — | 11,000 | 5,200 | 57 | — | — | 6J9 ¶ |

Metal tubes are shown in bold-face type, miniature tubes in italics.

♦ G3 and G5 are screen. G4 is signal-input grid.

♥ G2 and G4 are screen. G3 is signal-input grid.

1, 2, 3, etc. indicate tube sections.

■ Maximum screen dissipation appears immediately below the screen voltage.

¶ Heater warm-up time controlled.

| Tube Type | Classification by Construction | Base Connections | Out-line Dwg | Filament Volts | Filament Amp | Max Plate Watts | Max Plate Volts | Max Screen Volts and Watts* | Capacitance in Picofarads | | |
|-----------|----------------------------------|------------------|--------------|----------------|--------------|-----------------|-----------------|-----------------------------|---|--------------------------------------|------------|
| | | | | | | | | | Input | Out-put | Grid-plate |
| 6J10 | Pentode-Gated-Beam Discriminator | 12BT | 9-58 | 6.3 | 0.95 | 10 — | 275 330 | 275 2.0 110 | Pentode Section (Pins 2, 3, 9, 11) Gated-Beam Discriminator (Pins 4, 5, 6, 7, 8) | | |
| 6J11 | Twin Pentode | 12BW | 9-58 | 6.3 | 0.8 | 3.1 ↑ | 330 ↑ | 330 0.65 ↑ | 11 | 2.8 ₁ 3.2 ₂ | 0.04 ♣ |
| 6JA5 | Beam Power Amplifier | 12EY | 12-57 | 6.3 | 1.0 | 19 | 400 | 300 275 | 14 | 7.5 | 0.66 |
| 6JA8 | Triode-Pentode | 9DX | 6-3 | 6.3 | 0.75 | 5.0 1.0 | 330 300 | 330 1.5 — | Pentode Section Triode Section | | |
| 6JB5 | Beam Power Amplifier | 12EY | 12-57 | 6.3 | 0.8 | 15 | 350 | 300 2.75 | 9.5 | 6.5 | 0.49 |
| 6JB6 | Beam Power Amplifier | 9QL | 12-70 | 6.3 | 1.2 | 17.5 | 770 | 220 3.5 | 15 | 6.0 | 0.2 |
| 6JB6-A | Beam Power Amplifier | 9QL | T-X | 6.3 | 1.2 | 17.5 | 770 | 220 3.5 | 15 | 6.0 | 0.2 |
| 6JC5 | Beam Power Amplifier | 12EY | 12-57 | 6.3 | 0.8 | 19 | 350 | 300 2.75 | 9.5 | 7.0 | 0.54 |
| 6JC6 | Sharp-Cutoff Pentode | 9PM | 6-2 | 6.3 | 0.3 | 2.5 | 330 | 330 0.6 | 8.2 | 3.0 | 0.019 ♣ |
| 6JC6-A | Sharp-Cutoff Pentode | 9PM | 6-2 | 6.3 | 0.3 | 3.1 | 330 | 330 0.7 | 8.5 | 3.0 | 0.019 ♣ |
| 6JC8 | Triode-Pentode | 9PA | 6-2 | 6.3 | 0.45 | 2.3 1.7 | 275 275 | 275 0.45 — | Pentode Section Triode Section | | |
| 6JD5 | Beam Triode | 12GV | T-X | 6.3 | 2.4 | 35 | 5,500 peak | — | 23 | 12 | 1.7 |
| 6JD6 | Sharp-Cutoff Pentode | 9PM | 6-2 | 6.3 | 0.3 | 2.5 | 330 | 330 0.6 | 8.2 | 3.0 | 0.019 ♣ |
| 6JE6 | Beam Power Amplifier | 9QL | T-X | 6.3 | 2.5 | 24 | 990 | 190 3.2 | 21 | 11 | 0.44 |
| 6JE6-A | Beam Power Amplifier | 9QL | 12-116 | 6.3 | 2.5 | 30 | 990 | 220 5.0 | 22 | 11 | 0.56 |
| 6JE6-B | Beam Power Amplifier | 9QL | 12-116 | 6.3 | 2.5 | 30 | 990 | 220 5.0 | 22 | 11 | 0.56 |
| 6JE6-C | Beam Power Amplifier | 9QL | 12-116 | 6.3 | 2.5 | 30 | 990 | 220 5.0 | 22 | 11 | 0.56 |
| 6JE8 | Triode-Pentode | 9DX | 6-3 | 6.3 | 0.78 | 5.0 1.0 | 330 300 | 330 2.0 — | Pentode Section Triode Section | | |
| 6JF6 | Beam Power Amplifier | 9QL | T-X or 12-70 | 6.3 | 1.6 | 17 | 770 | 220 3.5 | 22 | 9.0 | 1.2 |
| 6JG5 | Sharp-Cutoff Pentode | 9SF | 6-3 | 6.3 | 0.525 | 5.0 | 330 | 330 1.1 | 11 | 4.5 | 0.10 |
| 6JG6 | Beam Power Amplifier | 9QU | 12-64 | 6.3 | 1.6 | 17 | 770 | 220 3.5 | 22 | 9.0 | 0.7 |

■ Compactron.
† Zero signal.
♣ Per section.

‡ Plate-to-plate.
♣ Maximum.
‡ Supply voltage.

⊙ Subminiature type.
▲ Without external shield.
♣ Design maximum rating.

⊙ Total for all similar sections.
⊙ Absolute maximum rating.
Conversion transconductance.

| Service | Plate Volts | Screen Volts | Neg Grid Volts | Plate Milli-amperes | Screen Milli-amperes | R _p ' Ohms | G _m ' μmhos | μ Factor | Load for Rated Output, Ohms | Power Output, Watts | Tube Type |
|---|-------------|--------------|-----------------------------|---------------------|----------------------|-----------------------|------------------------|---|---------------------------------|---------------------|-----------|
| Class A Amplifier FM Limiter-Discriminator | 250 | 250 | 8.0 | 35† | 2.5† | 100,000 | 6,500 | — | 5,000 | 4.2 | 6J10 ■ |
| | 285‡ | 100 | R _k = 200 to 400 | 0.49 | 9.8 | — | — | — | 330,000 | — | |
| E _{c1} = 1.25 Volts RMS | | | | | | | | | | | |
| Class A Amplifier ♣ | 125 | 125 | R _k = 56 | 11 | 3.8 | 200,000 | 13,000 | — | — | — | 6J11 ■ |
| Vertical-Deflection Amplifier | 135 | 125 | 10 | 95 | 4.2 | 12,000 | 10,300 | — | — | — | 6JA5 ■ |
| | 45 | 125 | 0 | 210 | 20 | — | — | — | — | — | |
| Max positive pulse plate voltage ♦ = 2,500 volts; max d-c cathode current ♦ = 110 ma. | | | | | | | | | | | |
| Class A Amplifier | 200 | 135 | 1.5 | 18 | 4.0 | 70,000 | 14,000 | — | — | — | 6JA8 |
| | 30 | 135 | 0 | 32 | 14 | — | — | — | — | — | |
| Class A Amp | 200 | — | 2.0 | 3.5 | — | 19,000 | 3,700 | 70 | — | — | |
| Vertical Amplifier | 250 | 250 | 20 | 43 | 3.5 | 50,000 | 4,100 | — | — | — | 6JB5 ■ |
| | 60 | 250 | 0 | 180 | 20 | — | — | — | — | — | |
| Max positive pulse plate voltage ♦ = 2,500 volts; max d-c cathode current ♦ = 75 ma. | | | | | | | | | | | |
| Horizontal Amplifier | 250 | 150 | 22.5 | 70 | 2.1 | 15,000 | 7,100 | (g ₃ connected to k at socket) | — | — | 6JB6 |
| | 60 | 150 | 0 | 390 | 32 | — | — | — | — | — | |
| Max positive pulse plate voltage ♦ = 6,500; max d-c cathode current ♦ = 175 ma. | | | | | | | | | | | |
| Horizontal Amplifier | 250 | 150 | 22.5 | 70 | 2.1 | 15,000 | 7,100 | (g ₃ connected to k at socket) | — | — | 6JB6-A |
| | 60 | 150 | 0 | 390 | 32 | — | — | — | — | — | |
| Max positive pulse plate voltage ♦ = 6,500; max d-c cathode current ♦ = 175 ma. | | | | | | | | | | | |
| Vertical Amplifier | 250 | 250 | 20 | 43 | 3.5 | 50,000 | 4,100 | — | — | — | 6JC5 ■ |
| | 60 | 250 | 0 | 180 | 20 | — | — | — | — | — | |
| Max positive pulse plate voltage ♦ = 2,500 volts; max d-c cathode current ♦ = 75 ma. | | | | | | | | | | | |
| Class A Amplifier | 125 | 125 | R _k = 56 | 13 | 3.2 | 180,000 | 15,000 | — | — | — | 6JC6 |
| Class A Amplifier | 125 | 125 | R _k = 56 | 14 | 3.4 | 180,000 | 16,000 | (g ₃ connected to k at socket) | — | — | 6JC6-A |
| Class A Amp | 125 | 125 | 1.0 | 9.0 | 2.2 | 300,000 | 5,500 | — | — | — | 6JC6† |
| Class A Amp | 125 | — | 1.0 | 12 | — | 6,000 | 6,500 | 40 | — | — | |
| Pulse Regulator | 3,500 | — | 4.4 | 300 peak | — | 4,600 | 55,000 | 300 | (b.p. connected to k at socket) | — | 6JD5 ■ |
| Class A Amplifier | 125 | 125 | R _k = 56 | 15 | 4.0 | 160,000 | 14,000 | — | — | — | 6JD6 |
| | 175 | 125 | 25 | 115 | 5.0 | 5,500 | 10,500 | (g ₃ connected to k at socket) | — | — | |
| Horizontal Amplifier | 70 | 125 | 0 | 580 | 40 | — | — | — | — | — | 6JE6 |
| Max positive pulse plate voltage ♦ = 7,000; max d-c cathode current ♦ = 315 ma. | | | | | | | | | | | |
| Horizontal Amplifier | 175 | 125 | 25 | 130 | 2.8 | 5,800 | 9,600 | (E _{c3} = 30 volts) | — | — | 6JE6-A |
| | 55 | 125 | 0 | 580 | 40 | — | — | — | — | — | |
| Max positive pulse plate voltage ♦ = 7,500; max d-c cathode current ♦ = 350 ma. | | | | | | | | | | | |
| Horizontal Amplifier | 175 | 125 | 25 | 130 | 2.8 | 5,500 | 10,500 | (b.p. connected to k at socket) | — | — | 6JE6-B |
| | 70 | 125 | 0 | 600 | 36 | — | — | — | — | — | |
| Max positive pulse plate voltage ♦ = 7,500 volts; max d-c cathode current ♦ = 350 ma. | | | | | | | | | | | |
| Horizontal Amplifier | 175 | 125 | 25 | 130 | 2.8 | 5,500 | 10,500 | (b.p. connected to k at socket) | — | — | 6JE6-C |
| | 60 | 125 | 0 | 600 | 30 | — | — | — | — | — | |
| Max positive pulse plate voltage ♦ = 7,500 volts; max d-c cathode current ♦ = 350 ma. | | | | | | | | | | | |
| Class A Amplifier | 250 | 170 | R _k = 82 | 22 | 4.0 | 140,000 | 12,000 | — | — | — | 6JE8 |
| | 200 | — | 2.0 | 4.5 | — | 16,600 | 4,200 | 70 | — | — | |
| Class A Amp | 130 | 125 | 20 | 80 | 2.5 | 12,000 | 10,000 | (E _{c3} = +25 volts) | — | — | 6JF6 |
| Horizontal Amplifier | 55 | 125 | 0 | 525 | 32 | — | — | — | — | — | |
| Max positive pulse plate voltage ♦ = 6,500; max d-c cathode current ♦ = 275 ma. | | | | | | | | | | | |
| Class A Amplifier | 200 | 150 | R _k = 100 | 25 | 5.5 | 60,000 | 1,500 | — | — | — | 6JG5 |
| | 60 | 150 | 0 | 55 | 18 | — | — | — | — | — | |
| Horizontal Amplifier | 130 | 125 | 20 | 80 | 2.5 | 12,000 | 10,000 | (g ₃ connected to k at socket) | — | — | 6JG6 |
| | 50 | 125 | 0 | 525 | 32 | — | — | — | — | — | |
| Max positive pulse plate voltage ♦ = 6,500; max d-c cathode current ♦ = 275 ma. | | | | | | | | | | | |

Metal tubes are shown in bold-face type, miniature tubes in italics.

♦ G3 and G5 are screen. G4 is signal-input grid.

‡ Maximum screen dissipation appears immediately below the screen voltage.

♣ G2 and G4 are screen. G3 is signal-input grid.

† Heater warm-up time controlled.

1, 2, 3, etc. indicate tube sections.

| Tube Type | Classification by Construction | Base Connections | Out-line Dwg | Filament Volts | Filament Amp | Max Plate Watts | Max Plate Volts | Max Screen Volts and Watts | Capacitance in Picofarads | | |
|-----------|----------------------------------|------------------|--------------|----------------|--------------|-----------------|-----------------|----------------------------|--|--------|------------|
| | | | | | | | | | Input | Output | Grid-plate |
| 6JG6-A | Beam Power Amplifier | 9QU | 12-96 | 6.3 | 1.6 | 17 | 770 | 220 3.5 | 22 | 9.0 | 0.7 |
| 6JH5 | Beam Triode | 12JE | T-X | 6.3 | 2.4 | 35 | 5,500 peak | — | 23 | 12 | 1.7 |
| 6JH6 | Semi-Remote-Cutoff Pentode | 7CM | 5-2 | 6.3 | 0.3 | 2.3 | 300 | 300 0.55 | 7.0 | 3.0 | 0.015 |
| 6JH8 | Double Plate Sheet-Beam Tube | 9DP | 6-3 | 6.3 | 0.3 | 3.0 | 330 | 330 1.0 | — | — | — |
| 6JK5 | Beam Triode | 12JE | T-X | 6.3 | 1.8 | 35 | 5,500 peak | — | 22 | 11 | 1.8 |
| 6JK6 | Sharp-Cutoff RF Pentode | 7CM | 5-2 | 6.3 | 0.35 | 2.5 | 275 | 275 0.6 | 9.5 | 2.7 | 0.02 |
| 6JK8 | Double Triode | 9AJ | 6-2 | 6.3 | 0.4 | 1.0 | 165 | — | Section 1 (Pins 6, 7, 8) Section 2 (Pins 1, 2, 3) | | |
| 6JL6 | Semi-Remote-Cut-off RF Pentode | 7CM | 5-2 | 6.3 | 0.35 | 2.5 | 275 | 275 0.6 | 9.3 | 2.7 | 0.02 |
| 6JL8 | Triode-Pentode | 9DX | 6-3 | 6.3 | 0.75 | 5.0 | 330 | 175 1.1 | Pentode Section | | |
| | | | | | | 2.0 | 330 | — | Triode Section | | |
| 6JM6 | Beam Power Amplifier | 12FJ | 12-79 | 6.3 | 1.2 | 17.5 | 770 | 220 3.5 | 16 | 7.0 | 0.6 |
| 6JM6-A | Beam Power Amplifier | 12FJ | 12-79 | 6.3 | 1.2 | 17.5 | 770 | 220 3.5 | 16 | 7.0 | 0.6 |
| 6JN6 | Beam Power Amplifier | 12FK | 12-56 | 6.3 | 1.2 | 17.5 | 770 | 220 3.5 | 16 | 7.0 | 0.34 |
| 6JN6-A | Beam Power Amplifier | 12FK | 12-56 | 6.3 | 1.2 | 17.5 | 770 | 220 3.5 | 16 | 7.0 | 0.34 |
| 6JN8 | Triode-Pentode | 9FA | 6-2 | 6.3 | 0.45 | 2.5 | 300 | 300 0.55 | Pentode Section | | |
| | | | | | | 2.5 | 300 | — | Triode Section | | |
| 6JQ6 | Beam Pentode with Integral Diode | 9RA | 6-4 | 6.3 | 1.2 | 10 | 425 | 330 2.0 | 13 | 6.0 | 0.32 |
| 6JR6 | Beam Power Amplifier | 9QU | 12-96 | 6.3 | 1.6 | 17 | 770 | 220 3.5 | 22 | 9.0 | 0.7 |
| 6JS6 | Beam Pentode | 12FY | 12-89 | 6.3 | 2.25 | 28 | 990 | 190 5.5 | 24 | 10 | 0.7 |
| 6JS6-A | Beam Power Amplifier | 12FY | 12-89 | 6.3 | 2.25 | 28 | 990 | 190 5.5 | 24 | 10 | 0.7 |
| 6JS6-B | Beam Power Amplifier | 12FY | 12-89 | 6.3 | 2.25 | 28 | 990 | 190 5.5 | 24 | 10 | 0.7 |

■ Compactron.

† Zero signal.

◆ Per section.

‡ Plate-to-plate.

♣ Maximum.

‡ Supply value.

● Subminiature type.

▲ Without external shield.

◆ Design maximum rating.

⊕ Total for all similar sections.

⊖ Absolute maximum rating.

Conversion transconductance.

● See X-Radiation Warning, page 4.

| Service | Plate Volts | Screen Volts | Neg Grid Volts | Plate Milli-amperes | Screen Milli-amperes | R _p , Ohms | G _m , μmhos | μ Factor | Load for Rated Output, Ohms | Power Output, Watts | Tube Type |
|---|---------------------------------|-----------------|----------------------|---------------------|----------------------|---------------------------|------------------------|---|--------------------------------------|---------------------|-----------|
| Horizontal Amplifier | 130 55 Max positive pulse | 125 125 0 | 20 0 | 80 525 plate | 2.5 32 voltage | 12,000 — ◆ = 6,500; | 10,000 — max d-c | (Ec3 = +25 volts) — cathode current | — — ◆ = | — — — | 6JG6-A |
| Pulse Regulator | 3,500 | — | 4.4 | 300 peak | — | 4,600 | 55,000 | 300 | (b.p. connected to k at socket) | — | 6JH5 ■ |
| Class A Amplifier | 125 | 125 | R _k = 56 | 14 | 3.6 | 260,000 | 8,000 | — | — | — | 6JH6 |
| Color TV Synchronous Detector | 250 | 250 | R _k = 220 | 14 | 1.5 | — | 4,400 | — | — | — | 6JH8 |
| (With plates tied together and deflectors (pins 1 and 2) grounded.) Total voltage change on either deflector with an equal and opposite change on the other deflector required to switch the plate current from one plate to the other = 20 volts maximum | | | | | | | | | | | |
| Pulse Regulator | 3,500 | — | 4.4 | 300 peak | — | 4,600 | 65,000 | 300 | (b.p. connected to k at socket) | — | 6JK5 ■ |
| Class A Amplifier | 125 | 125 | R _k = 68 | 11.5 | 3.9 | 150,000 | 18,000 | — | — | — | 6JK6 |
| Class A Amplifier | 100 | — | 1.0 | 5.3 | — | 8,000 | 6,800 | 55 | — | — | 6JK8 |
| Class A Amplifier | 135 | — | 1.2 | 10 | — | 5,400 | 13,000 | 70 | — | — | 6JL6 |
| Class A Amplifier | 125 | 60 | R _k = 68 | 12.5 | 4.0 | 120,000 | 15,500 | — | — | — | 6JL6 |
| Class A Amplifier | 300 | 150 | 3.5 | 25† | 5.0† | 60,000 | 11,500 | — | 5,000 | 1.8 | 6JL8 |
| Class A Amplifier | 150 | — | R _k = 150 | 10 | — | 7,500 | 4,700 | 35 | — | — | 6JL8 |
| Horizontal Amplifier | 250 60 Max positive pulse | 150 150 0 | 22.5 0 | 65 345 plate | 1.8 27 voltage | 18,000 — ◆ = 6,500; | 7,300 — max d-c | (b.p. connected to k at socket) — cathode current | — — ◆ = | — — — | 6JM6 ■ |
| Horizontal Amplifier | 250 55 Max positive pulse | 150 150 0 | 22.5 0 | 70 345 plate | 2.4 30 voltage | 15,000 — ◆ = 6,500; | 7,300 — max d-c | (b.p. connected to k at socket) — cathode current | — — ◆ = | — — — | 6JM6-A ■ |
| Horizontal Amplifier | 250 60 Max positive pulse | 150 150 0 | 22.5 0 | 65 345 plate | 1.8 27 voltage | 18,000 — ◆ = 6,500; | 7,300 — max d-c | (b.p. connected to k at socket) — cathode current | — — ◆ = | — — — | 6JN6 ■ |
| Horizontal Amplifier | 250 55 Max positive pulse | 150 150 0 | 22.5 0 | 70 345 plate | 2.4 30 voltage | 15,000 — ◆ = 6,500; | 7,300 — max d-c | (b.p. connected to k at socket) — cathode current | — — ◆ = | — — — | 6JN6-A ■ |
| Class A Amplifier | 125 | 125 | 1.0 | 12 | 4.0 | 200,000 | 7,500 | — | — | — | 6JN8 ¶ |
| Class A Amp | 125 | — | 1.0 | 13.5 | — | 5,400 | 8,500 | 46 | — | — | 6JN8 ¶ |
| Vertical Amplifier | 140 40 | 140 120 | 18 0 | 35 150 | 2.5 20 | 10,500 — | 4,200 — | — — | — — | — — | 6JQ6 |
| Max positive pulse plate voltage ◆ = 2,000 volts; max d-c cathode current ◆ = 70 ma. Instantaneous diode-plate-to-cathode voltage drop for instantaneous diode-plate current of 2.0 ma = 5.0 volts | | | | | | | | | | | |
| Horizontal Amplifier | 130 50 | 125 125 | 20 0 | 45 470 | 1.5 32 | 18,000 — | 7,000 — | — — | — — | — — | 6JR6 |
| Max positive pulse plate voltage ◆ = 6,500 volts; max d-c cathode current ◆ = 275 ma. | | | | | | | | | | | |
| Horizontal Amplifier | 175 70 | 125 120 | 25 0 | 125 570 | 4.5 34 | 5,600 — | 11,300 — | — — | (b.p. connected to k at socket) — | — — | 6JS6 ■ |
| Max positive pulse plate voltage ◆ = 7,500; max d-c cathode current ◆ = 315 ma | | | | | | | | | | | |
| Horizontal Amplifier | 175 62 | 125 125 | 25 0 | 125 570 | 4.5 34 | 5,600 — | 11,300 — | — — | (b.p. connected to k at socket) — | — — | 6JS6-A ■ |
| Max positive pulse plate voltage □ = 7,500; max d-c cathode current ◆ = 315 ma | | | | | | | | | | | |
| Horizontal Amplifier | 175 62 | 125 125 | 25 0 | 125 570 | 4.5 34 | 5,600 — | 11,300 — | — — | (b.p. connected to k at socket) — | — — | 6JS6-B ■ |
| Max positive pulse plate voltage □ = 7,500 volts; max d-c cathode current ◆ = 315 ma.; primary beam-plate emission = 100 microamperes | | | | | | | | | | | |

Metal tubes are shown in bold-face type, miniature tubes in italics.

◆ G3 and G5 are screen. G4 is signal-input grid.

★ Maximum screen dissipation appears immediately below the screen voltage.

♥ G2 and G4 are screen. G3 is signal-input grid.

¶ Heater warm-up time controlled.

1, 2, 3, etc. indicate tube sections.

| Tube Type | Classification by Construction | Base Connections | Out-line Dwg | Filament Volts | Filament Amp | Max Plate Watts | Max Plate Volts | Max Screen Volts and Watts | Capacitance in Picofarads | | |
|------------------------|--------------------------------|------------------|---------------------|----------------|--------------|-----------------|-----------------|---|---|----------------------|----------------------------------|
| | | | | | | | | | Input | Output | Grid-plate |
| 6JS6-C ■ | Beam Power Amplifier | 12FY | 12-89 | 6.3 | 2.25 | 30 ⬥ | 990 ⬥ | 220 ⬥ 5.5 ⬥ | 24 ▲ | 10 ▲ | 0.7 ▲ |
| 6JT6 | Beam Pentode | 9QU | T-X | 6.3 | 1.2 | 17.5 ⬥ | 770 ⬥ | 220 ⬥ 3.5 ⬥ | 15 ▲ | 6.5 ▲ | 0.26 ▲ |
| 6JT6-A | Beam Power Amplifier | 9QU | 12-95 | 6.3 | 1.2 | 17.5 ⬥ | 770 ⬥ | 220 ⬥ 3.5 ⬥ | 15 ▲ | 6.5 ▲ | 0.26 ▲ |
| 6JT8 | Triode-Pentode | 9DX | 9-69 | 6.3 | 0.725 | 4.0 ⬥ | 330 ⬥ | 330 ⬥ 1.1 ⬥ | Pentode Section | | |
| 6JU6 | Beam Power Amplifier | 9QL | T-X | 6.3 | 1.6 | 1.0 ⬥ 17 ⬥ | 330 ⬥ 770 ⬥ | — 220 ⬥ 3.5 ⬥ | Triode Section | | |
| 6JU8 | Quadruple Diode | 9PQ | 6-3 | 6.3 | 0.6 | — | — | Tube Voltage Drop: ⬥ 10 volts at 60 ma d-c | | | |
| 6JU8-A | Quadruple Diode | 9PQ | 6-2 | 6.3 | 0.6 | — | — | Tube Voltage Drop: ⬥ 10 volts at 60 ma d-c | | | |
| 6JV8 ¶ | Triode-Pentode | 9DX | 6-3 | 6.3 | 0.6 | 4.0 ⬥ 1.1 ⬥ | 330 ⬥ 330 ⬥ | 330 ⬥ 1.7 ⬥ | Pentode Section | | |
| 6JW6 ¶ | Pentode | 9PU | 6-3 | 6.3 | 0.6 | 11.5 ⬥ | 400 ⬥ | 330 ⬥ 1.0 ⬥ | 16 ▲ | 5.0 ▲ | 0.13 ▲ |
| 6JW8 | Triode-Pentode | 9DC | 6-2 | 6.3 | 0.43 | 1.2 1.4 | 250 250 | 250 0.8 | Pentode Section | | |
| 6JZ6 ■ | Beam Power Amplifier | 12GD | 12-79 | 6.3 | 1.5 | 18 ⬥ | 770 ⬥ | 220 ⬥ 3.5 ⬥ | 24 ▲ | 8.5 ▲ | 0.34 ▲ |
| 6JZ8 ■ | Triode-Pentode | 12DZ | 9-58 | 6.3 | 1.2 | 7.0 ⬥ 1.0 ⬥ | 250 ⬥ 250 ⬥ | 200 ⬥ 1.8 ⬥ | Pentode Section | | |
| 6K4 ⊙ | Medium-Mu Triode | 6K4 | 3-2 | 6.3 | 0.15 | 3.0 | 250 | — | 2.4 ▲ | 0.8 ▲ | 2.4 ▲ |
| 6K5-G 6K5-GT | High-Mu Triode | 5U | 12-8 9-17 | 6.3 | 0.3 | — | 250 | — | 2.4 ▲ | 3.6 ▲ | 2.0 ▲ |
| 6K6-GT | Power Amplifier Pentode | 7S | 9-11 or 9-41 | 6.3 | 0.4 | 8.5 | 315 | 285 2.8 | Single Tube | | |
| 6K7 6K7-G 6K7-GT | Remote-Cutoff RF Pentode | 7R | 8-4 12-8 9-18 | 6.3 | 0.3 | 2.75 | 300 | 300 ⬥ 0.35 | 7.0 5.0 4.6 | 12.0 12.0 12.0 | 0.005 0.007 0.005 0.005 |
| 6K8 6K8-G 6K8-GT | Triode-Hexode Converter | 8K ♥ | 8-2 12-8 9-24 | 6.3 | 0.3 | 0.75 ♣ | 300 | 150 0.7 | Osc I _{ct} = 0.15 ma R _{gt} = 50,000 ohms | | |
| 6K11 ¶ | Three-Section Triode | 12BY | 9-56 | 6.3 | 0.6 | 2.75 ⬥ 0.3 ⬥ | 330 ⬥ 330 ⬥ | — — | Section 1 (Pins 4, 9, 10) Section 2 and 3 (Pins 5, 6, 7, and 2, 3, 11) | | |
| 6KA8 ¶ | Triode-Pentode | 9PV | 6-3 | 6.3 | 0.6 | 2.0 ⬥ 1.1 ⬥ | 300 ⬥ 300 ⬥ | 300 ⬥ 1.1 ⬥ | Pentode Section | | |
| | | | | | | | | | Triode Section | | |

■ Compactron. † Plate-to-plate.
‡ Zero signal. ♣ Maximum.
♣ Per section. ‡ Supply voltage.

⊙ Subminiature type.
♥ Without external shield.
♦ Design maximum rating.

⊕ Total for all similar sections.
⊖ Absolute maximum rating.
Conversion transconductance.

● See X-Radiation Warning, page 4.

| Service | Plate Volts | Screen Volts | Neg Grid Volts | Plate Milli-amperes | Screen Milli-amperes | R _p , Ohms | G _m , μmhos | μ Factor | Load for Rated Output, Ohms | Power Output, Watts | Tube Type |
|----------------------|---|-------------------|----------------------|----------------------|----------------------|-------------------------------|-------------------------|---|---------------------------------|---------------------|------------------------|
| Horizontal Amplifier | 175 60 | 125 125 | 25 0 | 130 600 | 2.8 32 | 5,500 — | 11,500 — | — | (b.p. connected to k at socket) | — | 6JS6-C ■ |
| | Max positive pulse plate voltage ⬥ = 7,500 volts; max d-c cathode current ⬥ = 350 ma. | | | | | | | | | | |
| Horizontal Amplifier | 250 60 | 150 150 | 22.5 0 | 70 390 | 2.1 32 | 15,000 — | 7,100 — | (g3 connected to k at socket) | — | — | 6JT6 |
| | Max positive pulse plate voltage ⬥ = 6,500; max d-c cathode current ⬥ = 175 ma. | | | | | | | | | | |
| Horizontal Amplifier | 250 60 | 150 150 | 22.5 0 | 70 390 | 2.1 32 | 15,000 — | 7,100 — | (g3 connected to k at socket) | — | — | 6JT6-A |
| | Max positive pulse plate voltage ⬥ = 6,500; max d-c cathode current ⬥ = 175 ma. | | | | | | | | | | |
| Class A Amplifier | 200 | 100 | R _k = 82 | 17 | 3.5 | 50,000 | 20,000 | — | — | — | 6JT8 |
| Class A Amp | 35 250 | 100 — | 0 2.0 | 50 1.5 | 17 | — 37,000 | — 2,700 | — 100 | — | — | |
| Horizontal Amplifier | 130 50 | 125 125 | 20 0 | 45 470 | 1.5 32 | 18,000 — | 7,000 — | (b.p. connected to k at socket) | — | — | 6JU6 |
| | Max positive pulse plate voltage ⬥ = 6,500; max d-c cathode current ⬥ = 275 ma. | | | | | | | | | | |
| Detector | Max d-c output current per plate ⬥ = 9.0 ma; max peak inverse voltage ⬥ = 300 volts; max peak current per plate ⬥ = 54 ma | | | | | | | | | | |
| Detector | Max d-c output current per plate ⬥ = 9.0 ma; max peak inverse voltage ⬥ = 300 volts; max peak current per plate ⬥ = 54 ma | | | | | | | | | | |
| Class A Amplifier | 125 40 | 125 125 | 1.0 0 | 22 28 | 4.0 9.0 | 100,000 — | 11,500 — | — | — | — | 6JV8 ¶ |
| Class A Amplifier | 200 | — | 2.0 | 4.0 | — | 17,500 | 4,000 | 70 | — | — | |
| Class A Amplifier | 250 | 150 | R _k = 56 | 28 | 6.5 | 50,000 | 36,000 | — | — | — | 6JW6 ¶ |
| Class A Amplifier | 100 | 100 | 1.0 | 6.0 | 1.7 | — | 5,500 | — | — | — | 6JW8 |
| Class A Amplifier | 200 | — | 2.0 | 3.5 | — | — | 3,500 | 70 | — | — | |
| Horizontal Amplifier | 130 50 | 130 130 | 20 0 | 46 450 | 1.8 29 | 9,900 — | 9,000 — | — | — | — | 6JZ6 ■ |
| | Max positive pulse plate voltage ⬥ = 6,500; max d-c cathode current ⬥ = 230 ma. | | | | | | | | | | |
| Vertical Amplifier | 120 45 | 110 110 | 8.0 0 | 46 122 | 3.5 16.5 | 11,700 — | 7,100 — | — | — | — | 6JZ8 ■ |
| Vertical Oscillator | 150 | — | 5.0 | 5.5 | — | 8,500 | 2,350 | 20 | — | — | |
| Class A Amplifier | 200 | — | R _k = 680 | 11.5 | — | 4,650 | 3,450 | 16 | — | — | 6K4 ⊕ |
| Class A Amplifier | 250 | — | 3.0 | 1.1 | — | 50,000 | 1,400 | 70 | — | — | 6K5-G 6K5-GT |
| Class A Amplifier | 315 250 100 | 250 250 100 | 21 18 7.0 | 25.5† 32† 9.0† | 4.0† 5.5† 1.6† | 110,000 90,000 104,000 | 2,100 2,300 1,500 | — | 9,000 7,600 12,000 | 4.5 3.4 0.35 | 6K6-GT |
| Class A Amplifier | 285 | 285 | R _k = 400 | 55† | 9.0† | — | — | — | 12,000 | 9.8 | |
| Vertical Amplifier | 250 | — | 18 | 37.5 | — | 2,500 | 2,700 | 6.8 | — | — | |
| Class A Amplifier | Max positive pulse plate voltage ⊕ = 1200 volts; max d-c cathode current = 25 ma | | | | | | | | | | |
| Class A Amplifier | 250 250 100 | 125 100 100 | 3.0 3.0 1.0 | 10.5 7.0 9.5 | 2.6 1.7 2.7 | 600,000 800,000 150,000 | 1,650 1,450 1,650 | — | — | — | 6K7 6K7-G 6K7-GT |
| Converter | 250 | 100 | 3.0 | 2.5 | 6.0 | 600,000 | 350 # | E _b (Triode Osc) = 100 I _b (Triode) = 3.8 ma | — | — | 6K8 6K8-G 6K8-GT |
| Class A Amp | 250 | — | 8.5 | 10.5 | — | 7,700 | 2,200 | 17 | — | — | 6K11 ¶ ■ |
| Class A Amplifier | 250 | — | 2.0 | 1.2 | — | 62,500 | 1,600 | 100 | — | — | |
| Class A Amplifier | 150 | 100 | R _k = 180 | 4.0 | 2.8 | 100,000 | 4,400 | — | — | — | 6KA8 ¶ |
| Class A Amp | 200 | — | 2.0 | 4.0 | — | 17,500 | 4,000 | 70 | — | — | |

Metal tubes are shown in bold-face type, miniature tubes in italics.

⬥ G3 and G5 are screen. G4 is signal-input grid.

⊕ Maximum screen dissipation appears immediately below the screen voltage.

¶ G2 and G4 are screen. G3 is signal-input grid.

¶ Heater warm-up time controlled.

1, 2, 3, etc. indicate tube sections.

| Tube Type | Classification by Construction | Base Connections | Out-line Dwg | Fila-ment Volts | Fila-ment Amp | Max Plate Watts | Max Plate Volts | Max Screen Volts and W† | Capacitance in Picofarads | | |
|-----------|--------------------------------|------------------|--------------|-----------------|---------------|-----------------|-----------------|-------------------------|---------------------------|---------|------------|
| | | | | | | | | | Input | Out-put | Grid-plate |
| 6KD6 | Beam Power Amplifier | 12GW | 12-118 | 6.3 | 2.85 | 33 | 990 | 200 5.0 | 40 | 16 | 0.8 |
| 6KD8 | Triode-Pentode | 9AE | 6-2 | 6.3 | 0.4 | 3.0 | 330 | 330 0.55 | Pentode Section | | |
| 6KE6 | Beam Power Amplifier | 12GM | 12-79 | 6.3 | 1.5 | 18 | 770 | 220 3.5 | Triode Section | | |
| 6KE8 | Triode-Pentode | 9DC | 6-2 | 6.3 | 0.4 | 2.0 | 280 | 280 0.5 | Pentode Section | | |
| | | | | | | 2.0 | 280 | — | Triode Section | | |
| 6KF8 | Twin Pentode | 9FG | 6-3 | 6.3 | 0.3 | 1.1 | 300 | 150 0.75 | — | — | — |
| 6KG6 | Beam Power Amplifier | 9RJ | T-X | 6.3 | 2.0 | 34 | 700 | 250 7.0 | — | — | — |
| 6KL8 | Diode-Pentode | 9LQ | 6-3 | 6.3 | 0.3 | 3.0 | 300 | 300 0.6 | Pentode Section | | |
| | | | | | | | | | Diode Section | | |
| 6KM6 | Beam Power Amplifier | 9QL | T-X or 12-70 | 6.3 | 1.6 | 20 | 770 | 220 3.5 | 22 | 9.0 | 1.2 |
| 6KM8 | Diode Triple-Plate Tetrode | 9QG | 6-3 | 6.3 | 0.3 | 1.0 | 330 | 330 0.65 | — | — | — |
| 6KN6 | Beam Power Amplifier | 12GU | 12-82 | 6.3 | 3.0 | 30 | 770 | 220 5.0 | 44 | 18 | 1.0 |
| 6KN8 | Twin Triode | 9AJ | 6-2 | 6.3 | 0.4 | 2.2 | 220 | — | — | — | — |
| 6KR8 | Triode-Pentode | 9DX | 6-3 | 6.3 | 0.75 | 5.0 | 330 | 330 1.1 | Pentode Section | | |
| | | | | | | 2.0 | 330 | — | Triode Section | | |
| 6KR8-A | Triode-Pentode | 9DX | 6-3 | 6.3 | 0.75 | 5.0 | 330 | 330 1.5 | Pentode Section | | |
| | | | | | | 2.0 | 330 | — | Triode Section | | |
| 6KS6 | Gated-Beam Discriminator | 7DF | 5-3 | 6.3 | 0.3 | — | 330 | 330 | — | — | — |
| 6KS8 | Triode-Pentode | 9DX | 6-3 | 6.3 | 0.6 | 3.75 | 330 | 330 1.1 | Pentode Section | | |
| | | | | | | 1.1 | 330 | — | Triode Section | | |
| 6KT6 | Semi-Remote-Cutoff Pentode | 9PM | 6-2 | 6.3 | 0.3 | 3.1 | 330 | 330 0.6 | 9.5 | 3.0 | 0.019 |
| 6KT8 | Triode-Pentode | 9QP | 6-2 | 6.3 | 0.6 | 2.5 | 330 | 330 0.55 | Pentode Section | | |
| | | | | | | 1.0 | 330 | — | Triode Section | | |
| 6KU8 | Duplex-Diode Pentode | 9LT | 9-69 | 6.3 | 0.725 | 4.0 | 330 | 330 1.1 | 12 | 3.0 | 0.1 |
| | | | | | | | | | Diode Sections | | |
| 6KV6 | Beam Power Pentode | 9QU | 12-97 | 6.3 | 1.6 | 20 | 770 | 220 2.0 | 22 | 9.0 | 0.6 |
| 6KV6-A | Beam Power Pentode | 9QU | 12-97 | 6.3 | 1.6 | 28 | 900 | 220 2.0 | 22 | 9.0 | 0.6 |

■ Compactron.

‡ Plate-to-plate.

⊙ Subminiature type.

⊕ Total for all similar sections.

† Zero signal.

♣ Maximum.

▲ Without external shield.

⊞ Absolute maximum rating.

♠ Per section.

‡ Supply voltage.

⊙ Design maximum rating.

Conversion transconductance.

| Service | Plate Volts | Screen Volts | Neg Grid Volts | Plate Milli-amperes | Screen Milli-amperes | R _p , Ohms | G _m , μmhos | μ Factor | Load for Rated Out-put, Ohms | Power Out-put, Watts | Tube Type |
|------------------------------|---|--------------|--------------------------|---------------------|----------------------|---------------------------------|--------------------------------|-------------------------------|---------------------------------|----------------------|-----------|
| Horizontal Amplifier | 150 45 | 110 160 | 22.5 0 | 100 1,100 | 2.0 110 | 6,000 | 14,000 | — | (b.p. connected to k at socket) | — | 6KD6 ■ |
| | Max positive pulse plate voltage ♦ = 7,000; max d-c cathode current ♦ = 400 ma | | | | | | | | | | |
| Class A Amplifier | 125 | 110 | 1.0 | 9.5 | 3.5 | 200,000 | 5,000 | — | — | — | 6KD8 |
| Class A Amp | 125 | — | 1.0 | 13.5 | — | — | 7,500 | 40 | — | — | 6KE6 ■ |
| Horizontal Amplifier | 130 60 | 130 130 | 20 0 | 50 410 | 1.75 24 | 11,000 | 9,100 | — | — | — | 6KE6 ■ |
| | Max positive pulse plate voltage ♦ = 6,500; max d-c cathode current ♦ = 230 ma | | | | | | | | | | |
| Class A Amplifier | 125 | 125 | R _k = 33 | 10 | 2.8 | 125,000 | 12,000 | — | — | — | 6KE8 |
| Class A Amplifier | 125 | — | R _k = 68 | 13 | — | 5,000 | 8,000 | 40 | — | — | 6KE8 |
| Sync Separator and AGC Keyer | 100 | 67.5 | E _{c1} = 0.1 ma | 2.8 | — | — | 270 | — | E _{c3} = 0 volts | — | 6KF8 |
| | 100 | 67.5 | 0 | — | — | — | 1,750 | — | E _{c3} = 0 volts | — | 6KF8 |
| | (Characteristics given are for each section separately with plate and grid number 3 of opposite section grounded) | | | | | | | | | | |
| Horizontal Amplifier | 160 45 | 160 160 | 0 0 | 1,400 1,000 | 45 — | — | — | — | (E _{c3} = 0 volts) | — | 6KG6 |
| | Max positive pulse plate voltage ♦ = 7,000; max d-c cathode current ♦ = 500 ma | | | | | | | | | | |
| Class A Amplifier Detector | 100 | 100 | E _{cc1} = 0 | 5.5 | 2.2 | 550,000 | 4,300 | R _{g1} = 2.2 Megohms | — | — | 6KL8 |
| | Max d-c output current ♦ = 1.0 ma | | | | | | | | | | |
| Horizontal Amplifier | 140 60 | 140 140 | 24.5 0 | 80 560 | 2.4 31 | 6,000 | 9,500 | — | (E _{c3} = 30 volts) | — | 6KM6 |
| | Max positive pulse plate voltage ♦ = 6,500; max d-c cathode current ♦ = 275 ma | | | | | | | | | | |
| Class A Amplifier | 100 | 100 | E _{cc1} = 0 | 4.2 | 1.7 | 30,000 | 3,400 | R _{g1} = 2.2 megohms | — | — | 6KM8 |
| | (With plates tied together) | | | | | | | | | | |
| Horizontal Amplifier | 130 60 | 130 125 | 20 0 | 100 800 | 4.0 50 | 4,000 | 16,000 | — | (b.p. connected to k at socket) | — | 6KN6 ■ |
| | Max positive pulse plate voltage ♦ = 6,500; max d-c cathode current ♦ = 400 ma | | | | | | | | | | |
| Class A Amplifier ♦ | 110 | — | 1.0 | 16 | — | 2,800 | 16,000 | 45 | — | — | 6KN8 |
| Class A Amplifier | 200 | 100 | R _k = 82 | 19.5 | 3.0 | 60,000 | 20,000 | — | — | — | 6KR8 |
| Class A Amplifier | 125 | — | R _k = 68 | 15 | — | 4,400 | 10,400 | 46 | — | — | 6KR8 |
| Avg. Char. | 200 | 100 | R _k = 82 | 19.5 | 3.0 | 60,000 | 20,000 | — | — | — | 6KR8-A |
| Avg. Char. | 35 125 | 100 — | 0 R _k = 68 | 54 15 | 13.5 — | — 4,400 | — 10,400 | — 46 | — | — | 6KR8-A |
| FM Limiter-Discriminator | 135 | 280 ‡ | — | 5.0 | — | (R _{g2} = 33,000 ohms) | (E _{c3} = +4.0 volts) | — | — | — | 6KS6 |
| Class A Amplifier | 150 | 150 | R _k = 150 | 20 | 4.5 | 150,000 | 9,500 | — | — | — | 6KS8 ¶ |
| Class A Amp | 65 200 | 150 — | 0 2.0 | 60 4.0 | 20 — | — 17,500 | — 4,000 | — 70 | — | — | 6KS8 ¶ |
| Class A Amplifier | 125 | 125 | R _k = 56 | 17 | 4.2 | 160,000 | 18,000 | — | (E _{c3} = 0 volts) | — | 6KT6 |
| Class A Amplifier | 125 | 125 | 1.0 | 12 | 4.5 | 150,000 | 10,000 | — | — | — | 6KT8 |
| Class A Amplifier | 250 | — | 2.0 | 1.8 | — | 31,500 | 3,200 | 100 | — | — | 6KT8 |
| Class A Amplifier | 200 | 100 | R _k = 82 | 17 | 3.5 | 50,000 | 20,000 | — | — | — | 6KU8 |
| | 50 | 100 | 0 | 55 | 18 | — | — | — | — | — | 6KU8 |
| | Average diode current at 10 volts = 2.0 ma | | | | | | | | | | |
| HV Pulse Shunt Regulator | 140 100 | 140 140 | 24.5 0 | 40 440 | 2.4 30 | 10,000 | 6,000 | — | (E _{c3} = 0 volts) | — | 6KV6 |
| | Max positive pulse plate voltage ♦ = 6,500; max d-c cathode current ♦ = 275 ma | | | | | | | | | | |
| Pulse Regulator | 140 100 | 140 140 | 24.5 0 | 40 440 | 2.4 30 | 10,000 | 6,000 | — | (E _{c3} = 0 volts) | — | 6KV6-A |
| | Max positive pulse plate voltage ♦ = 6,500 volts; max d-c cathode current ♦ = 275 ma. | | | | | | | | | | |

Metal tubes are shown in bold-face type, *miniature tubes in italics.*

♦ G3 and G5 are screen. G4 is signal-input grid.

♥ G2 and G4 are screen. G3 is signal-input grid.

1, 2, 3, etc. indicate tube sections.

‡ Maximum screen dissipation appears immediately below the screen voltage.

¶ Heater warm-up time controlled.

| Tube Type | Classification by Construction | § X-Radiation Rating | Base Connections | Out-line Dwg. | Filament Volts | Filament Amps | Max. Plate Watts | Max. Plate Volts | * Max. Screen Volts and Watts | Capacitance in Picofarads | | |
|----------------------------------|--------------------------------|----------------------|------------------|-------------------------------|----------------|---------------|------------------|------------------|-------------------------------|---|---------|------------|
| | | | | | | | | | | Input | Out-put | Grid-Plate |
| 6KV8 | Triode-Pentode | | 9DX | 6-3 | 6.3 | 0.775 | 5.0◆ | 300◆ | 300◆ 1.0◆ | Pentode Section | | |
| | | | | | | | 1.0◆ | 300◆ | — | Triode Section | | |
| 6KY6 | Sharp-Cutoff Pentode | | 9GK | 6-3 | 6.3 | 0.52 | 9.0◆ | 330◆ | 330◆ 1.0◆ | 14▲ | 6.0▲ | 0.16▲ |
| 6KY8 | Triode-Pentode | | 9QT | T-X | 6.3 | 1.1 | 12◆ | 300◆ | 150◆ 1.9◆ | Pentode Section | | |
| | | | | | | | 1.5◆ | 330◆ | — | Triode Section | | |
| 6KYS-A | Triode-Pentode | | 9QT | 9-107 | 6.3 | 1.1 | 12◆ | 300◆ | 150◆ 1.9◆ | Pentode Section | | |
| | | | | | | | 1.5◆ | 330◆ | — | Triode Section | | |
| 6KZ8* | Triode-Pentode | | 9FZ | 6-2 | 6.3 | 0.45 | 2.5◆ | 330◆ | 330◆ 0.55◆ | Pentode Section | | |
| | | | | | | | 2.5◆ | 330◆ | — | Triode Section | | |
| 6L4 | Medium-Mu Triode (Acorn) | | 7BR | 4-2 | 6.3 | 0.225 | 1.7 | 500 | — | 0.5▲ | 1.8▲ | 1.6▲ |
| 6L5-G | Medium-Mu Triode | | 6Q | 12-7 | 6.3 | 0.15 | — | 250 | — | 3.0 | 5.0 | 2.7 |
| 6L6 6L6-G 6L6-GA 6L6-GB | Beam Power Amplifier | | 7AC | 10-1 16-3 14-3 12-15 | 6.3 | 0.9 | 19 | 360 | 270 2.5 | Single Tube | | |
| 6L6-GC | Beam-Power Amplifier | | 7AC | 12-15 | 6.3 | 0.9 | 30◆ | 500◆ | 450◆ 5.0◆ | Two Tubes, Push-Pull | | |
| | | | | | | | 30◆ | 450◆ | — | Triode Connection (G ₂ & P tied) | | |
| 6L7 6L7-G | Pentagrid Mixer | | 7T | 8-4 12-8 | 6.3 | 0.3 | 1.5 | 300 | 100 1.0 150 1.0 | E _{cs} (Injection) = 18 v peak | | |
| 6L6B■ | Beam-Power Amplifier | | 12GJ | 12-90 | 6.3 | 2.25 | 30◆ | 990◆ | 200◆ 5.0◆ | 33▲ | 18▲ | 0.44▲ |
| 6L8S | Triode-Pentode | | 9DX | 9-69 | 6.3 | 0.725 | 4.0◆ | 330◆ | 330◆ 1.1◆ | Pentode Section | | |
| | | | | | | | 2.0◆ | 330◆ | — | Triode Section | | |
| 6LC6● | Beam Triode | ▲ | 8ML | 12-36 | 6.3 | 0.2 | 40◆ | 27,000◆ | — | 2.6▲ | 1.0▲ | 1.0▲ |
| 6LC8* | Triode-Pentode | | 9QY | 6-3 | 6.3 | 0.6 | 2.0◆ | 300◆ | 300◆ 1.1◆ | Pentode Section | | |
| | | | | | | | 1.1◆ | 300◆ | — | Triode Section | | |
| 6LE8 | Twin Pentode | | 9QZ | 6-4 | 6.3 | 0.76 | 2.0◆ ◆ | 300◆ | 150◆ 2.0◆ | — | — | — |
| 6LF6■ | Beam Power Amplifier | | 12GW | T-X | 6.3 | 2.0 | 40◆ | 990◆ | 275◆ 9.0◆ | 37▲ | 18.5▲ | 2.5▲ |
| 6LF8* | Triode-Pentode | | 9DX | 6-3 | 6.3 | 0.6 | 3.75◆ | 330◆ | 330◆ 1.1◆ | Pentode Section | | |
| | | | | | | | 1.1◆ | 330◆ | — | Triode Section | | |

§ See pages 20 and 21 for X-Radiation Rated Recommended Replacement Chart and Symbol Definitions—

▲ — X-Radiation Rated, and ▲ — No X-Radiation Rating.

■ Compactron.

† Plate-to-plate.

● Subminiature type.

⊕ Total for all similar sections.

† Zero signal.

◆ Maximum.

▲ Without external shield.

⊕ Absolute maximum rating.

◆ Per section.

‡ Supply voltage.

◆ Design maximum rating.

Conversion transconductance.

● See X-Radiation Warning, page 4.

| Service | Plate Volts | Screen Volts | Neg Grid Volts | Plate Milli-amperes | Screen Milli-amperes | R _p Ohms | G _m μmhos | μ Factor | Load for Rated Output, Ohms | Power Output, Watts | Tube Type |
|--|--|--------------|----------------------|---------------------|----------------------|---------------------|----------------------|---------------------------------|-----------------------------|---------------------|----------------------------------|
| Class A Amplifier | 200 | 125 | R _k = 68 | 20 | 3.5 | 75,000 | 23,000 | — | — | — | 6KV8 |
| | 125 | 125 | R _k = 82 | 16.5 | 3.1 | 55,000 | 21,000 | — | — | — | |
| Class A Amplifier | 200 | — | 2.0 | 4.0 | — | 17,500 | 4,000 | 70 | — | — | |
| Class A Amplifier | 200 | 135 | R _k = 47 | 30 | 5.2 | 40,000 | 30,000 | (g3 connected to k at socket) | | — | 6KY8 |
| Vertical Amplifier | 135 50 | 120 120 | 10 0 | 39 170 | 3.0 20 | 18,000 | 8,400 | — | — | — | 6KY8 |
| Vertical Oscillator | 250 | — | 3.0 | 1.4 | — | 40,000 | 1,600 | 64 | — | — | |
| Max positive pulse plate voltage ⬠ = 2,000; max d-c cathode current ⬠ = 70 ma | | | | | | | | | | | |
| Vertical Amplifier | 135 50 | 120 120 | 10 0 | 39 170 | 3.0 20 | 18,000 | 8,400 | — | — | — | 6KY8-A |
| Vertical Oscillator | 250 | — | 3.0 | 1.4 | — | 40,000 | 1,600 | 64 | — | — | |
| Max d-c cathode current ⬠ = 22 ma | | | | | | | | | | | |
| Class A Amplifier | 125 | 125 | 1.0 | 12 | 4.0 | 200,000 | 7,500 | — | — | — | 6KZ8† |
| Class A Amplifier | 125 | — | 1.0 | 13.5 | — | 5,400 | 8,500 | 46 | — | — | |
| Class A Amplifier | 80 | — | R _k = 150 | 9.5 | — | 4,400 | 6,400 | 28 | — | — | 6L4 |
| Class A Amp | 250 | — | 9.0 | 8.0 | — | 9,000 | 1,900 | 17 | — | — | 6L5-G |
| Class A Amplifier | 250 | 250 | 14 | 72† | 5.0† | 22,500 | 6,000 | — | 2,500 | 6.5 | 6L6 6L6-G 6L6-GA 6L6-GB |
| Class A Amplifier | 350 | 250 | 18 | 54† | 2.5† | 33,000 | 5,200 | — | 4,200 | 10.8 | |
| Class A Amplifier | 270 | 270 | 17.5 | 134† | 11† | 23,500 | 5,700 | — | 5,000 | 17.5 | |
| Class AB ₁ Amplifier | 360 | 270 | 22.5 | 88† | 5.0† | — | — | — | 3,800 | 18 | |
| Class AB ₂ Amplifier | 360 | 270 | 22.5 | 88† | 5.0† | — | — | — | 3,800 | 47 | |
| Class A Amplifier | 250 | — | 20 | 40† | — | 1,700 | 4,700 | 8.0 | 5,000 | 1.4 | |
| Class AB ₁ Amplifier | 450 | 400 | 37 | 116† | 5.6† | — | — | — | 5,600 | 55 | 6L6-GC |
| (Characteristics given above for 6L6, 6L6G, 6L6GA, and 6L6GB apply also.) | | | | | | | | | | | |
| Class A Amplifier Mixer | 250 | 100 | 3.0 | 5.3 | 6.5 | 600,000 | 1,100 | E _{c3} = -3.0 volts | | — | 6L7 6L7-G |
| | 250 | 150 | 6.0 | 3.3 | 9.2 | 1,000,000 | 350 | # E _{c3} = -15 volts | | — | |
| Horizontal Amplifier | 150 45 | 110 160 | 20 0 | 105 900 | 2.0 110 | 6,600 | 13,400 | (b.p. connected to k at socket) | | — | 6LB6■ |
| Max positive pulse plate voltage ⬠ = 7,000; max d-c cathode current ⬠ = 315 ma | | | | | | | | | | | |
| Class A Amplifier | 200 | 100 | R _k = 82 | 17 | 3.5 | 50,000 | 20,000 | — | — | — | 6L8 |
| Class A Amplifier | 50 | 100 | 0 | 55 | 18 | — | — | — | — | — | |
| Class A Amplifier | 125 | — | R _k = 68 | 13 | — | 6,000 | 5,000 | 30 | — | — | |
| HV Shunt Regulator | Unregulated d-c supply voltage = 36,000 volts; max d-c plate current ⬠ = 1.6 ma. | | | | | | | | | | 6LC6● |
| Class A Amplifier | 150 | 100 | R _k = 180 | 4.0 | 2.8 | 100,000 | 4,400 | — | — | — | 6LC8† |
| Class A Amplifier | 200 | — | 2.0 | 4.0 | — | 17,500 | 4,000 | 70 | — | — | |
| Color Demodulator | 100 | 100 | 2.5 | 8.0 | 15 | 50,000 | 5,800 | — | Ec3 = 0 volts | | 6LE8 |
| Horizontal Amplifier | 160 75 | 160 160 | 30 0 | 175 1350 | 2.5 90 | — | — | (Ec3 = 0 volts) | | — | 6LF6■ |
| Max positive pulse plate voltage ⬠ = 8,000 volts | | | | | | | | | | | |
| Class A Amplifier | 100 | 150 | 2.5 | 20 | 5.0 | 200,000 | 11,000 | — | — | — | 6LF8† |
| Class A Amplifier | 75 | 150 | 0 | 50 | 12 | — | — | — | — | — | |
| Class A Amplifier | 200 | — | 2.0 | 4.0 | — | 17,500 | 4,000 | 70 | — | — | |

Metal tubes are shown in bold-face type, *miniature tubes in italics.*

† G3 and G5 are screen. G4 is signal-input grid.

♥ G2 and G4 are screen. G3 is signal-input grid.

1, 2, 3, etc. indicate tube sections.

✱ Maximum screen dissipation appears immediately below the screen voltage.

† Heater warm-up time controlled.

| Tube Type | Classification by Construction | § X-Radiation Rating | Base Connections | Out-line Dwg. | Filament Volts | Filament Amps | Max. Plate Watts | Max. Plate Volts | * Max. Screen Volts and Watts | Capacitance in Picofarads | | |
|-----------|--------------------------------|----------------------|------------------|---------------|----------------|---------------|------------------|------------------|-------------------------------|-----------------------------------|---------|------------|
| | | | | | | | | | | Input | Out-put | Grid-Plate |
| 6LG6■ | Beam Power Amplifier | | 12HL | 12-89 | 6.3 | 2.0 | 28◇ | 990◇ | 200◇ 5.0◇ | 25▲ | 13▲ | 0.8▲ |
| 6LH6● | Beam Triode | 0.5 mR/hr ▲ | 8ML | 12-36 | 6.3 | 0.2 | 40◇ | 27,000◇ | — | 2.6▲ | 1.0▲ | 1.0▲ |
| 6LH6-A● | Beam Triode | 0.5 mR/hr ▲ | 8ML | 12-36 | 6.3 | 0.2 | 40□ | 27,000□ | — | 2.6▲ | 1.0▲ | 1.0▲ |
| 6LJ6● | Beam Triode | ▲ | 8MQ | 12-36 | 6.3 | 0.2 | 40◇ | 27,000◇ | — | 2.6▲ | 1.0▲ | 1.0▲ |
| 6LJ6-A● | Beam Triode | 0.5 mR/hr ▲ | 8MQ | 12-21 | 6.3 | 0.2 | 40□ | 27,000□ | — | 2.6▲ | 1.0▲ | 1.0▲ |
| 6LJ8 | Triode-Pentode | | 9GF | 6-2 | 6.3 | 0.4 | 2.0◇ 2.0◇ | 280◇ 280◇ | 280◇ 0.5◇ | Pentode Section Triode Section | | |
| 6LM8 | Triode-Pentode | | 9AE | 6-2 | 6.3 | 0.45 | 2.5◇ 2.5◇ | 350◇ 330◇ | 330◇ 0.55◇ | Pentode Section Triode Section | | |
| 6LM8-A¶ | Triode-Pentode | | 9AE | 6-2 | 6.3 | 0.45 | 3.75◇ 2.5◇ | 350◇ 330◇ | 330◇ 1.1◇ | Pentode Section Triode Section | | |
| 6LV8¶ | Triode-Pentode | | 9AE | 6-2 | 6.0 | 0.45 | 1.7 1.5 | 250 250 | 200 0.75 | Pentode Section Triode Section | | |
| 6LQ6 | Beam Power Amplifier | | 9QL | 12-117 | 6.3 | 2.5 | 30◇ | 990◇ | 220◇ 5.0◇ | 22▲ | 11▲ | 0.56▲ |
| 6LQ8 | Triode-Pentode | | 9DX | 6-3 | 6.3 | 0.775 | 5.0◇ 2.0◇ | 300◇ 300◇ | 300◇ 1.0◇ | Pentode Section Triode Section | | |
| 6LR6■ | Beam Power Amplifier | | 12FY | 12-90 | 6.3 | 2.5 | 30◇ | 990◇ | 220◇ 5.0◇ | 33▲ | 12▲ | 0.47▲ |
| 6LRS | Triode-Pentode | | 9QT | 12-65 | 6.3 | 1.5 | 14◇ 2.5◇ | 400◇ 400◇ | 300◇ 2.75◇ | Pentode Section Triode Section | | |
| 6LTS¶ | Duplex-Diode Pentode | | 9RL | 6-2 | 6.3 | 0.6 | 3.1◇ | 330◇ | 330◇ 0.65◇ | Pentode Section Diode Sections | | |
| 6LU'6 | Semi-Remote-Cutoff RF Pentode | | 7CM | 5-2 | 6.3 | 0.4 | 4.0◇ | 300◇ | 300◇ 1.5◇ | 7.3▲ | 2.2▲ | 0.058▲ |
| 6LUS■ | Triode-Pentode | | 12DZ | 12-57 | 6.3 | 1.5 | 14◇ 2.5◇ | 400◇ 400◇ | 300◇ 2.75◇ | Pentode Section Triode Section | | |
| 6LV6■ | Beam Power Amplifier | | 12GW | T-X | 6.3 | 2.0 | 40◇ | 990◇ | 275◇ 9.0◇ | 37▲ | 18.5▲ | 2.5▲ |
| 6LW6 | Beam Power Amplifier | | 8NC | 14-7 | 6.3 | 2.65 | 40◇ | 990◇ | 280◇ 7.0◇ | 40▲ | 14.5▲ | 1.0▲ |
| 6LX6■ | Beam Power Amplifier | | 12JA | 12-136 | 6.3 | 2.55 | 33◇ | 990◇ | 250◇ 5.0◇ | 40▲ | 17▲ | 1.0▲ |
| 6LX8¶ | Triode-Pentode | | 9DC | 6-2 | 6.0 | 0.45 | 1.2 1.4 | 250 250 | 250 0.8 | Pentode Section Triode Section | | |

§ See pages 20 and 21 for X-Radiation Rated Recommended Replacement Chart and Symbol Definitions--

▲—X-Radiation Rated, and (▲)—No X-Radiation Rating.

■—Compactor. † Plate-to-plate.

◇ Zero signal. ◆ Maximum.

◆ Per section. ‡ Supply voltage.

Ⓜ—Subminiature type.

▲—Without external shield.

◆—Design maximum rating.

Ⓜ—Total for all similar sections.

□—Absolute maximum rating.

Conversion transconductance.

● See X-Radiation Warning, page 4.

| Service | Plate Volts | Screen Volts | Neg Grid Volts | Plate Milli- am- peres | Screen Milli- am- peres | R _p , Ohms | G _m , μmhos | μ Fac- tor | Load for Rated Out- put, Ohms | Power Out- put, Watts | Tube Type |
|-------------------------|---|-----------------|-------------------------|---------------------------------|----------------------------------|--------------------------|---------------------------|------------------------------------|--|--------------------------------|--------------|
| Horizontal Amplifier | 175 60 | 125 125 | 23 0 | 90 600 | 1.7 42 | 7,500 | 11,500 | — | — | — | 6LG6 ■ |
| | Max positive pulse plate voltage □ = 7,500 volts; max d-c cathode current ♦ = 315 ma. | | | | | | | | | | |
| HV Shunt Regulator | Unregulated d-c supply voltage = 36,000 volts; d-c plate current ♦ = 1.6 ma. | | | | | | | | | | 6LH6 ● |
| HV Shunt Regulator | Unregulated d-c supply voltage = 36,000 volts; d-c plate current = □ | | | | | | | | | | 6LH6-A ● |
| HV Shunt Regulator | Unregulated d-c supply voltage = 36,000 volts; d-c plate current ♦ = 1.6 ma. | | | | | | | | | | 6LJ6 ● |
| HV Shunt Regulator | Unregulated d-c supply voltage = 36,000 volts; max d-c plate current □ = 1.5 ma. | | | | | | | | | | 6LJ6-A ● |
| Class A Amplifier | 125 | 125 | R _k = 33 | 12 | 3.5 | 125,000 | 13,000 | — | — | — | 6LJ8 |
| Class A Amplifier | 125 | — | R _k = 68 | 13 | — | 5,000 | 8,000 | 40 | — | — | |
| Class A Amplifier | 125 | 125 | 2.0 | 12 | 4.0 | 150,000 | 6,000 | — | — | — | 6LM8 |
| Class A Amplifier | 125 | — | 1.0 | 13.5 | — | 5,400 | 8,500 | 46 | — | — | |
| Class A Amplifier | 125 | 125 | 2.0 | 12 | 4.0 | 150,000 | 6,000 | — | — | — | 6LM8-A ¶ |
| Class A Amplifier | 125 | — | 1.0 | 13.5 | — | 5,400 | 8,500 | 46 | — | — | |
| Class A Amplifier | 170 | 170 | 2.0 | 10 | 2.8 | 400,000 | 6,200 | — | — | — | 6LN8 ¶ |
| Class A Amplifier | 100 | — | 2.0 | 14 | — | 4,000 | 5,000 | 20 | — | — | |
| Horizontal Amplifier | 175 60 | 145 145 | 35 0 | 95 710 | 2.4 55 | 7,000 | 7,500 | (Ec3 = 30 volts) | — | — | 6LQ6 |
| | Max positive pulse plate voltage ♦ = 7,500; max d-c cathode current ♦ = 350 ma. | | | | | | | | | | |
| Class A Amplifier | 125 | 125 | R _k = 82 | 16.5 | 3.1 | 55,000 | 21,000 | — | — | — | 6LQ8 |
| Class A Amplifier | 125 | — | R _k = 68 | 15 | — | 4,400 | 10,400 | 46 | — | — | |
| Horizontal Amplifier | 175 60 | 110 110 | 20 0 | 140 700 | 2.4 35 | 5,300 | 16,000 | (b.p. connected to k at socket) | — | — | 6LR6 ■ |
| | Max positive pulse plate voltage □ = 7,500; max d-c cathode current ♦ = 375 ma. | | | | | | | | | | |
| Class A Amplifier | 135 | 120 | 10 | 56 | 3.0 | 12,000 | 9,300 | — | — | — | 6LR8 |
| Class A Amplifier | 250 | — | 4.0 | 2.3 | — | 16,000 | 3,600 | 58 | — | — | |
| Class A Amplifier | 125 | 125 | R _k = 56 | 10 | 3.4 | 200,000 | 13,000 | — | — | — | 6LT8 ¶ |
| | Max d-c output current ♦ = 5.0 ma; voltage drop: 5.0 volts at 20 ma d-c ♦ | | | | | | | | | | |
| Class A Amplifier | 250 | 250 | R _k = 820 | 9.0 | 2.3 | 280,000 | 3,900 | — | — | — | 6LU6 |
| Class A Amplifier | 135 | 120 | 10 | 56 | 3.0 | 12,000 | 9,300 | — | — | — | 6LUS ■ |
| Class A Amplifier | 250 | — | 4.0 | 2.3 | — | 16,000 | 3,600 | 58 | — | — | |
| Horizontal Amplifier | 160 75 | 160 160 | 30 0 | 175 1350 | 2.5 90 | — | — | (Ec3 = 0 volts) | — | — | 6LV6 ■ |
| | Max positive pulse plate voltage ♦ = 8,000 volts. | | | | | | | | | | |
| Horizontal Amplifier | 250 60 | 250 110 | 56 0 | 125 650 | 4.2 37 | 6,700 | 12,000 | — | — | — | 6LW6 |
| | Max positive pulse plate voltage ♦ = 7,500 volts; d-c cathode current ♦ = 400 ma. | | | | | | | | | | |
| Horizontal Amplifier | 175 60 | 110 110 | 21 0 | 125 750 | 3.3 4.2 | 6,000 | 14,000 | — | — | — | 6LX6 ■ |
| | Max positive pulse plate voltage ♦ = 7,000 volts; max d-c cathode current ♦ = 400 ma. | | | | | | | | | | |
| Class A Amplifier | 100 | 100 | 1.0 | 6.0 | 1.7 | — | 5,500 | — | — | — | 6LX8 ¶ |
| Class A Amplifier | 200 | — | 2.0 | 3.5 | — | — | 3,500 | 70 | — | — | |

Metal tubes are shown in bold-face type, miniature tubes in italics.

♦ G3 and G5 are screen. G4 is signal-input grid.

◆ G2 and G4 are screen. G3 is signal-input grid.

1, 2, 3, etc. indicate tube sections.

¶ Maximum screen dissipation appears immediately below the screen voltage.

¶ Heater warm-up time controlled.

| Tube Type | Classification by Construction | X-Radiation Rating | Base Connections | Outline Dwg. | Filament Volts | Filament Amps | Max. Plate Watts | Max. Plate Volts | Max. Screen Volts and Watts | Capacitance in Picofarads | | | |
|-----------|---------------------------------|--------------------|------------------|--------------|----------------|---------------|---------------------|--|-----------------------------|------------------------------------|-------------------------------|----------------------------|--|
| | | | | | | | | | | Input | Out-put | Grid-Plate | |
| 6LY8 | Triode-Pentode | | 9DX | 6-3 | 6.3 | 0.75 | 5.0 ⬥ 1.0 ⬥ | 330 ⬥ 330 ⬥ | 330 ⬥ 1.1 ⬥ | Pentode Section Triode Section | | | |
| 6LZ6 | Beam Power Amplifier | | 9QL | 12-117 | 6.3 | 2.3 | 30 ⬥ | 990 ⬥ | 220 ⬥ 5.0 ⬥ | 22 ▲ | 11 ▲ | 0.6 ▲ | |
| 6M3 | Half-Wave High-Vacuum Rectifier | | 8GV | T-X | 6.3 | 3.0 | 8.0 | Tube Voltage Drop: 22 v at 640 ma d-c | | | | | |
| 6M11 | Twin-Triode Pentode | | 12CA | 9-58 | 6.3 | 0.75 | 3.1 ⬥ 2.25 ⬥ | 330 ⬥ 330 ⬥ | 330 ⬥ 0.65 ⬥ | Pentode Section Triode Sections | | | |
| 6MA6 | Beam Triode | 0.5 mR/hr ▲ | 8NP | 12-21 | 6.3 | 0.2 | 40 ⬥ | 30,000 ⬥ | — | 2.4 ▲ | 0.88 ▲ | 0.03 ▲ | |
| 6MB6 | Beam Power Amplifier | | 12FY | T-X | 6.3 | 2.25 | 35 ⬥ | 990 ⬥ | 225 ⬥ 7.0 ⬥ | 35 ▲ | 17 ▲ | 0.5 ▲ | |
| 6MB8 | Triode-Pentode | | 9FA | 6-2 | 6.3 | 0.4 | 2.0 ⬥ 2.0 ⬥ | 280 ⬥ 280 ⬥ | 280 ⬥ 0.5 ⬥ | Pentode Section Triode Section | | | |
| 6MC6 | Beam Power Amplifier | | 9QL | T-X | 6.3 | 2.85 | 33 ⬥ | 990 ⬥ | 250 ⬥ 5.0 ⬥ | 40 ▲ | 16 ▲ | 1.0 ▲ | |
| 6MD8 | Triple Triode | | 9RQ | T-X | 6.3 | 0.9 | 3.0 ⬥ ⬆ | 330 ⬥ | — | — | — | — | |
| 6ME6 | Beam Power Amplifier | | 9QL | 12-117 | 6.3 | 2.3 | 30 ⬥ | 990 ⬥ | 220 ⬥ 5.0 ⬥ | 22 ▲ | 11 ▲ | 0.6 ▲ | |
| 6ME8 | Double Plate Sheet Beam Tube | | 9RU | 6-3 | 6.3 | 0.3 | 2.0 ⬥ ⬆ | 400 ⬥ | 400 ⬥ 2.0 ⬥ | — | — | — | |
| 6MF8 | Triode-Pentode | | 12DZ | 12-57 | 6.3 | 1.4 | 12 ⬥ 2.5 ⬥ | 400 ⬥ 400 ⬥ | 300 ⬥ 2.75 ⬥ | Pentode Section Triode Section | | | |
| 6MG8 | Triode-Pentode | | 9DC | 6-2 | 6.3 | 0.45 | 2.0 ⬥ 2.5 ⬥ | 330 ⬥ 330 ⬥ | 300 ⬥ 0.5 ⬥ | Pentode Section Triode Section | | | |
| 6MJ8 | Triple Triode | | 12HG | 9-60 | 6.3 | 0.9 | 3.0 ⬥ ⬆ | 330 ⬥ | — | 2.91 ▲ 2.92 ▲ 3.02 ▲ | 0.361 ▲ 0.62 ▲ 0.73 ▲ | 2.81 ▲ 2.82 ▲ 2.83 ▲ | |
| 6MK8 | Twin Pentode | | 9FG | 6-3 | 6.3 | 0.3 | 1.1 ⬥ ⬆ | 300 ⬥ | 150 ⬥ 0.75 ⬥ | — | — | — | |
| 6MK8-A | Twin Pentode | | 9FG | 6-3 | 6.3 | 0.3 | 1.1 ⬥ ⬆ | 300 ⬥ | 150 ⬥ 0.75 ⬥ | — | — | — | |
| 6ML8 | Triple Triode | | 9RQ | 6-2 | 6.3 | 0.675 | 2.0 ⬥ 5.0 ⬥ ⊕ | 330 ⬥ | — | — | — | — | |
| 6MN8 | Triple Triode | | 12HU | 9-60 | 6.3 | 0.9 | 3.0 ⬥ ⬆ | 330 ⬥ | — | 4.6 ▲ | 0.331 ▲ 0.572 ▲ 0.652 ▲ | 2.6 ▲ | |
| 6MQ8 | Triode-Pentode | | 9AE | 6.2 | 6.3 | 0.535 | 2.5 ⬥ 2.7 ⬥ | 330 ⬥ 330 ⬥ | 330 ⬥ 0.55 ⬥ | Pentode Section Triode Section | | | |
| 6MU8 | Triode-Pentode | | 9AE | 6-3 | 6.3 | 0.6 | 3.75 ⬥ 2.5 ⬥ | 330 ⬥ 330 ⬥ | 330 ⬥ 1.1 ⬥ | Pentode Section Triode Section | | | |

§ See pages 20 and 21 for X-Radiation Rated Recommended Replacement Chart and Symbol Definitions—
 ▲—X-Radiation Rated, and (▲)—No X-Radiation Rating.

■ Compactron. † Plate-to-plate. ⊕ Subminiature type. ⊕ Total for all similar sections.
 † Zero signal. ‡ Maximum. ▲ Without external shield. ⊖ Absolute maximum rating.
 ⬆ Per section. § Supply voltage. ⬥ Design maximum rating. # Conversion transconductance.

● See X-Radiation Warning, page 4.

| Service | Plate Volts | Screen Volts | Neg Grid Volts | Plate Milli-amperes | Screen Milli-amperes | R _p , Ohms | G _m , μmhos | μ Factor | Load for Rated Output, Ohms | Power Output, Watts | Tube Type |
|-------------------------------|--|--------------|----------------------|---------------------|----------------------|---------------------------|------------------------|----------|-----------------------------|---------------------|-----------|
| Class A Amplifier | 200 | 100 | R _k = 82 | 19.5 | 3.0 | 60,000 | 20,000 | — | — | — | 6LY8 |
| | 35 | 100 | 0 | 54 | 13.5 | — | — | — | — | — | |
| Class A Amplifier | 250 | — | 2.0 | 1.0 | — | 59,000 | 1,700 | 100 | — | — | |
| Horizontal Amplifier | 175 | 125 | 25 | 140 | 2.0 | 6,000 | 11,000 | — | — | — | 6LZ6 |
| | 55 | 125 | 0 | 800 | 56 | — | — | — | — | — | |
| | Max positive pulse plate voltage ♦ = 7,500 volts; d-c cathode current ♦ = 350 ma. | | | | | | | | | | |
| TV Dampener | Max d-c output current = 320 ma; max peak inverse voltage □ = 6,000 volts; max peak current = 1,100 ma | | | | | | | | | | 6M3 |
| Class A Amplifier | 125 | 125 | R _k = 56 | 11 | 3.4 | 200,000 | 13,000 | — | — | — | 6M11■ |
| | 125 | — | R _k = 120 | 8.0 | — | 7,250 | 8,000 | 58 | — | — | |
| Class A Amp ♦ | | | | | | | | | | | |
| HV Shunt Regulator | Unregulated d-c supply voltage = 36,000 volts; max d-c plate current □ = 1.5 ma. | | | | | | | | | | 6MA6● |
| Horizontal Amplifier | 150 | 110 | 20 | 110 | 2.0 | 5,000 | 14,000 | — | — | — | 6MB6■ |
| | 60 | 110 | 0 | 660 | 42 | — | — | — | — | — | |
| | Max positive pulse plate voltage ♦ = 8,000 volts; max d-c cathode current ♦ = 400 ma. | | | | | | | | | | |
| Class A Amplifier | 125 | 125 | R _k = 33 | 10 | 2.8 | 125,000 | 12,000 | — | — | — | 6MB8 |
| | 125 | — | R _k = 68 | 13 | — | 5,000 | 8,000 | 40 | — | — | |
| Class A Amplifier | | | | | | | | | | | |
| Horizontal Amplifier | 175 | 110 | 21 | 125 | 3.3 | 6,000 | 14,000 | — | — | — | 6MC6 |
| | 60 | 110 | 0 | 750 | 42 | — | — | — | — | — | |
| | Max positive pulse plate voltage ♦ = 8,000 volts; max d-c cathode current ♦ = 400 ma. | | | | | | | | | | |
| Class A Amplifier ♦ | 250 | — | 10.5 | 11.5 | — | 5,500 | 3,100 | 17 | — | — | 6MD8 |
| Horizontal Amplifier | 175 | 125 | 25 | 130 | 2.8 | 5,800 | 9,600 | — | — | — | 6ME6 |
| | 55 | 125 | 0 | 580 | 40 | — | — | — | — | — | |
| | Max positive pulse plate voltage ♦ = 8,000 volts; max d-c cathode current ♦ = 350 ma. | | | | | | | | | | |
| Color TV Synchronous Detector | 250 | 350 | R _k = 390 | 14.5 | 0.7 | — | 4,400 | — | — | — | 6ME8 |
| | (With plates tied together and deflectors (pins 1 and 2) grounded.) Total voltage change on either deflector with an equal and opposite change on the other deflector required to switch the plate current from one plate to the other = 75 volts maximum. | | | | | | | | | | |
| Class A Amplifier | 250 | 250 | 20 | 50 | 3.5 | 5,000 | 4,100 | — | — | — | 6MF8■ |
| Class A Amplifier | 250 | — | 4.0 | 2.6 | — | 14,000 | 4,100 | 58 | — | — | |
| Class A Amplifier | | | | | | | | | | | |
| Class A Amplifier | 170 | 170 | 2.0 | 10 | 2.8 | 490,000 | 6,200 | — | — | — | 6MG8 |
| | 150 | — | R _k = 56 | 18 | — | 5,000 | 8,500 | 40 | — | — | |
| Class A Amplifier | | | | | | | | | | | |
| Class A Amplifier ♦ | 250 | — | 10.5 | 10 | — | 5,600 | 3,000 | 17 | — | — | 6MJ8■ |
| Avg. Char. ♦ | 100 | 67.5 | — | 2.0 | 4.4 | (Both sections operating) | | | | | 6MK8 |
| | (Grid current adjusted for 100 microamperes d-c) | | | | | | | | | | |
| Color Demodulator ♦ | 100 | 67.5 | — | 2.0 | 4.4 | (Both Sections Operating) | | | | | 6MK8-A |
| | (Grid current adjusted for 100 microamperes d-c) | | | | | | | | | | |
| Class A Amplifier ♦ | 125 | — | 1.0 | 11 | — | 6,400 | 6,700 | 43 | — | — | 6ML8 |
| Class A Amplifier ♦ | 125 | — | 1.0 | 11 | — | 5,500 | 9,000 | 50 | — | — | 6MN8■ |
| Class A Amplifier | 125 | 125 | R _k = 62 | 12 | 4.5 | 150,000 | 10,000 | — | — | — | 6MQ8 |
| | 150 | — | R _k = 56 | 18 | — | 5,000 | 5,000 | 40 | — | — | |
| Class A Amplifier | | | | | | | | | | | |
| Class A Amplifier | 150 | 150 | R _k = 150 | 19 | 4.2 | 165,000 | 9,000 | — | — | — | 6MU8¶ |
| | 125 | — | 1.0 | 115 | — | 5,800 | 6,000 | 35 | — | — | |
| Class A Amplifier | | | | | | | | | | | |

Metal tubes are shown in bold-face type, *miniature tubes in italics.*

♦ G3 and G5 are screen. G4 is signal-input grid.

♥ G2 and G4 are screen. G3 is signal-input grid.

1, 2, 3, etc. indicate tube sections.

■ Maximum screen dissipation appears immediately below the screen voltage.

¶ Heater warm-up time controlled.

| Tube Type | Classification by Construction | Base Connections | Out-line Dwg | Filament Volts | Filament Amp | Max Plate Watts | Max Plate Volts | Max Screen Volts and Watts | Capacitance in Picofarads | | |
|------------------------|---------------------------------------|------------------|---------------|----------------|--------------|-----------------|---|----------------------------|--|---------|------------|
| | | | | | | | | | Input | Out-put | Grid-plate |
| 6MV8* | Triode-Pentode | 9DX | 6-2 | 6.3 | 0.6 | 2.5 | 330 | 330 | Pentode Section | | |
| | | | | | | 1.0 | 330 | 0.55 | Triode Section | | |
| 6MY8 | Triode-Pentode | 12DZ | 12-57 | 6.3 | 1.45 | 16 | 400 | 300 | Pentode Section | | |
| | | | | | | 2.5 | 400 | 2.75 | Triode Section | | |
| 6N4 | Medium-Mu Triode | 7CA | 5-1 | 6.3 | 0.2 | 3.0 | 180 | — | 3.0 | 1.6 | 1.1 |
| 6N5 | Electron Ray Indicator same as 6AB5 | | | | | | | | | | |
| 6N6-G | Direct-Coupled Power Amplifier Triode | 7AU | 14-3 | 6.3 | 0.8 | 13.5 2.5 | 300 | 300 | — | — | — |
| 6N7 6N7-G 6N7-GT | Twin-Triode Power Amplifier | 8B | 8-6 | 6.3 | 0.8 | 1.0 | 300 | — | Both Sections in Push-pull | | |
| | | | 14-3 9-11 | | | | | | Both Sections in Parallel | | |
| 6P5-GT | Medium-Mu Triode | 6Q | 9-11 | 6.3 | 0.3 | 1.25 | 250 | — | 3.4 | 5.5 | 6.2 |
| 6P7-G | Triode-Pentode | 7U | 12-8 | 6.3 | 0.3 | 1.7 | 250 | 100 | Pentode Section | | |
| | | | | | | 0.4 | 100 | — | Triode Section | | |
| 6Q7 6Q7-G 6Q7-GT | Duplex-Diode High-Mu Triode | 7V | 8-4 | 6.3 | 0.3 | — | 300 | — | — | — | — |
| | | | 12-8 9-18 | | | | | | | | |
| 6Q11 | Three-Section Triode | 12BY | 9-56 | 6.3 | 0.6 | 3.0 | 330 | — | Section 1 (Pins 3, 9, 10) | | |
| | | | | | | 1.2 | 330 | — | Sections 2 and 3 (Pins 5, 6, 7, and 2, 3, 11) | | |
| 6R3 | Half-Wave, High-Vacuum Rectifier | 9CB | 6-8 | 6.3 | 0.81 | — | Tube Voltage Drop: 16.3 Volts at 150 ma d-c | | | | |
| 6R7 6R7-G 6R7-GT | Duplex-Diode Medium-Mu Triode | 7V | 8-4 | 6.3 | 0.3 | 2.5 | 250 | — | 4.8 | 3.8 | 2.4 |
| | | | 12-8 9-17 | | | | | | — | — | — |
| 6R8 | Triple-Diode, Low-Mu Triode | 9E | 6-2 | 6.3 | 0.45 | 2.5 | 250 | — | — | — | — |
| 6S4 | Medium-Mu Triode | 9AC | 6-3 | 6.3 | 0.6 | 8.5 | 550 | — | 4.2 | 0.6 | 2.4 |
| | | | | | | — | — | — | — | — | |
| 6S4-A | Medium-Mu Triode | 9AC | 6-3 | 6.3 | 0.6 | 8.5 | 550 | — | 4.2 | 0.6 | 2.4 |
| 6S7 6S7-G | Remote-Cutoff RF Pentode | 7R | 8-2 | 6.3 | 0.15 | 2.25 | 300 | 300 | 6.5 | 10.5 | 0.005 |
| | | | 12-8 | | | | | 0.25 | 4.4 | 8.0 | 0.008 |
| 6S8-GT | Triple-Diode High-Mu Triode | 8CB | 9-23, 9-48 | 6.3 | 0.3 | 0.5 | 300 | — | — | — | — |
| 6SA7 6SA7-GT | Pentagrid Converter | 8R 8AD | 8-1 | 6.3 | 0.3 | 1.0 | 300 | 100 | Osc $I_{c1} = 0.5$ ma $R_{g1} = 20,000$ ohms | | |
| | | | 9-11, 9-41 | | | | | 1.0 | — | — | |
| 6SB7-Y | Pentagrid Converter | 8R | 8-1 | 6.3 | 0.3 | 2.0 | 300 | 100 | Osc $I_{c1} = 0.35$ ma $R_{g1} = 20,000$ ohms | | |
| — | — | — | — | — | — | — | — | 1.5 | — | — | — |
| 6SC7 6SC7-GT | High-Mu Twin-Triode | 8S | 8-1 9-11 | 6.3 | 0.3 | — | 250 | — | — | — | — |
| 6SD7-GT | Semi-Remote-Cutoff Pentode | 8N | 9-12 | 6.3 | 0.3 | 4.0 | 300 | 125 | 9.0 | 7.5 | 0.0035 |
| | | | | | | | | 0.4 | — | — | — |
| 6SE7-GT | Sharp-Cutoff Pentode | 8N | 9-12 | 6.3 | 0.3 | 4.0 | 300 | 125 | 8.0 | 7.5 | 0.005 |
| — | — | — | — | — | — | — | — | 0.4 | — | — | — |
| 6SF5 6SF5-GT | High-Mu Triode | 6AB | 8-1 9-11 | 6.3 | 0.3 | — | 300 | — | — | — | — |
| 6SF7 | Diode Remote-Cutoff Pentode | 7AZ | 8-1 | 6.3 | 0.3 | 3.5 | 300 | 300 | 5.5 | 6.0 | 0.004 |
| | | | | | | | | 0.5 | — | — | — |
| 6SG7 6SG7-GT | Semi-Remote-Cutoff RF Pentode | 8BK | 8-1 | 6.3 | 0.3 | 3.0 | 300 | 300 | 8.5 | 7.0 | 0.003 |
| | | | 9-12 | | | | | 0.6 | 8.5 | 7.0 | 0.0035 |
| — | — | — | — | — | — | — | — | 0.7 | — | — | — |
| 6SH7 6SH7-GT | Sharp-Cutoff RF Pentode | 8BK | 8-1 9-12 | 6.3 | 0.3 | 3.0 | 300 | 300 | 8.5 | 7.0 | 0.0035 |
| — | — | — | — | — | — | — | — | 0.7 | — | — | — |

■ Compactron.
† Zero signal.
♣ Per section.

‡ Plate-to-plate.
♣ Maximum.
‡ Supply voltage.

◎ Subminiature type.
▲ Without external shield.
◆ Design maximum rating.

⊕ Total for all similar sections.
⊖ Absolute maximum rating.
Conversion transconductance.

| Service | Plate Volts | Screen Volts | Neg Grid Volts | Plate Milli-amperes | Screen Milli-amperes | R _p Ohms | G _m μmhos | μ Factor | Load for Rated Output, Ohms | Power Output, Watts | Tube Type |
|--------------------|--|--------------|----------------|---------------------|----------------------|---------------------|----------------------|----------|-----------------------------|---------------------|-----------------|
| Class A Amplifier | 125 | 125 | 1.0 | 13 | 4.0 | 150,000 | 9,000 | — | — | — | <i>6MV8</i> † |
| Class A Amplifier | 250 | — | 2.0 | 2.5 | — | 25,000 | 4,000 | 100 | — | — | |
| Class A Amplifier | 135 | 120 | 10 | 56 | 3.0 | 12,000 | 9,300 | — | — | — | 6MY8 ■ |
| Class A Amplifier | 45 | 125 | 0 | 200 | 20 | — | — | — | — | — | |
| Class A Amplifier | 250 | — | 4.0 | 2.3 | — | 16,000 | 3,600 | 58 | — | — | |
| Class A Amplifier | 180 | — | 3.5 | 12 | — | 5,400 | 6,000 | 32 | — | — | <i>6N4</i> |
| Class A Amplifier | 300 | 300 | 0 | 45 | 8.0 | 24,000 | 2,400 | — | 7,000 | 4.0 | 6N6-G |
| Class B Amplifier | 300 | — | 0 | 35† | — | — | — | — | 8,000‡ | 10 | 6N7 |
| Class A Amplifier | 294 | — | 6.0 | 7.0 | — | 11,000 | 3,200 | 35 | — | — | 6N7-G |
| Class A Amplifier | 250 | — | 13.5 | 5.0 | — | 9,500 | 1,450 | 13.8 | — | — | 6P5-GT |
| Class A Amp | 250 | 100 | 3.0 | 6.5 | 1.5 | 850,000 | 1,100 | — | — | — | 6P7-G |
| Class A Amp | 100 | — | 3.0 | 3.5 | — | 16,000 | 500 | 8.0 | — | — | |
| Class A Amplifier | 250 | — | 3.0 | 1.0 | — | 58,000 | 1,200 | 70 | — | — | 6Q7 |
| Class A Amplifier | 100 | — | 1.0 | 0.8 | — | 58,000 | 1,200 | 70 | — | — | 6Q7-G |
| Class A Amplifier | 150 | — | 0 | 22 | — | 7,000 | 2,500 | 18 | — | — | 6Q7-GT |
| Class A Amplifier | 100 | — | 1.0 | 0.5 | — | 80,000 | 1,250 | 100 | — | — | 6Q11 ¶ ■ |
| Class A Amplifier | 250 | — | 2.0 | 1.2 | — | 62,500 | 1,600 | 100 | — | — | |
| TV Dampner | Max d-c output current = 150 ma; max peak inverse voltage = 4,500 volts; max peak current = 450 ma | | | | | | | | | | <i>6R3</i> |
| Class A Amplifier | 250 | — | 9.0 | 9.5 | — | 8,500 | 1,900 | 16 | — | — | 6R7 |
| Class A Amplifier | 250 | — | 9.0 | 9.5 | — | 8,500 | 1,900 | 16 | 10,000 | 0.30 | 6R7-G |
| Class A Amplifier | 250 | — | 9.0 | 9.5 | — | 8,500 | 1,900 | 16 | 10,000 | 0.30 | 6R7-GT |
| Vertical Amplifier | 250 | — | 8.0 | 26 | — | 3,600 | 4,500 | 16 | — | — | <i>6S4</i> |
| Vertical Amplifier | Max positive pulse plate voltage ☐ = 2,200 volts; max d-c cathode current ◆ = 30 ma | | | | | | | | | | |
| Vertical Amplifier | 250 | — | 8.0 | 24 | — | 3,700 | 4,500 | 16.5 | — | — | <i>6S4-A</i> ¶ |
| Vertical Amplifier | Max positive pulse plate voltage ☐ = 2,200 volts; max d-c cathode current ◆ = 30 ma | | | | | | | | | | |
| Class A Amplifier | 250 | 100 | 3.0 | 8.5 | 2.0 | 1,000,000 | 1,750 | — | — | — | 6S7 |
| Class A Amplifier | 250 | — | 2.0 | 0.9 | — | 91,000 | 1,100 | 100 | — | — | 6S7-G |
| Class A Amplifier | 250 | — | 2.0 | 0.9 | — | 91,000 | 1,100 | 100 | — | — | 6S8-GT |
| Converter | 250 | 100 | 2.0 | 3.5 | 8.5 | 1,000,000 | 450‡ | — | — | — | 6SA7 |
| Converter | 100 | 100 | 2.0 | 3.3 | 8.5 | 500,000 | 425‡ | — | — | — | 6SA7-GT |
| Converter | 250 | 100 | 1.0 | 3.8 | 10 | 1,000,000 | 950‡ | — | — | — | 6SB7-Y |
| Class A Amplifier | 250 | — | 2.0 | 2.0 | — | 53,000 | 1,325 | 70 | — | — | 6SC7 |
| Class A Amplifier | 250 | 125 | 2.0 | 9.5 | 3.0 | 700,000 | 4,250 | — | — | — | 6SC7-GT |
| Class A Amplifier | 250 | 100 | 1.5 | 4.5 | 1.5 | 1,000,000 | 3,400 | — | — | — | 6SD7-GT |
| Class A Amplifier | 250 | — | 2.0 | 0.9 | — | 66,000 | 1,500 | 100 | — | — | 6SF5 |
| Class A Amplifier | 100 | — | 1.0 | 0.4 | — | 85,000 | 1,150 | 100 | — | — | 6SF5-GT |
| Class A Amplifier | 250 | 100 | 1.0 | 12.4 | 3.3 | 700,000 | 2,050 | — | — | — | 6SF7 |
| Class A Amplifier | 250 | 150 | 2.5 | 9.2 | 3.4 | 1,000,000 | 4,000 | — | — | — | 6SG7 |
| Class A Amplifier | 250 | 125 | 1.0 | 11.8 | 4.4 | 900,000 | 4,700 | — | — | — | 6SG7-GT |
| Class A Amplifier | 100 | 100 | 1.0 | 8.2 | 3.2 | 250,000 | 4,100 | — | — | — | |
| Class A Amplifier | 250 | 150 | 1.0 | 10.8 | 4.1 | 900,000 | 4,900 | — | — | — | 6SH7 |
| Class A Amplifier | 250 | 150 | 1.0 | 10.8 | 4.1 | 900,000 | 4,900 | — | — | — | 6SH7-GT |

Metal tubes are shown in bold-face type, miniature tubes in italics.

◆ G3 and G5 are screen. G4 is signal-input grid.

♥ G2 and G4 are screen. G3 is signal-input grid.

1, 2, 3, etc. indicate tube sections.

‡ Maximum screen dissipation appears

immediately below the screen voltage.

¶ Heater warm-up time controlled.

| Tube Type | Classification by Construction | Base Connections | Out-line Dwg | Fila-ment Volts | Fila-ment Amp | Max Plate Watts | Max Plate Volts | Max Screen Volts and Watts | Capacitance in Picofarads | | |
|---------------------------|---------------------------------|------------------|--------------------|-----------------|---------------|-----------------|-----------------|--|---|----------------|---------------------|
| | | | | | | | | | Input | Out-put | Grid-plate |
| 6SJ7 6SJ7-GT | Sharp-Cutoff Pentode | 8N | 8-1 9-12 | 6.3 | 0.3 | 2.5 2.5 | 300 250 | 300 0.7 — | Pentode Connection Triode Connection (G ₂ , G ₃ & P tied) | | |
| 6SK7 6SK7-GT | Remote-Cutoff RF Pentode | 8N | 8-1 9-11 | 6.3 | 0.3 | 4.0 | 300 | 300 0.4 | 6.0 6.5 | 7.0 7.5 | 0.003 0.005 ♣ |
| 6SL7-GT | High-Mu Twin-Triode | 8BD | 9-11, 9-41 | 6.3 | 0.3 | 1.0♣ | 300 | — | — | — | — |
| 6SN7-GT | Medium-Mu Twin Triode | 8BD | 9-11, 9-14 | 6.3 | 0.6 | 3.5♣ 5.0⊕ | 300 | — | 2.81▲ 3.02▲ | 0.81▲ 1.22▲ | 3.81▲ 4.02▲ |
| 6SN7-GTA 6SN7- GTB¶ | Medium-Mu Twin Triode | 8BD | 9-11 or 9-41 | 6.3 | 0.6 | 5.0♣ 7.5⊕ | 450 | — | 2.21▲ 2.62▲ | 0.7▲ | 4.01▲ 3.82▲ |
| 6SQ7 6SQ7-GT | Duplex-Diode, High-Mu Triode | 8Q | 8-1 9-12 | 6.3 | 0.3 | 0.5 | 300 | — | 3.2 4.2▲ | 3.0 3.4▲ | 1.6 1.8▲ |
| 6SR7 6SR7-GT | Duplex-Diode Medium-Mu Triode | 8Q | 8-1 9-11 | 6.3 | 0.3 | 2.5 | 250 | — | 3.6 | 2.8 | 2.4 |
| 6SS7 | Remote-Cutoff RF Pentode | 8N | 8-1 | 6.3 | 0.15 | 2.25 | 300 | 100 0.35 | 5.5 | 7.0 | 0.004 ♣ |
| 6ST7 | Duplex-Diode Medium-Mu Triode | 8Q | 8-1 | 6.3 | 0.15 | 2.5 | 250 | — | 2.8 | 3.0 | 1.5 |
| 6SU7- GTU | High-Mu Twin-Triode | 8BD | 9-11 | 6.3 | 0.3 | 1.0♣ | 250 | — | — | — | — |
| 6SV7 | Diode Sharp-Cutoff RF Pentode | 7AZ | 8-1 | 6.3 | 0.3 | 2.3 | 300 | 300 0.6 | 6.5 | 6.0 | 0.004 ♣ |
| 6SZ7 | Duplex-Diode High-Mu Triode | 8Q | 8-1 | 6.3 | 0.15 | — | 300 | — | 2.6 | 2.8 | 1.1 |
| 6T4 | UHF Triode Oscillator | 7DK | 5-1 | 6.3 | 0.225 | 3.5 | 200 | — | 2.6▲ | 0.4▲ | 1.7▲ |
| 6T5 | Electron-Ray Indicator | 6R | 9-26 | 6.3 | 0.3 | — | 250 | — | — | — | — |
| 6T7-G | Duplex-Diode High-Mu Triode | 7V | 12-8 | 6.3 | 0.15 | — | 250 | — | 1.8 | 3.1 | 1.7 |
| 6T8 6T8-A¶ | Triple-Diode High-Mu Triode | 9E | 6-2 | 6.3 | 0.45 | 1.1◆ | 330◆ | — | 1.7 | 2.4 | 1.7 |
| 6T9■ | Triode-Pentode | 12FM | 9-58 | 6.3 | 0.93 | 12◆ 1.5◆ | 275◆ 300◆ | 275◆ 2.0◆ — | Pentode Section: Triode Section | | |
| 6T10■ | Dissimilar Double Pentode | 12EZ | 9-59 | 6.3 | 0.95 | 10◆ 1.7◆ | 275◆ 330◆ | 275◆ 2.0◆ 330◆ 1.1◆ | Section 1 (Pins 8, 9, 10, 11) Section 2 (Pins 2, 3, 5, 6, 7) | | |
| 6U4-GT | Half-Wave High-Vacuum Rectifier | 4CG | 9-13 | 6.3 | 1.2 | — | — | Tube Voltage Drop: 21 v at 250 ma d-c | | | |
| 6U5 | Electron-Ray Indicator | 6R | 9-26 | 6.3 | 0.3 | — | 285 | Max target voltage = 285 Min target voltage = 125 | | | |
| 6U6-GT | Beam Power Amplifier | 7AC | 9-11 | 6.3 | 0.75 | 11 | 200 | 135 2.0 | — | — | — |
| 6U7-G | Remote-Cutoff RF Pentode | 7R | 12-4 | 6.3 | 0.3 | 2.25 | 300 | 100 0.25 | 5.0 | 9.0 | 0.007 ♣ |

■ Compactron.
† Zero signal.
♣ Per section.

‡ Plate-to-plate.
♣ Maximum.
‡ Supply voltage.

⊕ Subminiature type.
▲ Without external shield.
◆ Design maximum rating.

⊕ Total for all similar sections.
▲ Absolute maximum rating.
Conversion transconductance.

● See X-Radiation Warning, page 4.

| Service | Plate Volts | Screen Volts | Neg Grid Volts | Plate Milli-amperes | Screen Milli-amperes | R _p , Ohms | G _m , μ hos | μ Factor | Load for Rated Output, Ohms | Power Output, Watts | Tube Type |
|---------------------------------|--|--------------|----------------------|---------------------|----------------------|-----------------------|----------------------------|---------------------------|-----------------------------|---------------------|----------------------------|
| Class A Amplifier | 250 | 100 | 3.0 | 3.0 | 0.8 | 1,000,000 | 1,650 | — | — | — | 6SJ7 |
| | 100 | 100 | 3.0 | 2.9 | 0.9 | 700,000 | 1,575 | — | — | — | 6SJ7-GT |
| | 250 | — | 8.5 | 9.2 | — | 7,600 | 2,500 | 19 | — | — | |
| Class A Amplifier | 180 | — | 6.0 | 6.0 | — | 8,200 | 2,300 | 19 | — | — | |
| | 250 | 100 | 3.0 | 9.2 | 2.6 | 800,000 | 2,000 | — | — | — | 6SK7 |
| Class A Amplifier | 100 | 100 | 1.0 | 13 | 4.0 | 120,000 | 2,350 | — | — | — | 6SK7-GT |
| Class A Amplifier \spadesuit | 250 | — | 2.0 | 2.3 | — | 44,000 | 1,600 | 70 | — | — | 6SL7-GT |
| Class A Amplifier \spadesuit | 250 | — | 8.0 | 9.0 | — | 7,700 | 2,600 | 20 | — | — | 6SN7-GT |
| Class A Amplifier \spadesuit | 90 | — | 0 | 10 | — | 6,700 | 3,000 | 20 | — | — | |
| Class A Amplifier \spadesuit | 250 | — | 8.0 | 9.0 | — | 7,700 | 2,600 | 20 | — | — | 6SN7-GTA |
| | 90 | — | 0 | 10 | — | 6,700 | 3,000 | 20 | — | — | 6SN7-GTB \ddagger |
| Vertical Amplifier \spadesuit | Max positive pulse plate voltage \boxtimes = 1500 volts; max plate dissipation \oplus = 7.5 watts; max d-c cathode current = 20 ma | | | | | | | | | | |
| Class A Amplifier | 250 | — | 2.0 | 1.1 | — | 85,000 | 1,175 | 100 | — | — | 6SQ7 |
| Class A Amplifier | 100 | — | 1.0 | 0.5 | — | 110,000 | 925 | 100 | — | — | 6SQ7-GT |
| Class A Amplifier | 250 | — | 9.0 | 9.5 | — | 8,500 | 1,900 | 16 | — | — | 6SR7 |
| Class A Amplifier | 250 | 100 | 3.0 | 9.0 | 2.0 | 1,000,000 | 1,850 | — | — | — | 6SS7 |
| Class A Amplifier | 250 | — | 9.0 | 9.5 | — | 8,500 | 1,900 | 16 | — | — | 6ST7 |
| Class A Amplifier \spadesuit | 250 | — | 2.0 | 2.3 | — | 44,000 | 1,600 | 70 | — | — | 6SU7-GTY |
| Class A Amplifier | 250 | 150 | 1.0 | 7.5 | 2.8 | 1,500,000 | 3,600 | — | — | — | 6SV7 |
| | 100 | 100 | 1.0 | 3.7 | 1.4 | 700,000 | 2,600 | — | — | — | |
| Class A Amplifier | 250 | — | 3.0 | 1.0 | — | 58,000 | 1,200 | 70 | — | — | 6S27 |
| Class A Amplifier | 80 | — | R _k = 150 | 18 | — | 1,860 | 7,000 | 13 | — | — | 6T4 |
| Tuning Indicator | Plate voltage = 250 thru 1 meg, target voltage = 250 (E _c = -22 volts for max illumination) (E _c = 0 volts for min illumination) | | | | | | | | | | |
| Class A Amplifier | 250 | — | 3.0 | 1.2 | — | 62,000 | 1,050 | 65 | — | — | 6T7-G |
| Class A Amplifier | 250 | — | 3.0 | 1.0 | — | 58,000 | 1,200 | 70 | — | — | 6T8 |
| | 100 | — | 1.0 | 0.8 | — | 54,000 | 1,300 | 70 | — | — | 6T8-A \ddagger |
| Class A Amplifier | 250 | 250 | 8.0 | 35 \dagger | 2.5 \dagger | 100,000 | 6,500 | — | 5,000 | 4.2 | 6T9 \blacksquare |
| Class A Amplifier | 250 | — | 2.0 | 1.5 | — | 45,000 | 2,100 | 95 | — | — | |
| Class A Amplifier | 250 | 250 | 8.0 | 35 \dagger | 2.5 \dagger | 100,000 | 6,500 | — | 5,000 | 4.2 | 6T10 \blacksquare |
| Class A Amplifier | 150 | 100 | R _k = 560 | 1.3 | 2.1 | 150,000 | 1,000 | E _{cs} = 0 volts | — | — | |
| Half-Wave Rectifier TV Dumper | Max d-c output current = 125 ma; max peak inverse voltage = 1250 volts; rms supply voltage = 350 volts; max peak current = 600 ma Max d-c output current = 125 ma; max peak inverse voltage \boxtimes = 3850 volts; max peak current = 600 ma | | | | | | | | | | |
| Tuning Indicator | Plate voltage = 250 thru 1 meg, target voltage = 250 (E _c = -22 volts, shadow = 0°) (E _c = 0 volt, shadow = 90°, plate current = 0.24 ma, target current = 4 ma) | | | | | | | | | | |
| Class A Amplifier | 200 | 135 | 14.0 | 55 \dagger | 3.0 \dagger | 20,000 | 6,200 | — | 3,000 | 5.5 | 6U6-GT |
| Class A Amplifier | 250 | 100 | 3.0 | 8.2 | 2.0 | 800,000 | 1,600 | — | — | — | 6U7-G |

Metal tubes are shown in bold-face type, miniature tubes in italics.

\blacklozenge G3 and G5 are screen. G4 is signal-input grid.

\blacktriangledown G2 and G4 are screen. G3 is signal-input grid.

1, 2, 3, etc. indicate tube sections.

\ast Maximum screen dissipation appears immediately below the screen voltage.

\ddagger Heater warm-up time controlled.

| Tube Type | Classification by Construction | Base Connections | Out-line Dwg | Filament Volts | Filament Amp | Max Plate Watts | Max Plate Volts | Max Screen Volts and Watts | Capacitance in Picofarads | | |
|--------------------|----------------------------------|------------------|--------------------|----------------|--------------|-----------------|--|----------------------------|---|--------|------------|
| | | | | | | | | | Input | Output | Grid-plate |
| 6U8 6U8-A† | Triode-Pentode | 9AE | 6-2 | 6.3 | 0.45 | 3.0◆ 2.5◆ | 330◆ 330◆ | 330◆ 0.55◆ | Pentode Section Triode Section | | |
| 6U9 | Triode-Pentode | 10K | 6-2 | 6.3 | 0.41 | 2.1 1.5 | 250 250 | 250 0.7 | Pentode Section Triode Section | | |
| 6U10† | Three-Section Triode | 12FE | 9-56 | 6.3 | 0.6 | 2.0◆ 1.0◆ | 330◆ 330◆ | — — | Sections 1 and 3 (Pins 4, 9, 10, and 2, 3, 11) (Section 2 (Pins 5, 6, 7)) | | |
| 6V3 6V3-A | High-Wave, High-Vacuum Rectifier | 9BD | 6-7 T-X | 6.3 | 1.75 | — 2.7 | Tube Voltage Drop: 19 v at 250 ma d-c | | | | |
| 6V4 | Full-Wave, High-Vacuum Rectifier | 9M | 6-3 | 6.3 | 0.6 | — | Tube Voltage Drop:◆ 25 volts at 90 ma d-c | | | | |
| 6V5-GT | Beam Power Amplifier | 6AO | 9-11 | 6.3 | 0.45 | 12 | 315 | 285 2.0 | — | — | — |
| 6V6 | Beam Power Amplifier | 7AC | 8-6 | 6.3 | 0.45 | 14◆ | 350◆ | 315◆ 2.2◆ | Single Tube 2 Tubes, Push-pull | | |
| 6V6-GT 6V6-GTA† | Beam Power Amplifier | 7AC | 9-11 or 9-41 | 6.3 | 0.45 | 14◆ 10 | 350◆ 315◆ | 315◆ 2.2◆ — | Single Tube 2 Tubes, Push-Pull Triode Connection (G ₂ & P tied) | | |
| 6V7-G | Duplex-Diode Medium-Mu Triode | 7V | 12-8 | 6.3 | 0.3 | — | 250 | — | 2.0 | 3.5 | 1.7 |
| 6V8 | Triple-Diode, High-Mu Triode | 9AH | 6-2 | 6.3 | 0.45 | 1.0 | 300 | — | — | — | — |
| 6W4-GT | Half-Wave High-Vacuum Rectifier | 4CG | 9-11, 9-41 | 6.3 | 1.2 | 3.5 | Tube Voltage Drop: 21 v at 250 ma d-c | | | | |
| 6W4-GTA | Half-Wave High-Vacuum Rectifier | 4CG | 9-11 | 6.3 | 1.2 | 4.0◆ | Tube Voltage Drop: 21 volts at 250 ma d-c | | | | |
| 6W5-G | Full-Wave High-Vacuum Rectifier | 6S | 12-7 | 6.3 | 0.9 | — | Tube Voltage Drop:◆ 24 v at 90 ma d-c | | | | |
| 6W6-GT | Beam Power Amplifier | 7AC | 9-11 or 9-41 | 6.3 | 1.2 | 12◆ 8.5◆ | 330◆ 330◆ | 165◆ 1.35◆ — | Pentode Connection Triode Connection (G ₂ & P tied) | | |
| 6W7-G | Sharp-Cutoff Pentode | 7R | 12-8 | 6.3 | 0.15 | 0.5 | 300 | 300 0.1 | 5.0 | 8.5 | 0.007◆ |
| 6X4 | Full-Wave High-Vacuum Rectifier | 5BS | 5-3 | 6.3 | 0.6 | — | Tube Voltage Drop:◆ 22 v at 70 ma d-c | | | | |
| 6X5 6X5-GT | Full-Wave High-Vacuum Rectifier | 6S | 8-6 9-11 | 6.3 | 0.6 | — | Tube Voltage Drop:◆ 22 v at 70 ma d-c | | | | |
| 6X8 | Triode-Pentode Converter | 9AK | 6-2 | 6.3 | 0.45 | 2.3◆ | 275◆ | 275◆ 0.45◆ | Pentode Section | | |
| 6X8-A† | | | | | | 1.7◆ | 275◆ | — | Triode Section | | |
| 6X9 | Triode-Pentode | 10K | 6-2 | 6.3 | 0.41 | 2.1 1.5 | 250 250 | 250 0.7 — | Pentode Section Triode Section | | |

◆ Compactron.

† Plate-to-plate.

● Subminiature type.

⊕ Total for all similar sections.

‡ Zero signal.

◆ Maximum.

▲ Without external shield.

⊖ Absolute maximum rating.

◆ Per section.

◆ Supply voltage.

◆ Design maximum rating.

Conversion transconductance.

● See X-Radiation Warning, page 4.

| Service | Plate Volts | Screen Volts | Neg Grid Volts | Plate Milli-amperes | Screen Milli-amperes | R _p , Ohms | G _m , μmhos | μ Factor | Load for Rated Out-put, Ohms | Power Out-put, Watts | Tube Type |
|---------------------------------|--|--------------|----------------------|---------------------|----------------------|-----------------------|------------------------|-----------------------------|------------------------------|----------------------|---------------|
| Class A Amplifier | 125 | 110 | 1.0 | 9.5 | 3.5 | 200,000 | 5,000 | — | — | — | 6U8 |
| Class A Amplifier | 125 | — | 1.0 | 13.5 | — | — | 7,500 | 40 | — | — | 6U8-A† |
| Class A Amplifier | 160 | 110 | 1.4 | 13 | 5.0 | — | 12,000 | (E _{c3} = 0 volts) | | — | 6U9 |
| Class A Amplifier | 100 | — | 2.0 | 14 | — | — | 5,000 | 17 | — | — | — |
| Class A Amplifier | 200 | — | 6.0 | 9.6 | — | 7,700 | 2,300 | 17.5 | — | — | 6U10† |
| Class A Amplifier | 200 | — | 1.5 | 1.2 | — | 61,000 | 1,600 | 98 | — | — | — |
| TV Damper | Max d-c output current = 135 ma; max peak inverse voltage ⊖ = 6000 volts; max peak current = 800 ma | | | | | | | | | | 6V3 6V3-A |
| Full-Wave Rectifier | Max d-c output current = 90 ma; max RMS supply voltage per plate = 350 volts | | | | | | | | | | 6V4 |
| Class A Amplifier | 315 | 225 | 13 | 34† | 2.2† | 77,000 | 3,750 | — | 8,500 | 5.5 | 6V5-G† |
| Class A Amplifier | 250 | 250 | 12.5 | 45† | 4.5† | 52,000 | 4,100 | — | 5,000 | 4.5 | — |
| Class A Amplifier | 315 | 225 | 13 | 34† | 2.2† | 80,000 | 3,750 | — | 8,500 | 5.5 | 6V6 |
| Class A Amplifier | 250 | 250 | 12.5 | 45† | 4.5† | 50,000 | 4,100 | — | 5,000 | 4.5 | — |
| Class AB ₁ Amplifier | 180 | 180 | 8.5 | 29† | 3† | 50,000 | 3,700 | — | 5,500 | 2.0 | — |
| Class AB ₁ Amplifier | 285 | 285 | 19 | 70† | 4† | 70,000 | 3,600 | — | 8,000† | 14 | — |
| Class AB ₁ Amplifier | 250 | 250 | 15 | 70† | 5† | 60,000 | 3,750 | — | 10000† | 10 | — |
| Class A Amplifier | 315 | 225 | 13 | 34† | 2.2† | 80,000 | 3,750 | — | 8,500 | 5.5 | 6V6-G† |
| Class A Amplifier | 250 | 250 | 12.5 | 45† | 4.5† | 50,000 | 4,100 | — | 5,000 | 4.5 | 6V6-G† |
| Class AB ₁ Amplifier | 180 | 180 | 8.5 | 29† | 3.0† | 50,000 | 3,700 | — | 5,500 | 2.0 | GTA† |
| Class AB ₁ Amplifier | 285 | 285 | 19 | 70† | 4.0† | — | — | — | 8,000† | 14 | — |
| Class AB ₁ Amplifier | 250 | 250 | 15 | 70† | 5.0† | — | — | — | 10000† | 10 | — |
| Vertical Amplifier | 250 | — | 12.5 | 49.5 | — | 1,960 | 5,000 | 9.8 | — | — | — |
| Class A Amplifier | Max positive pulse plate voltage ⊖ = 1200 volts; max d-c cathode current ⊖ = 40 ma | | | | | | | | | | — |
| Class A Amplifier | 250 | — | 20 | 8.0 | — | 7,500 | 1,100 | 8.3 | 20,000 | 0.350 | 6V7-G |
| Class A Amplifier | 250 | — | 3.0 | 1.0 | — | 58,000 | 1,200 | 70 | — | — | 6V8 |
| Class A Amplifier | 100 | — | 1.0 | 0.8 | — | 54,000 | 1,300 | 70 | — | — | — |
| TV Damper | Max d-c output current = 125 ma; max peak inverse voltage ⊖ = 3850 volts; max peak current = 750 ma | | | | | | | | | | 6W4-G† |
| TV Damper | Max d-c output current ⊖ = 140 ma; max peak inverse voltage ⊖ = 3,950 volts max peak current ⊖ = 840 ma | | | | | | | | | | 6W4-GTA |
| Full-Wave Rectifier | Max d-c output current = 90 ma; max peak inverse voltage = 1250 volts; max rms supply voltage per plate = 325 volts; max peak current per plate = 270 ma | | | | | | | | | | 6W5-G |
| Class A Amplifier | 200 | 125 | R _k = 180 | 46† | 2.2† | 28,000 | 8,000 | — | 4,000 | 3.8 | 6W6-G† |
| Class A Amplifier | 110 | 110 | 7.5 | 49† | 4.0† | 13,000 | 8,000 | — | 2,000 | 2.1 | — |
| Vertical Amplifier | 225 | — | 30 | 22 | — | 1,600 | 3,800 | 6.2 | — | — | — |
| Class A Amplifier | Max positive pulse plate voltage ⊖ = 1200; max d-c cathode current ⊖ = 65 ma | | | | | | | | | | — |
| Class A Amplifier | 250 | 100 | 3.0 | 2.0 | 0.5 | 1,500,000 | 1,225 | — | — | — | 6W7-G |
| Full-Wave Rectifier | Max d-c output current ⊖ = 90 ma; max peak inverse voltage ⊖ = 1250 volts; rms supply voltage per plate ⊖ = 360 volts; max peak current per plate ⊖ = 245 ma | | | | | | | | | | 6X4 |
| Full-Wave Rectifier | Max d-c output current ⊖ = 80 ma; max peak inverse voltage ⊖ = 1250 volts; rms supply voltage per plate ⊖ = 360 volts; max peak current per plate ⊖ = 245 ma | | | | | | | | | | 6X5 6X5-G† |
| Class A Amplifier | 125 | 125 | 1.0 | 9.0 | 2.2 | 300,000 | 5,500 | — | — | — | 6X8 |
| Class A Amplifier | 125 | — | 1.0 | 12 | — | 6,000 | 6,500 | 40 | — | — | 6X8-A† |
| Class A Amplifier | 160 | 135 | 1.7 | 13 | 5.0 | — | 14,000 | — | — | — | 6X9 |
| Class A Amplifier | 170 | — | 1.0 | 8.5 | — | — | 4,800 | 55 | — | — | — |

Metal tubes are shown in bold-face type, miniature tubes in italics.

♦ G3 and G5 are screen. G4 is signal-input grid.

♥ G2 and G4 are screen. G3 is signal-input grid.

1, 2, 3, etc. indicate tube sections.

⊖ Maximum screen dissipation appears immediately below the screen voltage.

† Heater warm-up time controlled.

| Tube Type | Classification by Construction | Base Connections | Out-line Dwg | Filament Volts | Filament Amp | Max Plate Watts | Max Plate Volts | Max Screen Volts and Watts * | Capacitance in Picofarads | | |
|---------------------------|-----------------------------------|------------------|-----------------------|----------------|--------------|----------------------------------|---|--|---|----------------------|----------------------|
| | | | | | | | | | Input | Output | Grid-plate |
| 6Y3-G | Half-Wave High-Voltage Rectifier | 4AC | 12-8 | 6.3 | 0.7 | — | — | — | — | — | — |
| 6Y6-G 6Y6-GA 6Y6-GT | Beam Power Amplifier | 7AC | 14-3 12-14 9-11 | 6.3 | 1.25 | 12.5 | 200 | 200 $\frac{1}{2}$ 1.75 | 12.0 \blacktriangle | 7.5 \blacktriangle | 0.7 \blacktriangle |
| 6Y7-G | Twin-Triode Power Amplifier | 8B | 12-7 | 6.3 | 0.6 | 11.5 \oplus | 250 | — | Both Sections in Push-pull | | |
| 6Y9 | Dissimilar Double Pentode | 10L | 6-3 | 6.3 | 0.8 | 5.0 1.5 | 250 250 | 250 2.5 0.5 | Section 1 (Pins 7, 8, 9, 10) Section 2 (Pins 1, 2, 3, 4) | | |
| 6Y10 | Dissimilar Double Pentode | 12EZ | 9-58 | 6.3 | 0.83 | 4.8 \diamond 1.7 \diamond | 300 \diamond 300 \diamond | 300 $\frac{1}{2}$ \diamond 1.1 \diamond 2.0 \diamond 300 $\frac{1}{2}$ \diamond 1.0 \diamond | Section 1 (Pins 8, 9, 10, 11) Section 2 (Pins 2, 3, 5, 6, 7) | | |
| 6Z5 | Full-Wave High-Vacuum Rectifier | 6K | 12-5 | 6.3 12.6 | 0.8 0.4 | — | — | — | — | — | — |
| 6Z7-G | Twin-Triode Power Amplifier | 8B | 12-7 | 6.3 | 0.3 | 4.0 \clubsuit | 180 | — | Both Sections in Push-pull | | |
| 6Z10 | Pentode-Gated-Beam Discriminator | 12BT | 9-58 | 6.3 | 0.95 | 10 \diamond — | 275 \diamond 330 $\frac{1}{2}$ \diamond | 275 \diamond 330 $\frac{1}{2}$ \diamond | Pentode Section (Pins 2, 3, 9, 11) Gated-Beam Discriminator (Pins 4, 5, 6, 7, 8) | | |
| 6ZY5-G | Full-Wave High-Vacuum Rectifier | 6S | 12-7 | 6.3 | 0.3 | — | Tube Voltage Drop: \clubsuit 18 v at 40 ma d-c | | | | |
| 7A4 | Medium-Mu Triode | 5AC | 9-30 | 6.3 | 0.3 | 2.5 | 300 | — | 3.4 | 3.0 | 4.0 |
| 7A5 | Beam Power Amplifier | 6AA | 9-31 | 6.3 | 0.75 | 5.5 | 125 | 125 1.2 | — | — | — |
| 7A6 | Twin Diode | 7AJ | 9-30 | 6.3 | 0.15 | — | Tube Voltage Drop: \clubsuit 11 v at 16 ma d-c | | | | |
| 7A7 | Remote-Cutoff RF Pentode | 8V | 9-30 | 6.3 | 0.3 | 4.0 | 250 | 100 0.4 | 6.0 | 7.0 | 0.005 \clubsuit |
| 7A8 | Octode Converter | 8U \dagger | 9-30 | 6.3 | 0.15 | 1.0 | 300 | 100 0.3 | Osc $I_{c1} = 0.4$ ma $R_{g1} = 50,000$ ohms | | |
| 7AB7 | Sharp-Cutoff RF Pentode | 8B0 | 9-32 | 6.3 | 0.15 | 1.2 | 300 | 300 $\frac{1}{2}$ 0.15 | 3.5 | 4.0 | 0.06 \clubsuit |
| 7AD7 | Power Amplifier Pentode | 8V | 9-31 | 6.3 | 0.6 | 10 | 300 | 300 $\frac{1}{2}$ 1.2 | 11.5 | 7.5 | 0.03 \clubsuit |
| 7AF7 | Medium-Mu Twin Triode | 8AC | 9-30 | 6.3 | 0.3 | 2.5 \clubsuit | 300 | — | 2.2 | 1.6 | 2.3 \clubsuit |
| 7AG7 | Sharp-Cutoff RF Pentode | 8V | 9-30 | 6.3 | 0.15 | 2.0 | 300 | 300 0.75 | 7.0 | 6.0 | 0.005 \clubsuit |
| 7AH7 | Remote-Cutoff RF Pentode | 8V | 9-30 | 6.3 | 0.15 | 2.0 | 300 | 300 $\frac{1}{2}$ 0.7 | 7.0 | 6.5 | 0.005 \clubsuit |
| 7AJ7 | Sharp-Cutoff RF Pentode | 8V | 9-30 | 6.3 | 0.3 | 1.0 | 300 | 100 0.1 | 6.0 | 6.5 | 0.007 \clubsuit |
| 7AK7 | Sharp-Cutoff Dual-Control Pentode | 8V | 9-31 | 6.3 | 0.8 | 8.5 | 200 | 100 2.5 | 12.0 | 9.5 | 0.7 \clubsuit |
| 7AU7 \ddagger | Medium-Mu Twin Triode | 9A | 6-2 | 7.0 3.5 | 0.3 0.6 | 2.75 \diamond \clubsuit | 330 \diamond | — | 1.8 | 2.0 | 1.5 |
| 7B4 | High-Mu Triode | 5AC | 9-30 | 6.3 | 0.3 | — | 300 | — | 3.6 | 3.4 | 1.6 |

\blacksquare Compactron.

\dagger Zero signal.

\clubsuit Per section.

\ddagger Plate-to-plate.

\blacklozenge Maximum.

$\frac{1}{2}$ Supply voltage.

\circ Subminiature type.

\blacktriangle Without external shield.

\diamond Design maximum rating.

\oplus Total for all similar sections.

$\frac{1}{2}$ Absolute maximum rating.

$\#$ Conversion transconductance.

\bullet See X-Radiation Warning, page 4.

| Service | Plate Volts | Screen Volts | Neg Grid Volts | Plate Milli-am-peres | Screen Milli-am-peres | R_p , Ohms | G_m , μ mhos | μ Factor | Load for Rated Out-put, Ohms | Power Out-put, Watts | Tube Type |
|---|--|--------------|----------------|----------------------|---------------------------|----------------------------|--------------------|--|------------------------------|----------------------|---------------------------|
| Half-Wave Rectifier | Max d-c output current = 7.5 ma; max peak inverse voltage = 14,000 volts; max rms supply voltage = 5,000 volts; max peak current = 100 ma | | | | | | | | | | 6Y3-G |
| Class A Amplifier | 200 | 135 | 14 | 61† | 2.2† | 18,300 | 7,100 | — | 2,600 | 6.0 | 6Y6-G 6Y6-GA 6Y6-GT |
| Class B Amplifier | 250 | — | 0 | 5.3† ⬆ | — | — | — | — | 14,000† | 8.0 | 6Y7-G |
| Class A Amplifier | 170 | 170 | 2.6 | 30 | 6.5 | 40,000 | 21,000 | — | — | — | 6Y9 |
| Class A Amplifier | 150 | 150 | 2.3 | 10 | 3.0 | 160,000 | 8,500 | — | — | — | |
| Class A Amplifier | 250 | 250 | $R_k = 270$ | 16† | 2.7† | 150,000 | 8,400 | — | 15,000 | 1.1 | 6Y10■ |
| Class A Amplifier | 150 | 100 | $R_k = 180$ | 3.7 | 3.0 | 140,000 | 3,700 | — | — | — | |
| Full-Wave Rectifier | Max d-c output current = 60 ma; max peak inverse voltage = 1500 volts | | | | | | | | | | 6Z5 |
| Class B Amplifier | 180 | — | 0 | 4.2† ⬆ | — | Input signal = 0.320 watts | | | 12,000† | 4.2 | 6Z7-G |
| Class A Amplifier | 250 | 250 | 8.0 | 35† | 3.0† | 100,000 | 6,500 | — | 5,000 | 4.2 | 6Z10■ |
| Class A Amplifier FM Limiter-Discriminator | 135 | 280‡ | — | 5.0 | ($R_{g2} = 33,000$ ohms) | ($E_{c3} = +4.0$ volts) | — | — | — | — | |
| Full-Wave Rectifier | Max d-c output current = 40 ma; max peak inverse voltage = 1250 volts; max rms supply voltage per plate = 325 volts; max peak current per plate = 120 ma | | | | | | | | | | 6ZY5-G |
| Class A Amplifier | 250 | — | 8.0 | 9.0 | — | 7,700 | 2,600 | 20 | — | — | 7A4 |
| Class A Amplifier | 90 | — | 0 | 10 | — | 6,700 | 3,000 | 20 | — | — | |
| Class A Amplifier | 110 | 110 | 7.5 | 40† | 3.0† | 16,000 | 5,800 | — | 2,500 | 1.5 | 7A5 |
| Half-Wave Rectifier | Max d-c output current per plate = 8 ma; max rms supply voltage per plate = 150 volts; max peak current per plate = 45 ma | | | | | | | | | | 7A6 |
| Class A Amplifier | 250 | 100 | 3.0 | 9.2 | 2.6 | 800,000 | 2,000 | — | — | — | 7A7 |
| Converter | 250 | 100 | 3.0 | 3.0 | 3.2 | 700,000 | 550 # | E_{c2} (Osc Plate) = 250 thru 20,000 ohms $I_{c2} = 4.2$ ma | | | 7A8 |
| Class A Amplifier | 250 | 100 | 2.0 | 4.0 | 1.3 | 500,000 | 1,800 | — | — | — | 7AB7 |
| Class A Amplifier | 300 | 150 | $R_k = 68$ | 28 | 7.0 | 300,000 | 9,500 | — | — | — | 7AD7 |
| Class A Amplifier ⬆ | 250 | — | 10 | 9.0 | — | 7,600 | 2,100 | 16 | — | — | 7AF7 |
| Class A Amplifier | 250 | 250 | $R_k = 250$ | 6.0 | 2.0 | 1,000,000 | 4,200 | — | — | — | 7AG7 |
| Class A Amplifier | 250 | 250 | $R_k = 250$ | 6.8 | 1.9 | 1,000,000 | 3,300 | — | — | — | 7AH7 |
| Class A Amplifier | 100 | 100 | 1.0 | 5.7 | 1.8 | 400,000 | 2,275 | — | — | — | 7AJ7 |
| Class A Amplifier | 250 | 100 | 3.0 | 2.2 | 0.7 | 1,000,000 | 1,575 | — | — | — | |
| Class A Amplifier | 150 | 90 | 0 | 40 | 21 | 11,500 | 6,000 | $E_{c3} = 0$ volts $E_{c4} = 0$ volts $E_{c5} = 9.5$ volts | | | 7AK7 |
| Class A Amplifier | 150 | 90 | 11 | 2.5 ⬆ | 0.45 | — | — | — | — | — | |
| Class A Amplifier | 150 | 90 | 0 | 2.0 ⬆ | 60 ⬆ | — | — | — | — | — | |
| Class A Amplifier ⬆ Vertical Amplifier ⬆ | 250 | — | 8.5 | 10.5 | — | 7,700 | 2,200 | 17 | — | — | 7AU7¶ |
| Class A Amplifier | 100 | — | 0 | 11.8 | — | 6,500 | 3,100 | 20 | — | — | |
| Class A Amplifier | 250 | — | 2.0 | 0.9 | — | 66,000 | 1,500 | 100 | — | — | 7B4 |

Metal tubes are shown in bold-face type, miniature tubes in italics.

† G3 and G5 are screen. G4 is signal-input grid.

‡ G2 and G4 are screen. G3 is signal-input grid.

1, 2, 3, etc. indicate tube sections.

Maximum screen dissipation appears immediately below the screen voltage.

¶ Heater warm-up time controlled.

| Tube Type | Classification by Construction | Base Connections | Out-line Dwg | Filament Volts | Filament Amp | Max Plate Watts | Max Plate Volts | Max Screen Volts and Watts* | Capacitance in Picofarads | | |
|-----------|------------------------------------|------------------|--------------|----------------|--------------|-----------------|-----------------|---|---|---------|------------|
| | | | | | | | | | Input | Out-put | Grid-plate |
| 7B5 | Power Amplifier Pentode | 6AE | 9-31 | 6.3 | 0.4 | 8.5 | 315 | 285 2.8 | — | — | — |
| 7B6 | Duplex-Diode High-Mu Triode | 8W | 9-30 | 6.3 | 0.3 | 0.5 | 300 | — | — | — | — |
| 7B7 | Remote-Cutoff RF Pentode | 8V | 9-30 | 6.3 | 0.15 | 2.25 | 300 | 100 0.25 | 5.0 | 6.0 | 0.004 ♣ |
| 7B8 | Pentagrid Converter | 8X† | 9-30 | 6.3 | 0.3 | 1.0 | 300 | 100 0.3 | Osc $I_{c1} = 0.4$ ma $R_{g1} = 50,000$ ohms | | |
| 7C4 | High-Frequency Diode | 4AH | 9-30 | 6.3 | 0.15 | — | — | Tube Voltage Drop: 11 v at 10 ma d-c | | | |
| 7C5 | Beam Power Amplifier | 6AA | 9-31 | 6.3 | 0.45 | 12 | 315 | 285 2.0 | — | — | — |
| 7C6 | Duplex-Diode High-Mu Triode | 8W | 9-30 | 6.3 | 0.15 | 0.6 | 300 | — | — | — | — |
| 7C7 | Sharp-Cutoff Pentode | 8V | 9-30 | 6.3 | 0.15 | 1.0 | 300 | 100 0.1 | 5.5 | 6.5 | 0.007 ♣ |
| 7E5 | High-Frequency Triode | 8BN | 9-30 | 6.3 | 0.15 | 4.0 | 250 | — | 3.6 | 2.8 | 1.5 |
| 7E6 | Duplex-Diode Medium-Mu Triode | 8W | 9-30 | 6.3 | 0.3 | 2.5 | 250 | — | — | — | — |
| 7E7 | Duplex-Diode Remote-Cutoff Pentode | 8AE | 9-30 | 6.3 | 0.3 | 2.0 | 250 | 100 0.3 | 4.6 | 4.6 | 0.005 ♣ |
| 7EY6‡ | Beam Pentode | 7AC | 9-15 | 7.2 | 0.6 | 11◆ | 350◆ | 300◆ 2.75◆ | 8.5▲ | 7.0▲ | 0.7▲ |
| 7F7 | High-Mu Twin Triode | 8AC | 9-30 | 6.3 | 0.3 | 1.0♣ | 250 | — | — | — | — |
| 7F8 | High-Frequency Twin Triode | 8BW | 9-32 | 6.3 | 0.3 | 3.5♣ 3.5♣ | 300 | — | 2.8 | 1.4 | 1.6 |
| 7G7 | Sharp-Cutoff Pentode | 8V | 9-30 | 6.3 | 0.45 | 1.5 | 250 | 100 0.2 | 9.0 | 7.0 | 0.007 ♣ |
| 7G8 | Sharp-Cutoff Twin Tetrode | 8BV | 9-32 | 6.3 | 0.3 | 1.5♣ | 300 | 300 0.1 | 3.4 | 2.6 | 0.15 ♣ |
| 7GS7 | Triode-Pentode | 9GF | 6-2 | 7.6 | 0.3 | 2.0 | 250 | 150 0.5 | Pentode Section | | |
| | | | | | | 1.5 | 125 | — | Triode Section | | |
| 7GV7 | Triode-Pentode | 9KN | T-X | 7.4 | 0.3 | 2.0 | 250 | 230 0.5 | Pentode Section | | |
| | | | | | | 2.0 | 250 | — | Triode Section | | |
| 7H7 | Semi-Remote-Cutoff RF Pentode | 8V | 9-30 | 6.3 | 0.3 | 2.5 | 300 | 300 0.5 | 8.0 | 7.0 | 0.004 ♣ |
| 7HG8 | Triode-Pentode | 9MP | 6-2 | 7.2 | 0.3 | 2.0 | 250 | 150 0.5 | Pentode Section | | |
| | | | | | | 1.5 | 125 | — | Triode Section | | |
| 7J7 | Triode Heptode Converter | 8BL | 9-30 | 6.3 | 0.3 | 0.5 1.25 | 300 | 100 0.4 | Osc $I_{c1} = 0.4$ ma $R_{g1} = 50,000$ ohms Triode Section | | |
| 7K7 | Duplex-Diode High-Mu Triode | 8BF | 9-30 | 6.3 | 0.3 | — | 250 | — | — | — | — |
| 7KY6‡ | Sharp-Cutoff Pentode | 9GK | 6-3 | 7.3 | 0.45 | 9.0◆ | 330◆ | 330◆ 1.0◆ | 14▲ | 6.0▲ | 0.16▲ ♣ |
| 7KZ6‡ | Sharp-Cutoff Pentode | 9GK | 6-3 | 7.3 | 0.45 | 9.0◆ | 330◆ | 330◆ 1.0◆ | 13▲ | 6.0▲ | 0.16▲ ♣ |
| 7L7 | Sharp-Cutoff Pentode | 8V | 9-30 | 6.3 | 0.3 | 4.0 | 300 | 125 0.4 | 8.0 | 6.5 | 0.01 ♣ |
| 7N7 | Medium-Mu Twin Triode | 8AC | 9-31 | 6.3 | 0.6 | 2.5♣ | 300 | — | — | — | — |

■ Compactron.
† Zero signal.
♣ Per section.

‡ Plate-to-plate.
◆ Maximum.
‡ Supply voltage.

◎ Subminiature type.
▲ Without external shield.
◆ Design maximum rating.

⊕ Total for all similar sections.
⊕ Absolute maximum rating.
Conversion transconductance.

| Service | Plate Volts | Screen Volts | Neg Grid Volts | Plate Milli-am-peres | Screen Milli-am-peres | R_p , Ohms | G_m , μ mhos | μ Factor | Load for Rated Output, Ohms | Power Output, Watts | Tube Type |
|---|---|--------------|----------------------|----------------------|-----------------------|--------------|--------------------|--|-----------------------------|---------------------|-----------|
| Class A Amplifier | 315 | 250 | 21 | 25.5† | 4.0† | 75,000 | 2,100 | — | 9,000 | 4.5 | 7B5 |
| Class A Amplifier | 250 | 250 | 18 | 32† | 5.5† | 68,000 | 2,300 | — | 7,600 | 3.4 | |
| Class A Amplifier | 250 | — | 2.0 | 0.9 | — | 91,000 | 1,100 | 100 | — | — | 7B6 |
| Class A Amplifier | 100 | — | 1.0 | 0.4 | — | 110,000 | 900 | 100 | — | — | |
| Class A Amplifier | 250 | 100 | 3.0 | 8.5 | 1.7 | 750,000 | 1,750 | — | — | — | 7B7 |
| Class A Amplifier | 100 | 100 | 3.0 | 8.2 | 1.8 | 300,000 | 1,675 | — | — | — | |
| Converter | 250 | 100 | 3.0 | 3.5 | 2.7 | 360,000 | 550 # | — | — | — | 7B8 |
| | | | | | | | | E _{os} (Osc Plate) = 250 thru 20,000 ohms I _{e2} = 4.0 ma | | | |
| Half-Wave Rectifier | Max d-c output current = 5.0 ma; max rms supply voltage = 117 volts | | | | | | | | | | 7C4 |
| Class A Amplifier | 315 | 225 | 13.0 | 34† | 2.2† | 77,000 | 3,750 | — | 8,500 | 5.5 | 7C5 |
| Class A Amplifier | 250 | 250 | 12.5 | 45† | 4.5† | 52,000 | 4,100 | — | 5,000 | 4.5 | |
| Class A Amplifier | 250 | — | 1.0 | 1.3 | — | 100,000 | 1,000 | 100 | — | — | 7C6 |
| Class A Amplifier | 100 | — | 0 | 1.0 | — | 100,000 | 850 | 85 | — | — | |
| Class A Amplifier | 250 | 100 | 3.0 | 2.0 | 0.5 | 2,000,000 | 1,300 | — | — | — | 7C7 |
| Class A Amplifier | 180 | — | 3.0 | 5.5 | — | 12,000 | 3,000 | 36 | — | — | 7E5 |
| Class A Amplifier | 250 | — | 9.0 | 9.5 | — | 8,500 | 1,900 | 16 | — | — | 7E6 |
| Class A Amplifier | 250 | 100 | 3.0 | 7.5 | 1.6 | 700,000 | 1,300 | — | — | — | 7E7 |
| Vertical Amplifier | 250 | 250 | 17.5 | 44 | 3.0 | 60,000 | 4,400 | — | — | — | 7EY6† |
| Vertical Amplifier | 50 | 250 | 0 | 153 | 21 | — | — | — | — | — | |
| Max positive pulse plate voltage ♦ = 2,500; max d-c cathode current ♦ = 60 ma | | | | | | | | | | | |
| Class A Amplifier ♦ | 250 | — | 2.0 | 2.3 | — | 44,000 | 1,600 | 70 | — | — | 7F7 |
| Class A Amplifier ♦ | 250 | — | R _k = 500 | 6.0 | — | — | 3,300 | 48 | — | — | 7F8 |
| Class A Amplifier | 250 | 100 | 2.0 | 6.0 | 2.0 | 800,000 | 4,500 | — | — | — | 7G7 |
| Class A Amplifier ♦ | 250 | 100 | 2.5 | 4.5 | 0.8 | 225,000 | 2,100 | — | — | — | 7G8 |
| Class A Amplifier | 170 | 150 | 1.2 | 10 | 3.3 | 350,000 | 12,000 | — | — | — | 7GS7 |
| Class A Amplifier | 100 | — | 3.0 | 14 | — | — | 5,500 | 17 | — | — | |
| Class A Amplifier | 125 | 125 | 1.5 | 10 | 3.1 | — | 11,000 | — | — | — | 7GV7 |
| Class A Amplifier | 100 | — | 3.0 | 14 | — | — | 5,500 | 17 | — | — | |
| Class A Amplifier | 250 | 150 | R _k = 180 | 10 | 3.2 | 800,000 | 4,000 | — | — | — | 7H7 |
| Class A Amplifier | 100 | 100 | 1.5 | 7.5 | 2.6 | 350,000 | 4,000 | — | — | — | |
| Class A Amplifier | 170 | 150 | 1.2 | 10 | 3.3 | 350,000 | 12,000 | — | — | — | 7HG8 |
| Class A Amplifier | 100 | — | 3.0 | 14 | — | 3,100 | 5,500 | 17 | — | — | |
| Converter | 250 | 100 | 3.0 | 1.4 | 2.8 | 1,500,000 | 290 # | — | — | — | 7J7 |
| | | | | | | | | E _b (Triode Osc) = 250 thru 20,000 ohms I _b (Triode) = 5.0 ma | | | |
| Class A Amplifier | 250 | — | 2.0 | 2.3 | — | 44,000 | 1,600 | 70 | — | — | 7K7 |
| Class A Amplifier | 200 | 135 | R _k = 47 | 30 | 5.2 | 40,000 | 30,000 | (g3 connected to k at socket) | | | 7KY6† |
| Class A Amplifier | 250 | 115 | R _k = 75 | 25 | 3.6 | 45,000 | 24,000 | (g3 connected to k at socket) | | | 7KZ6† |
| Class A Amplifier | 250 | 100 | 1.5 | 4.5 | 1.5 | 1,000,000 | 3,100 | — | — | — | 7L7 |
| Class A Amplifier ♦ | 250 | — | 8.0 | 9.0 | — | 7,700 | 2,600 | 20 | — | — | 7N7 |

Metal tubes are shown in bold-face type, *miniature tubes in italics*.

♦ G3 and G5 are screen. G4 is signal-input grid.

♥ G2 and G4 are screen. G3 is signal-input grid.

1, 2, 3, etc. indicate tube sections.

* Maximum screen dissipation appears

immediately below the screen voltage.

† Heater warm-up time controlled.

| Tube Type | Classification by Construction | Base Connections | Out-line Dwg | Filament Volts | Filament Amp | Max Plate Watts | Max Plate Volts | Max Screen Volts and Watts | Capacitance in Picofarads | | |
|---------------|------------------------------------|------------------|--------------|----------------|--------------|-----------------|-----------------|---|---|-------------------------|----------------------|
| | | | | | | | | | Input | Output | Grid-plate |
| 7Q7 | Pentagrid Converter | 8AL ▼ | 9-30 | 6.3 | 0.3 | 1.0 | 300 | 100 1.0 | Osc $I_{c1} = 0.5$ ma $R_{g1} = 20,000$ ohms | | |
| 7R7 | Duplex-Diode Remote-Cutoff Pentode | 8AE | 9-30 | 6.3 | 0.3 | 2.0 | 250 | 250 0.25 | 5.6 | 5.3 | 0.004 ♣ |
| 7S7 | Triode-Heptode Converter | 8BL | 9-30 | 6.3 | 0.3 | 0.6 | 300 | 100 0.4 | Osc $I_{c1} = 0.4$ ma $R_{g1} = 50,000$ ohms | | |
| 7T7 | Sharp-Cutoff RF Pentode | 8V | 9-30 | 6.3 | 0.3 | 3.0 | 300 | 300 0.7 | 7.5 | 5.5 | 0.005 |
| 7V7 | Sharp-Cutoff RF Pentode | 8V | 9-30 | 6.3 | 0.45 | 4.0 | 300 | 300 0.8 | — | — | — |
| 7W7 | Sharp-Cutoff RF Pentode | 8BJ | 9-30 | 6.3 | 0.45 | 4.0 | 300 | 300 0.8 | — | — | — |
| 7X6 | High-Vacuum Rectifier-Doubler | 7AJ | 9-31 | 6.3 | 1.2 | — | — | Tube Voltage Drop: ♣ 22 v at 150 ma d-c | | | |
| 7X7/- XXFM | Duplex-Diode High-Mu Triode | 8BZ | 9-31 | 6.3 | 0.3 | — | 300 | — | — | — | — |
| 7Y4 | Full-Wave High-Vacuum Rectifier | 5AB | 9-30 | 6.3 | 0.5 | — | — | Tube Voltage Drop: ♣ 22 v at 70 ma d-c | | | |
| 7Z4 | Full-Wave High-Vacuum Rectifier | 5AB | 9-31 | 6.3 | 0.9 | — | — | Tube Voltage Drop: ♣ 40 v at 100 ma | | | |
| 8A8 | Triode-Pentode | 9DC | 6-2 | 8.4 | 0.3 | 1.7 | 250 | 200 0.75 | Pentode Section | | |
| | | | | | | 1.5 | 250 | — | Triode Section | | |
| 8AC9 | Duplex-Diode Pentode | 12GN | 9-57 | 8.4 | 0.45 | 2.5 | 330 | 330 0.55 | Pentode Section | | |
| | | | | | | | | Tube Voltage Drop: ♣ 10 volts at 50 ma d-c | | | |
| 8AC10 | Triple Triode | 12FE | 9-58 | 8.4 | 0.45 | 2.0 | 330 | — | 2.41 2.62 2.62 | 0.221 0.302 0.442 | 1.31 1.22 1.23 |
| 8AC10-A | Triple Triode | 12FE | 9-56 | 8.4 | 0.45 | 2.0 | 330 | — | 2.41 2.62 2.62 | 0.221 0.302 0.442 | 1.31 1.22 1.23 |
| 8AL9 | Triode-Pentode | 12HE | 9-59 | 8.6 | 0.6 | 10 1.5 | 330 330 | 200 | Pentode Section Triode Section | | |
| 8AR11 | Twin Pentode | 12DM | 9-58 | 8.4 | 0.6 | 3.1 ♣ | 330 | 330 0.65 | 10 | 2.81 3.02 | 0.026 |
| 8AU8 | Triode-Pentode | 9DX | 6-3 | 8.4 | 0.45 | 3.0 | 300 | 300 1.0 | Pentode Section | | |
| | | | | | | 2.5 | 300 | — | Triode Section | | |
| 8AU8-A | Triode-Pentode | 9DX | 6-3 | 8.4 | 0.45 | 3.0 | 300 | 300 1.0 | Pentode Section | | |
| | | | | | | 2.5 | 300 | — | Triode Section | | |
| 8AW8-A | Triode-Pentode | 9DX | 6-3 | 8.4 | 0.45 | 3.75 | 330 | 330 1.1 | Pentode Section | | |
| | | | | | | 1.1 | 330 | — | Triode Section | | |
| 8B10 | Duplex-Diode Medium-Mu Twin Triode | 12BF | 9-56 | 8.5 | 0.45 | 2.5 | 330 | — | 1.71 1.82 | 1.6 0.6 | 1.5 ▲ |
| | | | | | | | | Diode Sections | | | |
| 8BA8-A | Triode-Pentode | 9DX | 6-3 | 8.4 | 0.45 | 3.25 | 300 | 300 1.0 | Pentode Section | | |
| | | | | | | 2.0 | 300 | — | Triode Section | | |
| 8BA11 | Triode-Twin Pentode | 12ER | 9-58 | 8.4 | 0.45 | 1.1 ♣ | 300 | 150 0.75 | Pentode Sections | | |
| | | | | | | 1.5 | 300 | — | Triode Section | | |

■ Compactron.
† Zero signal.
♣ Per section.

‡ Plate-to-plate.
♣ Maximum.
‡ Supply voltage.

⊙ Subminiature type.
▲ Without external shield.
♣ Design maximum rating.

⊙ Total for all similar sections.
▲ Absolute maximum rating.
Conversion transconductance.

| Service | Plate Volts | Screen Volts | Neg Grid Volts | Plate Milli-amperes | Screen Milli-amperes | R_p , Ohms | G_m , μ mhos | μ Factor | Load for Rated Output, Ohms | Power Output, Watts | Tube Type |
|---|--|--------------|--------------------------|---------------------|----------------------|---------------------------|--------------------|--|-----------------------------|---------------------|--------------------|
| Converter | 250 | 100 | 2.0 | 3.5 | 8.5 | 1,000,000 | 550 # | — | — | — | 7Q7 |
| Class A Amplifier | 250 | 100 | 1.0 | 5.7 | 2.1 | 1,000,000 | 3,200 | — | — | — | 7R7 |
| | 100 | 100 | 1.0 | 5.5 | 2.2 | 350,000 | 3,000 | — | — | — | |
| Converter | 250 | 100 | 2.0 | 1.8 | 3.0 | 1,250,000 | 525 # | E _b (Triode Osc) = 250 thru 20,000 ohms I _b (Triode) = 5.0 ma | | | 7S7 |
| Class A Amplifier | 250 | 150 | 1.0 | 10.8 | 4.1 | 900,000 | 4,900 | — | — | — | 7T7 |
| Class A Amplifier | 300 | 150 | R _k = 160 | 10 | 3.9 | 300,000 | 5,800 | — | — | — | 7V7 |
| Class A Amplifier | 300 | 150 | R _k = 160 | 10 | 3.9 | 300,000 | 5,800 | — | — | — | 7W7 |
| Rectifier or Doubler | Max d-c output current per plate = 75 ma; max peak inverse voltage = 700; rms supply voltage per plate = 235; max peak current per plate = 450 ma | | | | | | | | | | 7X6 |
| Class A Amplifier | 250 | — | 1.0 | 1.9 | — | 67,000 | 1,500 | 100 | — | — | 7X7/- XXFM |
| Full-Wave Rectifier | Max d-c output current = 70 ma; max peak inverse voltage = 1250 volts; max rms supply voltage per plate = 325 volts; max peak current per plate = 210 ma | | | | | | | | | | 7Y4 |
| Full-Wave Rectifier | Max d-c output current = 100 ma; max peak inverse voltage = 1,250 volts; max rms supply voltage per plate = 325 volts; max peak current per plate = 300 ma | | | | | | | | | | 7Z4 |
| Class A Amplifier | 170 | 170 | 2.0 | 10 | 2.8 | 400,000 | 6,200 | — | — | — | 8A8 |
| | 100 | — | 2.0 | 14 | — | — | 5,000 | 20 | — | — | |
| Class A Amplifier | 125 | 125 | 1.0 | 12 | 4.5 | 150,000 | 10,000 | — | — | — | 8AC9 ∇ ■ |
| Max d-c output current \diamond \spadesuit = 5.0 ma | | | | | | | | | | | |
| Class A Amplifier \spadesuit | 200 | — | R _k = 150 | 9.0 | — | 10,700 | 5,800 | 62 | — | — | 8AC10 ∇ ■ |
| Class A Amplifier \spadesuit | 200 | — | R _k = 150 | 9.0 | — | 10,700 | 5,800 | 62 | — | — | 8AC10-A ∇ ■ |
| Video Amplifier | 250 | 150 | R _k = 56 | 28 | 5.6 | 40,000 | 30,000 | — | — | — | 8AL9 ∇ ■ |
| General Purpose Amplifier | 55 | 125 | 0 | 56 | 21 | — | — | — | — | — | 8AR11 ∇ ■ |
| | 200 | — | R _k = 270 | 7.6 | — | 9,200 | 6,300 | 59 | — | — | |
| Class A Amplifier \spadesuit | 125 | 125 | R _k = 56 | 11 | 3.5 | 200,000 | 10,500 | — | — | — | 8AR11 ∇ ■ |
| Class A Amplifier | 200 | 125 | R _k = 82 | 15 | 3.4 | 150,000 | 7,000 | — | — | — | 8AU8 ∇ |
| | 150 | — | R _k = 150 | 9.0 | — | 8,200 | 4,900 | 40 | — | — | |
| Class A Amplifier | 200 | 125 | R _k = 82 | 17 | 3.4 | 100,000 | 8,000 | — | — | — | 8AU8-A ∇ |
| | 40 | 125 | 0 | 28 | 10 | — | — | — | — | — | |
| Class A Amplifier | 150 | — | R _k = 150 | 9.5 | — | 8,100 | 5,300 | 43 | — | — | 8AU8-A ∇ |
| Class A Amplifier | 150 | 150 | R _k = 150 | 15 | 3.5 | 200,000 | 9,500 | — | — | — | 8AW8-A ∇ |
| | 65 | 150 | 0 | 46 | 15 | — | — | — | — | — | |
| Class A Amplifier | 200 | — | 2.0 | 4.0 | — | 17,500 | 4,000 | 70 | — | — | 8B10 ∇ ■ |
| Class A Amplifier | 250 | — | 9.5 | 7.0 | — | 9,750 | 1,850 | 18 | — | — | 8B10 ∇ ■ |
| Horizontal Phase Det. | Max d-c output current \diamond \spadesuit = 5.0 ma; voltage drop: \diamond \spadesuit 5 volts at 20 ma d-c | | | | | | | | | | |
| Class A Amplifier | 200 | 150 | R _k = 180 | 13 | 3.5 | 400,000 | 9,000 | — | — | — | 8BA8-A ∇ |
| | 65 | 150 | 0 | 42 | 12.5 | — | — | — | — | — | |
| Class A Amplifier | 200 | — | 8.0 | 8.0 | — | 6,700 | 2,700 | 18 | — | — | 8BA8-A ∇ |
| Sync Separator and AGC Keyer | 100 | 67.5 | I _{c1} = 0.1 ma | 2.5 | 4.4 | (Both Sections Operating) | | E _{c3} = 0 volts | | | 8BA11 ∇ ■ |
| | 100 | 67.5 | 0 | — | — | — | 1,700 | E _{c3} = 0 volts | | | |
| | 250 | — | 11 | 5.0 | — | — | 1,800 | 18 | — | — | |

Metal tubes are shown in bold-face type, *miniature tubes in italics*.

\diamond G3 and G5 are screen. G4 is signal-input grid.

∇ G2 and G4 are screen. G3 is signal-input grid.

1, 2, 3, etc. indicate tube sections.

∇ Maximum screen dissipation appears immediately below the screen voltage

∇ Heater warm-up time controlled.

| Tube Type | Classification by Construction | Base Connections | Outline Dwg | Filament Volts | Filament Amp | Max Plate Watts | Max Plate Volts | Max Screen Volts and Wat's | Capacitance in Picofarads | | |
|----------------|--------------------------------|------------------|-------------|----------------|---------------|-----------------|-----------------|----------------------------|----------------------------------|--------|------------|
| | | | | | | | | | Input | Output | Grid-plate |
| 8BH8 | Triode-Pentode | 9DX | 6-3 | 8.4 | 0.45 | 3.0 | 300 | 300 | Pentode Section | | |
| | | | | | | 2.5 | 300 | 0.6 | Triode Section | | |
| 8BM11 | Dissimilar Double Pentode | 12FU | 9-58 | 8.4 | 0.45 | 2.2 | 160 | 160 | Section 1 (Pins 7, 8, 9, 10, 11) | | |
| | | | | | | 2.2 | 160 | 0.55 | Section 2 (Pins 2, 3, 4, 5, 6) | | |
| 8BN8 | Duplex-Diode High-mu Triode | 9ER | 6-3 | 8.4 | 0.45 | 1.5 | 300 | — | 3.6 | 0.32 | 2.5 |
| 8BN11 | Twin Pentode | 12GF | 9-58 | 8.4 | 0.6 | 3.1 | 330 | 330 | 12 | 2.8 | 0.041 |
| 8BQ5 | Beam Power Amplifier | 9CV | 6-4 | 8.0 | 0.6 | 12 | 300 | 300 | — | — | — |
| 8BQ11 | Dissimilar Double Pentode | 12DM | 9-58 | 8.4 | 0.6 | 3.1 | 330 | 330 | Section 1 (Pins 7, 8, 9, 10, 11) | | |
| | | | | | | 3.1 | 330 | 0.65 | Section 2 (Pins 2, 3, 4, 5, 6) | | |
| 8BU11 | Twin-Triode Pentode | 12FP | 9-59 | 7.8 | 0.6 | 2.5 | 330 | 330 | Pentode Section | | |
| | | | | | | 1.8 | 330 | 0.55 | Triode Sections | | |
| 8CB11 | Twin Pentode | 12DM | 9-58 | 8.4 | 0.6 | 3.1 | 330 | 330 | 12 | 2.6 | 0.028 |
| 8CG7 | Medium-mu Twin Triode | 9AJ | 6-3 | 8.4 | 0.45 | 3.5 | 300 | — | 2.3 | 2.2 | 4.0 |
| 8CM7 | Medium-mu Double Triode | 9ES | 6-3 | 8.4 | 0.45 | 1.25 | 500 | — | Section 1 (Pins 3, 6, 7) | | |
| | | | | | | 5.0 | 500 | — | Section 2 (Pins 1, 8, 9) | | |
| 8CN7 | Duplex-Diode Triode | 9EN | 6-2 | 8.4 4.2 | 0.225 0.45 | 1.0 | 300 | — | 1.5 | 0.5 | 1.8 |
| | | | | | | — | — | Diode Sections | | | |
| 8CS7 | Double Triode | 9EF | 6-3 | 8.4 | 0.45 | 1.25 | 500 | — | Section 1 (Pins 6, 7, 8) | | |
| | | | | | | 6.5 | 500 | — | Section 2 (Pins 1, 3, 9) | | |
| 8CW5 8CW5-A | Power Amplifier Pentode | 9CV | 6-4 | 8.0 | 0.6 | 14 | 275 | 220 | Single Tube | | |
| 8CX8 | Triode-Pentode | 9DX | 6-3 | 8.0 | 0.6 | 5.0 | 330 | 330 | Pentode Section | | |
| | | | | | | 2.0 | 330 | 1.1 | Triode Section | | |
| 8CY7 | Double Triode | 9LG | 6-3 | 7.9 | 0.6 | 1.0 | 350 | — | Section 1 (Pins 6, 7, 8) | | |
| | | | | | | 5.5 | 350 | — | Section 2 (Pins 1, 3, 9) | | |
| 8EB8 | Triode-Pentode | 9DX | 6-3 | 8.0 | 0.6 | 5.0 | 330 | 330 | Pentode Section | | |
| | | | | | | 1.0 | 330 | 1.1 | Triode Section | | |
| 8EM5 | Beam Power Amplifier | 9HN | 6-4 | 8.4 | 0.6 | 10 | 315 | 285 | 10 | 5.1 | 0.7 |

■ Compactron.
† Zero signal.
♣ Per section.

‡ Plate-to-plate.
♣ Maximum.
§ Supply voltage.

⊙ Subminiature type.
▲ Without external shield.
◆ Design maximum rating.

⊕ Total for all similar sections.
⊖ Absolute maximum rating.
Conversion transconductance.

| Service | Plate Volts | Screen Volts | Neg Grid Volts | Plate Milli-amperes | Screen Milli-amperes | R_p , Ohms | G_m , μ mhos | μ Factor | Load for Rated Output, Ohms | Power Output, Watts | Tube Type |
|--|------------------|--------------|-------------------|---------------------|----------------------|------------------|--------------------|-------------------------------|-----------------------------|---------------------|--------------------------------|
| Class A Amplifier | 200 | 125 | $R_k = 82$ | 15 | 3.4 | 150,000 | 7,000 | — | — | — | 8BH8 ¶ |
| Class A Amplifier | 150 | — | 5.0 | 9.5 | — | 5,150 | 3,300 | 17 | — | — | |
| Class A Amplifier | 125 | 125 | $R_k = 56$ | 14 | 3.6 | 220,000 | 8,800 | — | — | — | 8BM11 ¶ |
| Class A Amplifier | 125 | 125 | $R_k = 120$ | 9.0 | 2.5 | 300,000 | 8,500 | — | — | — | |
| Class A Amplifier Horizontal Phase Det. | 250 100 | — | 3.0 1.0 | 1.6 1.5 | — | 28,000 21,000 | 2,500 3,500 | 70 75 | — | — | 8BN8 ¶ |
| Max d-c output current $\clubsuit = 9.0$ ma; voltage drop $\clubsuit = 2.6$ volts at 9.0 ma d-c | | | | | | | | | | | |
| Class A Amplifier \clubsuit | 125 | 125 | $R_k = 56$ | 11 | 3.8 | 200,000 | 13,000 | (g3 connected to k at socket) | | — | 8BN11 ¶ |
| Class A Amplifier | 250 | 250 | $R_k = 135$ | 48 † | 5.5 † | 40,000 | 11,300 | — | 4,500 | 5.7 | 8BQ5 ¶ |
| Class A Amplifier | 125 | 125 | $R_k = 56$ | 11 | 3.5 | 200,000 | 10,500 | — | — | — | 8BQ11 ¶ |
| Class A Amplifier | 125 | 125 | $R_k = 56$ | 11 | 3.8 | 200,000 | 13,000 | — | — | — | |
| Class A Amplifier | 125 | 125 | 1.0 | 12 | 4.0 | 200,000 | 7,500 | — | — | — | 8BU11 ¶ |
| Class A Amplifier | 125 | — | $R_k = 68$ | 13.5 | — | 5,000 | 8,600 | 43 | — | — | |
| IF, Band-pass Burst, Video Amplifier \clubsuit | 125 | 125 | $R_k = 56$ | 11 | 3.8 | 200,000 | 13,000 | — | — | — | 8CB11 ¶ |
| Class A Amplifier \clubsuit | 250 250 90 | — | 8.0 12.5 0 | 9.0 1.3 1.0 | — | 7,700 6,700 | 2,600 3,000 | 20 20 | — | — | 8CG7 ¶ |
| Vertical Oscillator | 200 | — | 7.0 | 5.0 | — | 10,500 | 2,000 | 21 | — | — | 8CM7 ¶ |
| Vertical Oscillator | 250 | — | 8.0 | 20 | — | 4,100 | 4,400 | 18 | — | — | |
| Vertical Oscillator | 250 | — | 8.0 | 20 | — | 4,100 | 4,400 | 18 | — | — | |
| Class A Amplifier Horizontal Phase Det. | 250 100 | — | 3.0 1.0 | 1.0 0.8 | — | 58,000 54,000 | 1,200 1,300 | 70 70 | — | — | 8CN7 ¶ |
| Max d-c output current $\clubsuit = 5.0$ ma; voltage drop $\clubsuit = 5$ volts at 20 ma d-c | | | | | | | | | | | |
| Vertical Oscillator | 250 | — | 8.5 | 10.5 | — | 7,700 | 2,200 | 17 | — | — | 8CS7 ¶ |
| Vertical Oscillator | 250 | — | 10.5 | 19 | — | 3,450 | 4,500 | 15.5 | — | — | |
| Class A Amplifier Class AB ₁ Amplifier | 170 250 | 170 200 | 12.5 18.5 | 70 † 91 † | 3.5 † 4.0 † | 26,000 | 11,000 | — | 2,400 | 5.6 | 8CW5 8CW5-A ¶ |
| Class A Amplifier | 200 | 125 | $R_k = 68$ | 24 | 5.2 | 70,000 | 10,000 | — | — | — | 8CX8 ¶ |
| Class A Amplifier | 40 150 | 125 — | 0 150 | 40 9.2 | 15.5 — | — 8,700 | — 4,600 | — 40 | — | — | |
| Vertical Oscillator | 250 | — | 3 | 1.2 | — | 52,000 | 1,300 | 68 | — | — | 8CY7 ¶ |
| Vertical Amplifier | 150 60 | — | $R_k = 620$ 0 | 30 80 | — | 920 | 5,400 | 5.0 | — | — | |
| Max positive pulse plate voltage $\clubsuit = 1,800$; max d-c cathode current $\clubsuit = 35$ ma | | | | | | | | | | | |
| Class A Amplifier Class A Amplifier | 200 250 | 125 — | $R_k = 68$ 2.0 | 25 2.0 | 7.0 — | 75,000 37,000 | 12,500 2,700 | — 100 | — | — | 8EB8 ¶ |
| Vertical Amplifier | 250 60 | 250 250 | 18 0 | 35 180 | 3.0 30 | — | 5,100 | — | — | — | 8EM6 ¶ |
| Max positive pulse plate voltage $\clubsuit = 2,200$ volts; max d-c cathode current = 60 ma | | | | | | | | | | | |

Metal tubes are shown in bold-face type, miniature tubes in italics.

\clubsuit G3 and G5 are screen. G4 is signal-input grid.

\spadesuit G2 and G4 are screen. G3 is signal-input grid.

1, 2, 3, etc. indicate tube sections.

*Maximum screen dissipation appears immediately below the screen voltage.

¶ Heater warm-up time controlled.

| Tube Type | Classification by Construction | Base Connection | Out-line Dwg | Filament Volts | Filament Amp | Max Plate Watts | Max Plate Volts | Max Screen Volts and Watts* | Capacitance in Picofarads | | |
|-----------|--------------------------------|-----------------|--------------|----------------|--------------|-----------------|------------------------------------|-----------------------------|---------------------------|---------|------------|
| | | | | | | | | | Input | Out-put | Grid-plate |
| 8E77 | Duplex-Diode Pentode | 9LT | 6-3 | 8.0 | 0.6 | 5.0 | 330 | 330 1.1 | 10 | 4.2 | 0.1 |
| | | | | | | | | | Diode Sections | | |
| 8FQ7 | Medium-Mu Twin Triode | 9LP | 6-3 | 8.4 | 0.45 | 4.0 5.7 5 | 330 | — | 2.4 | 0.34 | 3.6 |
| | | | | | | | | | 0.26 | 3.8 | |
| 8GJ7 | Triode-Pentode | 9QA | T-X | 8.0 | 0.3 | 2.4 1.8 | 275 140 | 275 0.55 | Pentode Section | | |
| | | | | | | | | | Triode Section | | |
| 8GN8 | Triode-Pentode | 9DX | 6-3 | 8.0 | 0.6 | 5.0 | 330 | 330 1.1 | Pentode Section | | |
| | | | | | | 1.0 | 330 | — | Triode Section | | |
| 8GU7 | Medium-Mu Twin Triode | 9LP | 6-3 | 8.4 | 0.45 | 3.0 | 330 | — | 3.4 | 0.44 | 3.0 |
| | | | | | | | | | 3.6 | 0.34 | |
| 8GX7 | Triode-Pentode | 9QA | 6-2 | 7.7 | 0.3 | 2.2 1.5 | 275 275 | 275 0.45 | Pentode Section | | |
| | | | | | | | | | Triode Section | | |
| 8HA6 | Pentode | 9NW | 6-4 | 8.0 | 0.6 | 8.0 | 300 | 250 1.5 | 13 | 8.0 | 0.18 |
| 8HG8 | Triode-Pentode | 9MP | 6-2 | 8.0 | 0.3 | 2.0 1.5 | 250 125 | 150 0.5 | Pentode Section | | |
| | | | | | | | | | Triode Section | | |
| 8JES | Triode-Pentode | 9DX | 6-3 | 8.2 | 0.6 | 5.0 | 330 | 330 2.0 | Pentode Section | | |
| | | | | | | 1.0 | 300 | — | Triode Section | | |
| 8JK8 | Double Triode | 9AJ | 6-2 | 8.4 | 0.3 | 1.0 2.0 | 165 200 | — | Section 1 (Pins 6, 7, 8) | | |
| | | | | | | | | | Section 2 (Pins 1, 2, 3) | | |
| 8JL8 | Triode-Pentode | 9DX | 6-3 | 8.0 | 0.6 | 5.0 2.0 | 330 330 | 175 1.1 | Pentode Section | | |
| | | | | | | | | | Triode Section | | |
| 8JT8 | Triode-Pentode | 9DX | 9-69 | 7.7 | 0.6 | 4.0 | 330 | 330 1.1 | Pentode Section | | |
| | | | | | | 1.0 | 330 | — | Triode Section | | |
| 8JU8-A | Quadruple Diode | 9PQ | 6-2 | 8.4 | 0.45 | — | Tube Voltage 10 volts at 60 ma d-c | | Drop: ♦ | | |
| 8JV8 | Triode-Pentode | 9DX | 6-3 | 8.5 | 0.45 | 4.0 1.1 | 330 330 | 330 1.7 | Pentode Section | | |
| | | | | | | | | | Triode Section | | |
| 8KA8 | Triode-Pentode | 9PV | 6-3 | 8.4 | 0.45 | 2.0 1.1 | 300 300 | 300 1.1 | Pentode Section | | |
| | | | | | | | | | Triode Section | | |
| 8KR8 | Triode-Pentode | 9DX | 6-3 | 8.0 | 0.6 | 5.0 2.0 | 330 330 | 330 1.5 | Pentode Section | | |
| | | | | | | | | | Triode Section | | |
| 8KS8 | Triode-Pentode | 9DX | 6-3 | 8.4 | 0.45 | 3.75 1.1 | 330 330 | 330 1.1 | Pentode Section | | |
| | | | | | | | | | Triode Section | | |
| 8LC8 | Triode-Pentode | 9QY | 6-3 | 8.4 | 0.45 | 2.0 1.1 | 300 300 | 300 1.1 | Pentode Section | | |
| | | | | | | | | | Triode Section | | |
| 8LE8 | Twin Pentode | 9QZ | 6-4 | 8.0 | 0.6 | 2.0 ♦ | 300 | 150 2.0 | — | — | — |
| 8LS6 | Sharp-Cutoff Pentode | 9GK | 6-3 | 7.7 | 0.45 | 5.0 | 180 | 180 1.2 | 7.2 | 4.2 | 0.075 |

■ Compactron.
† Zero signal.
♦ Per section.

‡ Plate-to-plate.
♣ Maximum.
♠ Supply voltage.

⊙ Subminiature type.
▲ Without external shield.
⊛ Design maximum rating.

⊕ Total for all similar sections.
⊖ Absolute maximum rating.
Conversion transconductance.

● See X-Radiation Warning, page 4.

| Service | Plate Volts | Screen Volts | Neg Grid Volts | Plate Milli-amperes | Screen Milli-amperes | R _p Ohms | G _m μ mhos | μ Factor | Load for Rated Output, Ohms | Power Output, Watts | Tube Type |
|--|---|--------------|----------------------|---------------------|----------------------|---------------------|---------------------------|--------------|-----------------------------|---------------------|-----------------|
| Class A Amplifier | 200 | 150 | R _k = 100 | 25 | 5.5 | 60,000 | 11,500 | — | — | — | 8ET7 ¶ |
| | 60 | 150 | 0 | 55 | 18 | — | — | — | — | — | |
| Average Diode current at 10 volts = 1.5 ma | | | | | | | | | | | |
| Class A Amplifier | 250 | — | 8.0 | 9.0 | — | 7,700 | 2,600 | 20 | — | — | 8FQ7 ¶ |
| | 90 | — | 0 | 10 | — | 6,700 | 3,000 | 20 | — | — | |
| Class A Amplifier Class A Amplifier | 170 | 120 | 1.2 | 10 | 3.0 | 350,000 | 11,000 | — | — | — | 8GJ7 |
| | 100 | — | 3.0 | 15 | — | — | 9,000 | 20 | — | — | |
| Class A Amplifier Class A Amp | 200 | 150 | R _k = 100 | 25 | 5.5 | 60,000 | 11,500 | — | — | — | 8GN8 ¶ |
| | 250 | — | 2.0 | 2.0 | — | 37,000 | 2,700 | 100 | — | — | |
| Class A Amplifier ♦ | 250 | — | 10.5 | 11.5 | — | 5,500 | 3,100 | 17 | — | — | 8GU7 ¶ |
| Class A Amplifier Class A Amplifier | 125 | 125 | 1.0 | 8.0 | 2.5 | 200,000 | 11,000 | — | — | — | 8GX7 ¶ |
| | 125 | — | 1.0 | 13 | — | 4,700 | 8,500 | 40 | — | — | |
| Class A Amplifier | 150 | 100 | R _k = 33 | 28 | 3.5 | 20,000 | 20,000 | — | — | — | 8HA6 |
| | 60 | 100 | 0 | 45 | 9.0 | — | — | — | — | — | |
| Class A Amplifier Class A Amp | 170 | 150 | 1.2 | 10 | 3.3 | 350,000 | 12,000 | — | — | — | 8HG8 |
| | 100 | — | 3.0 | 14 | — | 3,100 | 5,500 | 17 | — | — | |
| Class A Amplifier Class A Amp | 250 | 170 | R _k = 82 | 22 | 4.0 | 140,000 | 12,000 | — | — | — | 8JES ¶ |
| | 200 | — | 2.0 | 4.5 | — | 16,600 | 4,200 | 70 | — | — | |
| Class A Amplifier Class A Amplifier | 100 | — | 1.0 | 5.3 | — | 8,000 | 6,800 | 55 | — | — | 8JK8 |
| | 135 | — | 1.2 | 10 | — | 5,400 | 13,000 | 70 | — | — | |
| Class A Amplifier Class A Amplifier | 300 | 150 | 3.5 | 25† | 5.0† | 60,000 | 11,500 | — | 5,000 | 1.8 | 8JL8 |
| | 150 | — | R _k = 150 | 10 | — | 7,500 | 4,700 | 35 | — | — | |
| Class A Amplifier | 200 | 100 | R _k = 82 | 17 | 3.5 | 50,000 | 20,000 | — | — | — | 8JT8 ¶ |
| | 35 | 100 | 0 | 50 | 17 | — | — | — | — | — | |
| Class A Amp | 250 | — | 2.0 | 1.5 | — | 37,000 | 2,700 | 100 | — | — | |
| Detector | Max d-c output current per plate ♦ = 9.0 ma; max peak inverse voltage ♦ = 300 volts; max peak current per plate ♦ = 54 ma | | | | | | | | | | 8JU8-A ¶ |
| Class A Amplifier Class A Amplifier | 125 | 125 | 1.0 | 22 | 4.0 | 100,000 | 11,500 | — | — | — | 8JV8 ¶ |
| | 40 | 125 | 0 | 28 | 9.0 | — | — | — | — | — | |
| Class A Amplifier Class A Amp | 200 | — | 2.0 | 4.0 | — | 17,500 | 4,000 | 70 | — | — | 8KA8 ¶ |
| | 150 | 100 | R _k = 180 | 4.0 | 2.8 | 100,000 | 4,400 | — | — | — | |
| Class A Amplifier Class A Amp | 200 | — | 2.0 | 4.0 | — | 17,500 | 4,000 | 70 | — | — | 8KR8 ¶ |
| | 200 | 100 | R _k = 82 | 19.5 | 3.0 | 60,000 | 20,000 | — | — | — | |
| Video Amplifier General Purpose Amplifier | 35 | 100 | 0 | 54 | 13.5 | — | — | — | — | — | 8KS8 ¶ |
| | 125 | — | R _k = 68 | 15 | — | 4,400 | 10,400 | 46 | — | — | |
| Class A Amplifier Class A Amp | 150 | 150 | R _k = 150 | 20 | 4.5 | 150,000 | 9,500 | — | — | — | 8LC8 ¶ |
| | 65 | 150 | 0 | 60 | 20 | — | — | — | — | — | |
| Class A Amplifier Class A Amplifier | 200 | — | 2.0 | 4.0 | — | 17,500 | 4,000 | 70 | — | — | 8LC8 ¶ |
| | 150 | 100 | R _k = 180 | 4.0 | 2.8 | 100,000 | 4,400 | — | — | — | |
| Color Demodulator Video Amplifier | 200 | — | 2.0 | 4.0 | — | 17,500 | 4,000 | 70 | — | — | 8LE8 ¶ |
| | 100 | 100 | 2.5 | 8.0 | 15 | 50,000 | 5,800 | — | E _{c3} = 0 volts | — | |
| Video Amplifier | 110 | 110 | R _k = 65 | 14 | 3.2 | 54,000 | 11,000 | — | (E _{c3} = 0 volts) | — | 8LS6 ¶ |
| | 110 | 110 | — | — | — | — | — | — | — | — | |

Metal tubes are shown in bold-face type, *miniature tubes in italics.*

♦ G3 and G5 are screen. G4 is signal-input grid.

¶ G2 and G4 are screen. G3 is signal-input grid.

‡ Maximum screen dissipation appears immediately below the screen voltage.

1, 2, 3, etc. indicate tube sections.

¶ Heater warm-up time controlled.

| Tube Type | Classification by Construction | Base Connections | Out-line Dwg | Filament Volts | Filament Amp | Max Plate Watts | Max Plate Volts | Max Screen Volts and Watts* | Capacitance in Picofarads | | |
|-------------------|--------------------------------|------------------|--------------------|----------------|---------------|---|-----------------|--|--|--|--|
| | | | | | | | | | Input | Output | Grid-plate |
| 8LT8 ∇ | Duplex-Diode Pentode | 9RL | 6-2 | 8.1 | 0.45 | 3.1 \diamond | 330 \diamond | 330 ∇ \diamond 0.65 \diamond | Pentode Section | | |
| 8MU8 ∇ | Triode-Pentode | 9AE | 6-3 | 8.4 | 0.45 | 3.75 \diamond | 330 \diamond | 330 ∇ \diamond 1.1 \diamond | Diode Sections | | |
| | | | | | | 2.5 \diamond | 330 \diamond | | Pentode Section | | |
| 8SN7-GTB ∇ | Medium- μ Twin Triode | 8BD | 9-11 or 9-41 | 8.4 | 0.45 | 5.0 ∇ \diamond 7.5 \oplus | 450 | — | 2.2 ∇ \triangle 2.6 ∇ \triangle | 0.7 \triangle | 4.0 ∇ \triangle 3.8 ∇ \triangle |
| | | | | | | Triode Section | | | | | |
| 8U9 | Triode-Pentode | 10K | 6-2 | 8.0 | 0.3 | 2.1 | 250 | 250 | Pentode Section | | |
| | | | | | | 1.5 | 250 | 0.7 | Triode Section | | |
| 8X9 | Triode-Pentode | 10K | 6-2 | 8.0 | 0.3 | 2.1 | 250 | 250 | Pentode Section | | |
| | | | | | | 1.5 | 250 | 0.7 | Triode Section | | |
| 9A8 | Triode-Pentode | 9DC | 6-2 | 9.0 | 0.3 | 1.7 | 250 | 200 | Pentode Section | | |
| | | | | | | 1.5 | 250 | 0.75 | Triode Section | | |
| 9AH9 ∇ ■ | Triode-Pentode | 12HJ | 9-59 | 8.8 | 0.6 | 10 \diamond | 400 \diamond | 330 ∇ \diamond 1.0 \diamond | Pentode Section | | |
| | | | | | | 2.0 \diamond | 330 \diamond | — | Triode Section | | |
| 9AK10 ∇ ■ | Triple Triode | 12FE | 9-59 | 9.5 | 0.6 | 2.0 \diamond | 330 \diamond | — | 4.2 ∇ \triangle 4.2 ∇ \triangle 4.2 ∇ \triangle | 0.3 ∇ \triangle 0.4 ∇ \triangle 0.5 ∇ \triangle | 3.2 ∇ \triangle 3.0 ∇ \triangle 3.0 ∇ \triangle |
| 9AU7 ∇ | Medium- μ Twin Triode | 9A | 6-2 | 9.4 (4.7) | 0.225 0.45 | 2.75 \diamond ∇ | 330 \diamond | — | 1.8 | 2.0 | 1.5 |
| 9BJ11 ∇ ■ | Dissimilar Double Pentode | 12FU | 9-58 | 9.6 | 0.45 | 2.8 \diamond | 160 \diamond | 160 \diamond | Section 1 (Pins 7, 8, 9, 10, 11) | | |
| | | | | | | 2.2 \diamond | 160 \diamond | 160 \diamond 0.55 \diamond | Section 2 (Pins 2, 3, 4, 5, 6) | | |
| 9BR7 ∇ | Duplex-Diode Triode | 9CF | 6-2 | 9.4 (4.7) | 0.3 0.6 | 2.5 | 300 | — | 2.8 | 1.0 | 1.9 |
| | | | | | | Diode Sections | | | | | |
| 9CG8-A ∇ | Triode-Pentode | 9GF | 6-2 | 9.5 | 0.3 | 2.3 \diamond | 275 \diamond | 275 ∇ \diamond 0.45 \diamond | Pentode Section | | |
| | | | | | | 1.7 \diamond | 275 \diamond | — | Triode Section | | |
| 9CL8 ∇ | Triode-Tetrode | 9FX | 6-2 | 9.5 | 0.3 | 2.8 | 300 | 300 ∇ \diamond 0.5 | Tetrode Section | | |
| | | | | | | 2.7 | 300 | — | Triode Section | | |
| 9DZ8 | Triode-Pentode | 9JE | T-X | 9.0 | 0.6 | 6.5 | 150 | 135 | Pentode Section | | |
| | | | | | | 0.75 | 150 | 1.5 | Triode Section | | |
| 9EA8 ∇ | Triode-Pentode | 9AE | 6-2 | 9.5 | 0.3 | 3.1 \diamond | 330 \diamond | 330 ∇ \diamond 0.55 \diamond | Pentode Section | | |
| | | | | | | 2.5 \diamond | 330 \diamond | — | Triode Section | | |
| 9EF6 ∇ | Beam Power Amplifier | 7S | 9-13 or 9-42 | 9.4 | 0.6 | 10 | 250 | 250 2.0 | 11.5 ∇ \triangle | 9.0 ∇ \triangle | 0.8 ∇ \triangle |
| 9GH8-A ∇ | Triode-Pentode | 9AE | 6-2 | 9.45 | 0.3 | 2.5 \diamond | 350 \diamond | 330 ∇ \diamond 0.55 \diamond | Pentode Section | | |
| | | | | | | 2.5 \diamond | 330 \diamond | — | Triode Section | | |
| 9GV8 | Triode-Pentode | 9LY | 6-4 | 9.5 | 0.6 | 7.0 \square | 250 \square | 250 \square | Pentode Section | | |
| | | | | | | 0.5 \square | 250 \square | — | Triode Section | | |

■ Compactron.

† Plate-to-plate.

◎ Subminiature type.

⊕ Total for all similar sections.

‡ Zero signal.

♣ Maximum.

▲ Without external shield.

⊖ Absolute maximum rating.

◆ Per section.

‡ Supply voltage.

◇ Design maximum rating.

Conversion transconductance.

● See X-Radiation Warning, page 4.

| Service | Plate Volts | Screen Volts | Neg Grid Volts | Plate Milli-amperes | Screen Milli-amperes | R_p , Ohms | G_m , μ mhos | μ Factor | Load for Rated Output, Ohms | Power Output, Watts | Tube Type |
|------------------------------|---|--------------|----------------------|---------------------|----------------------|--------------|--------------------|---|-----------------------------|---------------------|-----------|
| Class A Amplifier | 125 | 125 | $R_k = 56$ | 10 | 3.4 | 200,000 | 13,000 | — | — | — | 8LT8† |
| | Max d-c output current ♦ = 5.0 ma; voltage drop: 5.0 volts at 20 ma d-c ♦ | | | | | | | | | | |
| Class A Amplifier | 150 | 150 | $R_k = 150$ | 19 | 4.2 | 165,000 | 9,000 | — | — | — | 8MU8† |
| Class A Amplifier | 125 | — | 1.0 | 11.5 | — | 5,800 | 6,000 | 35 | — | — | |
| Class A Vertical Amplifier ♦ | 250 | — | 8.0 | 9.0 | — | 7,700 | 2,600 | 20 | — | — | 8SN7-GTB† |
| Class A Vertical Amplifier ♦ | 90 | — | 0 | 10 | — | 6,700 | 3,000 | 20 | — | — | |
| | Max positive pulse plate voltage ♦ = 1,500 volts; max d-c cathode current ♦ = 22 ma | | | | | | | | | | |
| Class A Amplifier | 160 | 110 | 1.4 | 13 | 5.0 | — | 12,000 | (E _{cs} = 0 volts) | | — | 8U9 |
| Class A Amplifier | 100 | — | 2.0 | 14 | — | — | 5,000 | 17 | — | — | |
| Class A Amplifier | 160 | 135 | 1.7 | 13 | 5.0 | — | 14,000 | — | — | — | 8X9 |
| Class A Amplifier | 170 | — | 1.0 | 8.5 | — | — | 4,800 | 55 | — | — | |
| Class A Amplifier | 170 | 170 | 2.0 | 10 | 2.8 | 400,000 | 6,200 | — | — | — | 9A8 |
| Class A Amplifier | 100 | — | 2.0 | 14 | — | — | 5,000 | 20 | — | — | |
| Video Amplifier | 250 | 150 | $R_k = 122$ | 25 | 6.0 | 55,000 | 21,000 | — | — | — | 9AH9† |
| General Purpose Amplifier | 50 | 125 | 0 | 76 | 32 | — | — | — | — | — | |
| General Purpose Amplifier | 250 | — | $R_k = 68$ | 8.0 | — | 7,300 | 2,750 | 20 | — | — | |
| Color Difference Amplifier ♦ | 200 | — | $R_k = 230$ | 10 | — | 7,500 | 7,000 | 53 | — | — | 9AK10† |
| Class A Vertical Amplifier ♦ | 250 | — | 8.5 | 10.5 | — | 7,700 | 2,200 | 17 | — | — | 9AU7† |
| Class A Vertical Amplifier ♦ | 100 | — | 0 | 11.8 | — | 6,500 | 3,100 | 20 | — | — | |
| | Max positive pulse plate voltage ♦ = 1,200 volts; max d-c cathode current ♦ = 22 ma | | | | | | | | | | |
| Class A Amplifier | 110 | 110 | E _{cc1} = 0 | 5.8 | 6.8 | 40,000 | 7,500 | R _{g1} = 0.1 meg E _{cc2} = 0 volts | | — | 9BJ11† |
| Class A Amplifier | 125 | 125 | $R_k = 120$ | 8.5 | 2.5 | 400,000 | 9,600 | — | — | — | |
| Class A Amplifier | 250 | — | $R_k = 200$ | 10 | — | 10,900 | 5,500 | 60 | — | — | 9BR7† |
| Class A Amplifier | 100 | — | $R_k = 270$ | 3.7 | — | 15,000 | 4,000 | 60 | — | — | |
| Horizontal Phase Det. | Max peak output current ♦ = 60 ma; voltage drop ♦ = 5 volts at 17 ma | | | | | | | | | | |
| Class A Amplifier | 125 | 125 | 1.0 | 9.0 | 2.2 | 300,000 | 5,500 | — | — | — | 9CG8-A† |
| Class A Amplifier | 125 | — | 1.0 | 12 | — | 6,000 | 6,500 | 40 | — | — | |
| Class A Amplifier | 125 | 125 | 1.0 | 12 | 4.0 | 100,000 | 5,800 | — | — | — | 9CL8† |
| Class A Amplifier | 125 | — | $R_k = 56$ | 15 | — | 5,000 | 8,000 | 40 | — | — | |
| Class A Amplifier | 145 | 120 | $R_k = 180$ | 45† | 6.0† | — | 7,500 | — | 2,500 | 2.0 | 9DZ8 |
| Class A Amplifier | 120 | — | $R_k = 1500$ | 0.8 | — | — | 1,400 | 100 | — | — | |
| Class A Amplifier | 125 | 125 | 1.0 | 12 | 4.0 | 200,000 | 6,400 | — | — | — | 9EA8† |
| Class A Amplifier | 150 | — | $R_k = 56$ | 18 | — | 5,000 | 8,500 | 40 | — | — | |
| Vertical Amplifier | 250 | 250 | 18 | 50 | 2.0 | — | 5,000 | — | — | — | 9EF6† |
| Vertical Amplifier | 75 | 250 | 0 | 170 | 17 | — | — | — | — | — | |
| | Max positive pulse plate voltage ♦ = 2,000; max d-c cathode current = 60 ma | | | | | | | | | | |
| Class A Amplifier | 125 | 125 | 1.0 | 12 | 4.0 | 200,000 | 7,500 | — | — | — | 9GH8-A† |
| Class A Amplifier | 125 | — | 1.0 | 13.5 | — | 5,400 | 8,500 | 46 | — | — | |
| Class A Amplifier | 170 | 170 | 15 | 41 | 2.7 | 25,000 | 7,500 | — | — | — | 9GV8 |
| Class A Amp | 100 | — | 0.8 | 5.0 | — | 7,600 | 6,500 | 50 | — | — | |

Metal tubes are shown in bold-face type, miniature tubes in italics.

♦ G3 and G5 are screen. G4 is signal-input grid.

‡ Maximum screen dissipation appears immediately below the screen voltage.

♥ G2 and G4 are screen. G3 is signal-input grid.

† Heater warm-up time controlled.

1, 2, 3, etc. indicate tube sections.

| Tube Type | Classification by Construction | Base Connections | Out-line Dwg | Fila-ment Volts | Fila-ment Amp | Max Plate Watts | Max Plate Volts | Max Screen Volts and Watts | Capacitance in Picofarads | | |
|-----------|--------------------------------|------------------|--------------|-----------------|---------------|-----------------|-----------------|----------------------------|-----------------------------------|---------|------------|
| | | | | | | | | | Input | Out-put | Grid-plate |
| 9JW8 | Triode-Pentode | 9DC | 6-2 | 9.0 | 0.3 | 1.2 | 250 | 250 | Pentode Section | | |
| | | | | | | 1.4 | 250 | 0.8 | Triode Section | | |
| 9KC6 | Dual-Control Pentode | 9RF | 6-3 | 8.7 | 0.45 | 7.0 | 400 | 330 | — | — | — |
| 9KX6 | Sharp-Cutoff Pentode | 9GK | 6-3 | 8.7 | 0.45 | 11.5 | 400 | 330 | 17.5 | 4.0 | 0.12 |
| 9KZ8 | Triode-Pentode | 9FZ | 6-2 | 9.45 | 0.3 | 2.5 | 330 | 330 | Pentode Section | | |
| | | | | | | 2.5 | 330 | 0.55 | Triode Section | | |
| 9LA6 | Sharp-Cutoff Pentode | 9GK | 6-3 | 8.7 | 0.45 | 10 | 400 | 330 | 15 | 6.0 | 0.15 |
| 9ML8 | Triple Triode | 9RQ | 6-2 | 9.6 | 0.45 | 2.0 | 330 | — | — | — | — |
| 9MN8 | Triple Triode | 12HU | 9-60 | 9.5 | 0.6 | 3.0 | 330 | — | 4.6 | 0.31 | 2.6 |
| | | | | | | 5.0 | 330 | — | 0.57 | — | |
| 9U8-A | Triode-Pentode | 9AE | 6-2 | 9.45 | 0.3 | 3.0 | 330 | 330 | Pentode Section | | |
| | | | | | | 2.5 | 330 | 0.55 | Triode Section | | |
| 9X8 | Triode-Pentode Converter | 9AK | 6-2 | 9.5 | 0.3 | 2.0 | 250 | 250 | Pentode Section | | |
| | | | | | | 1.5 | 250 | 0.4 | Triode Section | | |
| 10 | Power Amplifier Triode | 4D | T-X | 7.5 | 1.25 | 12 | 425 | — | 4.0 | 3.0 | 7.0 |
| 10AL11 | Dissimilar Double Pentode | 12BU | 9-59 | 9.8 | 0.6 | 10 | 275 | 275 | Section 1 (Pins 8, 9, 10, 11) | | |
| | | | | | | 1.7 | 330 | 330 | Section 2 (Pins 2, 3, 4, 6, 7) | | |
| 10BQ6 | Beam Power Amplifier | 9CV | 6-4 | 10.6 | 0.45 | 12 | 300 | 300 | — | — | — |
| 10C8 | Triode-Pentode | 9DA | 6-2 | 10.5 | 0.3 | 2.2 | 300 | 300 | Pentode Section | | |
| | | | | | | 2.0 | 300 | 0.55 | Triode Section | | |
| | | | | | | 2.5 | 300 | — | Pentode Section—Triode Connection | | |
| | | | | | | 1.0 | 300 | — | Triode Section | | |
| 10CW6 | Power Amplifier Pentode | 9CV | 6-4 | 10.6 | 0.45 | 12 | 250 | 200 | Single Tube | | |
| | | | | | | | | 1.75 | Two Tubes, Push-Pull | | |
| 10DA7 | Double Triode | 9EF | 6-3 | 10.5 | 0.6 | 2.0 | 300 | — | Section 1 (Pins 6, 7, 8) | | |
| | | | | | | 6.0 | 500 | — | Section 2 (Pins 1, 3, 9) | | |
| 10DE7 | Double Triode | 9HF | 6-3 | 9.7 | 0.6 | 1.5 | 330 | — | Section 1 (Pins 6, 7, 8) | | |
| | | | | | | 7.0 | 275 | — | Section 2 (Pins 1, 2, 3, 9) | | |
| 10DR7 | Double Triode | 9HF | 6-3 | 9.7 | 0.6 | 1.0 | 330 | — | Section 1 (Pins 6, 7, 8) | | |
| | | | | | | 7.0 | 275 | — | Section 2 (Pins 1, 2, 3, 9) | | |
| 10DX8 | Triode-Pentode | 9HX | 6-3 | 10.2 | 0.45 | 4.0 | 300 | 300 | Pentode Section | | |
| | | | | | | 1.0 | 300 | 1.7 | Triode Section | | |
| 10EB8 | Triode-Pentode | 9DX | 6-3 | 10.5 | 0.45 | 5.0 | 330 | 330 | Pentode Section | | |
| | | | | | | 1.0 | 330 | 1.1 | Triode Section | | |
| 10EG7 | Double Triode | 8BD | 9-38 | 9.7 | 0.6 | 1.5 | 330 | — | Section 1 (Pins 4, 5, 6) | | |
| | | | | | | 10 | 330 | — | Section 2 (Pins 1, 2, 3) | | |

■ Compactron.
† Zero signal.

‡ Plate-to-plate.
♣ Maximum.
♠ Per section.
‡ Supply voltage.

◎ Subminiature type.
▲ Without external shield.
◆ Design maximum rating.

⊕ Total for all similar sections.
⊖ Absolute maximum rating.
Conversion transconductance.

● See X-Radiation Warning, page 4.

| Service | Plate Volts | Screen Volts | Neg Grid Volts | Plate Milli-amperes | Screen Milli-amperes | R_p , Ohms | G_m , μ mhos | μ Factor | Load for Rated Output, Ohms | Power Output, Watts | Tube Type |
|---------------------------------|---|--------------|----------------------------|---------------------|----------------------|--------------|--------------------|--------------------|-----------------------------|---------------------|-----------------|
| Class A Amplifier | 100 | 100 | 1.0 | 6.0 | 1.7 | — | 5,500 | — | — | — | 9JW8 ¶ |
| Class A Amplifier | 200 | — | 2.0 | 3.5 | — | — | 3,500 | 70 | — | — | |
| Class A Amplifier | 250 | 150 | $R_k = 56$ 0 | 18 | 9.0 | 55,000 | 24,000 | $E_{c3} = 0$ volts | — | — | 9KC6 ¶ |
| Avg. Char. | 50 | 100 | — | 25 | 25 | — | — | — | — | — | |
| Avg. Char. | 250 | 150 | $R_k = 56$ | 28 | 6.5 | 50,000 | 36,000 | — | — | — | 9KX8 ¶ |
| Class A Amplifier | 125 | 125 | 1.0 | 12 | 4.0 | 200,000 | 7,500 | — | — | — | 9KZ8 ¶ |
| Class A Amplifier | 125 | — | 1.0 | 13.5 | — | 5,400 | 8,500 | 46 | — | — | |
| Avg. Char. | 250 | 150 | $R_k = 122$ | 25 | 6.0 | 55,000 | 21,000 | — | — | — | 9LA6 ¶ |
| Class A Amplifier | 125 | — | 1.0 | 11 | — | 6,400 | 6,700 | 43 | — | — | 9ML8 ¶ |
| Class A Amplifier | 125 | — | 1.0 | 11 | — | 5,500 | 9,000 | 50 | — | — | 9MN8 ¶ ■ |
| Class A Amplifier | 125 | 110 | 1.0 | 9.5 | 3.5 | 200,000 | 5,000 | — | — | — | 9U8-A ¶ |
| Class A Amplifier | 125 | — | 1.0 | 13.5 | — | — | 7,500 | 40 | — | — | |
| Class A Amplifier | 250 | 150 | $R_k = 200$ $R_k = 100$ | 7.7 | 1.6 | 750,000 | 4,600 | — | — | — | 9X8 ¶ |
| Class A Amplifier | 100 | — | — | 8.5 | — | 6,900 | 5,800 | 40 | — | — | |
| Class A Amplifier | 425 | — | 40 | 18† | — | 5,000 | 1,600 | 8.0 | 10,200 | 1.6 | 10 |
| Class A Amplifier | 250 | 250 | 8.0 | 35† | 2.5† | 100,000 | 6,500 | — | 5,000 | 4.2 | 10AL11 ¶ |
| Class A Amplifier | 150 | 100 | $R_k = 560$ | 1.3 | 2.1 | 150,000 | 1,000 | $E_{c3} = 0$ volts | — | — | ■ |
| Class A Amplifier | 250 | 250 | $R_k = 135$ | 48† | 5.5† | 38,000 | 11,300 | — | 5,200 | 6.0 | 10BQ5 ¶ |
| Class A Amplifier | 135 | 135 | $R_k = 100$ $R_k = 390$ | 11.5 | 3.2 | 190,000 | 8,000 | — | — | — | 10C8 ¶ |
| Class A Amplifier | 250 | — | — | 7.3 | — | 12,000 | 4,400 | 53 | — | — | |
| Vertical Amplifier | Max positive pulse plate voltage ♦ = 1,000; max d-c cathode current ♦ = 18 ma | | | | | | | | | | |
| Vertical Oscillator | Max d-c cathode current ♦ = 12 ma | | | | | | | | | | |
| Class A Amplifier | 170 | 170 | 12.5 | 70† | 5.0† | 23,000 | 10,000 | — | 2,400 | 5.6 | 10CW5 ¶ |
| Class AB ₁ Amplifier | 250 | 200 | 18.5 | 91† | 4.0† | — | — | — | 3,000† | 25 | |
| Vertical Oscillator | 250 | — | 8.0 | 9.0 | — | 7,700 | 2,600 | 20 | — | — | 10DA7 ¶ |
| Vertical Amplifier | 150 | — | 17.5 | 40 | — | 1,100 | 5,700 | 6.3 | — | — | |
| Vertical Amplifier | 60 | — | 0 | 80 | — | — | — | — | — | — | |
| Vertical Amplifier | Max positive pulse plate voltage = 1,800 volts; max d-c cathode current = 40 ma | | | | | | | | | | |
| Vertical Oscillator | 250 | — | 11 | 5.5 | — | 8,750 | 2,000 | 17.5 | — | — | 10DE7 ¶ |
| Vertical Oscillator | Max d-c cathode current ♦ = 22 ma | | | | | | | | | | |
| Vertical Amplifier | 150 | — | 17.5 | 35 | — | 925 | 6,500 | 6.0 | — | — | |
| Vertical Amplifier | 60 | — | 0 | 80 | — | — | — | — | — | — | |
| Vertical Amplifier | Max positive pulse plate voltage ♦ = 1,000; max d-c cathode current ♦ = 50 ma | | | | | | | | | | |
| Vertical Oscillator | 250 | — | 3.0 | 1.4 | — | 40,000 | 1,600 | 64 | — | — | 10DR7 ¶ |
| Vertical Oscillator | Max d-c cathode current ♦ = 20 ma | | | | | | | | | | |
| Vertical Amplifier | 150 | — | 17.5 | 35 | — | 925 | 6,500 | 6.0 | — | — | |
| Vertical Amplifier | 60 | — | 0 | 80 | — | — | — | — | — | — | |
| Vertical Amplifier | Max positive pulse plate voltage ♦ = 1,500; d-c cathode current ♦ = 50 ma | | | | | | | | | | |
| Class A Amplifier | 220 | 220 | 3.4 | 18 | 3.0 | 150,000 | 10,000 | — | — | — | 10DX8 |
| Class A Amplifier | 200 | — | 1.7 | 3.0 | — | — | 4,000 | 65 | — | — | |
| Class A Amplifier | 200 | 125 | $R_k = 68$ 2.0 | 25 | 7.0 | 75,000 | 12,500 | — | — | — | 10EB8 ¶ |
| Class A Amplifier | 250 | — | 2.0 | 2.0 | — | 37,000 | 2,700 | 100 | — | — | |
| Vertical Oscillator | 250 | — | 11 | 5.5 | — | 8,750 | 2,000 | 17.5 | — | — | 10EG7 ¶ |
| Vertical Oscillator | Max d-c cathode current ♦ = 22 ma | | | | | | | | | | |
| Vertical Amplifier | 150 | — | 17.5 | 45 | — | 800 | 7,500 | 6.0 | — | — | |
| Vertical Amplifier | Max positive pulse plate voltage ♦ = 1,500; max d-c cathode current ♦ = 50 ma | | | | | | | | | | |

Metal tubes are shown in bold-face type, miniature tubes in italics.

♦ G3 and G5 are screen. G4 is signal-input grid.

▼ G2 and G4 are screen. G3 is signal-input grid.

1, 2, 3, etc. indicate tube sections.

■ Maximum screen dissipation appears

immediately below the screen voltage.

¶ Heater warm-up time controlled.

| Tube Type | Classification by Construction | Base Connections | Outline Dwg | Filament Volts | Filament Amp | Max Plate Watts | Max Plate Volts | Max Screen Volts and Watts * | Capacitance in Picofarads | | |
|-----------|--------------------------------|------------------|-------------|----------------|--------------|-------------------------|-------------------------|------------------------------|---|--------|-------------|
| | | | | | | | | | Input | Output | Grid-plate |
| 10EM7† | Double Triode | 8BD | 9-38 | 9.7 | 0.6 | 1.5 ⬢ 10 ⬢ | 330 ⬢ 330 ⬢ | — | Section 1 (Pins 4, 5, 6) Section 2 (Pins 1, 2, 3) | | |
| 10EW7† | Double Triode | 9HF | 9-70 | 9.7 | 0.6 | 1.5 ⬢ 10 ⬢ | 330 ⬢ 330 ⬢ | — | Section 1 (Pins 6, 7, 8) Section 2 (Pins 1, 2, 3, 9) | | |
| 10FD7† | Double Triode | 9HF | 9-77 | 9.7 | 0.6 | 1.5 ⬢ 10.0 ⬢ | 330 ⬢ 330 ⬢ | — | Section 1 (Pins 6, 7, 8) Section 2 (Pins 1, 2, 3, 9) | | |
| 10FR7† | Double Triode | 9HF | 9-70 | 9.7 | 0.6 | 1.5 ⬢ 10 ⬢ | 330 ⬢ 330 ⬢ | — | Section 1 (Pins 6, 7, 8) Section 2 (Pins 1, 2, 3, 9) | | |
| 10GF7† | Dissimilar Double Triode | 9QD | T-X | 9.7 | 0.6 | 1.5 ⬢ 11 ⬢ | 330 ⬢ 330 ⬢ | — | Section 1 (Pins 1, 8, 9) Section 2 (Pins 2, 3, 6) | | |
| 10GF7-A† | Dissimilar Double Triode | 9QD | 9-107 | 9.7 | 0.6 | 1.5 ⬢ 11 ⬢ | 330 ⬢ 330 ⬢ | — | Section 1 (Pins 1, 8, 9) Section 2 (Pins 2, 3, 6) | | |
| 10GK6† | Beam Power Amplifier | 9GK | 6-4 | 10.6 | 0.45 | 13.2 ⬢ | 330 ⬢ | 330 ⬢ 2.0 ⬢ | Single Tube Two Tubes, Push-Pull Two Tubes, Push-Pull | | |
| 10GN8† | Triode-Pentode | 9DX | 6-3 | 10.5 | 0.45 | 5.0 ⬢ 1.0 ⬢ | 330 ⬢ 330 ⬢ | 330 ⬢ 1.1 ⬢ — | Pentode Section Triode Section | | |
| 10HA6 | Pentode | 9NW | 6-4 | 10.4 | 0.45 | 8.0 ⬢ | 300 ⬢ | 250 ⬢ 1.5 ⬢ | 13 ▲ | 8.0 ▲ | 0.18 ▲ |
| 10HF8† | Triode-Pentode | 9DX | 6-3 | 10.5 | 0.45 | 5.0 ⬢ 1.0 ⬢ | 330 ⬢ 330 ⬢ | 330 ⬢ 1.1 ⬢ — | Pentode Section Triode Section | | |
| 10JA5† | Beam Power Amplifier | 12FY | 12-57 | 10.5 | 0.6 | 19 ⬢ | 400 ⬢ | 300 ⬢ 2.75 ⬢ | 14 ▲ | 7.5 ▲ | 0.66 ▲ c |
| 10JA8† | Triode-Pentode | 9DX | 6-3 | 10.5 | 0.45 | 5.0 ⬢ 1.0 ⬢ | 330 ⬢ 300 ⬢ | 330 ⬢ 1.5 ⬢ — | Pentode Section Triode Section | | |
| 10JT8† | Triode-Pentode | 9DX | 9-69 | 10.2 | 0.45 | 4.0 ⬢ | 330 ⬢ | 330 ⬢ 1.1 ⬢ | Pentode Section | | |
| 10JY8† | Triode-Pentode | 9DX | 6-3 | 10.5 | 0.45 | 1.0 ⬢ 5.0 ⬢ 2.0 ⬢ | 330 ⬢ 330 ⬢ 330 ⬢ | — 330 ⬢ 1.1 ⬢ — | Triode Section Pentode Section Triode Section | | |
| 10KR8† | Triode-Pentode | 9DX | 6-3 | 10.5 | 0.45 | 5.0 ⬢ 2.0 ⬢ | 330 ⬢ 330 ⬢ | 330 ⬢ 1.1 ⬢ — | Pentode Section Triode Section | | |
| 10KU8† | Duplex-Diode Pentode | 9LT | 9-69 | 10.2 | 0.45 | 4.0 ⬢ | 330 ⬢ | 330 ⬢ 1.1 ⬢ | 12 ▲ | 3.0 ▲ | 0.1 ▲ ▲ |
| 10LB8† | Triode-Pentode | 9DX | 9-69 | 10.2 | 0.45 | 4.0 ⬢ 2.0 ⬢ | 330 ⬢ 330 ⬢ | 330 ⬢ 1.1 ⬢ — | Pentode Section Triode Section | | |

■ Compactron.

† Zero signal.

◆ Per section.

‡ Plate-to-plate.

♣ Maximum.

§ Supply voltage.

⊙ Subminiature type.

▲ Without external shield.

⊕ Design maximum rating.

⊗ Total for all similar sections.

⊖ Absolute maximum rating.

Conversion transconductance.

● See X-Radiation Warning, page 4.

| Service | Plate Volts | Screen Volts | № Grid Volts | Plate Milli-amperes | Screen Milli-amperes | R _p , Ohms | G _m , μmhos | μ Factor | Load for Rated Output, Ohms | Power Output, Watts | Tube Type |
|--|-------------|--------------|----------------------|---------------------|----------------------|-----------------------|------------------------|----------|-----------------------------|---------------------|-----------|
| Vertical Oscillator Vertical Amplifier | 250 | — | 3.0 | 1.4 | — | 40,000 | 1,600 | 64 | — | — | 10EM7† |
| | 150 | — | 20 | 50 | — | 750 | 7,200 | 5.4 | — | — | |
| Max positive pulse plate voltage ⬠ = 1,500; max d-c cathode current ⬠ = 50 ma | | | | | | | | | | | |
| Vertical Oscillator Vertical Amplifier | 250 | — | 11 | 5.5 | — | 8,750 | 2,000 | 17.5 | — | — | 10EW7† |
| | 150 | — | 17.5 | 45 | — | 800 | 7,500 | 6.0 | — | — | |
| Max positive pulse plate voltage ⬠ = 1,500; max d-c cathode current ⬠ = 50 ma | | | | | | | | | | | |
| Vertical Oscillator Vertical Amplifier | 250 | — | 3.0 | 1.4 | — | 40,000 | 1,600 | 64 | — | — | 10FD7† |
| | 150 | — | 17.5 | 40 | — | 800 | 7,500 | 6.0 | — | — | |
| Max positive pulse plate voltage ⬠ = 1,500; max d-c cathode current ⬠ = 50 ma | | | | | | | | | | | |
| Vertical Oscillator Vertical Amplifier | 250 | — | 3.0 | 1.4 | — | 40,000 | 1,600 | 68 | — | — | 10PR7† |
| | 150 | — | 20.0 | 50 | — | 750 | 7,200 | 5.4 | — | — | |
| Max peak negative grid voltage ⬠ = 400; max d-c cathode current ⬠ = 22 ma Max positive pulse plate voltage ⬠ = 1,500; max d-c cathode current ⬠ = 50 ma | | | | | | | | | | | |
| Vertical Oscillator Vertical Amplifier | 250 | — | 3.0 | 1.4 | — | 40,000 | 1,600 | 64 | — | — | 10GF7† |
| | 150 | — | 20 | 50 | — | 750 | 7,200 | 5.4 | — | — | |
| Max positive pulse plate voltage ⬠ = 1,500; max d-c cathode current ⬠ = 50 ma | | | | | | | | | | | |
| Vertical Oscillator Vertical Amplifier | 250 | — | 3.0 | 1.4 | — | 40,000 | 1,600 | 64 | — | — | 10GF7-A† |
| | 150 | — | 20 | 50 | — | 750 | 7,200 | 5.4 | — | — | |
| Max positive pulse plate voltage ⬠ = 1,500; max d-c cathode current ⬠ = 50 ma | | | | | | | | | | | |
| Class A Amplifier | 250 | 250 | 7.3 | 48† | 5.5† | 38,000 | 11,300 | — | 5,200 | 5.7 | 10GK6† |
| | 300 | 300 | R _k = 130 | 72† | 8.0† | — | — | — | 8,000† | 17 | |
| Class AB Amplifier | 250 | 250 | 130 | 62† | 7.0† | — | — | — | 8,000† | 11 | 10GN8† |
| | 300 | 300 | 130 | 15† | 1.6† | — | — | — | 8,000† | 17 | |
| Class B Amplifier | 250 | 250 | 14.6 | 20† | 2.2† | — | — | — | 8,000† | 11 | 10HA6 |
| | 250 | 250 | 11.6 | 20† | 2.2† | — | — | — | 8,000† | 11 | |
| Class A Amplifier Class A Amp | 200 | 150 | R _k = 100 | 25 | 5.5 | 60,000 | 11,500 | — | — | — | 10HA6 |
| | 250 | — | 2.0 | 2.0 | — | 37,000 | 2,700 | 100 | — | — | |
| Class A Amplifier | 150 | 100 | R _k = 33 | 28 | 3.5 | 20,000 | 20,000 | — | — | — | 10HF8† |
| | 60 | 100 | 0 | 45 | 9.0 | — | — | — | — | — | |
| Class A Amplifier Class A Amp | 200 | 125 | R _k = 68 | 25 | 7.0 | 75,000 | 12,500 | — | — | — | 10JA5† |
| | 45 | 125 | 0 | 40 | 15 | — | — | — | — | — | |
| Class A Amplifier | 200 | — | 2.0 | 4.0 | — | 17,500 | 4,000 | 70 | — | — | 10JA5† |
| | 135 | 125 | 10 | 95 | 4.2 | 12,000 | 10,300 | — | — | — | |
| Vertical-Deflection Amplifier | 45 | 125 | 0 | 210 | 20 | — | — | — | — | — | 10JA5† |
| | 135 | 125 | 10 | 95 | 4.2 | 12,000 | 10,300 | — | — | — | |
| Max positive pulse plate voltage ⬠ = 2,500 volts; max d-c cathode current ⬠ = 110 ma | | | | | | | | | | | |
| Class A Amplifier Class A Amp | 200 | 135 | 1.5 | 18 | 4.0 | 70,000 | 14,000 | — | — | — | 10JA8† |
| | 30 | 135 | — | 32 | 14 | — | — | — | — | — | |
| Class A Amplifier | 200 | — | 2.0 | 3.5 | — | 19,000 | 3,700 | 70 | — | — | 10JT8† |
| | 200 | 100 | R _k = 82 | 17 | 3.5 | 50,000 | 20,000 | — | — | — | |
| Class A Amplifier Class A Amp | 35 | 100 | 0 | 50 | 17 | — | — | — | — | — | 10JY8† |
| | 250 | — | 2.0 | 1.5 | — | 37,000 | 2,700 | 100 | — | — | |
| Class A Amplifier Class A Amplifier | 200 | 150 | R _k = 100 | 24 | 4.8 | 55,000 | 11,000 | — | — | — | 10KR8† |
| | 125 | — | 68 | 15 | — | 4,400 | 10,400 | 46 | — | — | |
| Class A Amplifier Class A Amplifier | 200 | 100 | R _k = 82 | 19.5 | 3.0 | 60,000 | 20,000 | — | — | — | 10KU8† |
| | 125 | — | 68 | 15 | — | 4,400 | 10,400 | 46 | — | — | |
| Class A Amplifier | 200 | 100 | R _k = 82 | 17 | 3.5 | 50,000 | 20,000 | — | — | — | 10LBS† |
| | 50 | 100 | 0 | 55 | 18 | — | — | — | — | — | |
| Average diode current at 10 volts = 2.0 ma | | | | | | | | | | | |
| Class A Amplifier Class A Amplifier | 200 | 100 | R _k = 82 | 17 | 3.5 | 50,000 | 20,000 | — | — | — | 10LBS† |
| | 50 | 100 | 0 | 55 | 18 | — | — | — | — | — | |
| Class A Amplifier | 125 | — | R _k = 68 | 13 | — | 6,000 | 5,000 | 30 | — | — | 10LBS† |
| | 125 | — | 68 | 13 | — | 6,000 | 5,000 | 30 | — | — | |

Metal tubes are shown in bold-face type, miniature tubes in italics.

♦ G3 and G5 are screen. G4 is signal-input grid.

* Maximum screen dissipation appears immediately below the screen voltage.

♥ G2 and G4 are screen. G3 is signal-input grid.

† Heater warm-up time controlled.

1, 2, 3, etc. indicate tube sections.

| Tube Type | Classification by Construction | Base Connections | Out-line Dwg | Filament Volts | Filament Amp | Max Plate Watts | Max Plate Volts | Max Screen Volts and Watts $\frac{V}{\mu}$ | Capacitance in Picofarads | | |
|----------------------|----------------------------------|------------------|--------------|----------------|--------------|-----------------|-----------------|--|---|----------------------|----------------------|
| | | | | | | | | | Input | Output | Grid-plate |
| 10LE8 ∇ | Twin Pentode | 9QZ | 6-4 | 10 | 0.45 | 2.0 \diamond | 300 \diamond | 150 \diamond 2.0 \diamond | — | — | — |
| 10LW8 ∇ | Triode-Pentode | 9DX | 6-3 | 10.5 | 0.45 | 4.0 \diamond | 330 \diamond | 330 \diamond 1.5 \diamond | Pentode Section | | |
| | | | | | | 1.5 \diamond | 330 \diamond | — | Triode Section | | |
| 10LY8 ∇ | Triode-Pentode | 9DX | 6-3 | 10.5 | 0.45 | 5.0 \diamond | 330 \diamond | 330 \diamond 1.1 \diamond | Pentode Section | | Triode Section |
| 10LZ8 ∇ | Triode-Pentode | 9DX | 6-3 | 10.5 | 0.45 | 4.5 \diamond | 225 \diamond | 160 \diamond 2.0 \diamond | Pentode Section | | |
| | | | | | | 1.0 \diamond | 300 \diamond | — | Triode Section | | |
| 10T10 \blacksquare | Dissimilar Double Triode-Pentode | 12EZ | 9-59 | 9.8 | 0.6 | 10 \diamond | 275 \diamond | 275 \diamond 2.0 \diamond | Section 1 (pins 8, 9, 10 and 11) | | |
| | | | | | | 1.7 \diamond | 330 \diamond | 330 \diamond 1.1 \diamond | Section 2 (pins 2, 3, 5, 6 and 7) | | |
| 10Z10 \blacksquare | Pentode-Gated Beam Discriminator | 12BT | 9-58 | 10 | 0.6 | 10 \diamond | 275 \diamond | 275 \diamond 2.0 \diamond | Pentode Section (Pins 2, 3, 9, 11) | | |
| | | | | | | — | 330 \diamond | 330 \diamond | Gated-Beam Discriminator (Pins 4, 5, 6, 7, 8) | | |
| 11AR11 ∇ | Twin Pentode | 12DM | 9-58 | 11.2 | 0.45 | 3.1 \diamond | 330 \diamond | 330 \diamond 0.65 \diamond | 10 | 2.8 \dagger | 0.026 |
| | | | | | | — | — | — | | 3.0 \dagger | — |
| 11BM8 | Triode-Pentode | 9EX | 6-4 | 10.7 | 0.45 | 5.0 | 250 | 250 | Pentode Section | | |
| | | | | | | 1.0 | 250 | 1.8 | Triode Section | | |
| 11BQ11 ∇ | Dissimilar Double Pentode | 12DM | 9-58 | 11.2 | 0.45 | 3.1 \diamond | 330 \diamond | 330 \diamond 0.65 \diamond | Section 1 (Pins 7, 8, 9, 10, 11) | | |
| | | | | | | 3.1 \diamond | 330 \diamond | 330 \diamond 0.65 \diamond | Section 2 (Pins 2, 3, 4, 5, 6) | | |
| 11BT11 ∇ | Dissimilar-Double-Triode Pentode | 12GS | 9-58 | 10.7 | 0.6 | 3.5 \diamond | 165 \diamond | 165 \diamond 1.5 \diamond | Pentode Section | | |
| | | | | | | 1.5 \diamond | 330 \diamond | — | Triode Section 1 (Pins 5, 6, 7) | | |
| | | | | | | 2.0 \diamond | 330 \diamond | — | Triode Section 2 (Pins 3, 4, 9) | | |
| 11C5 ∇ | Beam Power Amplifier | 7CV | 5-3 | 11.6 | 0.45 | 4.5 | 135 | 117 1.0 | 12 \blacktriangle | 9.0 \blacktriangle | 0.6 \blacktriangle |
| 11CA11 ∇ | Dissimilar-Double-Triode Pentode | 12HN | 9-58 | 10.7 | 0.6 | 5.0 \diamond | 330 \diamond | 330 \diamond 1.0 \diamond | Pentode Section | | |
| | | | | | | 1.5 \diamond | 330 \diamond | — | Triode Section 1 (Pins 4, 5, 6) | | |
| | | | | | | 1.5 \diamond | 330 \diamond | — | Triode Section 2 (Pins 2, 3, 7) | | |
| 11CF11 ∇ | Dissimilar-Double-Triode-Pentode | 12HW | 9-58 | 10.7 | 0.6 | 5.0 \diamond | 330 \diamond | 330 \diamond 1.0 \diamond | Pentode Section | | |
| | | | | | | 2.0 \diamond | 330 \diamond | — | Triode Section 1 | | |
| | | | | | | 1.5 \diamond | 330 \diamond | — | Triode Section 2 | | |
| 11CH11 ∇ | Dissimilar-Double-Triode-Pentode | 12GS | 9-58 | 10.7 | 0.6 | 6.0 \diamond | 330 \diamond | 330 \diamond 1.0 \diamond | Pentode Section | | |
| | | | | | | 2.0 \diamond | 330 \diamond | — | Triode Section 1 | | |
| | | | | | | 1.0 \diamond | 330 \diamond | — | Triode Section 2 | | |
| 11CY7 ∇ | Double Triode | 9LG | 6-3 | 11.0 | 0.45 | 1.0 \diamond | 350 \diamond | — | Section 1 (Pins 6, 7, 8) | | |
| | | | | | | 5.5 \diamond | 350 \diamond | — | Section 2 (Pins 1, 3, 9) | | |

\blacksquare Compactron.
 \dagger Zero signal.
 \blacklozenge Per section.

\ddagger Plate-to-plate.
 \blacklozenge Maximum.
 \ddagger Supply voltage.

\circ Subminiature type.
 \blacktriangle Without external shield.
 \blacklozenge Design maximum rating.

\circ Total for all similar sections.
 \blacksquare Absolute maximum rating.
 $\#$ Conversion transconductance.

| Service | Plate Volts | Screen Volts | Neg Grid Volts | Plate Milli-amperes | Screen Milli-amperes | R _p , Ohm | G _m , μmhos | μ Factor | Load for Rated Output, Ohms | Power Output, Watts | Tube Type |
|---|-------------|--------------|----------------------|---------------------|---------------------------------|----------------------|--------------------------------|-----------------------------|-----------------------------|---------------------|------------------|
| Color De-modulator | 100 | 100 | 2.5 | 8.0 | 15 | 50,000 | 5,800 | — | E _{c3} = 0 volts | — | 10LE8 ¶ |
| Class A Amplifier | 200 | 100 | R _k = 82 | 16.5 | 2.8 | 60,000 | 19,000 | — | — | — | 10LW8 ¶ |
| | 35 200 | 100 — | 0 2.0 | 48 2.6 | 12.5 — | — 18,700 | — 4,000 | — 75 | — — | — — | |
| Class A Amplifier | 200 | 100 | R _k = 82 | 19.5 | 3.0 | 60,000 | 20,000 | — | — | — | 10LY8 ¶ |
| | 35 250 | 100 — | 0 2.0 | 54 1.0 | 13.5 — | — 59,000 | — 1,700 | — 100 | — — | — — | |
| Class A Amplifier | 200 | 140 | 2.0 | 12 | 2.5 | 150,000 | 9,500 | — | — | — | 10LZ8 ¶ |
| | 30 250 | 140 — | 0 2.0 | 30 1.1 | 13.5 — | — 52,000 | — 2,100 | — 110 | — — | — — | |
| Class A Amplifier | 250 | 250 | 8.0 | 35+ | 2.5+ | 100,000 | 6,500 | — | 5,000 | 4.2 | 10T10 ¶■ |
| | 150 | 100 | R _k = 560 | 1.3 | 2.1 | 150,000 | 1,000 | (E _{c3} = 0 volts) | | | |
| Class A Amplifier FM Limiter-Discriminator | 250 | 250 | 8.0 | 35+ | 3.0+ | 100,000 | 6,500 | — | 5,000 | 4.2 | 10Z10 ¶■ |
| | 135 | 280 | — | 5.0 | (R _{kt} = 33,000 ohms) | | (E _{c3} = +4.0 volts) | | | | |
| Class A Amplifier | 125 | 125 | R _k = 56 | 11 | 3.5 | 200,000 | 10,500 | — | — | — | 11AR11 ¶■ |
| Class A Amplifier | 200 | 200 | 16 | 35 | 7.0 | 20,000 | 6,400 | — | — | — | 11B8 |
| | 100 | — | 0 | 3.5 | — | — | 2,500 | 70 | — | — | |
| Class A Amplifier | 125 | 125 | R _k = 56 | 11 | 3.5 | 200,000 | 10,500 | — | — | — | 11BQ11 ¶■ |
| | 125 | 125 | R _k = 56 | 11 | 3.8 | 200,000 | 13,000 | — | — | — | |
| Avg. Char. | 150 | 100 | R _k = 82 | 17.4 | 3.2 | 51,000 | 19,000 | — | — | — | 11BT11 ¶■ |
| | 35 200 | 100 — | 0 — | 54 7.1 | 13.5 — | — 12,500 | — 5,500 | — 69 | — — | — — | |
| Class A Amplifier | 200 | — | R _k = 270 | 7.2 | — | 7,600 | 5,300 | 40 | — | — | 11C6 ¶ |
| | 200 | — | R _k = 470 | 7.2 | — | 7,600 | 5,300 | 40 | — | — | |
| Class A Amplifier | 110 | 110 | 7.5 | 40† | 3.0† | — | 5,800 | — | 2,500 | 1.5 | 11C6 ¶ |
| Class A Amplifier | 200 | 120 | R _k = 65 | 27.5 | 4.9 | 490,000 | 21,200 | — | — | — | 11CA11 ¶■ |
| | 200 | — | R _k = 270 | 7.1 | — | 10,000 | 6,300 | 63 | — | — | |
| | 200 | — | R _k = 270 | 7.1 | — | 12,400 | 5,500 | 69 | — | — | |
| Class A Amplifier | 200 | 120 | R _k = 65 | 27.5 | 4.9 | 490,000 | 21,200 | — | — | — | 11CF11 ¶■ |
| | 200 | — | R _k = 270 | 7.1 | — | 12,400 | 5,500 | 69 | — | — | |
| | 200 | — | R _k = 270 | 7.6 | — | 9,200 | 6,300 | 59 | — | — | |
| Video Amplifier | 200 | 120 | R _k = 65 | 27.5 | 4.9 | 49,000 | 20,000 | — | — | — | 11CH11 ¶■ |
| | 50 200 | 120 — | 0 — | 71 7.1 | 18 — | — 12,500 | — 5,500 | — 69 | — — | — — | |
| General Purpose Amplifier | 200 | — | R _k = 270 | 7.2 | — | 7,600 | 5,300 | 40 | — | — | 11CH11 ¶■ |
| Vertical Oscillator | 250 | — | 3.0 | 1.2 | — | 52,000 | 1,300 | 68 | — | — | 11CY7 ¶ |
| | 150 | — | R _k = 620 | 30 | — | 920 | 5,400 | 5.0 | — | — | |
| Vertical Amplifier | 60 | — | 0 | 80 | — | — | — | — | — | — | 11CY7 ¶ |

Max positive pulse plate voltage ⚡ = 1,800; max d-c cathode current ⚡ = 35 ma

Metal tubes are shown in bold-face type, miniature tubes in italics.

† G3 and G5 are screen. G4 is signal-input grid.

‡ G2 and G4 are screen. G3 is signal-input grid.

1, 2, 3, etc. indicate tube sections.

■ Maximum screen dissipation appears immediately below the screen voltage.

¶ Heater warm-up time controlled.

| Tube Type | Classification by Construction | Base Connections | Out-line Dwg | Fila-ment Volts | Fila-ment Amp | Max Plate Watts | Max Plate Volts | Max Screen Volts and Watts * | Capacitance in Picofarads | | |
|-------------------------|--------------------------------|------------------|--------------|-----------------|---------------|--------------------------------------|--------------------------------------|---|--|---|--|
| | | | | | | | | | Input | Out-put | Grid-plate |
| 11DS5 [¶] | Beam Power Amplifier | 7BZ | 5-3 | 11.2 | 0.45 | 9.0 [◆] | 275 [◆] | 275 [◆] 2.2 [◆] | 9.5 [▲] | 6.3 [▲] | 0.19 [▲] |
| 11FY7 [¶] ■ | Dissimilar Double Triode | 12EO | 9-60 | 11 | 0.6 | 1.0 [◆] 7.0 [◆] | 330 [◆] 275 [◆] | — — | Section 1 (Pins 9, 10, 11) Section 2 (Pins 3, 5, 7) | | |
| 11HM7 | Sharp-Cutoff Pentode | 9BF | 6-3 | 11 | 0.3 | 7.0 [◆] | 330 [◆] | 330 [◆] 1.0 [◆] | 14 [▲] | 5.0 [▲] | 0.15 [▲] |
| 11JE8 [¶] | Triode-Pentode | 9DX | 6-3 | 10.9 | 0.45 | 5.0 [◆] 1.0 [◆] | 330 [◆] 300 [◆] | 330 [◆] 2.0 [◆] — | Pentode Section Triode Section | | |
| 11KV8 [¶] | Triode-Pentode | 9DX | 6-3 | 10.9 | 0.45 | 5.0 [◆] 1.0 [◆] | 300 [◆] 300 [◆] | 300 [◆] 1.0 [◆] — | Pentode Section Triode Section | | |
| 11LQ8 [¶] | Triode-Pentode | 9DX | 6-3 | 10.9 | 0.45 | 5.0 [◆] 2.0 [◆] | 300 [◆] 300 [◆] | 300 [◆] 1.0 [◆] — | Pentode Section Triode Section | | |
| 11LT8 | Duplex-Diode Pentode | 9RL | 6-2 | 11.4 | 0.315 | 3.1 [◆] | 330 [◆] | 330 [◆] 0.65 [◆] | Pentode Section Diode Sections | | |
| 11LY6 [¶] | Sharp-Cutoff Pentode | 9GK | 6-3 | 11.0 | 0.3 | 6.5 [◆] | 330 [◆] | 190 [◆] 1.2 [◆] | 9.5 [▲] | 3.8 [▲] | 0.07 [▲] |
| 11MS8 [¶] | Triode-Pentode | 9LV | 6-4 | 11.6 | 0.45 | 6.0 [◆] 0.5 [◆] | 250 [◆] 250 [◆] | 200 [◆] 1.5 [◆] — | Pentode Section Triode Section | | |
| 11Y9 | Dissimilar Double Pentode | 10L | 6-3 | 11 | 0.45 | 5.0 1.5 | 250 250 | 250 2.5 250 0.5 | Section 1 (Pins 7, 8, 9, 10) Section 2 (Pins 1, 2, 3, 4) | | |
| 12A | Detector Amplifier Triode | 4D | 14-1 | 5.0 DC | 0.25 | — | 180 | — | 4.0 [▲] | 2.0 [▲] | 8.5 [▲] |
| 12A4 | Medium-Mu Triode | 9AG | 6-3 | 12.6 6.3 | 0.3 0.6 | 5.9 | 450 | — | 4.9 [▲] | 0.9 [▲] | 5.6 [▲] |
| 12A5 | Power Amplifier Pentode | 7F | 12-5 | 12.6 6.3 | 0.3 0.6 | 8.25 | 180 | 180 2.5 | — | — | — |
| 12A6 | Beam Power Amplifier | 7AC | 8-6 9-9 | 12.6 | 0.15 | 7.5 | 250 | 250 1.5 | — | — | — |
| 12A6-GT | Half-Wave Rectifier | 7K | 12-6 | 12.6 | 0.3 | — | 135 | 135 | — | — | — |
| 12A7 | Power Amplifier Pentode | 7K | 12-6 | 12.6 | 0.3 | — | 135 | 135 | — | — | — |
| 12A8-G | Pentagrid Converter | 8A [♠] | 12-8 9-18 | 12.6 | 0.15 | 1.0 | 300 | 100 0.3 | Osc I _{ct} = 0.4 ma R _{gt} = 30,000 ohms | | |
| 12A8-GT | Pentagrid Converter | 8A [♠] | 12-8 9-18 | 12.6 | 0.15 | 1.0 | 300 | 100 0.3 | Osc I _{ct} = 0.4 ma R _{gt} = 30,000 ohms | | |
| 12AB5 | Beam Power Amplifier | 9EU | 6-3 | 12.6 | 0.2 | 12 | 315 | 285 2.0 | 8.0 [▲] | 8.5 [▲] | 0.7 [▲] |
| 12AC6 | Remote-Cutoff RF Pentode | 7BK | 5-2 | 12.6 | 0.15 | — | 30 | 30 | 4.3 | 5.0 | 0.004 |
| 12AC10-A [¶] ■ | Triple Triode | 12FE | 9-56 | 12.6 | 0.3 | 2.0 [◆] ♠ | 330 [◆] | — | 2.4 [▲] 2.6 [▲] 2.6 [▲] | 0.22 [▲] 0.30 [▲] 0.44 [▲] | 1.3 [▲] 1.2 [▲] 1.2 [▲] |
| 12AD6 | Pentagrid Converter | 7CH [♠] | 5-2 | 12.6 | 0.15 | — | 16 | 16 | Osc. I _{ct} = 0.060 ma R _{gt} = 33,000 ohms | | |
| 12AD7 | High-mu Twin Triode | 9A | 6-2 | 12.6 6.3 | 0.225 0.45 | 1.0 [◆] | 300 | — | 1.6 [▲] | 0.5 [▲] 0.45 [▲] | 1.8 [▲] |
| 12AE6 | Duplex-Diode Triode | 7BT | 5-2 | 12.6 | 0.15 | — | 30 | — | 1.8 [▲] | 1.1 [▲] | 2.0 [▲] |
| 12AE6-A | Duplex-Diode Triode | 7BT | 5-2 | 12.6 | 0.15 | — | 30 | — | 1.8 [▲] | 1.1 [▲] | 2.0 [▲] |

■ Compactron.
† Zero signal.
♠ Per section.

‡ Plate-to-plate.
♣ Maximum.
♠ Supply voltage.

◎ Subminiature type.
▲ Without external shield.
◆ Design maximum rating.

⊕ Total for all similar sections.
⊖ Absolute maximum rating.
Conversion transconductance.

| Service | Plate Volts | Screen Volts | Neg Grid Volts | Plate Milli-amperes | Screen Milli-amperes | R _p , Ohms | G _m , μmhos | μ Factor | Load for Rated Output, Ohms | Power Output, Watts | Tube Type |
|---------------------------------|---|--------------|------------------------------|---------------------|----------------------|-----------------------|------------------------|--|-----------------------------|---------------------|---------------------------------|
| Class A Amplifier | 250 200 | 200 | 8.5 7.5 | 29+ 35+ | 3.0+ 3.0+ | 28,000 28,000 | 5,800 6,000 | — | 8,000 6,000 | 3.8 3.0 | 11DS6 ¶ |
| Vertical Oscillator | 250 | — | 3.0 | 1.4 | — | 40,500 | 1,600 | 65 | — | — | 11FY7 ¶ |
| Vertical Amplifier | 150 60 | — | 17.5 0 | 35 95 | — | 920 | 6,500 | 6.0 | — | — | |
| | Max positive pulse plate voltage ♦ = 2,000; max d-c cathode current ♦ = 50 ma | | | | | | | | | | |
| Class A Amplifier | 200 | 135 | R _k = 47 | 30 | 5.2 | 40,000 | 30,000 | (E _{cs} = 0 volts) | | | 11HM7 |
| Class A Amplifier | 250 | 170 | R _k = 82 | 22 | 4.0 | 140,000 | 12,000 | — | — | — | 11JE8 ¶ |
| Class A Amp | 200 | — | 2.0 | 4.5 | — | 16,600 | 4,200 | 70 | — | — | |
| Class A Amplifier | 200 | 125 | R _k = 68 | 22 | 4.0 | 75,000 | 23,000 | — | — | — | 11KV8 ¶ |
| Class A Amplifier | 125 | 125 | R _k = 82 | 19 | 3.8 | 55,000 | 21,000 | — | — | — | |
| Class A Amplifier | 200 | — | 2.0 | 4.0 | — | 17,500 | 4,000 | 70 | — | — | |
| Class A Amplifier | 125 | 125 | R _k = 82 | 16.5 | 3.1 | 55,000 | 21,000 | — | — | — | 11LQ8 ¶ |
| Class A Amplifier | 125 | — | R _k = 68 | 15 | — | 4,400 | 10,400 | 46 | — | — | |
| Class A Amplifier | 125 | 125 | R _k = 68 | 10 | 3.4 | 200,000 | 13,000 | — | — | — | 11LT8 |
| | Max d-c output current ♦ = 5.0 ma; voltage drop = 5.0 volts at 20 ma d-c ♦ | | | | | | | | | | |
| Class A Amplifier | 250 | 180 | R _k = 100 | 26 | 5.75 | 89,000 | 11,000 | — | — | — | 11LY6 ¶ |
| Vertical Deflection Amplifier | 120 | 110 | 10 | 50 | 3.0 | 13,000 | 8,500 | — | — | — | 11MS8 ¶ |
| Class A Amplifier | 100 | — | 0.85 | 5.0 | — | 11,000 | 5,500 | 60 | — | — | |
| Class A Amplifier | 100 | — | 0 | 10 | — | 9,000 | 7,000 | 63 | — | — | |
| Class A Amplifier | 170 | 170 | 2.6 | 30 | 6.5 | 40,000 | 21,000 | — | — | — | 11Y9 |
| Class A Amplifier | 150 | 150 | 2.3 | 10 | 3.0 | 160,000 | 8,500 | — | — | — | |
| Class A Amplifier | 180 | — | 13.5 | 7.7† | — | 4,700 | 1,800 | 8.5 | 10,650 | 0.285 | 12A |
| Vertical Amplifier | 250 | — | 9.0 | 23 | — | 2,500 | 8,000 | 20 | — | — | 12A4 |
| | Max positive pulse plate voltage ¶ = 1,000; max d-c cathode current = 30 ma | | | | | | | | | | |
| Class A Amplifier | 180 | 180 | 25 | 45† | 8† | 35,000 | 2,400 | — | 3,300 | 3.4 | 12A5 |
| Class A Amplifier | 100 | 100 | 15 | 17† | 3† | 50,000 | 1,700 | — | 4,500 | 0.8 | |
| Class A Amplifier | 250 | 250 | 12.5 | 30† | 3.5† | 70,000 | 3,000 | — | 7,500 | 3.4 | 12A6 12A6-GT |
| Class A Amp Half-Wave Rectifier | 135 | 135 | 13.5 | 9.0† | 2.5† | 102,000 | 975 | — | 13,500 | 0.55 | 12A7 |
| | Max d-c output current = 30 ma; max rms supply voltage = 125 v | | | | | | | | | | |
| Converter | 250 | 100 | 3.0 | 3.5 | 2.7 | 360,000 | 550 # | E _{cs} (Osc Plate) = 250 thru 20,000 ohms I _{cs} = 4.0 ma | | | 12A8-G 12A8-GT |
| Class A Amplifier | 250 250 | 250 200 | 12.5 R _k = 270 | 45† 33.5† | 4.5† 1.6† | 50,000 — | 4,100 4,000 | — | 5,000 6,000 | 4.5 3.3 | 12A B5 |
| Class A Amplifier | 12.6 | 12.6 | E _{cc1} = 0 | 0.6 | 0.2 | 600,000 | 750 | R _{g1} = 2.2 meg | | | 12AC6 |
| Class A Amplifier ♦ | 200 | — | R _k = 150 | 9.0 | — | 10,700 | 5,800 | 62 | — | — | 12AC10-A ¶ |
| Converter | 12.6 | 12.6 | E _{cc1} = 0 | 0.34 | 1.19 | 400,000 | 320# | R _{g1} = 2.2 meg | | | 12AD6 |
| Class A Amplifier ♦ | 250 | — | 2.0 | 1.25 | — | 62,500 | 1,600 | 100 | — | — | 12AD7 |
| Class A Amplifier | 12.6 | — | 0 | 0.75 | — | 15,000 | 1,000 | 15 | — | — | 12AE6 |
| Class A Amplifier AM Detect. | Max d-c output current ♦ = 1.0 ma; voltage drop ♦: 10 volts at 2.0 ma d-c | | | | | | | | | | |
| Class A Amplifier AM Detect. | 12.6 | — | 0 | 1.0 | — | 13,000 | 1,300 | 16.7 | — | — | 12AE6-A |
| Class A Amplifier AM Detect. | Max d-c output current ♦ = 1.0 ma; voltage drop ♦: 10 volts at 2.0 ma d-c | | | | | | | | | | |

Metal tubes are shown in bold-face type, miniature tubes in italics.

♦ G3 and G5 are screen. G4 is signal-input grid.

¶ G2 and G4 are screen. G3 is signal-input grid.

1, 2, 3, etc. indicate tube sections.

* Maximum screen dissipation appears

immediately below the screen voltage.

¶ Heater warm-up time controlled.

| Tube Type | Classification by Construction | Base Connections | Out-line Dwg | Filament Volts | Filament Amp | Max Plate Watts | Max Plate Volts | Max Screen Volts and Watts * | Capacitance in Picofarads | | |
|-----------|----------------------------------|------------------|--------------|----------------|---------------|-----------------|--|------------------------------|---|-------------------------|------------|
| | | | | | | | | | Input | Output | Grid-plate |
| 12AE7 | Double Triode | 9A | 6-2 | 12.6 | 0.45 | 1.0◆ | 16◆ | — | Section 1 (Pins 6, 7, 8) Section 2 (Pins 1, 2, 3) | | |
| 12AE10 | Dissimilar Double Pentode | 12EZ | 9-59 | 12.6 | 0.45 | 6.0◆ | 165◆ | 150◆ | Section 1 (Pins 8, 9, 10, 11) Section 2 (Pins 2, 3, 5, 6, 7) | | |
| 12AF3 | Half-Wave High-Vacuum Rectifier | 9CB | 6-8 | 12.6 | 0.6 | 6.0◆ | Tube Voltage Drop: 30 volts at 340 ma d-c | | | | |
| 12AF6 | RF Pentode | 7BK | 5-2 | 12.6 | 0.15 | — | 16◆ | 16◆ | 5.5▲ | 4.8▲ | 0.006▲◆ |
| 12AG6 | Heptode | 7CH | 5-2 | 12.6 | 0.15 | — | 16 | 16 | Osc. I _{c1} = 0.05 ma R _{g1} = 20,000 ohms | | |
| 12AH7-GT | Medium-Mu Twin Triode | 8BE | 9-7 | 12.6 | 0.15 | 1.5◆ | 180 | — | — | — | — |
| 12AJ6 | Duplex-Diode-Triode | 7BT | 5-2 | 12.6 | 0.15 | — | 30 | — | 2.2▲ | 0.8▲ | 2.0▲ |
| 12AL5 | Twin Diode | 6BT | 5-1 | 12.6 | 0.15 | — | Tube Voltage Drop:◆ 10 v at 60 ma d-c | | | | |
| 12AL8 | Triode Space-Charge-Grid Tetrode | 9GS | 6-3 | 12.6 | 0.55 | — | 30 | — | Tetrode Section | | |
| 12AL11 | Dissimilar-Double Pentode | 12BU | 9-59 | 12.6 | 0.45 | 10◆ | 275◆ | 275◆ | Triode Section | | |
| 12AQ5 | Beam Power Amplifier | 7BZ | 5-3 | 12.6 | 0.225 | 1.7◆ | 330◆ | 330◆ | Section 1 (Pins 8, 9, 10, 11) Section 2 (Pins 2, 3, 4, 6, 7) | | |
| 12AS5 | Beam Power Amplifier | 7CV | 5-3 | 12.6 | 0.4 | 5.5 | 150 | 250 | 8.3▲ | 8.2▲ | 0.35▲ |
| 12AT6 | Duplex-Diode High-Mu Triode | 7BT | 5-2 | 12.6 | 0.15 | 0.5 | 300 | 2.0 | 12▲ | 6.2▲ | 0.6▲ |
| 12AT7 | High-Frequency Twin Triode | 9A | 6-2 | 12.6 6.3 | 0.15 0.3 | 2.5◆ | 300 | 1.1◆ | 2.2 | 1.2 1.5 ₂ | 1.5 |
| 12AU6 | Sharp-Cutoff RF Pentode | 7BK | 5-2 | 12.6 | 0.15 | 3.5◆ | 330◆ | 330◆ | Pentode Connection | | |
| 12AU6-A | | | | | | 3.5◆ | 275◆ | 0.75◆ | Triode Connection (G ₂ , G ₃ , & P tied) | | |
| 12AU7 | Medium-Mu Twin Triode | 9A | 6-2 | 12.6 6.3 | 0.15 0.3 | 2.75◆ | 330◆ | — | 1.8 | 2.0 | 1.5 |
| 12AU8 | Triode-Pentode | 9DX | 6-3 | 12.6 | 0.3 | 3.0 | 300 | 300 | Pentode Section | | |
| 12AV5-GA | Beam Power Amplifier | 6CK | T-X | 12.6 | 0.6 | 11 | 550 | 1.0 | Triode Section | | |
| 12AV6 | Duplex-Diode High-Mu Triode | 7BT | 5-2 | 12.6 | 0.15 | 0.55 | 330◆ | — | 14▲ | 7.0▲ | 0.5▲ |
| 12AV6-A | | | | | | ◆ | — | — | 2.2 | 1.2 | 2.0 |
| 12AV7 | Twin Triode | 9A | 6-2 | 6.3 12.6 | 0.45 0.225 | 2.7◆ | 300 | — | 3.2 | 1.3 1.6 ₂ | 1.9 |
| 12AW6 | Sharp-Cutoff RF Pentode | 7CM | 5-2 | 12.6 | 0.15 | 2.0 | 300 | 300 | Pentode Connection | | |
| 12AX3 | Half-Wave High-Vacuum Rectifier | 12BL | 9-59 | 12.6 | 0.6 | 5.3◆ | 300 | 0.5 | Triode Connection (G ₂ & P tied) | | |
| 12AX4-GT | Half-Wave High-Vacuum Rectifier | 4CG | 9-11 | 12.6 | 0.6 | 4.8 | 300 | — | Tube Voltage Drop: 32 v at 250 ma d-c | | |
| 12AX4-GTA | | | | | | | | | Tube Voltage Drop: 32 v at 250 ma d-c | | |

◆ Compactron.

† Plate-to-plate.

● Subminiature type.

⊕ Total for all similar sections.

† Zero signal.

▲ Maximum.

▲ Without external shield.

⊗ Absolute maximum rating.

◆ Per section.

‡ Supply voltage.

◆ Design maximum rating.

Conversion transconductance.

● See X-Radiation Warning, page 4.

| Service | Plate Volts | Screen Volts | Neg Grid Volts | Plate Milli-amperes | Screen Milli-amperes | R _p ' Ohms | G _m ' μmhos | μ Factor | Load for Rated Out-put, Ohms | Power Out-put, Watts | Tube Type |
|------------------------------|---|--------------|---------------------|---------------------|----------------------|-----------------------|------------------------|----------------------------|------------------------------|----------------------|------------|
| Class A Amplifier | 12.6 | — | E _{cc} =0 | 1.9 | — | 3,150 | 4,000 | 13 | R _g =1.5 meg | — | 12AE7 |
| Class A Amplifier | 12.6 | — | E _{cc} =0 | 7.5 | — | 985 | 6,500 | 6.4 | R _g =1.0 meg | — | 12AE10† |
| Class A Amplifier Avg. Char. | 145 | 110 | 7.0 | 34† | 6.5† | 33,000 | 5,600 | — | 2,500 | 1.45 | 12AE10† |
| | 150 | 100 | R _k =560 | 1.3 | 2.0 | 150,000 | 1,000 | (E _{cc} =0 volts) | — | — | 12AE10† |
| TV Damper | Max d-c output current ⬠=185 ma; max peak inverse voltage ⬠=4,500 volts; max peak current ⬠=750 ma | | | | | | | | | | 12AF3† |
| Class A Amplifier | 12.6 | 12.6 | E _{cc} =0 | 1.1 | 0.45 | 350,000 | 1,500 | R _g =2.2 meg | — | — | 12AF6 |
| Converter | 12.6 | 12.6 | — | 0.55 | 1.4 | — | 300† | E _{cc} =0 volts | — | — | 12AG6 |
| | | | | | | | | R _g =2.2 meg | — | — | 12AG6 |
| Class A Amplifier | 180 | — | 6.5 | 7.6 | — | 8,400 | 1,900 | 16 | — | — | 12AH7-GT |
| Class A Amp AM Detector | 12.6 | — | 0 | 0.75 | — | 45,000 | 1,200 | 55 | — | — | 12AJ6 |
| | Max d-c output current ⬠=1.0 ma; voltage drop ⬠=10 volts at 2.0 ma | | | | | | | | | | 12AJ6 |
| Half-Wave Rectifier | Max d-c output current per plate=9 ma; max peak inverse voltage=330; max rms supply voltage per plate=117; max peak current per plate=54 ma | | | | | | | | | | 12AL6 |
| Class A Amplifier | 12.6 | — | E _{cc} =0 | 40 | — | 480 | 15,000 | — | — | — | 12AL8 |
| | E _{ct} =12.6 volts; I _{ct} =75 ma (Note: grid 1 is space-charge grid, grid 2 is control grid) | | | | | | | | | | 12AL8 |
| Class A Amp | 12.6 | — | E _{cc} =0 | 0.5 | — | 13,000 | 1,000 | 13 | — | — | 12AL11† |
| Class A Amplifier | 250 | 250 | 8.0 | 35† | 2.5† | 100,000 | 6,500 | — | 5,000 | 4.2 | 12AL11† |
| Class A Amplifier | 150 | 100 | R _k =60 | 1.3 | 2.1 | 150,000 | 1,000 | E _{cc} =0 volts | — | — | 12AL11† |
| Class A Amplifier | 180 | 180 | 8.5 | 29† | 3.0† | 58,000 | 3,700 | — | 5,500 | 2.0 | 12AQ6 |
| | 250 | 250 | 12.5 | 45† | 4.5† | 52,000 | 4,100 | — | 5,000 | 4.5 | 12AQ6 |
| Class A Amplifier | 150 | 110 | 8.5 | 35† | 2.0† | — | 5,600 | — | 4,500 | 2.2 | 12AS6 |
| Class A Amplifier | 250 | — | 3.0 | 1.0 | — | 58,000 | 1,200 | 70 | — | — | 12AT6 |
| | 100 | — | 1.0 | 0.8 | — | 54,000 | 1,300 | 70 | — | — | 12AT6-A† |
| Class A Amplifier | 250 | — | R _k =200 | 10 | — | 10,900 | 5,500 | 60 | — | — | 12AT7 |
| | 100 | — | R _k =270 | 3.7 | — | 15,000 | 4,000 | 60 | — | — | 12AT7 |
| Class A Amplifier | 250 | 150 | R _k =68 | 10.6 | 4.3 | 1,000,000 | 5,200 | — | — | — | 12AU6 |
| | 100 | 100 | R _k =150 | 5.0 | 2.1 | 500,000 | 3,900 | — | — | — | 12AU6-A† |
| Class A Amplifier | 250 | — | R _k =330 | 12.2 | — | — | 4,800 | 36 | — | — | 12AU6 |
| Class A Amplifier | 250 | — | 8.5 | 10.5 | — | 7,700 | 2,200 | 17 | — | — | 12AU7 |
| | 100 | — | 0 | 11.8 | — | 6,500 | 3,100 | 20 | — | — | 12AU7-A |
| Vertical Amplifier | Max positive pulse plate voltage ⬠=1,200; max d-c cathode current ⬠=22 ma | | | | | | | | | | 12AU7-A |
| Class A Amplifier | 200 | 125 | R _k =82 | 15 | 3.4 | 150,000 | 7,000 | — | — | — | 12AU8 |
| Class A Amplifier | 150 | — | R _k =150 | 9.0 | — | 8,200 | 4,900 | 40 | — | — | 12AU8 |
| Horizontal Amplifier | 250 | 150 | 22.5 | 57 | 2.1 | 14,500 | 5,900 | — | — | — | 12AV5-GA† |
| | 60 | 150 | 0 | 260 | 26 | — | — | — | — | — | 12AV5-GA† |
| | Max positive pulse plate voltage ⬠=5,500 volts; max screen dissipation=2.5 watts; max d-c cathode current=110 ma | | | | | | | | | | 12AV5-GA† |
| Class A Amplifier | 250 | — | 2.0 | 1.2 | — | 62,500 | 1,600 | 100 | — | — | 12AV6 |
| | 100 | — | 1.0 | 0.5 | — | 80,000 | 1,250 | 100 | — | — | 12AV6-A† |
| Class A Amplifier | 150 | — | R _k =56 | 18 | — | 4,800 | 8,500 | 41 | — | — | 12AV7 |
| | 100 | — | R _k =120 | 9.0 | — | 6,100 | 6,100 | 37 | — | — | 12AV7 |
| Class A Amplifier | 250 | 150 | R _k =200 | 7.0 | 2.0 | 800,000 | 5,000 | — | — | — | 12AW6 |
| Class A Amplifier | 250 | — | R _k =825 | 5.5 | — | 11,000 | 3,800 | 42 | — | — | 12AW6 |
| TV Damper | Max d-c output current ⬠=165 ma; max peak inverse voltage ⬠=5,000 volts; max peak current ⬠=1,000 ma | | | | | | | | | | 12AX3† |
| TV Damper | Max d-c output current=125 ma; max peak inverse voltage ⬠=4400 volts; max peak current=750 ma | | | | | | | | | | 12AX4-GT |
| | | | | | | | | | | | 12AX4-GTA† |

Metal tubes are shown in bold-face type, miniature tubes in italics.

⬠ G3 and G5 are screen, G4 is signal-input grid.

⬡ G2 and G4 are screen, G3 is signal-input grid.

1, 2, 3, etc. indicate tube sections.

⬢ Maximum screen dissipation appears immediately below the screen voltage.

† Heater warm-up time controlled.

| Tube Type | Classification by Construction | Base Connections | Out-line Dwg | Fila-ment Volts | Fila-ment Amp | Max Plate Watts | Max Plate Volts | Max Screen Volts and Watts * | Capacitance in Picofarads | | |
|------------------|------------------------------------|------------------|--------------------|-----------------|---------------|-----------------|---|------------------------------|---|--|------------|
| | | | | | | | | | Input | Out-put | Grid-plate |
| 12AX4-GTB | Half-Wave High-Vacuum Rectifier | 4CG | 9-11 | 12.6 | 0.6 | 5.3 | Tube Voltage Drop: 32 volts at 250 ma d-c | | | | |
| 12AX7 | High-Mu Twin Triode | 9A | 6-2 | 12.6 6.3 | 0.15 0.3 | 1.2 | 330 | — | 1.8 | 1.9 | 1.7 |
| 12AX7-A | High-Mu Twin Triode | 9A | 6-2 | 12.6 6.3 | 0.15 0.3 | 1.2 | 330 | — | 1.6 | 0.46 ₁ 0.34 ₂ | 1.7 |
| 12AY3 | Half-Wave High-Vacuum Rectifier | 9HP | 9-86 | 12.6 | 0.6 | 6.5 | Tube Voltage Drop: 32 volts at 350 ma d-c | | | | |
| 12AY3-A | Half-Wave High-Vacuum Rectifier | 9HP | T-X | 12.6 | 0.6 | 6.5 | Tube Voltage Drop: 32 volts at 350 ma d-c | | | | |
| 12AY7 | Twin Triode | 9A | 6-2 | 6.3 12.6 | 0.3 0.15 | 1.5 | 300 | — | 1.3 | 0.6 | 1.3 |
| 12AZ7 | Twin Triode | 9A | 6-2 | 12.6 6.3 | 0.225 0.45 | 2.5 | 330 | — | 2.8 | 1.4 ₁ 1.6 ₂ | 1.9 |
| 12AZ7-A | Twin Triode | 9A | 6-2 | 12.6 6.3 | 0.225 0.45 | 2.5 | 300 | — | 2.8 | 1.4 ₁ 1.6 ₂ | 1.9 |
| 12B4 12B4-A | Low-Mu Triode | 9AG | 6-3 | 12.6 6.3 | 0.3 0.6 | 5.5 | 550 | — | 5.0 | 1.5 | 4.8 |
| 12B7 | Remote Cutoff Pentode same as 14A7 | | | | | | | | | | |
| 12B8-GT | Triode Remote-Cutoff Pentode | 8T | 9-24 | 12.6 | 0.3 | — | 90 | 90 | Pentode Section Triode Section | | |
| 12BA6 12BA6-A | Remote-Cutoff RF Pentode | 7BK | 5-2 | 12.6 | 0.15 | 3.4 | 330 | 330 0.7 | 5.5 | 5.0 | 0.0035 |
| 12BA7 | Pentagrid Converter | 8CT | 6-3 | 12.6 | 0.15 | 2.0 | 300 | 100 1.5 | Osc I _{ct} = 0.35 ma R _{g1} = 20,000 ohms | | |
| 12BD6 | Remote-Cutoff RF Pentode | 7BK | 5-2 | 12.6 | 0.15 | 3.0 | 300 | 125 0.65 | 4.3 | 5.0 | 0.005 |
| 12BE3 | Half-Wave High-Vacuum Rectifier | 12GA | 9-60 | 12.6 | 0.6 | 6.5 | Tube Voltage Drop: 25 volts at 350 ma d-c | | | | |
| 12BE3-A | Half-Wave High-Vacuum Rectifier | 12GA | 9-60 | 12.6 | 0.6 | 6.5 | Tube Voltage Drop: 22.5 volts at 350 ma d-c | | | | |
| 12BE6 12BE6-A | Pentagrid Converter | 7CH | 5-2 | 12.6 | 0.15 | 1.1 | 330 | 110 1.1 | Osc I _{ct} = 0.5 ma R _{g1} = 20,000 ohms | | |
| 12BF6 | Duplex-Diode Medium-Mu Triode | 7BT | 5-2 | 12.6 | 0.15 | 2.5 | 300 | — | 1.8 | 0.7 | 1.9 |
| 12BF11 | Dissimilar Double Pentode | 12EZ | 9-59 | 12.6 | 0.6 | 6.5 | 165 330 | 150 1.8 330 1.1 | Section 1 (Pins 8, 9, 10, 11) Section 2 (Pins 2, 3, 5, 6, 7) | | |
| 12BH7 12BH7-A | Medium-Mu Twin Triode | 9A | 6-3 | 12.6 6.3 | 0.3 0.6 | 3.5 | 300 450 | — | 3.2 | 0.5 ₁ 0.42 ₂ | 2.6 |
| 12BK5 | Beam Power Amplifier | 9BQ | 6-3 | 12.6 | 0.6 | 9.0 | 250 | 250 2.5 | 13 | 5.0 | 0.6 |
| 12BK6 | Duplex-Diode, High-Mu Triode | 7BT | 5-3 | 12.6 | 0.15 | — | 300 | — | — | — | — |
| 12BL6 | Sharp-Cutoff Pentode | 7BK | 5-2 | 12.6 | 0.15 | — | 30 | 30 | 5.5 | 4.8 | 0.006 |
| 12BN6 12BN6-A | Gated-Beam Discriminator | 7DF | 5-3 | 12.6 | 0.15 | — | 300 | 110 | E _{ct} = 1.25 volts rms | | |
| 12BQ6-GTA | Beam Power Amplifier | 6AM | 9-49 or 9-50 | 12.6 | 0.6 | 11 | 600 | 175 2.5 | — | — | — |

■ Compactron.

† Zero signal.

♣ Per section.

‡ Plate-to-plate.

♣ Maximum.

‡ Supply voltage.

⊙ Subminiature type.

▲ Without external shield.

⊙ Design maximum rating.

⊙ Total for all similar sections.

⊙ Absolute maximum rating.

Conversion transconductance.

● See X-Radiation Warning, page 4.

| Service | Plate Volts | Screen Volts | Neg Grid Volts | Plate Milli-amperes | Screen Milli-amperes | R _p ' Ohms | G _m ' μmhos | μ Factor | Load for Rated Output, Ohms | Power Output, Watts | Tube Type |
|--------------------------|--|--------------|-----------------------------|---------------------|----------------------|-----------------------|------------------------|-----------------------------|-----------------------------|---------------------|--------------------|
| TV Damper | Max d-c output current ⬠ = 165 ma; max peak inverse voltage ⬠ = 5,000 volts; max peak current ⬠ = 1,000 ma | | | | | | | | | | 12AX4-GTB ¶ |
| Class A Amplifier ⬠ | 100 | — | 1.0 | 0.5 | — | 80,000 | 1,250 | 100 | — | — | 12AX7 |
| Class A Amplifier ⬠ | 250 | — | 2.0 | 1.2 | — | 62,500 | 1,600 | 100 | — | — | 12AX7-A |
| TV Damper | Max d-c output current ⬠ = 175 ma; max peak inverse voltage ⬠ = 5,000 volts; max peak current ⬠ = 1100 ma | | | | | | | | | | 12AY3 ¶ |
| TV Damper | Max d-c output current ⬠ = 175 ma; max peak inverse voltage ⬠ = 5,000 volts; max peak current ⬠ = 1,100 ma | | | | | | | | | | 12AY3-A ¶ |
| Class A Amplifier ⬠ | 250 | — | 4.0 | 3.0 | — | 25,000 | 1,750 | 44 | — | — | 12AY7 |
| Class A Amplifier | 250 | — | R _k = 200 | 10 | — | 10,900 | 5,500 | 60 | — | — | 12AZ7 |
| | 100 | — | R _k = 270 | 3.7 | — | 15,000 | 4,000 | 60 | — | — | |
| Class A Amplifier | 250 | — | R _k = 200 | 10 | — | 10,900 | 5,500 | 60 | — | — | 12AZ7-A ¶ |
| | 100 | — | R _k = 270 | 3.7 | — | 15,000 | 4,000 | 60 | — | — | |
| Vertical Amplifier | 150 | — | 17.5 | 34 | — | 1,030 | 6,300 | 6.5 | — | — | 12B4 12B4-A |
| | Max positive pulse plate voltage ⬠ = 1000; max d-c cathode current = 30 ma | | | | | | | | | | |
| Class A Amp | 90 | 90 | 3.0 | 7.0 | 2.0 | 200,000 | 1,800 | — | — | — | 12B8-GT |
| Class A Amp | 90 | — | 0 | 2.8 | — | 37,000 | 2,400 | 96 | — | — | |
| Class A Amplifier | 250 | 100 | R _k = 68 | 11 | 4.2 | 1,000,000 | 4,400 | — | — | — | 12BA6 12BA6-A ¶ |
| | 100 | 100 | R _k = 68 | 10.8 | 4.4 | 250,000 | 4,300 | — | — | — | |
| Converter | 250 | 100 | 1.0 | 3.8 | 10 | 1,000,000 | 950 # | — | — | — | 12BA7 |
| Class A Amplifier | 250 | 100 | 3.0 | 9.0 | 3.5 | 700,000 | 2,000 | — | — | — | 12BD6 |
| TV Damper | Max d-c output current ⬠ = 200 ma; max peak inverse voltage ⬠ = 5,000 volts; max peak current ⬠ = 1,200 ma | | | | | | | | | | 12BE3 ¶ ■ |
| TV Damper | Max d-c output current ⬠ = 200 ma; max peak inverse voltage ⬠ = 5,000 volts; max peak current ⬠ = 1,200 ma | | | | | | | | | | 12BE3-A ¶ ■ |
| Converter | 250 | 100 | 1.5 | 2.9 | 6.8 | 1,000,000 | 475 # | — | — | — | 12BE6 |
| | 100 | 100 | 1.5 | 2.6 | 7.0 | 400,000 | 455 # | — | — | — | 12BE6-A ¶ |
| Class A Amplifier | 250 | — | 9.0 | 9.5 | — | 8,500 | 1,900 | 16 | 10,000 | 0.3 | 12BF6 |
| Class A Amplifier | 145 | 110 | 6.0 | 36† | 3.0† | 30,000 | 8,600 | — | 3,000 | 2.4 | 12BF11 ¶ ■ |
| Class A Amplifier | 150 | 100 | R _k = 560 | 1.3 | 2.0 | 150,000 | 1,000 | (E _{c3} = 0 volts) | | | |
| Class A Amplifier ⬠ | 250 | — | 10.5 | 11.5 | — | 5,300 | 3,100 | 16.5 | — | — | 12BH7 |
| Vertical Amplifier ⬠ | Max positive pulse plate voltage ⬠ = 1,500; max d-c cathode current = 20 ma | | | | | | | | | | 12BH7-A ¶ |
| Class A Amplifier | 250 | 250 | 5.0 | 35† | 3.5† | 100,000 | 8,500 | — | 6,500 | 3.5 | 12BK6 ¶ |
| Class A Amplifier | 250 | — | 2.0 | 1.2 | — | 62,500 | 1,600 | 100 | — | — | 12BK6 |
| Class A Amplifier | 100 | — | 1.0 | 0.5 | — | 80,000 | 1,250 | 100 | — | — | |
| Class A Amplifier | 12.6 | 12.6 | E _{cc1} = 0 | 1.35 | 0.5 | 500,000 | 1,350 | R _{g1} = 2.2 meg | | — | 12BL6 |
| FM Limiter-Discriminator | 285 ¶ | 100 | R _k = 200 to 400 | 0.49 | 9.8 | — | — | — | 33,000 | — | 12BN6 12BN6-A ¶ |
| Horizontal Amplifier | 250 | 150 | 22.5 | 55 | 2.1 | 20,000 | 5,500 | — | — | — | 12BQ6-GTA ¶ |
| | 60 | 150 | 0 | 225 | 25 | — | — | — | — | — | |
| | Max positive pulse plate voltage ⬠ = 6,000 volts; max screen dissipation = 2.5 watts; max d-c cathode current = 110 ma | | | | | | | | | | |

Metal tubes are shown in bold-face type, *miniature tubes in italics.*

⬠ G3 and G5 are screen. G4 is signal-input grid.

¶ G2 and G4 are screen. G3 is signal-input grid.

1, 2, 3, etc. indicate tube sections.

■ Maximum screen dissipation appears immediately below the screen voltage.

¶ Heater warm-up time controlled.

| Tube Type | Classification by Construction | Base Connections | Outline Dwg | Filament Volts | Filament Amp | Max Plate Watts | Max Plate Volts | Max Screen Volts and Watts | Capacitance in Picofarads | | |
|-----------------------|---|------------------|----------------------|----------------|-----------------|------------------|--|----------------------------|--|-----------------|------------|
| | | | | | | | | | Input | Output | Grid-plate |
| 12BQ6-GA 12BQ6-GTB | Beam Power Amplifier | 6AM | T-X 9-49, 9-50 | 12.6 | 0.6 | 11 | 600‡ | 200 2.5 | 15▲ | 7.0▲ | 0.6▲ |
| 12BR3 | Half-Wave High-Vacuum Rectifier | 9CB | T-X | 12.6 | 0.6 | 6.5◆ | Tube Voltage Drop: 19 volts at 250 ma d-c | | | | |
| 12BR7 | Duplex-Diode Triode | 9CF | 6-2 | {12.6 6.3} | {0.225 0.45} | 2.5 | 300 | — | 2.8 | 1.0 | 1.9 |
| | | | | | | | | | Diode Sections | | |
| 12BR7-A | Duplex-Diode Triode | 9CF | 6-2 | {12.6 6.3} | {0.225 0.45} | 2.5 | 300 | — | 2.8 | 1.0 | 1.9 |
| | | | | | | | | | Diode Sections | | |
| 12BS3 | Half-Wave High-Vacuum Rectifier | 9HP | 9-86 | 12.6 | 0.6 | 6.0◆ | Tube Voltage Drop: 12 volts at 140 ma d-c | | | | |
| 12BS3-A | Half-Wave High-Vacuum Rectifier | 9HP | T-X | 12.6 | 0.6 | 6.0◆ | Tube Voltage Drop: 12 volts at 140 ma d-c | | | | |
| 12BT3 | Half-Wave High-Vacuum Rectifier | 12BL | 9-59 | 12.6 | 0.45 | 5.3◆ | Tube Voltage Drop: 21 volts at 250 ma d-c | | | | |
| 12BT6 | Duplex-Diode High-Mu Triode | 7BT | 5-3 | 12.6 | 0.15 | — | 300 | — | — | — | — |
| 12BU6 | Duplex-Diode Medium-Mu Triode | 7BT | 5-3 | 12.6 | 0.15 | — | 300 | — | — | — | — |
| 12BV7 | Sharp-Cutoff Pentode | 9BF | 6-3 | {12.6 6.3} | {0.3 0.6} | 6.25 | 300 | 175 1.0 | 11▲ | 3.0▲ | 0.055▲ |
| 12BV11 | Twin Pentode | 12HB | 9-59 | 12.6 | 0.45 | 1.7◆ ◆ | 300◆ | 300◆ 0.1◆ | — | — | — |
| 12BW4 | Full-Wave High-Vacuum Rectifier | 9DJ | 6-3 | 12.6 | 0.45 | — | Tube Voltage Drop:◆ 40 v at 100 ma d-c | | | | |
| 12BY3 | Half-Wave, High-Vacuum Rectifier | 9CB | 6-8 | 12.6 | 0.45 | 4.0◆ | Tube Voltage Drop: 21 volts at 250 ma d-c | | | | |
| 12BY7 | Sharp-Cutoff Pentode | 9BF | 6-3 | {12.6 6.3} | {0.3 0.6} | 6.5◆ | 330◆ | 190◆ 1.2◆ | 10.2▲ | 3.5▲ | 0.063▲◆ |
| 12BZ6 | Semi-Remote-Cutoff RF Pentode | 7CM | 5-2 | 12.6 | 0.15 | 2.3◆ | 330◆ | 330◆ 0.55◆ | 7.0 | 3.0 | 0.015◆ |
| 12BZ7 | High-Mu Twin Triode | 9A | 6-3 | {12.6 6.3} | {0.3 0.6} | 1.5◆ | 300 | — | 6.5▲ | 0.71▲ 0.552▲ | 2.5▲ |
| 12C6 | Beam Power Amplifier | 7CV | 5-3 | 12.6 | 0.6 | 6.0 | 135 | 117 1.25 | 13▲ | 8.5▲ | 0.6▲ |
| 12C8 | Duplex-Diode Semi-Remote-Cutoff Pentode | 8E | 8-4 | 12.6 | 0.15 | 2.25 | 300 | 125 0.3 | 6.0 | 9.0 | 0.005◆ |
| 12CA6 | Beam Power Amplifier | 7CV | 5-3 | 12.6 | 0.6 | 5.0 | 130 | 130 1.4 | 15▲ | 9▲ | 0.5▲ |
| 12CK3 | Half-Wave, High-Vacuum Rectifier | 9HP | T-X or 9-86 | 12.6 | 0.6 | 6.5◆ | Tube Voltage Drop: 16 volts at 350 ma d-c | | | | |
| 12CL3 | Half-Wave, High-Vacuum Rectifier | 9HP | T-X or 9-86 | 12.6 | 0.6 | 8.5◆ | Tube Voltage Drop: 16 volts at 350 ma d-c | | | | |
| 12CM6 | Beam Power Amplifier | 9CK | 6-3 | 12.6 | 0.225 | 12 9.0 8.0 | 315 315 315 | 285 1.75 1.75 | Pentode Connection Triode (G ₂ & P tied) or Pentode Connection | | |

■ Compactor.
† Zero signal.
◆ Per section.

‡ Plate-to-plate.
◆ Maximum.
‡ Supply voltage.

◆ Subminiature type.
▲ Without external shield.
◆ Design maximum rating.

⊕ Total for all similar sections.
⊕ Absolute maximum rating.
Conversion transconductance.

| Service | Plate Volts | Screen Volts | Neg Grid Volts | Plate Milli-amperes | Screen Milli-amperes | R _p , Ohms | G _m , μmhos | μ Factor | Load for Rated Output, Ohms | Power Output, Watts | Tube Type |
|---|--|--------------|--------------------------------|---------------------|----------------------|-----------------------|------------------------|-----------------------------|-----------------------------|---------------------|---|
| Horizontal Amplifier | 250 60 | 150 150 | 22.5 0 | 57 260 | 2.1 26 | 14,500 | 5,900 | — | — | — | 12BQ6-GA ¶ 12BQ6-GTB ¶ |
| TV Damper | Max d-c output current ⬠=200 ma; max peak inverse voltage ⬡=5,500 v; max peak current ⬢=1,200 ma | | | | | | | | | | 12BR3 ¶ |
| Class A Amplifier | 250 100 | — | R _k = 200 270 | 10 3.7 | — | 10,900 15,000 | 5,500 4,000 | 60 60 | — | — | 12BR7 |
| Horizontal Phase Det. | Max peak output current ⬣=60 ma; voltage drop ⬣: 5 volts at 17 ma d-c | | | | | | | | | | |
| Class A Amplifier | 250 100 | — | R _k = 200 270 | 10 3.7 | — | 10,900 15,000 | 5,500 4,000 | 60 60 | — | — | 12BR7-A ¶ |
| Horizontal Phase Det. | Max peak output current ⬣=60 ma; voltage drop ⬣: 5 volts at 17 ma | | | | | | | | | | |
| TV Damper | Max d-c output current ⬠=200 ma; max peak inverse voltage ⬡=5,000 v; max peak current ⬢=1,100 ma | | | | | | | | | | 12BS3 ¶ |
| TV Damper | Max d-c output current ⬠=200 ma; max peak inverse voltage ⬡=5,000 v; max peak current ⬢=1,100 ma | | | | | | | | | | 12BS3-A ¶ |
| TV Damper | Max d-c output current ⬠=165 ma; max peak inverse voltage ⬡=3,300 v; max peak current ⬢=1,000 ma | | | | | | | | | | 12BT3 ■ |
| Class A Amplifier | 250 100 | — | 3.0 1.0 | 1.0 0.8 | — | 58,000 54,000 | 1,200 1,300 | 70 70 | — | — | 12BT6 |
| Class A Amplifier | 250 | — | 9.0 | 9.5 | — | 8,500 | 1,900 | 16 | 10,000 | 0.30 | 12BU6 |
| Class A Amplifier | 250 | 150 | R _k = 68 | 27 | 6.0 | 85,000 | 13,000 | — | — | — | 12BV7 |
| Avg. Char. ⬤ | 150 | 100 | R _k = 180 | 3.6 | 2.0 | 200,000 | 3,700 | (E _{cs} = 0 volts) | | — | 12BV11 ¶ ■ |
| Full-Wave Rectifier | Max d-c output current = 100 ma; max peak inverse voltage = 1,275 volts; rms supply voltage per plate = 325 volts; max peak current per plate = 350 ma | | | | | | | | | | 12BW4 |
| TV Damper | Max d-c output current ⬠=140 ma; max peak inverse voltage ⬡=4,500 v; max peak current ⬢=840 ma | | | | | | | | | | 12BY3 ¶ |
| Class A Amplifier | 250 | 180 | R _k = 100 | 26 | 5.75 | 93,000 | 11,000 | — | — | — | 12BY7 12BY7-A ¶ |
| Class A Amplifier | 125 | 125 | R _k = 56 | 14 | 3.6 | 260,000 | 8,000 | — | — | — | 12BZ6 |
| Class A Amplifier ⬣ | 125 | 125 | 4.5 | — | — | — | 700 | — | — | — | |
| Class A Amplifier ⬣ | 250 | — | 2 | 2.5 | — | 31,800 | 3,200 | 100 | — | — | 12BZ7 |
| Class A Amplifier | 120 | 110 | 8.0 | 49† | 4.0† | 10,000 | 7,500 | — | 2,500 | 2.3 | 12C6 ¶ |
| Class A Amplifier | 250 | 125 | 3.0 | 10 | 2.3 | 600,000 | 1,325 | — | — | — | 12C8 |
| Class A Amplifier | 125 110 | 125 110 | 4.5 4.0 | 37† 32† | 4.0† 3.5† | 15,000 16,000 | 9,200 8,100 | — | 4,500 3,500 | 1.5 1.1 | 12CA5 ¶ |
| TV Damper | Max d-c output current ⬠=250 ma; max peak inverse voltage ⬡=5,200 v; max peak current ⬢=1,200 ma | | | | | | | | | | 12CK3 ¶ |
| TV Damper | Max d-c output current ⬠=250 ma; max peak inverse voltage ⬡=5,500 v; max peak current ⬢=1,300 ma | | | | | | | | | | 12CL3 ¶ |
| Class A Amplifier Vertical Amplifier | 250 | 250 | 12.5 | 45† | 4.5† | 50,000 | 4,100 | — | 5,000 | 4.5 | 12CM6 |
| | Max positive pulse plate voltage ⬠=2000 volts; max screen dissipation (pentode connection only) = 1.75 watts; max d-c cathode current = 40 ma | | | | | | | | | | |

Metal tubes are shown in bold-face type, miniature tubes in italics.

⬣ G3 and G5 are screen. G4 is signal-input grid.

♥ G2 and G4 are screen. G3 is signal-input grid.

1, 2, 3, etc. indicate tube sections.

⬢ Maximum screen dissipation appears

immediately below the screen voltage.

¶ Heater warm-up time controlled.

| Tube Type | Classification by Construction | Base Connections | Out-line Dwg | Filament Volts | Filament Amp | Max Plate Watts | Max Plate Volts | Max Screen Volts and Watts | Capacitance in Picofarads | | |
|-----------|--|------------------|--------------|----------------|--------------|-----------------|---|--|------------------------------------|----------------|-------------|
| | | | | | | | | | Input | Output | Grid-plate |
| 12CN5 | RF Pentode | 7CV | 5-3 | 12.6 | 0.45 | — | 16 | 16 | — | — | — |
| 12CR6 | Diode Remote-Cutoff Pentode | 7EA | 5-2 | 12.6 | 0.15 | 2.5 | 300 | 150 0.3 | — | — | — |
| 12CS5 | Beam Power Amplifier | 9GR | 6-3 | 12.6 | 0.6 | 10 | 300 | 150 1.25 | 15▲ | 9.0▲ | 0.5▲ |
| 12CS6 | Dual-Control Heptode | 7CH ▼ | 5-2 | 12.6 | 0.15 | 1.0 | 300 | 100 1.0 | — | — | — |
| 12CT3 | Half-Wave High-Voltage Rectifier | 9RX | T-X | 12.6 | 0.6 | 4.75◆ | Tube Voltage Drop: 16 volts at 350 ma d-c | | | | |
| 12CT8 | Triode-Pentode | 9DA | 6-2 | 12.6 | 0.3 | 2.75◆ 2.5◆ | 300◆ 300◆ | 300◆ 0.9◆ | Pentode Section Triode Section | | |
| 12CU5 | Beam Power Amplifier | 7CV | 5-3 | 12.6 | 0.6 | 7.0◆ | 150◆ | 130◆ 1.4◆ | 13▲ | 8.5▲ | 0.6▲ |
| 12CU6 | Beam Power Amplifier | 6AM | T-X | 12.6 | 0.6 | 11 | 600◆ | 200 2.5 | 15▲ | 7.0▲ | 0.6▲ |
| 12CX6 | Sharp-Cutoff RF Pentode | 7BK | 5-2 | 12.6 | 0.15 | — | 33◆ | 33◆ | 7.6▲ | 6.2▲ | 0.05▲ ♣ |
| 12CY6 | Sharp-Cutoff RF Pentode | 7BK | 5-2 | 12.6 | 0.2 | — | 33◆ | 33◆ | 8.5▲ | 4.0▲ | 0.18▲ ♣ |
| 12D4 | Half-Wave High-Vacuum Rectifier | 4CG | 9-11 9-41 | 12.6 | 0.6 | 5.5◆ | — | — | — | — | ♣ |
| 12D4-A | Half-Wave High-Vacuum Rectifier | 4CG | 9-41 | 12.6 | 0.6 | 8.0◆ | — | Tube Voltage Drop: 30 volts at 340 ma d-c | | | |
| 12DB6 | Beam Power Amplifier | 9GR | T-X | 12.6 | 0.6 | 10 | 300 | 150 1.25 | 13▲ | 8.0▲ | 0.2▲ |
| 12DE8 | Diode-Pentode | 9HG | 6-2 | 12.6 | 0.2 | — | 30 | 30 | 5.5▲ | 5.7▲ | 0.006▲ ♣ |
| 12DF5 | Full-Wave High-Vacuum Rectifier | 9BS | 6-3 | 12.6 6.3 | 0.45 0.9 | — | Tube Voltage Drop:♣ 40 volts at 100 ma d-c | | | | |
| 12DF7 | High- μ Twin Triode | 9A | 6-2 | 12.6 6.3 | 0.15 0.3 | 1.0♣ | 300 | — | 1.6▲ | 0.41▲ 0.32▲ | 1.4▲ |
| 12DJ8 | Twin Triode | 9DE | 6-2 | 12.6 | 0.18 | 1.8 | 130 | — | — | — | — |
| 12DK5 | RF Pentode | 9GT | 6-2 | 12.6 | 0.3 | — | 16◆ | 16◆ | 9.5 | 2.65 | 0.045 |
| 12DK6 | Sharp-Cutoff Pentode | 7CM | 5-2 | 12.6 | 0.15 | 2.3◆ | 330◆ | 330◆ 0.55◆ | 6.3▲ | 1.9▲ | 0.025▲ ♣ |
| 12DK7 | Duplex-Diode-Tetrode | 9HZ | 6-3 | 12.6 | 0.5 | 0.5 | 30 | 30 | — | — | — |
| 12DL8 | Duplex-Diode Space-Charge-Grid Tetrode | 9HR | 6-3 | 12.6 | 0.55 | — | 30 | — | Diode Sections 12▲ 1.3▲ 14▲ | | |
| 12DM4 | Half-Wave High-Vacuum Rectifier | 4CG | 9-44 | 12.6 | 0.6 | 6.5◆ | Tube Voltage Drop: 35 volts at 400 ma d-c | | | | |
| 12DM4A | Half-Wave High-Vacuum Rectifier | 4CG | 9-44 | 12.6 | 0.6 | 6.5◆ | Tube Voltage Drop: 35 volts at 400 ma d-c | | | | |

■ Compactron.

† Plate-to-plate.

◎ Subminiature type.

⊕ Total for all similar sections.

‡ Zero signal.

♣ Maximum.

▲ Without external shield.

⊖ Absolute maximum rating.

◆ Per section.

♠ Supply voltage.

◆ Design maximum rating.

Conversion transconductance.

● See X-Radiation Warning, page 4.

| Service | Plate Volts | Screen Volts | Neg Grid Volts | Plate Milli-amperes | Screen Milli-amperes | R_p , Ohms | G_m , μ mhos | μ Factor | Load for Rated Output, Ohms | Power Output, Watts | Tube Type |
|------------------------------|--|---------------|--------------------|---------------------|----------------------|---------------------------|--------------------|---|-----------------------------|---------------------|-----------------|
| Class A Amplifier | 12.6 | 12.6 | $E_{cct} = 0$ | 4.5 | 0.35 | 40,000 | 3,800 | $R_{g1} = 2.2$ meg | — | — | <i>12CN5</i> |
| Class A Amplifier | 250 | 100 | 2.0 | 9.6 | 2.6 | 800,000 | 2,200 | — | — | — | <i>12CR6</i> |
| Class A Amplifier | 200 | 125 | $R_k = 180$ 75 | 46† | 2.2† | 28,000 | 8,000 | — | 4,000 | 3.8 | <i>12CS5</i> ¶ |
| Gated Amplifier | 110 | 110 | — | 49† | 4.0† | 13,000 | 8,000 | — | 2,000 | 2.1 | <i>12CS6</i> |
| TV Damper | 100 100 10 | 30 30 0 | 1.0 0 0 | 1.0 0.8 2.0 | 1.3 5.5 4.5 | 1,000,000 700,000 — | 1,100 — — | $E_{c3} = 0$ volts $E_{c3} = -1.0$ volts $E_{c3} = 0$ volts | — | — | <i>12CT3</i> ¶ |
| Class A Amplifier | 200 | 125 | $R_k = 82$ | 15 | 3.4 | 150,000 | 7,000 | — | — | — | <i>12CT8</i> ¶ |
| Class A Amplifier | 150 | — | $R_k = 150$ | 9.0 | — | 8,200 | 4,900 | 40 | — | — | <i>12CU5</i> ¶ |
| Class A Amplifier | 120 | 110 | 8.0 | 49† | 4.0† | 10,000 | 7,500 | — | 2,500 | 2.3 | <i>12CU6</i> |
| Horizontal Amplifier | 250 60 | 150 150 | 22.5 0 | 57 260 | 2.1 126 | 14,500 | 5,900 | — | — | — | <i>12CU6</i> |
| Class A Amplifier | 12.6 | 12.6 | $E_{cct} = 0$ | 3.0 | 1.4 | 40,000 | 3,100 | $R_{g1} = 2.2$ meg | — | — | <i>12CX6</i> |
| Class A Amplifier | 12.6 | 12.6 | $E_{cct} = 0$ | 1.6 | 0.4 | 140,000 | 3,250 | $R_{g1} = 2.2$ meg | — | — | <i>12CY6</i> |
| TV Damper | Max d-c output current $\diamond = 155$ ma; max peak inverse voltage $\diamond = 4,400$ volts; max peak current $\diamond = 900$ ma | | | | | | | | | | <i>12D4</i> ¶ |
| TV Damper | Max d-c output current $\diamond = 185$ ma; max peak inverse voltage $\diamond = 5,000$ volts; max peak current $\diamond = 900$ ma | | | | | | | | | | <i>12D4-A</i> ¶ |
| Class A Amplifier | 200 | 125 | $R_k = 180$ 7.5 | 46† | 2.2† | 28,000 | 8,000 | — | 4,000 | 3.8 | <i>12DB5</i> ¶ |
| Vertical Amplifier | 110 | 110 | — | 49† | 4.0† | 13,000 | 8,000 | — | 2,000 | 2.1 | <i>12DB5</i> ¶ |
| Class A Amplifier | 12.6 | 12.6 | $E_{cct} = 0$ | 1.3 | 0.5 | 300,000 | 1,500 | $R_{g1} = 2.2$ meg | — | — | <i>12DE8</i> |
| AM Detector | Max d-c output current $\diamond = 5$ ma; voltage drop \diamond : 5 volts at 20 ma d-c | | | | | | | | | | <i>12DF5</i> |
| Full-Wave Rectifier | Max d-c output current = 100 ma; max peak inverse voltage = 1,275 volts; max rms supply voltage per plate = 325 volts; max peak current per plate = 350 ma | | | | | | | | | | <i>12DF5</i> |
| Class A Amplifier \diamond | 250 | — | 2.0 | 1.2 | — | 55,000 | 1,600 | 100 | — | — | <i>12DF7</i> |
| Class A Amplifier \diamond | 100 | — | 1.0 | 0.5 | — | 70,000 | 1,250 | 100 | — | — | <i>12DF7</i> |
| Class A Amplifier \diamond | 90 | — | 1.3 | 15 | — | — | 12,500 | 33 | — | — | <i>12DJ8</i> |
| Class A Amplifier | 12.6 | 12.6 | $E_{cct} = 0$ | 2.0 | 0.65 | 100,000 | 3,300 | $R_{g1} = 2.2$ meg | — | — | <i>12DK5</i> |
| Class A Amplifier | 125 | 125 | $R_k = 56$ | 12 | 3.8 | 350,000 | 9,800 | — | — | — | <i>12DK6</i> |
| Class A Amplifier | 12.6 | 12.6 | $E_{cct} = 0$ | 6.0 | 1.0 | 4,000 | 5,000 | $R_{g1} = 2.2$ meg | — | — | <i>12DK7</i> |
| AM Detector | Max d-c output current $\diamond = 10$ ma; voltage drop \diamond : 10 volts at 1 ma d-c | | | | | | | | | | <i>12DL8</i> |
| Class A Amplifier | 12.6 | — | $E_{cct} = 0$ | 40 | — | 430 | 15,000 | — | — | — | <i>12DL8</i> |
| AM Detector | $E_{c1} = 12.6$ volts; $I_{c1} = 75$ ma (Note: grid 1 is space-charge grid, grid 2 is control grid) | | | | | | | | | | <i>12DM4</i> ¶ |
| TV Damper | Max d-c output current $\diamond = 5.0$ ma; voltage drop \diamond : 10 volts at 3.0 ma d-c | | | | | | | | | | <i>12DM4</i> ¶ |
| TV Damper | Max d-c output current $\diamond = 175$ ma; max peak inverse voltage $\diamond = 5,000$ volts max peak current $\diamond = 1,100$ ma | | | | | | | | | | <i>12DM4</i> ¶ |
| TV Damper | Max d-c output current $\diamond = 200$ ma; max peak inverse voltage $\diamond = 5,000$ volts; max peak current $\diamond = 1,200$ ma | | | | | | | | | | <i>12DM4A</i> ¶ |

Metal tubes are shown in bold-face type, miniature tubes in italics.

\diamond G3 and G5 are screen. G4 is signal-input grid.

¶ Maximum screen dissipation appears immediately below the screen voltage.

¶ G2 and G4 are screen. G3 is signal-input grid.

¶ Heater warm-up time controlled.

1, 2, 3, etc. indicate tube sections.

| Tube Type | Classification by Construction | Base Connections | Out-line Dwg | Filament Volts | Filament Amp | Max Plate Watts | Max Plate Volts | Max Screen Volts and Watts | Capacitance in Picofarads | | |
|------------------|--|------------------|--------------|----------------|----------------|----------------------|--|--|--|--|-----------------------|
| | | | | | | | | | Input | Out-put | Grid-plate |
| 12DM5 ∇ | Beam Power Amplifier | 7CV | 5-3 | 12.6 | 0.45 | 5.5 | 135 | 117 1.25 | 13 \blacktriangle | 9.0 \blacktriangle | 0.55 \blacktriangle |
| 12DM7 | High-Mu Twin Triode | 9A | 6-2 | 12.6 6.3 | 0.130 0.260 | 1.1 \blacklozenge | 330 \blacklozenge | — | 1.6 \blacktriangle | 0.46 \blacktriangle 0.34 \blacktriangle | 1.7 \blacktriangle |
| 12DQ4 ∇ | Half-Wave High-Vacuum Rectifier | 4CG | 9-43 | 12.6 | 0.6 | 6.0 \blacklozenge | Tube Voltage Drop: 32 volts at 250 ma d-c | | | | |
| 12DQ6 ∇ | Beam Power Amplifier | 6AM | T-X | 12.6 | 0.6 | 15 | 550 \blacklozenge | 175 2.5 | 15 \blacktriangle | 7.0 \blacktriangle | 0.55 \blacktriangle |
| 12DQ6-A ∇ | Beam Power Amplifier | 6AM | 12-51 | 12.6 | 0.6 | 18 \blacklozenge | 770 \blacklozenge | 220 \blacklozenge 3.6 \blacklozenge | 15 \blacktriangle | 7.0 \blacktriangle | 0.55 \blacktriangle |
| 12DQ6-B ∇ | Beam-Power Amplifier | 6AM | 12-51 | 12.6 | 0.6 | 18 \blacklozenge | 770 \blacklozenge | 220 \blacklozenge 3.6 \blacklozenge | 15 \blacktriangle | 7.0 \blacktriangle | 0.5 \blacktriangle |
| 12DQ7 ∇ | Sharp-Cutoff Pentode | 9BF | 6-3 | 12.6 6.3 | 0.3 0.6 | 6.5 \blacklozenge | 330 \blacklozenge | 330 \blacklozenge 1.1 \blacklozenge | 10.0 \blacktriangle | 3.8 \blacktriangle | 0.1 \blackclubsuit |
| 12DS7 | Duplex-Diode Space-Charge-Grid Tetrode | 9JU | 6-3 | 12.6 | 0.4 | — | 16 \blacklozenge | — | — | — | — |
| 12DS7-A | Duplex-Diode Space-Charge-Grid Tetrode | 9JU | 6-3 | 12.6 | 0.4 | — | 16 \blacklozenge | — | Diode Sections 12.7 \blacktriangle 2.2 \blacktriangle 13.8 \blacktriangle | | |
| 12DT5 ∇ | Beam Power Pentode | 9HN | 6-3 | 12.6 | 0.6 | 9.0 \blacklozenge | 315 \blacklozenge | 285 \blacklozenge 2.0 \blacklozenge | 12.5 \blacktriangle | 4.9 \blacktriangle | 0.57 \blacktriangle |
| 12DT6 | Sharp-Cutoff Pentode | 7EN | 5-2 | 12.6 | 0.15 | 1.7 \blacklozenge | 330 \blacklozenge | 330 \blacklozenge 1.1 \blacklozenge | — | — | — |
| 12DT7 | High-Mu Twin Triode | 9A | 6-2 | 12.6 6.3 | 0.15 0.3 | 1.0 \blackclubsuit | 300 | — | 1.6 | 0.46 \blacktriangle 0.34 \blacktriangle | 1.7 \blacktriangle |
| 12DT8 | High-Mu Twin Triode | 9DE | 6-2 | 12.6 | 0.15 | 2.5 \blackclubsuit | 300 | — | 2.7 | 1.6 | 1.6 |
| 12DU7 | Duplex-Diode-Tetrode | 9JX | 6-2 | 12.6 | 0.250 | — | 16 \blacklozenge | 16 \blacklozenge | 11 \blacktriangle | 3.6 \blacktriangle | 0.6 \blacktriangle |
| 12DV7 | Duplex-Diode-Triode | 9JY | 6-2 | 12.6 | 0.15 | — | 16 \blacklozenge | — | 1.3 \blacktriangle | 0.38 \blacktriangle | 1.6 \blacktriangle |
| 12DV8 | Duplex-Diode Space-Charge-Grid Tetrode | 9HR | 6-3 | 12.6 | 0.375 | — | 16 \blacklozenge | — | 9.0 \blacktriangle | 1.0 \blacktriangle | 12 \blacktriangle |

\blacksquare Compactron.

\dagger Zero signal.

\blackclubsuit Per section.

\ddagger Plate-to-plate.

\blacklozenge Maximum.

\blacklozenge Supply voltage.

\circ Subminiature type.

\blacktriangle Without external shield.

\blacklozenge Design maximum rating.

\oplus Total for all similar sections.

\blacklozenge Absolute maximum rating.

$\#$ Conversion transconductance.

● See X-Radiation Warning, page 4.

| Service | Plate Volts | Screen Volts | Neg Grid Volts | Plate Milli-amperes | Screen Milli-amperes | R_p , Ohms | C_m , μ mhos | μ Factor | Load for Rated Output, Ohms | Power Output, Watts | Tube Type |
|----------------------|--|--------------|----------------|---------------------|----------------------|-----------------------|--------------------|--------------------|-----------------------------|---------------------|------------------|
| Class A Amplifier | 110 | 110 | 7.5 | 49† | 4.0† | 14,000 | 7,500 | — | 2,500 | 1.9 | 12DM6 ¶ |
| Class A Amplifier | 100 | — | 1.0 | 0.5 | — | 80,000 | 1,250 | 100 | — | — | 12DM7 |
| Class A Amplifier | 250 | — | 2.0 | 1.2 | — | 62,500 | 1,600 | 100 | — | — | 12DM7 |
| TV Damper | Max d-c output current ♦ = 175 ma; max peak inverse voltage ♦ = 5,500 volts; max peak current ♦ = 1,000 ma | | | | | | | | | | 12DQ4 ¶ |
| Horizontal Amplifier | 250 | 150 | 22.5 | 75 | 2.4 | 20,000 | 6,000 | — | — | — | 12DQ6 ¶ |
| Horizontal Amplifier | 60 | 150 | 0 | 300 | 27 | — | — | — | — | — | 12DQ6 ¶ |
| Horizontal Amplifier | 250 | 150 | 22.5 | 55 | 1.5 | 20,000 | 6,600 | — | — | — | 12DQ6-A ¶ |
| Horizontal Amplifier | 60 | 150 | 0 | 315 | 25 | — | — | — | — | — | 12DQ6-A ¶ |
| Horizontal Amplifier | 250 | 150 | 22.5 | 65 | 1.8 | 18,000 | 7,300 | — | — | — | 12DQ6-B ¶ |
| Horizontal Amplifier | 60 | 150 | 0 | 345 | 27 | — | — | — | — | — | 12DQ6-B ¶ |
| Class A Amplifier | 200 | 125 | $R_k = 68$ | 26 | 5.6 | 53,000 | 10,500 | — | — | — | 12DQ7 ¶ |
| Class A Amplifier | 40 | 125 | 0 | 45 | 16 | — | — | — | — | — | 12DQ7 ¶ |
| Class A Amplifier | 12.6 | — | $E_{cct} = 0$ | 35 | — | 500 | 16,000 | — | $R_{g2} = 2.2$ meg | — | 12DS7 |
| AM Detector | $E_{c1} = 12.6$ volts; $I_{c1} = 80$ ma (Note: grid 1 is space-charge grid, grid 2 is control grid) | | | | | | | | | | |
| AM Detector | Max d-c output current ♦ = 5.0 ma; voltage drop: ♦ = 10 volts at 3 ma d-c | | | | | | | | | | |
| Class A Amplifier | 12.6 | — | $E_{cct} = 0$ | 35 | — | 500 | 19,000 | — | $R_{g2} = 2.2$ meg | — | 12DS7-A |
| AM Detector | $E_{c1} = 12.6$ volts; $I_{c1} = 75$ ma (Note: grid 1 is space-charge grid, grid 2 is control grid) | | | | | | | | | | |
| Vertical Amplifier | Max d-c output current ♦ = 5.0 ma; voltage drop: ♦ = 10 volts at 3 ma d-c | | | | | | | | | | |
| Vertical Amplifier | 250 | 250 | 16.5 | 44 | 1.5 | — | 6,200 | — | — | — | 12DT6 ¶ |
| Vertical Amplifier | 80 | 250 | 0 | 195 | 19 | — | — | — | — | — | 12DT6 ¶ |
| Vertical Amplifier | Max positive pulse plate voltage □ = 2,200 volts; max d-c cathode current ♦ = 55 ma | | | | | | | | | | |
| Class A Amplifier | 150 | 100 | $R_k = 560$ | 1.1 | 2.1 | 150,000 | 800 | $E_{c3} = 0$ volts | — | — | 12DT6 |
| Class A Amplifier | 250 | 100 | $R_k = 560$ | 0.22 | 5.5 | $E_{c3} = -6.0$ volts | — | 270,000 | — | — | 12DT6 |
| Class A Amplifier | 250 | — | 2.0 | 1.2 | — | 62,500 | 1,600 | 100 | — | — | 12DT7 |
| Class A Amplifier | 100 | — | 1.0 | 0.5 | — | 80,000 | 1,250 | 100 | — | — | 12DT7 |
| Class A Amplifier ♦ | 250 | — | $R_k = 200$ | 10 | — | 10,900 | 5,500 | 60 | — | — | 12DT8 |
| Class A Amplifier ♦ | 100 | — | $R_k = 270$ | 3.7 | — | 15,000 | 4,000 | 60 | — | — | 12DT8 |
| Class A Amplifier | 12.6 | 12.6 | $E_{cct} = 0$ | 12 | 1.5 | 6,000 | 6,200 | $R_{g1} = 2.2$ meg | 2,700 | 0.025 | 12DU7 |
| Class A Amplifier | Max d-c output current ♦ = 1 ma; voltage drop: ♦ = 10 volts at 1.3 ma d-c | | | | | | | | | | |
| Class A Amplifier | 12.6 | — | $E_{cct} = 0$ | 0.04 | — | 19,000 | 750 | 14 | $R_{g1} = 2.2$ meg | — | 12DV7 |
| Class A Amplifier | Maximum d-c output current ♦ = 1 ma; voltage drop: ♦ = 10 volts at 1.3 ma d-c | | | | | | | | | | |
| Class A Amplifier | 12.6 | — | $E_{cct} = 0$ | 9.0 | — | 900 | 8,500 | — | — | — | 12DV8 |
| Detector AVC | $E_{c1} = 12.6$ volts; $R_k = 18$ ohms; $I_{c1} = 53$ ma (Note: grid 1 is space-charge grid, grid 2 is control grid) | | | | | | | | | | |
| Detector AVC | Max d-c output current ♦ = 5.0 ma; voltage drop: ♦ = 10 volts at 3.0 ma d-c | | | | | | | | | | |

Metal tubes are shown in bold-face type, *miniature tubes in italics*.

♦ G3 and G5 are screen. G4 is signal-input grid.

♥ G2 and G4 are screen. G3 is signal-input grid.

1, 2, 3, etc. indicate tube sections.

⊛ Maximum screen dissipation appears immediately below the screen voltage.

¶ Heater warm-up time controlled.

| Tube Type | Classification by Construction | Base Connections | Out-line Dwg | Filament Volts | Filament Amp | Max Plate Watts | Max Plate Volts | Max Screen Volts and Watts | Capacitance in Picofarads | | |
|--------------|----------------------------------|------------------|--------------------|----------------|--------------|-----------------|-------------------------------------|----------------------------|--|--------|------------|
| | | | | | | | | | Input | Output | Grid-plate |
| 12DW4-A † | Half-Wave, High-Vacuum Rectifier | 9HP | T-X or 9-86 | 12.6 | 0.6 | 8.5 | Tube Voltage 25 volts at 350 ma d-c | — | Drop: | | |
| 12DW6‡ | Beam Power Amplifier | 9CK | 6-4 | 12.6 | 0.6 | 11 | 330 | 220 2.5 | 14 | 9.0 | 0.5 |
| 12DW7 | Double Triode | 9A | 6-2 | 12.6 6.3 | 0.15 0.3 | 1.2 3.3 | 330 330 | — | Section 1 (Pins 6, 7, 8) Section 2 (Pins 1, 2, 3) | | |
| 12DW8 | Diode Double Triode | 9JC | 6-2 | 12.6 | 0.45 | 0.5 0.5 | 16 16 | — | Section 1 (Pins 6, 7, 8) Section 2 (Pins 1, 2, 3) | | |
| 12DY8 | Triode-Tetrode | 9JD | 6-2 | 12.6 | 0.35 | — | 16 16 | 16 — | Tetrode Section Triode Section | | |
| 12DZ6 | Remote-Cutoff RF Pentode | 7BK | 5-2 | 12.6 | 0.190 | — | 16 | 16 | 9.5 | 4.0 | 0.05 |
| 12DZ8 | Triode-Pentode | 9JE | T-X | 12.0 | 0.45 | 6.5 0.75 | 150 150 | 135 1.5 — | Pentode Section Triode Section | | |
| 12E5-GT | Medium-Mu Triode | 6Q | 9-11 | 12.6 | 0.15 | 1.25 | 250 | — | 3.4 | 5.5 | 2.6 |
| 12EA6 | Remote-Cutoff Pentode | 7BK | 5-2 | 12.6 | 0.190 | — | 16 | 16 | 11 | 4.0 | 0.04 |
| 12EC8 | Triode-Pentode | 9FA | 6-2 | 12.6 | 0.225 | — | 16 16 | 16 — | Pentode Section Triode Section | | |
| 12ED5‡ | Beam Power Amplifier | 7CV | 5-3 | 12.6 | 0.45 | 6.25 | 150 | 150 1.5 — | 14 | 8.5 | 0.26 |
| 12EF6‡ | Beam Power Amplifier | 7S | 9-13 or 9-42 | 12.6 | 0.45 | 10 | 250 | 250 2.0 | 11.5 | 9.0 | 0.8 |
| 12EG6 | Dual-Control Heptode | 7CH | 5-2 | 12.6 | 0.15 | — | 30 | 30 | — | — | — |
| 12EH5‡ | Power-Amplifier Pentode | 7CV | 5-3 | 12.6 | 0.6 | 5.5 | 150 | 130 2.0 — | 17 | 9 | 0.65 |
| 12EK6 | Sharp-Cutoff RF Pentode | 7BK | 5-2 | 12.6 | 0.190 | — | 16 | 16 | 10 | 5.0 | 0.036 |
| 12EL6 | Duplex-Diode High-Mu Triode | 7FB | 5-2 | 12.6 | 0.15 | — | 30 | — | 2.2 | 1.0 | 1.8 |
| 12EM6 | Diode-Tetrode | 9HV | 6-3 | 12.6 | 0.5 | 0.5 | 30 | 30 | — | — | — |
| 12EN6‡ | Beam Power Amplifier | 7AC | 9-11 or 9-41 | 12.6 | 0.6 | 7.0 | 300 | 150 1.25 — | 14 | 8.0 | 0.65 |
| 12EQ7 | Diode-Pentode | 9LQ | 6-3 | 12.6 | 0.15 | 3.0 | 300 | 300 0.6 — | 5.5 | 5.0 | 0.002 |
| 12EZ6 | Sharp-Cutoff RF Pentode | 7BK | 5-2 | 12.6 | 0.175 | — | 30 | 30 | 7.8 | 5.5 | 0.008 |
| 12F5-GT | High-Mu Triode | 5M | 9-17 | 12.6 | 0.15 | — | 300 | — | 1.9 | 3.4 | 2.4 |
| 12F8 | Duplex-Diode-Pentode | 9FH | 6-2 | 12.6 | 0.15 | — | 30 | 30 | 4.5 | 3.0 | 0.06 |
| 12FA6 | Pentagrid Converter | 7CH | 5-2 | 12.6 | 0.15 | — | 30 | 30 | Osc. I _{o1} = 0.045 ma R _{g1} = 33,000 ohms | | |

‡ Compactron.

† Zero signal.

♣ Per section.

‡ Plate-to-plate.

♣ Maximum.

‡ Supply voltage.

⊙ Subminiature type.

▲ Without external shield.

◆ Design maximum rating.

⊕ Total for all similar sections.

♣ Absolute maximum rating.

Conversion transconductance.

| Service | Plate Volts | Screen Volts | Neg Grid Volts | Plate Milli-amperes | Screen Milli-amperes | R _p , Ohms | G _m , μmhos | μ Factor | Load for Rated Out-put, Ohms | Power Out-put, Watts | Tube Type |
|--|---|--------------|-----------------------|---------------------|----------------------|-----------------------|------------------------|------------------------------|------------------------------|----------------------|-----------|
| TV Damper | Max d-c output current $\diamond = 250$ ma; max peak inverse voltage $\diamond = 5,500$ volts; max peak current $\diamond = 1,300$ ma | | | | | | | | | | 12DW4-A¶ |
| Vertical Amplifier | 200 60 | 150 150 | 22.5 0 | 55 260 | 2.0 20 | 15,000 | 5,500 | — | — | — | 12DW5¶ |
| Max positive pulse plate voltage $\square = 2,200$; max d-c cathode current $\diamond = 65$ ma | | | | | | | | | | | |
| Class A Amplifier | 250 | — | 2.0 | 1.2 | — | 62,500 | 1,600 | 100 | — | — | 12DW7 |
| Class A Amplifier | 100 | — | 1.0 | 0.5 | — | 80,000 | 1,250 | 100 | — | — | |
| Class A Amplifier | 250 | — | 8.5 | 10.5 | — | 7,700 | 2,200 | 17 | — | — | |
| Class A Amplifier | 100 | — | 0 | 11.8 | — | 6,500 | 3,100 | 20 | — | — | |
| Class A Amplifier | 12.6 | — | E _{cc1} = 0 | 1.9 | — | — | 2,700 | 9.5 | R _g = 1.5 meg | — | 12DW8 |
| Class A Amplifier | 12.6 | — | E _{cc1} = 0 | 7.5 | — | — | 6,500 | 6.4 | R _g = 1.0 meg | — | |
| Average Diode current at 10 volts = 20 ma | | | | | | | | | | | |
| Class A Amplifier | 12.6 | 12.6 | E _{cc1} = 0 | 14 | 2.0 | 5,000 | 6,000 | R _{g1} = 2.2 meg | — | — | 12DY8 |
| Class A Amp | 12.6 | — | 0 | 1.2 | — | 10,000 | 2,000 | 20 | — | — | |
| Class A Amplifier | 12.6 | 12.6 | E _{cc1} = 0 | 4.5 | 2.2 | 25,000 | 3,800 | R _{g1} = 10 megohms | — | — | 12DZ6 |
| Class A Amplifier | — | — | 0 | — | — | — | — | R _{g1} = 10 megohms | — | — | |
| Class A Amplifier | 145 | 120 | R _k = 180 | 45† | 6.0† | — | 7,500 | — | 2,500 | 2.0 | 12DZ8 |
| Class A Amplifier | 120 | — | R _k = 1500 | 0.8 | — | — | 1,400 | 100 | — | — | |
| Class A Amp | 250 | — | 13 | 5.0 | — | 9,500 | 1,450 | 13.8 | — | — | 12E5-GT |
| Class A Amplifier | 12.6 | 12.6 | E _{cc1} = 0 | 3.2 | 1.4 | 32,000 | 3,800 | R _{g1} = 10 megohms | — | — | 12EA6 |
| Class A Amplifier | 12.6 | 12.6 | 0 | 0.66 | 0.28 | 750,000 | 2,000 | — | — | — | 12EC8 |
| Class A Amp | 12.6 | — | 0 | 2.4 | — | 6,000 | 4,700 | 25 | — | — | |
| Class A Amplifier | 125 | 125 | 4.5 | 37† | 7.0† | 14,000 | 8,500 | — | 4,500 | 1.5 | 12ED5¶ |
| Class A Amplifier | 110 | 110 | 4.0 | 32† | 4.0† | 14,000 | 8,100 | — | 4,500 | 1.1 | |
| Vertical Amplifier | 250 | 250 | 18 | 50 | 2.0 | — | 5,000 | — | — | — | 12EF6¶ |
| Vertical Amplifier | 75 | 250 | 0 | 170 | 17 | — | — | — | — | — | |
| Max positive pulse plate voltage $\square = 2,000$; max d-c cathode current = 60 ma | | | | | | | | | | | |
| Class A Amplifier | 12.6 | 12.6 | E _{cc1} = 0 | 0.4 | 2.4 | 150,000 | 800 | — | — | — | 12EG6 |
| R _{g1} = 2.2 meg; grid 3 connected to grid 1 through 2.2 meg | | | | | | | | | | | |
| Class A Amplifier | 110 | 115 | R _k = 62 | 42† | 11.5† | 11,000 | 14,600 | — | 8,000 | 1.4 | 12EH5¶ |
| Class A Amplifier | 12.6 | 12.6 | E _{cc1} = 0 | 4.0 | 1.7 | 50,000 | 4,200 | R _{g1} = 2.2 meg | — | — | 12EK6 |
| Class A Amp Detector | 12.6 | — | 0 | 0.75 | — | 45,000 | 1,200 | 55 | — | — | 12EL6 |
| Max d-c output current $\blacklozenge = 1.0$ ma; voltage drop: \blacklozenge 10 volts at 2 ma d-c | | | | | | | | | | | |
| Class A Amplifier | 12.6 | 12.6 | E _{cc1} = 0 | 6.0 | 1.0 | 4,000 | 5,000 | R _{g1} = 2.2 meg | — | — | 12EM6 |
| Class A Amplifier | Max d-c output current = 10 ma; voltage drop: 10 volts at 1 ma d-c | | | | | | | | | | |
| Vertical Amplifier | 200 | 110 | 9.5 | 50 | 2.2 | 28,000 | 8,000 | — | — | — | 12EN6¶ |
| Vertical Amplifier | 50 | 110 | 0 | 135 | 18 | — | — | — | — | — | |
| Max positive pulse plate voltage $\diamond = 1,200$; max d-c cathode current $\diamond = 50$ ma | | | | | | | | | | | |
| Class A Amplifier | 100 | 100 | E _{cc1} = 0 | 9.0 | 3.5 | 250,000 | 3,800 | R _{g1} = 2.2 meg | — | — | 12EQ7 |
| Class A Amp AM Det. | Max d-c output current $\diamond = 1$ ma; voltage drop: 10 volts at 2.0 ma | | | | | | | | | | |
| Class A Amplifier | 12.6 | 12.6 | E _{cc1} = 0 | 1.9 | 0.7 | 400,000 | 2,700 | R _{g1} = 2.2 meg | — | — | 12EZ6 |
| Class A Amp | 250 | — | 2.0 | 0.9 | — | 66,000 | 1,500 | 100 | — | — | 12F5-GT |
| Class A Amp AM Det. | 12.6 | 12.6 | 0 | 1.0 | 0.38 | 330,000 | 1,000 | — | — | — | 12F8 |
| Max d-c output current $\blacklozenge = 1.0$ ma; voltage drop \blacklozenge : 10 volts at 2.0 ma d-c | | | | | | | | | | | |
| Converter | 12.6 | 12.6 | E _{cc3} = 0 | 0.67 | 0.12 | — | 300# | — | — | — | 12FA6 |

Metal tubes are shown in bold-face type, miniature tubes in italics.

♦ G3 and G5 are screen. G4 is signal-input grid.

* Maximum screen dissipation appears

▼ G2 and G4 are screen. G3 is signal-input grid.

immediately below the screen voltage.

1, 2, 3, etc. indicate tube sections.

¶ Heater warm-up time controlled.

| Tube Type | Classification by Construction | Base Connections | Out-line Dwg | Filament Volts | Filament Amp | Max Plate Watts | Max Plate Volts | Max Screen Volts and Watts | Capacitance in Picofarads | | |
|-----------|--------------------------------|------------------|--------------|----------------|--------------|-------------------|-----------------|------------------------------|---|----------------|----------------|
| | | | | | | | | | Input | Out-put | Grid-plate |
| 12FK6 | Duplex-Diode Triode | 7BT | 5-2 | 12.6 | 0.15 | — | 16 | — | 1.8▲ | 0.7▲ | 1.6▲ |
| 12FM6 | Duplex-Diode Triode | 7BT | 5-2 | 12.6 | 0.15 | — | 30 | — | 2.7▲ | 1.7▲ | 1.7▲ |
| 12FQ7 | Medium-Mu Twin Triode | 9LP | 6-3 | 12.6 | 0.3 | 4.0◆ 5.7◆ ⊕ | 330◆ | — | 2.4▲ | 0.34▲ 0.26▲ | 3.61▲ 3.82▲ |
| 12FQ8 | Twin Double-Plate Triode | 9KT | 6-2 | 12.6 | 0.15 | 2.0 | 330◆ | — | — | — | — |
| 12FR8 | Diode Triode-Pentode | 9KU | 6-10 | 12.6 | 0.32 | — | 16 | 16 | Pentode Section | | |
| | | | | | | — | 16 | — | Triode Section | | |
| 12FT6 | Duplex-Diode Triode | 7BT | 5-2 | 12.6 | 0.15 | — | 30 | — | Diode Section | | |
| | | | | | | | | | 1.8▲ | 1.1▲ | 2.0▲ |
| 12FV7 | Medium-Mu Twin Triode | 9A | 6-3 | 12.6 | 0.45 | 2.5◆ | 330◆ | — | Diode Section | | |
| | | | | 6.3 | 0.9 | | | | 0.6▲ | 5.5▲ | 6.0▲ |
| 12FX5 | Power Amplifier Pentode | 7CV | 5-3 | 12.6 | 0.45 | 5.5◆ | 150◆ | 130◆ 2.0◆ | 17▲ | 9.0▲ | 0.65▲ |
| 12FX8 | Triode-Heptode | 9KV ▼ | 6-10 | 12.6 | 0.27 | — | 16 | 16 | Heptode Section | | |
| | | | | | | — | 16 | — | Triode Section | | |
| 12FX8-A | Triode-Heptode | 9KV ▼ | 6-10 | 12.6 | 0.27 | — | 16 | 16 | Heptode Section | | |
| | | | | | | | | 16 | Triode Section | | |
| 12FY8 | Triode-Pentode | 9EX | 6-4 | 12.6 | 0.6 | 8.0◆ | 150◆ | 150◆ 2.0◆ | Pentode Section | | |
| | | | | | | 1.0◆ | 150◆ | — | Triode Section | | |
| 12G4 | Medium-Mu Triode | 6BG | 5-3 | 12.6 | 0.15 | 2.5 | 300 | — | 2.6 | 3.2 | 3.4 |
| 12G8 | Double Triode | 9CZ | 6-3 | 12.6 | 0.4 | — | 16 | 16 | Section 1 (Pins 6, 7, 8) Section 2 (Pins 1, 2, 3) | | |
| 12G11 | Dissimilar Double Pentode | 12BU | 9-58 | 12.6 | 0.6 | 6.5◆ 1.7◆ | 150◆ 330◆ | 135◆ 1.8◆ 330◆ 1.1◆ | Section 1 (Pins 8, 9, 10, 11) Section 2 (Pins 2, 3, 4, 6, 7) | | |
| 12GA6 | Heptode | 7CH ▼ | 5-2 | 12.6 | 0.15 | — | 16 | 16◆ | Osc. I _{c1} = 0.06 ma R _{g1} = 33,000 ohms | | |
| 12GC6 | Beam-Power Amplifier | 8JX | 12-15 | 12.6 | 0.6 | 17.5◆ | 770◆ | 220◆ 4.5◆ | 15▲ | 7.0▲ | 0.55▲ |
| 12GE5 | Beam Power Amplifier | 12BJ | 12-56 | 12.6 | 0.6 | 17.5◆ | 770◆ | 220◆ 3.5◆ | 16▲ | 7.0▲ | 0.34▲ |
| 12GJ5 | Beam Power Amplifier | 9QK | T-X | 12.6 | 0.6 | 17.5◆ | 770◆ | 220◆ 3.5◆ | 15▲ | 6.5▲ | 0.26▲ |
| 12GN7 | Sharp-Cutoff Pentode | 9BF | 6-3 | 12.6 6.3 | 0.3 0.6 | 7.5◆ | 400◆ | 330◆ 1.5◆ | 17.5▲ | 4.0▲ | 0.12▲ |
| 12GN7-A | Sharp-Cutoff Pentode | 9BF | 6-3 | 12.6 6.3 | 0.3 0.6 | 11.5◆ | 400◆ | 330◆ 1.5◆ | 17.5▲ | 4.0▲ | 0.12▲ |

■ Compactron.
† Zero signal.
◆ Per section.

‡ Plate-to-plate.
◆ Maximum.
‡ Supply voltage.

⊙ Subminiature type.
▲ Without external shield.
◆ Design maximum rating.

⊙ Total for all similar sections.
▲ Absolute maximum rating.
Conversion transconductance.

| Service | Plate Volts | Screen Volts | Neg Grid Volts | Plate Milli-amperes | Screen Milli-amperes | R _p ' Ohms | G _m ' μmhos | μ Factor | Load for Rated Output, Ohms | Power Output, Watts | Tube Type |
|--|---|--------------|----------------------|---------------------|----------------------|-----------------------|------------------------|----------------------------|-----------------------------|---------------------|------------------|
| Class A Amplifier AM Detector | 12.6 | — | E _{cc} = 0 | 1.3 | — | 6,200 | 1,200 | 7.4 | R _g = 2.2 meg | — | 12FK6 |
| | Max d-c output current ♦ = 1 ma; voltage drop: ♦ 10 volts at 2 ma d-c | | | | | | | | | | |
| Class A Amplifier Detector | 12.6 | — | E _{cc} = 0 | 1.0 | — | 7,700 | 1,300 | 10 | R _g = 2.2 meg | — | 12FM6 |
| | Max d-c output current ♦ = 1 ma; voltage drop: ♦ 10 volts at 2 ma d-c | | | | | | | | | | |
| Class A Amplifier ♦ | 250 | — | 8.0 | 9.0 | — | 7,700 | 2,600 | 20 | — | — | 12F07 ¶ |
| | 90 | — | 0 | 10 | — | 6,700 | 3,000 | 20 | — | — | |
| Class A Amplifier | 250 | — | 1.5 | 1.5 | — | 76,000 | 1,250 | 95 | — | — | 12F08 |
| | (Values for each plate) | | | | | | | | | | |
| Class A Amplifier | 12.6 | 12.6 | E _{cc1} = 0 | 1.9 | 0.7 | 400,000 | 2,700 | — | R _{g1} = 2.2 meg | — | 12FR8 |
| Class A Amplifier | 12.6 | — | E _{cc} = 0 | 1.0 | — | — | 1,200 | 10 | R _g = 2.2 meg | — | |
| Class A Amplifier AM Det. | Max d-c output current = 5.0 ma; voltage drop: 10 volts at 2.0 ma d-c | | | | | | | | | | |
| Class A Amplifier AM Det. | 12.6 | — | E _{cc} = 0 | 0.6 | — | 13,000 | 1,000 | 14 | R _g = 2.2 meg | — | 12FT6 |
| | Max d-c output current = 1.0 ma; voltage drop: 10 volts at 3.0 ma | | | | | | | | | | |
| Class A Amplifier ♦ | 100 | — | 2.0 | 16 | — | 2,250 | 9,600 | 21.5 | — | — | 12FV7 |
| Class A Amplifier | 110 | 115 | R _k = 62 | 36† | 10† | 17,500 | 13,500 | — | 3,000 | 1.3 | 12FX6 ¶ |
| Converter | 12.6 | 12.6 | E _{cc3} = 0 | 0.29 | 1.25 | 500,000 | — | — | R _{g3} = 2.2 meg | — | 12FX3 |
| Class A Amplifier Converter | 12.6 | — | E _{cc} = 0 | 1.3 | — | — | 1,400 | 10 | R _g = 2.2 meg | — | |
| Class A Amplifier Converter | 12.6 | 12.6 | E _{cc3} = 0 | 0.29 | 1.25 | 500,000 | — | — | R _{g3} = 2.2 meg | — | 12FX8-A |
| Class A Amplifier | 12.6 | — | E _{cc} = 0 | 1.3 | — | — | 1,400 | 10 | R _g = 2.2 meg | — | |
| Class A Amplifier Class A Amp | 125 | 125 | 13.5 | 50† | 10† | — | 7,500 | — | 2,000 | 2.7 | 12FY8 |
| Class A Amplifier | 125 | — | 1.5 | 2.5 | — | — | 2,000 | — | — | — | |
| Class A Amplifier | 90 | — | 0 | 10 | — | 6,700 | 3,000 | 20 | — | — | 12G4 |
| Class A Amplifier | 250 | — | 8.0 | 9.0 | — | 7,700 | 2,600 | 20 | — | — | |
| Direct-Coupled Amplifier | 12.6 ₁ | — | 0 ₁ | 3.0 ₁ † | — | 8,500 | 2,600 | 22 | — | — | 12G8 |
| | 12.6 ₂ | — | — | 7.2 ₂ † | — | — | — | — | 2,000 | 0.025 | |
| | Characteristics given are with pin 7 connected directly to pin 3. R _p , G _m , and μ are measured with respect to the grid voltage of input section (section 1) and the plate current and plate voltage of output section (section 2). | | | | | | | | | | |
| Class A Amplifier Class A Amplifier | 120 | 110 | 8.0 | 49† | 4.0† | 10,000 | 7,500 | — | 2,500 | 2.3 | 12G11 ¶ ■ |
| Class A Amplifier Converter | 150 | 100 | R _k = 560 | 1.3 | 2.0 | 150,000 | 1,000 | E _{cc3} = 0 volts | — | — | |
| Class A Amplifier Converter | 12.6 | 12.6 | E _{cc1} = 0 | 0.3 | 0.8 | 1,000,000 | 140 # | E _{cc3} = 0 volts | R _{g3} = 2.2 meg | — | 12GA6 |
| Horizontal Amplifier | 250 | 150 | 22.5 | 75 | 2.4 | 20,000 | 6,600 | — | — | — | 12GC6 ¶ |
| | 60 | 150 | 0 | 345 | 30 | — | — | — | — | — | |
| | Max positive pulse plate voltage ♦ = 6,500; max d-c cathode current ♦ = 175 ma | | | | | | | | | | |
| Horizontal Amplifier | 250 | 150 | 22.5 | 65 | 1.8 | 18,000 | 7,300 | — | — | — | 12GE5 ¶ ■ |
| | 60 | 150 | 0 | 345 | 27 | — | — | — | — | — | |
| | Max positive pulse plate voltage ♦ = 6,500; max d-c cathode current ♦ = 175 ma | | | | | | | | | | |
| Horizontal Amplifier | 250 | 150 | 22.5 | 70 | 2.1 | 15,000 | 7,100 | — | — | — | 12GJ5 ¶ |
| | 60 | 150 | 0 | 390 | 32 | — | — | — | — | — | |
| | Max positive pulse plate voltage ♦ = 6,500; max d-c cathode current ♦ = 175 ma | | | | | | | | | | |
| Class A Amplifier | 250 | 150 | R _k = 56 | 28 | 6.5 | 50,000 | 36,000 | — | — | — | 12GN7 |
| Class A Amplifier | 250 | 150 | R _k = 56 | 28 | 6.5 | 50,000 | 36,000 | — | — | — | 12GN7-A ¶ |

Metal tubes are shown in bold-face type, miniature tubes in italics.

♦ G3 and G5 are screen. G4 is signal-input grid. * Maximum screen dissipation appears immediately below the screen voltage.
 ▼ G2 and G4 are screen. G3 is signal-input grid.
 † 1, 2, 3, etc. indicate tube sections. ¶ Heater warm-up time controlled.

| Tube Type | Classification by Construction | Base Connections | Outline Dwg | Filament Volts | Filament Amp | Max Plate Watts | Max Plate Volts | Max Screen Volts and Watts | Capacitance in Picofarads | | |
|-----------------|----------------------------------|------------------|----------------------|----------------|--------------|-----------------|--|----------------------------|---|------------|------------|
| | | | | | | | | | Input | Output | Grid-plate |
| 12GT5† | Beam Power Amplifier | 9NZ | 12-64 | 12.6 | 0.6 | 17.5 | 770 | 220 3.5 | 15▲ | 6.5▲ | 0.26▲ |
| 12GT5-A† | Beam Power Amplifier | 9NZ | 12-95 | 12.6 | 0.6 | 17.5 | 770 | 220 3.5 | 15▲ | 6.5▲ | 0.26▲ |
| 12GW6† | Beam-Power Amplifier | 6AM | 12-51 | 12.6 | 0.6 | 17.5 | 770 | 220 3.5 | 17▲ | 7.0▲ | 0.5▲ |
| 18H4 | Medium-Mu Triode | 7DW | 5-3 | 12.6 6.3 | 0.15 0.3 | 2.5 | 300 | — | 2.6 | 3.2 | 3.4 |
| 12H6 | Twin Diode | 7Q | 8-5 | 12.6 | 0.15 | — | Tube Voltage Drop: † 11 v at 16 ma d-c | | | | |
| 12HE7■ | Diode-Pentode | 12FS | 12-57 | 12.6 | 1.35 | 10 | 500 | 150 3.5 | Pentode Section | | |
| | | | | | | — | Tube Voltage Drop: 21 volts at 350 ma d-c | | | | |
| 12HG7 | Sharp-Cutoff Pentode | 9BF | 9-70 | 6.3 12.6 | 0.52 0.26 | 10 | 400 | 330 1.0 | 14▲ | 4.4▲ | 0.18▲ |
| 12HL5 | Beam Power Amplifier | 9QW | 6-4 | 12.6 | 0.45 | 12 | 330 | 250 2.5 | — | — | — |
| 12J5 12J5-GT | Medium-Mu Triode | 6Q | 8-1 9-11, 9-41 | 12.6 | 0.15 | 2.5 | 300 | — | 3.4 4.2 | 3.6 5.0 | 3.4 3.8 |
| 12J7-GT | Sharp-Cutoff Pentode | 7R | 9-18 | 12.6 | 0.15 | 0.75 1.75 | 300 250 | 300 0.1 | Pentode Connected Triode Connected (G ₂ , G ₃ & P Tied) | | |
| 12J8 | Duplex-Diode Tetrode | 9GC | 6-2 | 12.6 | 0.325 | — | 30 | 30 | 10.5▲ | 4.4▲ | 0.7▲ |
| | | | | | | | | | Diode Sections | | |
| 12JB6† | Beam Power Amplifier | 9QL | 12-70 | 12.6 | 0.6 | 17.5 | 770 | 220 3.5 | 15▲ | 6.0▲ | 0.2▲ |
| 12JB6-A† | Beam Power Amplifier | 9QL | T-X | 12.6 | 0.6 | 17.5 | 770 | 220 3.5 | 15▲ | 6.0▲ | 0.2▲ |
| 12JF5† ■ | Beam Power Amplifier | 12JH | 12-79 | 12.6 | 0.6 | 17.5 | 770 | 220 3.5 | 15.6▲ | 6.4▲ | 0.55▲ |
| 12JN6† ■ | Beam Power Amplifier | 12FK | 12-56 | 12.6 | 0.6 | 17.5 | 770 | 220 3.5 | 16▲ | 7.0▲ | 0.34▲ |
| 12JN6-A† ■ | Beam Power Amplifier | 12FK | 12-56 | 12.6 | 0.6 | 17.5 | 770 | 220 3.5 | 16▲ | 7.0▲ | 0.34▲ |
| 12JN8 | Triode-Pentode | 9FA | 6-2 | 12.6 | 0.225 | 2.5 2.5 | 300 300 | 300 0.55 — | Pentode Section Triode Section | | |
| 12JQ6† | Beam Pentode with Integral Diode | 9RA | 6-4 | 12.6 | 0.6 | 10 | 425 | 330 2.0 | 13▲ | 6.0▲ | 0.32▲ |
| 12JS6■ | Beam Power Amplifier | 12FY | 12-89 | 12.6 | 1.125 | 28 | 8066 | 190 5.5 | 24▲ | 10▲ | 0.7▲ |

■ Compactron.
† Zero signal.
♣ Per section.

‡ Plate-to-plate.
♣ Maximum.
♠ Supply voltage.

⊙ Subminiature type.
▲ Without external shield.
⊕ Design maximum rating.

⊕ Total for all similar sections.
⊖ Absolute maximum rating.
Conversion transconductance.

| Service | Plate Volts | Screen Volts | Neg Grid Volts | Plate Milli-amperes | Screen Milli-amperes | R_p , Ohms | G_m , μ mhos | μ Factor | Load for Rated Output, Ohms | Power Output, Watts | Tube Type |
|---|---|--------------|----------------|---------------------|----------------------|----------------|--------------------|---------------------------------|-----------------------------|---------------------|------------------------------------|
| Horizontal Amplifier | 250 60 | 150 150 | 22.5 0 | 70 390 | 2.1 32 | 15,000 | 7,100 | — | — | — | 12GT5 ∇ |
| Max positive pulse plate voltage \diamond = 6,500; max d-c cathode current \diamond = 175 ma | | | | | | | | | | | |
| Horizontal Amplifier | 250 60 | 150 150 | 22.5 0 | 70 390 | 2.1 32 | 15,000 | 7,100 | — | — | — | 12GT5-A ∇ |
| Max positive pulse plate voltage \diamond = 6,500; max d-c cathode current \diamond = 175 ma | | | | | | | | | | | |
| Horizontal Amplifier | 250 60 | 150 150 | 22.5 0 | 70 390 | 2.1 32 | 15,000 | 7,100 | — | — | — | 12GW6 ∇ |
| Max positive pulse plate voltage \diamond = 6,500; max d-c cathode current \diamond = 175 ma | | | | | | | | | | | |
| Class A Amplifier | 90 250 | — — | 0 8.0 | 10 9.0 | — | 6,700 7,700 | 3,000 2,600 | 20 20 | — | — | 12H4 |
| Half-Wave Rectifier | Max d-c output current per plate = 8 ma; max peak inverse voltage = 420; max rms supply voltage per plate = 150; max peak current per plate = 48 ma | | | | | | | | | | 12H6 |
| Horizontal Amplifier | 130 50 | 130 130 | 22 0 | 60 450 | 2.8 40 | 6,200 | 8,800 | — | — | — | 12HE7 \blacksquare |
| Max positive pulse plate voltage \diamond = 5,000; max d-c cathode current \diamond = 230 ma | | | | | | | | | | | |
| TV Damper | Max d-c output current \diamond = 200 ma; max peak inverse voltage \diamond = 4,200; max peak current \diamond = 1,200 ma | | | | | | | | | | |
| Class A Amplifier | 300 | 135 | $R_k = 47$ | 31 | 4.8 | 60,000 | 32,000 | (g3 connected to k at socket) | | | 12HG7 |
| Class A Amplifier | 130 | 130 | $R_k = 56$ | 70 \dagger | 5.0 \dagger | 7,500 | 17,000 | — | 2,000 | 3.0 | 12HL5 |
| Class A Amplifier | 90 250 | — — | 0 8.0 | 10 9.0 | — | 6,700 7,700 | 3,000 2,600 | 20 20 | — | — | 12J6 12J5-GT |
| Class A Amplifier | 250 | 100 | 3.0 | 2.0 | 0.5 | 1,000,000 | 1,225 | — | — | — | 12J7-GT |
| Class A Amplifier | 250 | — | 8.0 | 6.5 | — | 10,500 | 1,900 | 20 | — | — | |
| Class A Amplifier AM Det. | 12.6 | 12.6 | $E_{cc1} = 0$ | 12 \dagger | 1.5 \dagger | 60,000 | 5,500 | $R_{g1} = 2.2$ meg | | | 12J8 |
| Max d-c output current \diamond = 5.0 ma; voltage drop: 5.0 volts at 8.5 ma d-c; voltage drop: 5.0 volts at 12 ma d-c | | | | | | | | | | | |
| Horizontal Amplifier | 250 60 | 150 150 | 22.5 0 | 70 390 | 2.1 32 | 15,000 | 7,100 | (g3 connected to k at socket) | | | 12JB6 ∇ |
| Max positive pulse plate voltage \diamond = 6,500; max d-c cathode current \diamond = 175 ma | | | | | | | | | | | |
| Horizontal Amplifier | 250 60 | 150 150 | 22.5 0 | 70 390 | 2.1 32 | 15,000 | 7,100 | (g3 connected to k at socket) | | | 12JB6-A ∇ |
| Max positive pulse plate voltage \diamond = 6,500; max d-c cathode current \diamond = 175 ma | | | | | | | | | | | |
| Horizontal Amplifier | 250 60 | 150 150 | 22.5 0 | 65 345 | 1.8 27 | 18,000 | 7,300 | — | — | — | 12JF5 ∇ \blacksquare |
| Max positive pulse plate voltage \diamond = 6,500 volts; max d-c cathode current \diamond = 175 ma | | | | | | | | | | | |
| Horizontal Amplifier | 250 60 | 150 150 | 22.5 0 | 65 345 | 1.8 27 | 18,000 | 7,300 | (b.p. connected to k at socket) | | | 12JN6 ∇ \blacksquare |
| Max positive pulse plate voltage \diamond = 6,500; max d-c cathode current \diamond = 175 ma | | | | | | | | | | | |
| Horizontal Amplifier | 250 55 | 150 150 | 22.5 0 | 70 345 | 2.4 30 | 15,000 | 7,300 | (b.p. connected to k at socket) | | | 12JN6-A ∇ \blacksquare |
| Max positive pulse plate voltage \diamond = 6,500; max d-c cathode current \diamond = 175 ma | | | | | | | | | | | |
| Class A Amplifier | 125 | 125 | 1.0 | 12 | 4.0 | 200,000 | 7,500 | — | — | — | 12JN8 |
| Class A Amplifier | 125 | — | 1.0 | 13.5 | — | 5,400 | 8,500 | 46 | — | — | |
| Vertical Amplifier | 140 40 | 140 120 | 18 0 | 35 150 | 2.5 20 | 10,500 | 4,200 | — | — | — | 12JQ6 ∇ |
| Max positive pulse plate voltage \diamond = 2,000; max d-c cathode current \diamond = 70 ma. Instantaneous diode-plate-to-cathode voltage drop for instantaneous diode-plate current of 2.0 ma = 5.0 volts. | | | | | | | | | | | |
| Horizontal Amplifier | 175 70 | 125 120 | 25 0 | 125 570 | 4.5 34 | 5,600 | 11,300 | (b.p. connected to k at socket) | | | 12JS6 \blacksquare |
| Max positive pulse plate voltage \diamond = 7,500; max d-c cathode current \diamond = 315 ma | | | | | | | | | | | |

Metal tubes are shown in bold-face type, miniature tubes in italics.

\diamond G3 and G5 are screen. G4 is signal-input grid.

∇ G2 and G4 are screen. G3 is signal-input grid.

1, 2, 3, etc. indicate tube sections.

\blacksquare Maximum screen dissipation appears immediately below the screen voltage.

∇ Heater warm-up time controlled.

| Tube Type | Classification by Construction | Base Connections | Out-line Dwg | Fila-ment Volts | Fila-ment Amp | Max Plate Watts | Max Plate Volts | Max Screen Volts and Watts | Capacitance in Picofarads | | |
|----------------------|--------------------------------|-------------------------------------|---------------------|-----------------|---------------|--------------------------------------|------------------|--------------------------------------|---|--|--|
| | | | | | | | | | Input | Out-put | Grid-plate |
| 12JT6 [†] | Beam Power Amplifier | 9QU | T-X | 12.6 | 0.6 | 17.5 [⊕] | 770 [⊕] | 220 [⊕] 3.5 [⊕] | 15 [▲] | 6.5 [▲] | 0.26 [▲] |
| 12JT6-A [†] | Beam Power Amplifier | 9QU | 12-95 | 12.6 | 0.6 | 17.5 [⊕] | 770 [⊕] | 220 [⊕] 3.5 [⊕] | 15 [▲] | 6.5 [▲] | 0.26 [▲] |
| 12K5 | Space-Charge-Grid Tetrode | 7FD | 5-3 | 12.6 | 0.4 | — | 30 | — | 23.0 [▲] | 1.8 [▲] | 11.0 [▲] |
| 12K7-GT | Remote-Cutoff RF Pentode | 7R | 9-18 | 12.6 | 0.15 | 2.75 | 300 | 300 [⊕] 0.35 | 4.6 | 12.0 | 0.005 [♣] |
| 12K8 | Triode Hexode Converter | 8K [♥] | 8-2 9-24 | 12.6 | 0.15 | 0.75 [♣] | 300 | 300 [⊕] 0.7 | Osc I _{c1} = 0.15 ma R _{g1} = 50,000 ohms | | |
| 12KL8 [†] | Diode-Pentode | 9LQ | 6-3 | 12.6 | 0.15 | 3.0 [⊕] | 330 [⊕] | 330 [⊕] 0.6 | Pentode Section | | |
| 12L6-GT [†] | Beam Power Amplifier | 7AC | 9-11 or 9-41 | 12.6 | 0.6 | 10 | 200 | 125 1.25 | 15 [▲] | 10 [▲] | 0.8 [▲] |
| 12L8-GT | Twin-Pentode Power Amplifier | 8BU | 9-11 | 12.6 | 0.15 | 2.5 [♣] | 180 | 180 1.0 | 5.0 [▲] | 6.0 [▲] | 0.7 [▲] |
| 12MD8 [†] | Triple Triode | 9RQ | T-X | 12.6 | 0.45 | 3.0 [⊕] | 330 [⊕] | — | — | — | — |
| 12Q7-GT | Duplex-Diode High-Mu Triode | 7V | 9-18 | 12.6 | 0.15 | — | 300 | — | 2.2 | 5.0 | 1.6 |
| 12R6 [†] | Beam Power Amplifier | 7CV | 5-3 | 12.6 | 0.6 | 4.5 | 150 | 150 1.0 | 13 [▲] | 9.0 [▲] | 0.55 [▲] |
| 12S8-GT | Triple-Diode High-Mu Triode | 8CB | 9-23 | 12.6 | 0.15 | 0.5 | 300 | — | 1.2 | 5.0 | 2.0 |
| 12SA7 12SA7-GT | Pentagrid Converter | 8R [♥] 8AD [♥] | 8-1 9-11 9-41 | 12.6 | 0.15 | 1.0 | 300 | 100 1.0 | Osc I _{c1} = 0.5 ma R _{g1} = 20,000 ohms | | |
| 12SC7 | High-Mu Twin Triode | 8S | 8-1 | 12.6 | 0.15 | — | 250 | — | — | — | — |
| 12SF6 12SF5-GT | High-Mu Triode | 6AB | 8-1 9-11 | 12.6 | 0.15 | — | 300 | — | 4.0 | 3.6 | 2.4 |
| 12SF7 12SF7-GT | Diode Remote-Cutoff Pentode | 7AZ | 8-1 9-18 | 12.6 | 0.15 | 3.5 | 300 | 300 [⊕] 0.5 | 5.5 5.5 | 6.0 6.0 | 0.004 [♣] 0.004 [♣] |
| 12SG7 | Semi-Remote-Cutoff RF Pentode | 8BK | 8-1 | 12.6 | 0.15 | 3.0 | 300 | 300 [⊕] 0.6 | 8.5 | 7.0 | 0.003 [♣] |
| 12SH7 | Sharp-Cutoff RF Pentode | 8BK | 8-1 | 12.6 | 0.15 | 3.0 | 300 | 300 [⊕] 0.7 | 8.5 | 7.0 | 0.0035 [♣] |
| 12SJ7 12SJ7-GT | Sharp-Cutoff Pentode | 8N | 8-1 9-12 | 12.6 | 0.15 | 2.5 2.5 | 300 250 | 300 [⊕] 0.7 — | Pentode Connection Triode Connection (G ₂ , G ₃ & P tied) | | |
| 12SK7 12SK7-GT | Remote-Cutoff RF Pentode | 8N | 8-1 9-11 | 12.6 | 0.15 | 4.0 | 300 | 300 [⊕] 0.4 | 6.0 6.5 | 7.0 7.5 | 0.003 [♣] 0.005 [♣] |
| 12SL7-GT | High-Mu Twin Triode | 8BD | 9-11 | 12.6 | 0.15 | 1.0 [♣] | 300 | — | — | — | — |
| 12SN7-GT | Medium-Mu Twin Triode | 8BD | 9-11 9-41 | 12.6 | 0.3 | 3.5 [♣] 5.0 [⊕] | 300 | — | 2.8 ₁ [▲] 3.0 ₂ [▲] | 0.8 ₁ [▲] 1.2 ₂ [▲] | 3.8 ₁ [▲] 4.0 ₂ [▲] |

■ Compactron.
† Zero signal.
♣ Per section.

‡ Plate-to-plate.
♣ Maximum.
‡ Supply voltage.

⊙ Subminiature type.
♣ Without external shield.
⊕ Design maximum rating.

⊕ Total for all similar sections.
♣ Absolute maximum rating.
Conversion transconductance.

| Service | Plate Volts | Screen Volts | Neg Grid Volts | Plate Milli-am-peres | Screen Milli-am-peres | R_p , Ohms | G_m , μ mhos | μ Factor | Load for Rated Out-put, Ohms | Power Out-put, Watts | Tube Type |
|------------------------------|---|-------------------|-------------------|----------------------|-----------------------|---------------------------------|-------------------------|---|------------------------------|----------------------|-------------------|
| Horizontal Amplifier | 250 60 | 150 150 | 22.5 0 | 70 390 | 2.1 32 | 15,000 — | 7,100 — | (g3 connected to k at socket) | — | — | 12JT6 ∇ |
| | Max positive pulse plate voltage $\diamond = 6,500$; max d-c cathode current $\diamond = 175$ ma | | | | | | | | | | |
| Horizontal Amplifier | 250 60 | 150 150 | 22.5 0 | 70 390 | 2.1 32 | 15,000 — | 7,100 — | (g3 connected to k at socket) | — | — | 12JT6-A ∇ |
| | Max positive pulse plate voltage $\diamond = 6,500$; max d-c cathode current $\diamond = 175$ ma | | | | | | | | | | |
| Class A Amplifier | 12.6 | — | $E_{cct} = 0$ | 40 | — | 480 | 15,000 | — | $R_{g2} = 2.2$ meg | — | 12K5 |
| | $E_{c1} = 12.6$ volts; $I_{c1} = 75$ ma (Note: grid number 1 is space-charge grid, grid number 2 is control grid) | | | | | | | | | | |
| Class A Amplifier | 250 | 125 | 3.0 | 10.5 | 2.6 | 600,000 | 1,650 | — | — | — | 12K7-GT |
| Converter | 250 | 100 | 3.0 | 2.5 | 6.0 | 600,000 | 350 # | E_b (Triode Osc) = 100 I_b (Triode) = 3.8 ma | | — | 12K8 12K8-GT |
| Class A Amplifier Detector | 100 | 100 | $E_{cct} = 0$ | 5.5 | 2.2 | 550,000 | 4,300 | $R_{g1} = 2.2$ megohms | | — | 12KL8 ∇ |
| | Max d-c output current $\diamond = 1.0$ ma | | | | | | | | | | |
| Class A Amplifier | 200 | 125 | $R_k = 180$ | 46 \dagger | 2.2 \dagger | 28,000 | 8,000 | — | 4,000 | 3.8 | 12L6-GT ∇ |
| | 110 | 110 | 7.5 | 49 \dagger | 4.0 \dagger | 13,000 | 8,000 | — | 2,000 | 2.1 | 12L8-GT |
| Class A Amplifier \diamond | 180 | 180 | 9.0 | 13 \dagger | 2.8 \dagger | 160,000 | 2,150 | — | 10,000 | 1.0 | 12M8 ∇ |
| Class A Amplifier \diamond | 250 | — | 10.5 | 11.5 | — | 5,500 | 3,100 | 17 | — | — | 12Q7-GT |
| Class A Amplifier | 250 | — | 3.0 | 1.0 | — | 58,000 | 1,200 | 70 | — | — | 12R5 ∇ |
| Vertical Amplifier | 110 45 | 110 110 | 8.5 0 | 40 120 | 3.3 17 | 13,000 | 7,000 | — | — | — | 12S8-GT |
| | Max positive pulse plate voltage $\diamond = 1,500$ volts; max screen dissipation = 1.0 watt; max d-c cathode current = 45 ma | | | | | | | | | | |
| Class A Amplifier | 250 | — | 2.0 | 0.9 | — | 91,000 | 1,100 | 100 | — | — | 12SA7 12SA7-GT |
| Converter | 250 100 | 100 100 | 2.0 2.0 | 3.5 3.3 | 8.5 8.5 | 1,000,000 500,000 | 450 # 425 # | — | — | — | 12SC7 |
| Class A Amplifier \diamond | 250 | — | 2.0 | 2.0 | — | 53,000 | 1,325 | 70 | — | — | 12SF5 12SF5-GT |
| Class A Amplifier | 250 | — | 2.0 | 0.9 | — | 66,000 | 1,500 | 100 | — | — | 12SF7 12SF7-GT |
| Class A Amplifier | 250 100 | 100 100 | 1.0 1.0 | 12.4 12 | 3.3 3.4 | 700,000 200,000 | 2,050 1,975 | — | — | — | 12SG7 |
| Class A Amplifier | 250 250 100 | 150 125 100 | 2.5 1.0 1.0 | 9.2 11.8 8.2 | 3.4 4.4 3.2 | 1,000,000 900,000 250,000 | 4,000 4,700 4,100 | — | — | — | 12SH7 |
| Class A Amplifier | 250 | 150 | 1.0 | 10.8 | 4.1 | 900,000 | 4,900 | — | — | — | 12SJ7 |
| Class A Amplifier | 250 | 100 | 3.0 | 3.0 | 0.8 | 1,000,000 | 1,650 | — | — | — | 12SJ7-GT |
| Class A Amplifier | 250 | — | 8.5 | 9.2 | — | 7,600 | 2,500 | 19 | — | — | 12SK7 12SK7-GT |
| Class A Amplifier | 250 100 | 100 100 | 3.0 1.0 | 9.2 13 | 2.6 4.0 | 800,000 120,000 | 2,000 2,350 | — | — | — | 12SL7-GT |
| Class A Amplifier \diamond | 250 | — | 2.0 | 2.3 | — | 44,000 | 1,600 | 70 | — | — | 12SN7-GT |
| Class A Amplifier \diamond | 250 90 | — — | 8.0 0 | 9.0 10 | — — | 7,700 6,700 | 2,600 3,000 | 20 20 | — | — | 12SN7-GT |

Metal tubes are shown in bold-face type, miniature tubes in italics.

\diamond G3 and G5 are screen. G4 is signal-input grid.
 ∇ G2 and G4 are screen. G3 is signal-input grid.

1, 2, 3, etc. indicate tube sections.

*Maximum screen dissipation appears immediately below the screen voltage.
 ∇ Heater warm-up time controlled.

| Tube Type | Classification by Construction | Base Connections | Out-line Dwg | Filament Volts | Filament Amp | Max Plate Watts | Max Plate Volts | Max Screen Volts and Watts * | Capacitance in Picofarads | | |
|-------------------|---------------------------------|------------------|--------------------|----------------|--------------|-----------------|---|------------------------------|--|--------------------------------------|--|
| | | | | | | | | | Input | Output | Grid-plate |
| 12SN7-GTA | Medium-Mu Twin Triode | 8BD | 9-11, 9-41 | 12.6 | 0.3 | 5.0♣ 7.5⊕ | 450 | — | 2.2 ₁ ▲ 2.6 ₂ ▲ | 0.7▲ | 4.0 ₁ ▲ 3.8 ₂ ▲ |
| 12SQ7 12SQ7-GT | Duplex-Diode High-Mu Triode | 8Q | 8-1 9-12 | 12.6 | 0.15 | 0.5 | 300 | — | 3.2 4.2▲ | 3.0 3.4▲ | 1.6 1.8▲ |
| 12SR7 12SR7-GT | Duplex-Diode Medium-Mu Triode | 8Q | 8-1 9-11 | 12.6 | 0.15 | 2.5 | 250 | — | 3.6 3.5 | 2.8 3.8 | 2.4 2.3 |
| 12SW7 | Duplex-Diode Medium-Mu Triode | 8Q | 8-1 | 12.6 | 0.15 | 2.5 | 250 | — | 3.0 | 2.8 | 2.4 |
| 12SX7-GT | Medium-Mu Twin Triode | 8BD | 9-11 | 12.6 | 0.3 | 2.5♣ | 300 | — | 3.0 ₁ 2.8 ₂ | 0.8 ₁ 1.2 ₂ | 3.6 |
| 12SY7 12SY7-GT | Pentagrid Converter | 8R♥ 8AD♥ | 8-1 9-12 | 12.6 | 0.15 | — | 300 | 100 1.0 | Osc I _{c1} = 0.5 ma R _{g1} = 20,000 ohms Osc I _{c1} = 0.1 ma R _{g1} = 20,000 ohms | | |
| 12T10 | Dissimilar Double Pentode | 12EZ | 9-59 | 12.6 | 0.45 | 10◇ 1.7◇ | 275◇ 330◇ | 275◇ 2.0◇ 330◇ 1.1◇ | Section 1 (Pins 8, 9, 10, 11) Section 2 (Pins 2, 3, 5, 6, 7) | | |
| 12U7 | Twin Triode | 9A | 6-2 | 12.6 | 0.15 | — | 30 | — | 1.8 | 2.0 | 1.5 |
| 12V6-GT | Beam Power Amplifier | 7AC | 9-11 or 9-41 | 12.6 | 0.225 | 12 | 315 | 285 2.0 | Single Tube 2 Tubes, Push-Pull | | |
| 12W6-GT | Beam Power Amplifier | 7AC | 9-11 or 9-41 | 12.6 | 0.6 | 12◇ 8.5◇ | 330◇ 330◇ | 165◇ 1.35◇ — | Pentode Connection Triode Connection (G ₂ & P tied) | | |
| 12X4 | Full-Wave High-Vacuum Rectifier | 5BS | 5-3 | 12.6 | 0.3 | — | Tube Voltage Drop: ♣ 22 v at 70 ma d-c | | | | |
| 12Z3 | Half-Wave High-Vacuum Rectifier | 4G | 12-5 | 12.6 | 0.3 | — | Tube Voltage Drop: 17 v at 110 ma d-c | | | | |
| 13CW4 | High-Mu Triode (Nuvistor) | 12AQ | 4-4 | 13.5 | 0.06 | 1.5◇ | 135◇ | — | 4.3▲ | 1.8▲ | 0.92▲ |
| 13DE7 | Double Triode | 9HF | 6-3 | 13.0 | 0.45 | 1.5◇ 7.0◇ | 330◇ 275◇ | — | Section 1 (Pins 6, 7 8) Section 2 (Pins 1, 2, 3, 9) | | |
| 13DR7 | Double Triode | 9HF | 6-3 | 13.0 | 0.45 | 1.0◇ 7.0◇ | 330◇ 275◇ | — | Section 1 (Pins 6, 7 8) Section 2 (Pins 1, 2, 3, 9) | | |
| 13EM7 | Double Triode | 8BD | 9-37 | 13.0 | 0.45 | 1.5◇ 10◇ | 330◇ 330◇ | — | Section 1 (Pins 4, 5, 6) Section 2 (Pins 1, 2, 3) | | |
| 13FD7 | Double Triode | 9HF | 9-77 | 13.0 | 0.45 | 1.5◇ 10◇ | 330◇ 330◇ | — | Section 1 (Pins 6, 7, 8) Section 2 (Pins 1, 2, 3, 9) | | |

■ Compactron.
‡ Zero signal.
♣ Per section.

‡ Plate-to-plate.
♣ Maximum.
‡ Supply voltage.

⊕ Subminiature type.
▲ Without external shield.
◇ Design maximum rating.

⊕ Total for all similar sections.
▲ Absolute maximum rating.
Conversion transconductance.

| Service | Plate Volts | Screen Volts | Neg Grid Volts | Plate Milli-amperes | Screen Milli-amperes | R _p , Ohms | G _m , μmhos | μ Factor | Load for Rated Output, Ohms | Power Output, Watts | Tube Type |
|---|---|--------------|--------------------------|---------------------|----------------------|-----------------------|------------------------|-----------------------------|-----------------------------|---------------------|--------------|
| Class A Amplifier ♦ Vertical Amplifier ♦ | 250 | — | 8.0 | 9.0 | — | 7,700 | 2,600 | 20 | — | — | 12SN7-GTA |
| | 90 | — | 0 | 10 | — | 6,700 | 3,000 | 20 | — | — | |
| Max positive pulse plate voltage ⊠ = 1,500; max d-c cathode current = 20 ma | | | | | | | | | | | |
| Class A Amplifier | 250 | — | 2.0 | 1.1 | — | 85,000 | 1,175 | 100 | — | — | 12SQ7 |
| Class A Amplifier | 100 | — | 1.0 | 0.5 | — | 110,000 | 925 | 100 | — | — | 12SQ7-GT |
| Class A Amplifier | 250 | — | 9.0 | 9.5† | — | 8,500 | 1,900 | 16 | 10,000 | 0.3 | 12SR7 |
| Class A Amplifier | 250 | — | 9.0 | 9.5 | — | 8,500 | 1,900 | 16 | — | — | 12SR7-GT |
| Class A Amplifier | 26.5 | — | R _g = 2 meg | 1.1 | — | 15,500 | 1,100 | 17 | — | — | 12SW7 |
| Class A Amplifier ♦ | 250 | — | 8.0 | 9.0 | — | 7,700 | 2,600 | 20 | — | — | 12SX7-GT |
| Class A Amplifier ♦ | 26.5 | — | R _g = .05 meg | 1.8 | — | 11,500 | 1,800 | 21 | — | — | |
| Converter Converter | 250 | 100 | 2.0 | 3.5 | 8.5 | 1,000,000 | 450 # | — | — | — | 12SY7 |
| Converter Converter | 28 | 28 | 1.0 | 0.5 | 1.8 | — | 250 # | — | — | — | |
| Class A Amplifier | 250 | 250 | 8.0 | 35† | 2.5† | 100,000 | 6,500 | — | 5,000 | 4.2 | 12T10¶ |
| Class A Amplifier | 150 | 100 | R _k = 560 | 1.3 | 2.1 | 150,000 | 1,000 | (E _{ca} = 0 volts) | | | |
| Class A Amplifier ♦ | 12.6 | — | 0 | 1.0 | — | 12,500 | 1,600 | 20 | — | — | 12U7 |
| Class A Amplifier | 315 | 225 | 13 | 34† | 2.2† | 80,000 | 3,750 | — | 8,500 | 5.5 | 12V6-GT |
| Class A Amplifier | 250 | 250 | 12.5 | 45† | 4.5† | 50,000 | 4,100 | — | 5,000 | 4.5 | |
| Class A ₁ Amplifier | 180 | 180 | 8.5 | 29† | 3.0† | 50,000 | 3,700 | — | 5,500 | 2.0 | 12W6-GT¶ |
| | 285 | 285 | 19 | 70† | 4.0† | 70,000 | 3,600 | — | 8,000† | 14 | |
| Class A Amplifier | 250 | 250 | 15 | 70† | 5.0† | 60,000 | 3,750 | — | 10,000† | 10 | |
| Class A Amplifier | 200 | 125 | R _k = 180 | 46† | 2.2† | 28,000 | 8,000 | — | 4,000 | 3.8 | 12W6-GT¶ |
| Class A Amplifier | 110 | 110 | 7.5 | 49† | 4.0† | 13,000 | 8,000 | — | 2,000 | 2.1 | |
| Vertical Amplifier | 225 | — | 30 | 22 | — | 1,600 | 3,800 | 6.2 | — | — | |
| Max positive pulse plate voltage ♦ = 1,200; max d-c cathode current ♦ = 65 ma | | | | | | | | | | | |
| Full-Wave Rectifier | Max d-c output current = 90 ma; max peak inverse voltage = 1,250; rms supply voltage per plate = 360; max peak current per plate = 245 ma | | | | | | | | | | 12X4 |
| Half-Wave Rectifier | Max d-c output current = 55 ma; max peak inverse voltage = 700 volts; max rms supply voltage = 235 volts; max peak current = 330 ma | | | | | | | | | | 12Z3 |
| Class A Amplifier | 110 | — | R _k = 130 | 7.0 | — | 6,600 | 9,800 | 65 | — | — | 13CW4 |
| Vertical Oscillator | 250 | — | 11 | 5.5 | — | 8,750 | 2,000 | 17.5 | — | — | 13DE7¶ |
| Vertical Amplifier | Max d-c cathode current ♦ = 22 ma | | | | | | | | | | 13DR7¶ |
| | 150 | — | 17.5 | 35 | — | 925 | 6,500 | 6.0 | — | — | |
| Vertical Amplifier | 60 | — | 0 | 80 | — | — | — | — | — | — | |
| Max positive pulse plate voltage ♦ = 4,000; max d-c cathode current ♦ = 50 ma | | | | | | | | | | | |
| Vertical Oscillator | 250 | — | 3.0 | 1.4 | — | 40,000 | 1,600 | 68 | — | — | 13EM7¶ |
| Vertical Oscillator | 150 | — | 17.5 | 35 | — | 925 | 6,500 | 6.0 | — | — | |
| Vertical Amplifier | 60 | — | 0 | 80 | — | — | — | — | — | — | |
| Max positive pulse plate voltage ⊠ = 1,500; max d-c cathode current ♦ = 50 ma | | | | | | | | | | | |
| Vertical Oscillator | 250 | — | 3.0 | 1.4 | — | 40,000 | 1,600 | 64 | — | — | 13FD7¶ |
| Vertical Oscillator | 150 | — | 20 | 50 | — | 750 | 7,200 | 5.4 | — | — | |
| Vertical Amplifier | Max positive pulse plate voltage ⊠ = 1,500; max d-c cathode current ♦ = 50 ma | | | | | | | | | | |
| Vertical Oscillator | 250 | — | 3.0 | 1.4 | — | 40,000 | 1,600 | 64 | — | — | 13FD7¶ |
| Vertical Oscillator | 150 | — | 17.5 | 40 | — | 800 | 7,500 | 6.0 | — | — | |
| Vertical Amplifier | Max positive pulse plate voltage ♦ = 1,500; max d-c cathode current ♦ = 50 ma | | | | | | | | | | |

Metal tubes are shown in bold-face type, *miniature tubes in italics.*

♦ G3 and G5 are screen. G4 is signal-input grid.

*Maximum screen dissipation appears immediately below the screen voltage.

♥ G2 and G4 are screen. G3 is signal-input grid.

¶ Heater warm-up time controlled.

1, 2, 3, etc. indicate tube sections.

| Tube Type | Classification by Construction | Base Connections | Outline Dwg | Filament Volts | Filament Amp | Max Plate Watts | Max Plate Volts | Max Screen Volts and Watts | Capacitance in Picofarads | | |
|-----------|----------------------------------|------------------|-------------|----------------|--------------|-------------------|-------------------|----------------------------|---|--------|------------|
| | | | | | | | | | Input | Output | Grid-plate |
| 13FM7 | Dissimilar Double Triode | 12EJ | 9-58 | 13 | 0.45 | 1.0 10 | 350 550 | — — | Section 1 (Pins 9, 10, 11) Section 2 (Pins 3, 5, 7, 8) | | |
| 13FR7 | Double Triode | 9EF | 9-70 | 13.0 | 0.45 | 1.5 10 | 330 330 | — — | Section 1 (Pins 6, 7, 8) Section 2 (Pins 1, 2, 3, 9) | | |
| 13GB5 | Beam Power Amplifier | 9NH | T-X | 13.3 | 0.6 | 17 | 275 | 275 6.0 | — | — | — |
| 13GF7 | Dissimilar Double Triode | 9QD | T-X | 13 | 0.45 | 1.5 11 | 330 330 | — — | Section 1 (Pins 1, 8, 9) Section 2 (Pins 2, 3, 6) | | |
| 13GF7-A | Dissimilar Double Triode | 9QD | 9-107 | 13 | 0.45 | 1.5 11 | 330 330 | — — | Section 1 (Pins 1, 8, 9) Section 2 (Pins 2, 3, 6) | | |
| 13J10 | Pentode Gated-Beam Discriminator | 12BT | 9-58 | 13.2 | 0.45 | 10 — | 275 330 | 275 2.0 110 | Pentode Section (Pins 2, 3, 9, 11) Gated-Beam Discriminator (Pins 4, 5, 6, 7, 8) | | |
| 13JZ8 | Triode-Pentode | 12DZ | 9-58 | 12.7 | 0.6 | 7.0 1.0 | 250 250 | 200 1.8 — | Pentode Section Triode Section | | |
| 13JZ8-A | Triode-Pentode | 12DZ | 9-98 | 12.7 | 0.6 | 10 1.0 | 250 250 | 200 1.8 — | Pentode Section Triode Section | | |
| 13V10 | Dissimilar Double Pentode | 12EZ | 9-59 | 13.2 | 0.45 | 6.5 1.7 | 165 330 | 150 1.8 1.1 | Section 1 (Pins 8, 9, 10, 11) Section 2 (Pins 2, 3, 5, 6, 7) | | |
| 13Z10 | Pentode-Gated-Beam Discriminator | 12BT | 9-58 | 13.2 | 0.45 | 10 — | 275 330 | 275 2.0 330 | Pentode Section (Pins 2, 3, 9, 11) Gated-Beam Discriminator (Pins 4, 5, 6, 7, 8) | | |
| 14A4 | Medium-Mu Triode | 5AC | 9-30 | 12.6 | 0.15 | 2.5 | 300 | — | 3.4 | 3.0 | 4.0 |
| 14A5 | Beam Power Amplifier | 6AA | 9-30 | 12.6 | 0.15 | 7.5 | 250 | 250 1.5 | — | — | — |
| 14A7/12B7 | Remote-Cutoff Pentode | 8V | 9-30 | 12.6 | 0.15 | 4.0 | 300 | 125 0.4 | 6.0 | 7.0 | 0.005 |
| 14AF7/XXD | Medium-Mu Twin Triode | 8AC | 9-30 | 12.6 | 0.15 | 2.5 | 300 | — | 2.2 | 1.6 | 2.3 |
| 14B6 | Duplex-Diode High-Mu Triode | 8W | 9-30 | 12.6 | 0.15 | 0.5 | 300 | — | — | — | — |
| 14B8 | Pentagrid Converter | 8X | 9-30 | 12.6 | 0.15 | 1.0 | 300 | 100 0.3 | Osc $I_{c1} = 0.4$ ma $R_{g1} = 50,000$ ohms | | |
| 14BL11 | Dissimilar-Double-Triode Pentode | 12GC | 9-58 | 14.2 | 0.45 | 2.5 1.5 2.0 | 250 330 300 | 125 1.25 — | Pentode Section Triode Section 1 (Pins 5, 6, 7) Triode Section 2 (Pins 3, 4, 9) | | |

■ Compactron.
† Zero signal.
♣ Per section.

‡ Plate-to-plate.
♣ Maximum.
‡ Supply voltage.

⊙ Subminiature type.
▲ Without external shield.
⊙ Design maximum rating.

⊙ Total for all similar sections.
⊙ Absolute maximum rating.
Conversion transconductance.

| Service | Plate Volts | Screen Volts | Neg Grid Volts | Plate Milli-amperes | Screen Milli-amperes | R _p , Ohms | G _m , μmhos | μ Factor | Load for Rated Output, Ohms | Power Output, Watts | Tube Type |
|--------------------------|--|--------------|-----------------------------|---------------------|--|------------------------|------------------------|--|-----------------------------|---------------------|-----------|
| Vertical Oscillator | 250 | — | 3.0 | 2.0 | — | 30,000 | 2,200 | 66 | — | — | 13FM7† |
| Vertical Amplifier | 175 | — | 25 | 40 | — | 920 | 6,000 | 5.5 | — | — | |
| | 60 | — | 0 | 95 | — | — | — | — | — | — | |
| | Max positive pulse plate voltage ⬠ = 6,500; max d-c cathode current ⬠ = 175 ma | | | | | | | | | | |
| Vertical Oscillator | 250 | — | 3.0 | 1.4 | — | 40,000 | 1,600 | 68 | — | — | 13FR7† |
| Vertical Amplifier | 150 | — | 20 | 50 | — | 750 | 7,200 | 5.4 | — | — | |
| | Max positive pulse plate voltage ⬠ = 1,500; max d-c cathode current = 50 ma | | | | | | | | | | |
| Horizontal Amplifier | 75 | 200 | 10 | 440 | 37 | (Instantaneous Values) | | | | | 13GB5 |
| | Max positive pulse plate voltage ⬠ = 7,700; max d-c cathode current ⬠ = 275 ma | | | | | | | | | | |
| Vertical Oscillator | 250 | — | 3.0 | 1.4 | — | 40,000 | 1,600 | 64 | — | — | 13GF7† |
| Vertical Amplifier | 150 | — | 20 | 50 | — | 750 | 7,200 | 5.4 | — | — | |
| | 60 | — | 0 | 95 | — | — | — | — | — | — | |
| | Max positive pulse plate voltage ⬠ = 1,500; max d-c cathode current ⬠ = 50 ma | | | | | | | | | | |
| Vertical Oscillator | 250 | — | 3.0 | 1.4 | — | 40,000 | 1,600 | 64 | — | — | 13GP7-A† |
| Vertical Amplifier | 150 | — | 20 | 50 | — | 750 | 7,200 | 5.4 | — | — | |
| | 60 | — | 0 | 95 | — | — | — | — | — | — | |
| | Max positive pulse plate voltage ⬠ = 1,500; max d-c cathode current ⬠ = 50 ma | | | | | | | | | | |
| Class A Amplifier | 250 | 250 | 8.0 | 35† | 2.5† | 100,000 | 6,500 | — | 5,000 | 4.2 | 13J10† |
| FM Limiter-Discriminator | 285‡ | 100 | R _k = 200 to 400 | 0.49 | 9.8 | — | — | — | 330,000 | — | |
| | E _{c1} = 1.25 volts RMS | | | | | | | | | | |
| Vertical Amplifier | 120 | 110 | 8.0 | 46 | 3.5 | 11,700 | 7,100 | — | — | — | 13JZ8† |
| Vertical Oscillator | 45 | 110 | 0 | 122 | 16.5 | — | — | — | — | — | |
| | 150 | — | 5.0 | 5.5 | — | 8,500 | 2,350 | 20 | — | — | |
| | Max positive pulse plate voltage ⬠ = 2,000; max d-c cathode current ⬠ = 70 ma | | | | | | | | | | |
| | Max d-c cathode current ⬠ = 20 ma | | | | | | | | | | |
| Vertical Amplifier | 120 | 110 | 8.0 | 46 | 3.5 | 11,700 | 7,100 | — | — | — | 13JZ8-A† |
| Vertical Oscillator | 45 | 110 | 0 | 122 | 16.5 | — | — | — | — | — | |
| | 150 | — | 5.0 | 5.5 | — | 8,500 | 2,350 | 20 | — | — | |
| | Max positive pulse plate voltage ⬠ = 2,000 volts; max d-c cathode current ⬠ = 70 ma. | | | | | | | | | | |
| | 150 | — | 5.0 | 5.5 | — | 8,500 | 2,350 | 20 | — | — | |
| | Max d-c cathode current ⬠ = 20 ma. | | | | | | | | | | |
| Class A Amplifier | 145 | 125 | 6.0 | 34† | 2.2† | 58,000 | 6,400 | — | 3,000 | 1.5 | 13V10† |
| Class A Amplifier | 150 | 100 | R _k = 560 | 1.3 | 2.0 | 150,000 | 1,000 | (E _{c3} = 0 volts) | | | |
| Class A Amplifier | 250 | 250 | 8.0 | 35† | 3.0† | 100,000 | 6,500 | — | 5,000 | 4.2 | 13Z10† |
| FM Limiter-Discriminator | 135 | 280‡ | — | 5.0 | (R _{g2} = 33,000 ohms) (E _{c3} = +4.0 volts) | | | | | | |
| Class A Amplifier | 250 | — | 8.0 | 9.0 | — | 7,700 | 2,600 | 20 | — | — | 14A4 |
| Class A Amplifier | 90 | — | 0 | 10 | — | 6,700 | 3,000 | 20 | — | — | |
| Class A Amplifier | 250 | 250 | 12.5 | 30† | 3.5† | 70,000 | 3,000 | — | 7,500 | 2.8 | 14A5 |
| Class A Amplifier | 250 | 100 | 3.0 | 9.2 | 2.6 | 800,000 | 2,000 | — | — | — | 14A7/12B7 |
| Class A Amplifier | 250 | — | 10 | 9.0 | — | 7,600 | 2,100 | 16 | — | — | 14AF7-XXD |
| Class A Amplifier | 250 | — | 2.0 | 0.9 | — | 91,000 | 1,100 | 100 | — | — | 14B6 |
| Class A Amplifier | 100 | — | 1.0 | 0.4 | — | 110,000 | 900 | 100 | — | — | |
| Converter | 250 | 100 | 3.0 | 3.5 | 2.7 | 360,000 | 550 # | E _{c2} (Osc Plate) = 250 thru 20,000 ohms I _{e2} = 4.0 ma | | | 14B8 |
| Class A Amplifier | 200 | 100 | R _k = 82 | 16 | 3.0 | 70,000 | 19,000 | — | — | — | 14BL11† |
| Class A Amplifier | 35 | 100 | 0 | 40 | 13 | — | — | — | — | — | |
| Class A Amplifier | 200 | — | R _k = 270 | 7.1 | — | 12,500 | 5,500 | 69 | — | — | |
| Class A Amplifier | 200 | — | R _k = 470 | 7.2 | — | 7,600 | 5,300 | 40 | — | — | |

Metal tubes are shown in bold-face type, miniature tubes in italics.

‡ G3 and G5 are screen. G4 is signal-input grid.

♥ G2 and G4 are screen. G3 is signal-input grid.

1, 2, 3, etc. indicate tube sections.

‡ Maximum screen dissipation appears immediately below the screen voltage.

† Heater warm-up time controlled.

| Tube Type | Classification by Construction | Base Connections | Out-line Dwg | Filament Volts | Filament Amp | Max Plate Watts | Max Plate Volts | Max Screen Volts and Watts* | Capacitance in Picofarads | | |
|----------------------|------------------------------------|------------------|--------------|----------------|--------------|--|--|--|--|-------------------|--------------------|
| | | | | | | | | | Input | Out-put | Grid-plate |
| 14BR11 [■] | Dissimilar-Double-Triode Pentode | 12GL | 9-59 | 14.2 | 0.45 | 4.0 [◆] 1.5 [◆] 2.0 [◆] | 330 [◆] 330 [◆] 330 [◆] | 330 [◆] 1.1 [◆] — | Pentode Section | | |
| 14C5 | Beam Power Amplifier | 6AA | 9-31 | 12.6 | 0.225 | 12 | 315 | 285 2.0 | — | — | — |
| 14C7 | Sharp-Cutoff Pentode | 8V | 9-30 | 12.6 | 0.15 | 1.0 | 300 | 100 0.1 | 6.0 | 6.5 | 0.007 [♣] |
| 14E6 | Duplex-Diode High-Mu Triode | 8W | 9-30 | 12.6 | 0.15 | 2.5 | 250 | — | — | — | — |
| 14E7 | Duplex-Diode Remote-Cutoff Pentode | 8AE | 9-30 | 12.6 | 0.15 | 2.0 | 250 | 100 0.3 | 4.6 | 5.3 | 0.005 [♣] |
| 14F7 | High-Mu Twin Triode | 8AC | 9-30 | 12.6 | 0.15 | 1.0 [♣] | 250 | — | — | — | — |
| 14F8 | High-Frequency Twin Triode | 8BW | 9-32 | 12.6 | 0.15 | 3.5 [♣] 3.5 [⊕] | 300 | — | 2.8 | 1.4 | 1.6 |
| 14GT8 | Duplex-Diode Triode | 9KR | 6-2 | 14.0 | 0.15 | 1.1 [◆] | 330 [◆] | — | 1.6 [▲] | 0.24 [▲] | 1.8 [▲] |
| 14GT8-A [¶] | | | | | | | | | Diode Section | | |
| 14H7 | Semi-Remote-Cutoff RF Pentode | 8V | 9-30 | 12.6 | 0.15 | 2.5 | 300 | 300 [♣] 0.5 | 8.0 | 7.0 | 0.004 [♣] |
| 14J7 | Triode-Heptode Converter | 8BL | 9-30 | 12.6 | 0.15 | 0.5 1.25 | 300 150 | 100 0.4 — | Osc $I_{c1} = 0.4$ ma $R_{g1} = 50,000$ ohms Triode Section | | |
| 14JG8 | Duplex-Diode Triode | 9KR | 6-2 | 14.0 | 0.15 | 1.1 [◆] | 330 [◆] | — | 1.8 [▲] | 0.22 [▲] | 1.7 [▲] |
| 14N7 | Medium-Mu Twin Triode | 8AC | 9-31 | 12.6 | 0.3 | 2.5 [♣] | 300 | — | Diode Sections | | |
| 14Q7 | Pentagrid Converter | 8AL [♥] | 9-30 | 12.6 | 0.15 | 1.0 | 300 | 100 1.0 | Osc $I_{c1} = 0.5$ ma $R_{g1} = 20,000$ ohms | | |
| 14R7 | Duplex-Diode Remote-Cutoff Pentode | 8AE | 9-30 | 12.6 | 0.15 | 2.0 | 250 | 250 [♣] 0.25 | 5.6 | 5.3 | 0.004 [♣] |
| 14S7 | Triode-Heptode Converter | 8BL | 9-30 | 12.6 | 0.15 | 0.6 1.0 | 300 175 | 100 0.4 | Osc $I_{c1} = 0.4$ ma $R_{g1} = 50,000$ ohms Triode Section | | |
| 14W7 | Sharp-Cutoff RF Pentode | 8BJ | 9-30 | 12.6 | 0.225 | — | 300 | 150 0.8 | — | — | — |
| 14X7 | Duplex-Diode High-Mu Triode | 8BZ | 9-31 | 12.6 | 0.15 | — | 300 | — | — | — | — |
| 14Y4 | Full-Wave High-Vacuum Rectifier | 5AB | 9-30 | 12.6 | 0.3 | — | Tube Voltage Drop: [♣] 22 v at 70 ma d-c | | | | |
| 15 | Sharp-Cutoff RF Pentode | 5F | 12-6 | 2.0 DC | 0.22 | — | 135 | 67.5 | 2.35 [▲] | 7.80 [▲] | 0.01 |
| 15A8 [¶] | Triode-Pentode | 8GS | 9-49 | 15.0 | 0.6 | 10 2.5 7.5 | 300 300 | 150 1.25 | Pentode Section Triode Section Pentode Section-Triode Connection G and P tied | | |
| 15A B9 | Twin Tetrode | 10N | T-X | 15.0 | 0.15 | 2.0 [◆] ♣ | 250 [◆] | 180 [◆] 0.5 [◆] | 5.7 | 2.7 | 0.055 [♣] |
| 15AF11 [¶] | Dissimilar-Double Triode Pentode | 12DP | 9-58 | 14.7 | 0.45 | 5.0 [◆] 1.1 [◆] 2.0 [◆] | 330 [◆] 330 [◆] 330 [◆] | 330 [◆] 1.25 [◆] — | Pentode Section Triode Section 1 (Pins 7, 9, 10) Triode Section 2 (Pins 5, 6, 8) | | |

■ Compactron.
† Zero signal.
♣ Per section.

‡ Plate-to-plate.
♣ Maximum.
‡ Supply voltage.

⊙ Subminiature type.
▲ Without external shield.
◆ Design maximum rating.

⊕ Total for all similar sections.
⊙ Absolute maximum rating.
Conversion transconductance.

| Service | Plate Volts | Screen Volts | Neg Grid Volts | Plate Milli-amperes | Screen Milli-amperes | R_p , Ohms | G_m , μ mhos | μ Factor | Load for Rated Output, Ohms | Power Output, Watts | Tube Type |
|---|--|--------------|----------------|---------------------|----------------------|--------------|--------------------|--------------|-----------------------------|---------------------|--------------------|
| Avg. Char. | 135 | 135 | $R_k = 100$ | 17 | 4.0 | 45,000 | 10,400 | — | — | — | 14BR11 ∇ ■ |
| Class A Amplifier | 35 | 135 | 0 | 34 | 13 | — | — | — | — | — | 14BR11 ∇ ■ |
| | 200 | — | 2.0 | 7.0 | — | 12,400 | 5,500 | 68 | — | — | |
| Class A Amplifier | 200 | — | $R_k = 220$ | 9.2 | — | 9,400 | 4,400 | 41 | — | — | 14BR11 ∇ ■ |
| Class A Amplifier | 315 | 225 | 13 | 34 \dagger | 2.2 \dagger | 77,000 | 3,750 | — | 8,500 | 5.5 | 14C5 |
| Class A Amplifier | 250 | 100 | 3.0 | 2.2 | 0.7 | 1,000,000 | 1,575 | — | — | — | 14C7 |
| Class A Amplifier | 250 | — | 9.0 | 9.5 | — | 8,500 | 1,900 | 16 | — | — | 14E6 |
| Class A Amplifier | 250 | 100 | 3.0 | 7.5 | 1.6 | 700,000 | 1,300 | — | — | — | 14E7 |
| Class A Amplifier | 250 | — | 2.0 | 2.3 | — | 44,000 | 1,600 | 70 | — | — | 14F7 |
| Class A Amplifier | 250 | — | $R_k = 500$ | 6.0 | — | — | 3,300 | 48 | — | — | 14F8 |
| Class A Amplifier FM Det. | 250 | — | 3.0 | 0.7 | — | 72,000 | 1,000 | 72 | — | — | 14GT8 |
| Max d-c output current $\diamond \blacklozenge = 5.0$ ma; voltage drop $\blacklozenge = 5.0$ volts at 18 ma | | | | | | | | | | | |
| Class A Amplifier | 250 | 150 | $R_k = 180$ | 10 | 3.2 | 800,000 | 4,000 | — | — | — | 14GT8-A ∇ ¶ |
| Converter | 100 | 100 | 1.5 | 7.5 | 2.6 | 350,000 | 4,000 | — | — | — | 14H7 |
| | 250 | 100 | 3.0 | 1.4 | 2.8 | 1,500,000 | 290 # | — | — | — | 14H7 |
| Class A Amplifier FM Detector | 250 | — | 2.0 | 2.0 | — | 41,000 | 2,200 | 90 | — | — | 14JG8 |
| | Max d-c output current $\blacklozenge = 5.0$ ma; voltage drop $\blacklozenge = 5$ volts at 20 ma | | | | | | | | | | |
| Class A Amplifier | 250 | — | 8.0 | 9.0 | — | 7,700 | 2,600 | 20 | — | — | 14N7 |
| Converter | 250 | 100 | 2.0 | 3.5 | 8.5 | 1,000,000 | 550 # | — | — | — | 14Q7 |
| Class A Amplifier | 250 | 100 | 1.0 | 5.7 | 2.1 | 1,000,000 | 3,200 | — | — | — | 14R7 |
| Converter | 100 | 100 | 1.0 | 5.5 | 2.2 | 350,000 | 3,000 | — | — | — | 14R7 |
| | 250 | 100 | 2.0 | 1.8 | 3.0 | 1,250,000 | 525 # | — | — | — | 14S7 |
| Class A Amplifier | 300 | 150 | $R_k = 160$ | 10 | 3.9 | 300,000 | 5,800 | — | — | — | 14W7 |
| | 250 | — | 1.0 | 1.9 | — | 67,000 | 1,500 | 100 | — | — | 14X7 |
| Full-Wave Rectifier | Max d-c output current = 70 ma; max peak inverse voltage = 1250 volts; max rms supply voltage per plate = 325 volts; max peak current per plate = 210 ma | | | | | | | | | | |
| Class A Amplifier | 135 | 67.5 | 1.5 | 1.85 | 0.3 | 800,000 | 750 | — | — | — | 15 |
| Class A Amplifier Vertical Amplifier | 110 | 110 | 7.5 | 45 | 4.0 | 13,000 | 7,300 | — | — | — | 15A8 ∇ ¶ |
| | 250 | — | 8.0 | 9.0 | — | 7,700 | 2,600 | 20 | — | — | 15A8 ∇ ¶ |
| | 225 | — | 30 | 25 | — | 1,600 | 3,800 | 6.0 | — | — | 15A8 ∇ ¶ |
| Max positive pulse plate voltage $\square = 1,200$; max d-c cathode current = 40 ma | | | | | | | | | | | |
| Class A Amplifier | 125 | 80 | 1.0 | 8.0 | 2.0 | 110,000 | 10,000 | — | — | — | 15AB9 |
| Class A Amplifier Class A Amp | 200 | 150 | $R_k = 100$ | 24 | 4.8 | 68,000 | 11,000 | — | — | — | 15AF11 ∇ ■ |
| | 200 | — | 2.0 | 7.0 | — | 12,400 | 5,500 | 68 | — | — | 15AF11 ∇ ■ |
| | 200 | — | $R_k = 220$ | 9.2 | — | 9,400 | 4,400 | 41 | — | — | 15AF11 ∇ ■ |

Metal tubes are shown in bold-face type, miniature tubes in italics.

\blacklozenge G3 and G5 are screen. G4 is signal-input grid.

∇ G2 and G4 are screen. G3 is signal-input grid.

1, 2, 3, etc. indicate tube sections.

\ast Maximum screen dissipation appears immediately below the screen voltage.

∇ Heater warm-up time controlled.

| Tube Type | Classification by Construction | Base Connections | Out-line Dwg | Fila-ment Volts | Fila-ment Amp | Max Plate Watts | Max Plate Volts | Max Screen Volts and Watts* | Capacitance in Picofarads | | |
|----------------|----------------------------------|------------------|--------------|-----------------|---------------|-----------------|-----------------|-----------------------------|---------------------------------|---------|------------|
| | | | | | | | | | Input | Out-put | Grid-plate |
| 15BD11† ■ | Dissimilar-Double-Triode Pentode | 12DP | 9-58 | 14.7 | 0.45 | 4.0◆ | 330◆ | 330◆◆ | Pentode Section | | |
| | | | | | | 1.5◆ | 330◆ | 1.1◆ | Triode Section 1 (Pins 5, 6, 8) | | |
| | | | | | | 2.0◆ | 330◆ | — | Triode Section 2 (Pins 3, 4, 7) | | |
| 15BD11-A †■ | Dissimilar-Double-Triode Pentode | 12DP | 9-58 | 14.7 | 0.45 | 4.0◆ | 330◆ | 330◆◆ | Pentode Section | | |
| | | | | | | 1.5◆ | 330◆ | 1.5◆ | Triode Section 1 (Pins 5, 6, 8) | | |
| | | | | | | 2.0◆ | 330◆ | — | Triode Section 2 (Pins 3, 4, 7) | | |
| 16CW5 | Power Amplifier Pentode | 9CV | 6-4 | 15 | 0.3 | 14◆ | 275◆ | 220◆ | 11.8▲ | 6.0▲ | 0.6◆◆ |
| 15DQ8 | Triode-Pentode | 9HX | 6-3 | 15 | 0.3 | 4.0 | 250 | 250 | Pentode Section | | |
| | | | | | | 1.0 | 250 | 1.7 | Triode Section | | |
| 15EA7† | Double Triode | 8BD | 9-5 | 14.8 | 0.45 | 1.0◆ | 350◆ | — | Section 1 (Pins 4, 5, 6) | | |
| | | | | | | 10◆ | 550◆ | — | Section 2 (Pins 1, 2, 3) | | |
| 15EW6 | Sharp-Cutoff RF Pentode | 7CM | 5-2 | 15.0 | 0.15 | 3.1◆ | 330◆ | 330◆◆ | 10 | 3.4 | 0.03◆◆ |
| 15EW7† | Dissimilar Double Triode | 9HF | 9-70 | 14.8 | 0.45 | 1.5◆ | 330◆ | — | Section 1 (Pins 6, 7, 8) | | |
| | | | | | | 10◆ | 330◆ | — | Section 2 (Pins 1, 2, 3, 9) | | |
| 15FM7† ■ | Dissimilar Double Triode | 12EJ | 9-58 | 14.8 | 0.45 | 1.0◆ | 350◆ | — | Section 1 (Pins 9, 10, 11) | | |
| | | | | | | 10◆ | 550◆ | — | Section 2 (Pins 3, 5, 7, 8) | | |
| 15FY7† ■ | Dissimilar Double Triode | 12EO | 9-60 | 14.7 | 0.45 | 1.0◆ | 330◆ | — | Section 1 (Pins 9, 10, 11) | | |
| | | | | | | 7.0◆ | 275◆ | — | Section 2 (Pins 3, 5, 7) | | |
| 15HA6 | Pentode | 9NW | 6-4 | 15 | 0.3 | 8.0◆ | 300◆ | 250◆ | 13▲ | 8.0▲ | 0.18▲ |
| 15HB6† | Power Amplifier Pentode | 9NW | 6-4 | 14.7 | 0.3 | 10◆ | 350◆ | 300◆ | 13▲ | 8.0▲ | 0.18▲ |
| | | | | | | — | — | 2.0◆ | — | — | — |
| 15KY8† | Triode-Pentode | 9QT | T-X | 15 | 0.45 | 12◆ | 300◆ | 150◆ | Pentode Section | | |
| | | | | | | 1.5◆ | 330◆ | 1.9◆ | Triode Section | | |
| 15KY8-A† | Triode-Pentode | 9QT | 9-107 | 15 | 0.45 | 12◆ | 300◆ | 150◆ | Pentode Section | | |
| | | | | | | 1.5◆ | 330◆ | 1.9◆ | Triode Section | | |
| 15LE8† | Twin Pentode | 9QZ | 6-4 | 15 | 0.3 | 2.0◆ | 300◆ | 150◆ | — | — | — |
| | | | | | | ◆ | ◆ | 2.0◆ | — | — | — |

■ Compactron.

† Plate-to-plate.

◎ Subminiature type.

⊕ Total for all similar sections.

† Zero signal.

◆ Maximum.

▲ Without external shield.

⊖ Absolute maximum rating.

◆ Per section.

◆ Supply voltage.

◆ Design maximum rating.

Conversion transconductance.

| Service | Plate Volts | Screen Volts | Neg Grid Volts | Plate Milli-am-peres | Screen Milli-am-peres | R_p , Ohms | G_m , μ mhos | μ Fac-tor | Load for Rated Out-put, Ohms | Power Out-put, Watts | Tube Type |
|---|-------------|--------------|----------------|----------------------|-----------------------|--------------|--------------------|---------------|------------------------------|----------------------|----------------------|
| Class A Amplifier Class A Amplifier Class A Amplifier | 135 | 135 | $R_k = 100$ | 17 | 4.0 | 45,000 | 10,400 | — | — | — | 15BD11- ■ |
| | 200 | — | 2.0 | 7.0 | — | 12,400 | 5,500 | 68 | — | — | |
| | 200 | — | $R_k = 220$ | 9.2 | — | 9,400 | 4,400 | 41 | — | — | |
| Class A Amplifier Class A Amplifier Class A Amplifier | 135 | 135 | $R_k = 100$ | 17 | 4.0 | 45,000 | 10,400 | — | — | — | 15BD11-A ■ |
| | 200 | — | 2.0 | 7.0 | — | 12,400 | 5,500 | 68 | — | — | |
| | 200 | — | $R_k = 220$ | 9.2 | — | 9,400 | 4,400 | 41 | — | — | |
| Class A Amplifier | 170 | 170 | 12.5 | 70† | 3.5† | 26,000 | 11,000 | — | 2,400 | 5.6 | 16CW5 |
| Class A Amplifier Class A Amplifier | 200 | 200 | 2.9 | 18 | 3.0 | 130,000 | 10,400 | — | — | — | 16DQ8 |
| | 200 | — | 1.7 | 3.0 | — | — | 4,000 | 65 | — | — | |
| Vertical Oscillator | 250 | — | 3.0 | 2.0 | — | 30,000 | 2,200 | 66 | — | — | 15EA7‡ |
| Vertical Amplifier | 60 | — | 0 | 100 | — | — | — | — | — | — | |
| | 175 | — | 25 | 40 | — | 920 | 6,000 | 5.5 | — | — | |
| Max peak negative grid voltage $\diamond = 400$ volts Max positive pulse plate voltage $\diamond = 1,500$; max d-c cathode current $\diamond = 50$ ma | | | | | | | | | | | |
| Class A Amplifier | 125 | 125 | $R_k = 56$ | 11 | 3.2 | 200,000 | 14,000 | — | — | — | 16EW6 |
| Vertical Oscillator | 250 | — | 11 | 5.5 | — | 8,750 | 2,000 | 17.5 | — | — | 15EW7‡ |
| Vertical Amplifier | 150 | — | 17.5 | 45 | — | 800 | 7,500 | 6.0 | — | — | |
| | 150 | — | 17.5 | 45 | — | 800 | 7,500 | 6.0 | — | — | |
| Max d-c cathode current $\diamond = 22$ ma Max positive pulse plate voltage $\diamond = 1,500$; max d-c cathode current $\diamond = 50$ ma | | | | | | | | | | | |
| Vertical Oscillator | 250 | — | 3.0 | 2.0 | — | 30,000 | 2,200 | 66 | — | — | 15FM7‡ ■ |
| Vertical Amplifier | 175 | — | 25 | 40 | — | 920 | 6,000 | 5.5 | — | — | |
| | 60 | — | 0 | 95 | — | — | — | — | — | — | |
| Max peak negative grid voltage $\diamond = 400$ volts Max positive pulse plate voltage $\diamond = 1,500$; max d-c cathode current $\diamond = 50$ ma | | | | | | | | | | | |
| Vertical Oscillator | 250 | — | 3.0 | 1.4 | — | 40,500 | 1,600 | 65 | — | — | 15FY7‡ ■ |
| Vertical Amplifier | 150 | — | 17.5 | 35 | — | 920 | 6,500 | 6.0 | — | — | |
| | 60 | — | 0 | 95 | — | — | — | — | — | — | |
| Max d-c cathode current $\diamond = 20$ ma Max positive pulse plate voltage $\diamond = 2,000$; max d-c cathode current $\diamond = 50$ ma | | | | | | | | | | | |
| Class A Amplifier | 150 | 100 | $R_k = 33$ | 28 | 3.5 | 20,000 | 20,000 | — | — | — | 16HA6 |
| Class A Amplifier | 60 | 100 | 0 | 45 | 9.0 | — | — | — | — | — | |
| | 250 | 250 | $R_k = 100$ | 40 | 6.2 | 24,000 | 20,000 | — | — | — | |
| Vertical Amplifier | 135 | 120 | 10 | 39 | 3.0 | 18,000 | 8,400 | — | — | — | 15KY8‡ |
| Vertical Oscillator | 50 | 120 | 0 | 170 | 20 | — | — | — | — | — | |
| | 250 | — | 3.0 | 1.4 | — | 40,000 | 1,600 | 64 | — | — | |
| Max positive pulse plate voltage $\diamond = 2,000$; max d-c cathode current $\diamond = 70$ ma Max d-c cathode current $\diamond = 22$ ma | | | | | | | | | | | |
| Vertical Amplifier | 135 | 120 | 10 | 39 | 3.0 | 18,000 | 8,400 | — | — | — | 15KY8-A‡ |
| Vertical Oscillator | 50 | 120 | 0 | 170 | 20 | — | — | — | — | — | |
| | 250 | — | 3.0 | 1.4 | — | 40,000 | 1,600 | 64 | — | — | |
| Max positive pulse plate voltage $\diamond = 2,000$; max d-c cathode current $\diamond = 70$ ma Max d-c cathode current $\diamond = 22$ ma | | | | | | | | | | | |
| Color Demodul tor | 100 | 100 | 2.5 | 8.0 | 15 | 50,000 | 5,800 | — | $E_{c3} = 0$ volts | — | 16LE8‡ |

Metal tubes are shown in bold-face type, miniature tubes in italics.

♦ G3 and G5 are screen. G4 is signal-input grid.

♥ G2 and G4 are screen. G3 is signal-input grid.

1, 2, 3, etc. indicate tube sections.

✱ Maximum screen dissipation appears immediately below the screen voltage.

‡ Heater warm-up time controlled.

| Tube Type | Classification by Construction | Base Connections | Out-line Dwg | Fila-ment Volts | Fila-ment Amp | Max Plate Watts | Max Plate Volts | Max Screen Volts and Watts | Capacitance in Picofarads | | |
|--------------------------|----------------------------------|------------------|--------------|-----------------|---------------|--|--|--|---|------------------|------------------|
| | | | | | | | | | Input | Out-put | Grid-plate |
| 15MF8 [Ⓜ] ■ | Triode-Pentode | 12DZ | 12-57 | 14.7 | 0.6 | 12 [◆] 2.5 [◆] | 400 [◆] 400 [◆] | 300 [◆] 2.75 [◆] — | Pentode Section Triode Section | | |
| 15MX8 [Ⓜ] | Triode-Pentode | 9QT | 9-109 | 15.0 | 0.45 | 14 [◆] 1.5 [◆] | 300 [◆] 330 [◆] | 150 [◆] 1.9 [◆] — | Pentode Section Triode Section | | |
| 16A8 | Triode-Pentode | 9EX | 6-4 | 16 | 0.3 | 5.0 1.0 | 250 250 | 250 1.8 — | Pentode Section Triode Section | | |
| 16AK9 [Ⓜ] ■ | Dissimilar-Double-Triode Pentode | 12GZ | 12-56 | 16.4 | 0.6 | 10 [◆] 1.25 [◆] 1.0 [◆] | 350 [◆] 330 [◆] 330 [◆] | 250 [◆] 2.0 [◆] — | Pentode Section Triode Section 1 (Pins 7, 10, 11) Triode Section 2 (Pins 2, 3, 7) | | |
| 16AQ3 | Half-Wave High-Vacuum Rectifier | 9CB | T-X | 16.4 | 0.6 | 5.0 | Tube Voltage Drop: 28.5 volts at 440 ma d-c | | | | |
| 16BQ11 [Ⓜ] ■ | Dissimilar-Double Pentode | 12DM | 9-58 | 16.0 | 0.315 | 3.1 [◆] 3.1 [◆] | 330 [◆] 330 [◆] | 330 [◆] 0.65 [◆] 330 [◆] 0.65 [◆] | Section 1 (pins 7, 8, 9, 10, 11) Section 2 (2, 3, 4, 5, 6) | | |
| 16BX11 [Ⓜ] ■ | Dissimilar-Double Triode-Pentode | 12CA | 9-58 | 16.0 | 0.315 | 3.0 [◆] 2.0 [◆] 1.5 [◆] | 165 [◆] 330 [◆] 330 [◆] | 165 [◆] 1.0 [◆] — | Pentode Section Triode Section 1 (pins 7, 8, 9) Triode Section 2 (pins 4, 5, 6) | | |
| 16GK6 [Ⓜ] | Beam Power Amplifier | 9GK | 6-4 | 16.0 | 0.3 | 13.2 [◆] | 330 [◆] | 330 [◆] 2.0 [◆] | Single Tube 2 Tubes, Push-Pull 2 Tubes, Push-Pull | | |
| 16GY5 [Ⓜ] ■ | Beam Pentode | 12DR | 12-79 | 15.8 | 0.6 | 18 [◆] | 770 [◆] | 220 [◆] 3.5 [◆] | 22 [▲] | 9.0 [▲] | 0.7 [▲] |
| 16KA6 [Ⓜ] ■ | Beam Pentode | 12GH | 12-79 | 15.8 | 0.6 | 18 [◆] | 770 [◆] | 220 [◆] 3.5 [◆] | 23 [▲] | 8.5 [▲] | 0.6 [▲] |
| 16LU8 [Ⓜ] ■ | Triode-Pentode | 12DZ | 12-57 | 15.8 | 0.6 | 14 [◆] 2.5 [◆] | 400 [◆] 400 [◆] | 300 [◆] 2.75 [◆] — | Pentode Section Triode Section | | |

■ Compactron.
† Zero signal.
▲ Per section.

† Plate-to-plate.
▲ Maximum.
§ Supply voltage.

Ⓜ Subminiature type.
▲ Without external shield.
◆ Design maximum rating.

Ⓜ Total for all similar sections.
◆ Absolute maximum rating.
Conversion transconductance.

| Service | Plate Volts | Screen Volts | Neg Grid Volts | Plate Milli-amperes | Screen Milli-amperes | R _p , Ohms | G _m , μ mhos | μ Factor | Load for Rated Output, Ohms | Power Output, Watts | Tube Type |
|--------------------------------|--|--------------|----------------------|---------------------|----------------------|-----------------------|-----------------------------|--------------|---------------------------------|---------------------|---------------------|
| Class A Amplifier | 250 | 250 | 20 | 50 | 3.5 | 5,000 | 4,100 | — | — | — | 15MF8 [†] |
| Class A Amplifier | 250 | — | 4.0 | 2.6 | — | 14,000 | 4,100 | 58 | — | — | ■ |
| Vertical-Deflection Amplifier | 135 50 120 | 120 120 | 10 0 | 39 170 | 3.0 20 | 18,000 | 8,400 | — | — | — | 15MX8 [†] |
| Vertical-Deflection Oscillator | 250 | — | 3.0 | 1.4 | — | 40,000 | 1,600 | 64 | — | — | ■ |
| Class A Amplifier | 200 | 200 | 16 | 35 | 7.0 | 20,000 | 6,400 | — | — | — | 16A8 |
| Class A Amplifier | 100 | — | 0 | 3.5 | — | — | 2,500 | 70 | — | — | ■ |
| Avg. Char. | 150 | 150 | 14 | 49 | 3.5 | 16,400 | 6,200 | — | — | — | 16AK9 [†] |
| Avg. Char. | 60 | 125 | 0 | 140 | 18 | — | — | — | — | — | ■ |
| Avg. Char. | 150 | — | 2.0 | 5.4 | — | 11,000 | 3,900 | 43 | — | — | ■ |
| Avg. Char. | 150 | — | 5.0 | 5.5 | — | 8,500 | 2,350 | 20 | — | — | ■ |
| TV Damper | Max d-c output current = 220 ma; max peak inverse voltage = 6,000 volts; max peak current = 550 ma | | | | | | | | | | 16AQ3 |
| Class A Amplifier | 125 | 125 | R _k = 56 | 11 | 3.5 | 200,000 | 10,500 | — | — | — | 16BQ11 [†] |
| Class A Amplifier | 125 | 125 | R _k = 56 | 11 | 3.8 | 200,000 | 13,000 | — | — | — | ■ |
| Video Amplifier | 125 | 125 | R _k = 56 | 12 | 3.8 | 100,000 | 11,300 | — | — | — | 16BX11 [†] |
| General-Purpose Amplifier | 35 | 125 | 0 | 20 | 9.2 | — | — | — | — | — | ■ |
| General-Purpose Amplifier | 150 | — | R _k = 150 | 11 | — | 6,800 | 6,200 | — | — | — | ■ |
| General-Purpose Amplifier | 150 | — | R _k = 220 | 7.6 | — | 8,400 | 6,800 | — | — | — | ■ |
| Class A Amplifier | 250 | 250 | 7.3 | 48† | 5.5† | 38,000 | 11,300 | — | 5,200 | 5.7 | 16GK6 [†] |
| Class AB Amplifier | 300 | 300 | R _k = 130 | 72† | 8.0† | — | — | — | 8,000† | 17 | ■ |
| Class B Amplifier | 250 | 250 | R _k = 130 | 62† | 7.0† | — | — | — | 8,000† | 11 | ■ |
| Class B Amplifier | 300 | 300 | 14.7 | 15† | 1.6† | — | — | — | 8,000† | 17 | ■ |
| Class B Amplifier | 250 | 250 | 11.6 | 20† | 2.2† | — | — | — | 8,000† | 11 | ■ |
| Horizontal Amplifier | 130 | 130 | 20 | 50 | 1.75 | 11,000 | 9,100 | — | — | — | 16GY5 [†] |
| Horizontal Amplifier | 60 | 130 | 0 | 410 | 24 | — | — | — | — | — | ■ |
| Horizontal Amplifier | 130 | 130 | 20 | 50 | 1.75 | 11,000 | 9,100 | — | — | — | 16KA6 [†] |
| Horizontal Amplifier | 60 | 130 | 0 | 410 | 24 | — | — | — | (b.p. connected to k at socket) | — | ■ |
| Horizontal Amplifier | Max positive pulse plate voltage \diamond = 7,000; max d-c cathode current \diamond = 230 ma | | | | | | | | | | 16KA6 [†] |
| Horizontal Amplifier | Max positive pulse plate voltage \diamond = 6,500; max d-c cathode current \diamond = 230 ma | | | | | | | | | | 16KA6 [†] |
| Class A Amplifier | 135 | 120 | 10 | 56 | 3.0 | 12,000 | 9,300 | — | — | — | 16LU8 [†] |
| Class A Amplifier | 250 | — | 4.0 | 2.3 | — | 16,000 | 3,600 | 58 | — | — | ■ |

Metal tubes are shown in bold-face type, *miniature tubes in italics.*

\diamond G3 and G5 are screen. G4 is signal-input grid.

∇ G2 and G4 are screen. G3 is signal-input grid.

1, 2, 3, etc. indicate tube sections.

∇ Maximum screen dissipation appears immediately below the screen voltage.

∇ Heater warm-up time controlled.

| Tube Type | Classification by Construction | Base Connections | Out-line Dwg | Filament Volts | Filament Amp | Max Plate Watts | Max Plate Volts | Max Screen Volts and Watts | Capacitance in Picofarads | | |
|--------------------------|----------------------------------|------------------|--------------|----------------|--------------|-----------------|---|----------------------------|---|--------|------------|
| | | | | | | | | | Input | Output | Grid-plate |
| 16L8-A [Ⓜ] ■ | Triode-Pentode | 12DZ | 12-56 | 16.0 | 0.6 | 14◆ | 400◆ | 300◆ | Pentode Section Triode Section | | |
| | | | | | | 2.5◆ | 400◆ | 2.75◆ | | | |
| 16MY8 [Ⓜ] ■ | Triode-Pentode | 12DZ | 12-57 | 15.8 | 0.6 | 16◆ | 400◆ | 300◆ | Pentode Section Triode Section | | |
| | | | | | | 2.5◆ | 400◆ | 2.75◆ | | | |
| 16Y9 | Dissimilar Double Pentode | 10L | 6-3 | 16.5 | 0.3 | 5.0 | 250 | 250 | Section 1 (Pins 7, 8, 9, 10) Section 2 (Pins 1, 2, 3, 4) | | |
| | | | | | | 1.5 | 250 | 250 | | | |
| C16J | Thyratron same as 5665 | | | | | | | | | | |
| 17A8 | Triode-Pentode | 9DC | 6-2 | 9.0 | 0.3 | 1.7 | 250 | 200 | Pentode Section Triode Section | | |
| | | | | | | 1.5 | 250 | 0.75 | | | |
| 17A89 | Twin Tetrode | 10N | T-X | 16.8 | 0.15 | 2.0◆ | 250◆ | 180◆ | 5.7 | 2.7 | 0.055 |
| 17AB10 [Ⓜ] ■ | Pentode-Gated-Beam Discriminator | 12BT | 9-58 | 16.8 | 0.45 | 6.5◆ | 165◆ | 150◆ | Pentode Section (Pins 2, 3, 9, 11) Gated-Beam Discriminator (Pins 4, 5, 6, 7, 8) | | |
| | | | | | | — | 330◆ | 1.8◆ | | | |
| 17AV5-GA [Ⓜ] | Beam Power Amplifier | 6CK | T-X | 16.8 | 0.45 | 11 | 550‡ | 175 | 14▲ | 7.0▲ | 0.5▲ |
| 17AX3 [Ⓜ] ■ | Half-Wave High-Vacuum Rectifier | 12BL | 9-59 | 16.8 | 0.45 | 5.3◆ | Tube Voltage Drop: 32 volts at 250 ma d-c | | | | |
| 17AX4-GT [Ⓜ] | Half-Wave High-Vacuum Rectifier | 4CG | 9-11, 9-41 | 16.8 | 0.45 | 4.8 | Tube Voltage Drop: 32 v at 250 ma d-c | | | | |
| 17AX4-GTA [Ⓜ] | Half-Wave High-Vacuum Rectifier | 4CG | 9-11 | 16.8 | 0.45 | 5.3◆ | Tube Voltage Drop: 32 volts at 250 ma d-c | | | | |
| 17AY3 [Ⓜ] | Half-Wave High-Vacuum Rectifier | 9HP | 9-86 | 16.8 | 0.45 | 6.5◆ | Tube Voltage Drop: 32 volts at 350 ma d-c | | | | |
| 17AY3-A [Ⓜ] | Half-Wave High-Vacuum Rectifier | 9HP | T-X | 16.8 | 0.45 | 6.5◆ | Tube Voltage Drop: 32 volts at 350 ma d-c | | | | |
| 17BE3 [Ⓜ] ■ | Half-Wave High-Vacuum Rectifier | 12GA | 9-60 | 16.8 | 0.45 | 6.5◆ | Tube Voltage Drop: 25 volts at 350 ma d-c | | | | |
| 17BE3-A [Ⓜ] ■ | Half-Wave High-Vacuum Rectifier | 12GA | 9-60 | 16.8 | 0.45 | 6.5◆ | Tube Voltage Drop: 22.5 volts at 350 ma d-c | | | | |
| 17BF11 [Ⓜ] ■ | Dissimilar-Double Pentode | 12EZ | 9-59 | 16.8 | 0.45 | 6.5◆ | 165◆ | 150◆ | Section 1 (Pins 8, 9, 10, 11) Section 2 (Pins 2, 3, 5, 6, 7) | | |
| | | | | | | 1.7◆ | 330◆ | 1.1◆ | | | |
| 17BF11-A [Ⓜ] ■ | Dissimilar Double Pentode | 12EZ | T-X | 16.8 | 0.45 | 6.5◆ | 165◆ | 150◆ | Section 1 (Pins 8, 9, 10, 11) Section 2 (Pins 2, 3, 5, 6, 7) | | |
| | | | | | | 1.7◆ | 330◆ | 1.1◆ | | | |
| 17BH3 [Ⓜ] | Half-Wave High-Vacuum Rectifier | 9HP | 9-86 | 17 | 0.6 | 6.5◆ | Tube Voltage Drop: 33 volts at 360 ma d-c | | | | |
| 17BH3-A [Ⓜ] | Half-Wave High-Vacuum Rectifier | 9HP | T-X | 17 | 0.6 | 6.5◆ | Tube Voltage Drop: 33 volts at 360 ma d-c | | | | |
| 17BQ6-GTB [Ⓜ] | Beam Power Amplifier | 6AM | 9-49 or 9-50 | 16.8 | 0.45 | 11 | 600‡ | 200 | 15▲ | 7.0▲ | 0.6▲ |
| 17BR3 [Ⓜ] | Half-Wave High-Vacuum Rectifier | 9CB | T-X | 16.8 | 0.45 | 6.5◆ | Tube Voltage Drop: 19 volts at 250 ma d-c | | | | |
| 17BS3 [Ⓜ] | Half-Wave High-Vacuum Rectifier | 9HP | 9-86 | 16.8 | 0.45 | 6.0◆ | Tube Voltage Drop: 12 volts at 140 ma d-c | | | | |
| 17BS3-A [Ⓜ] | Half-Wave High-Vacuum Rectifier | 9HP | T-X | 16.8 | 0.45 | 6.0◆ | Tube Voltage Drop: 12 volts at 140 ma d-c | | | | |
| 17BW3 [Ⓜ] ■ | Half-Wave, High-Vacuum Rectifier | 12FX | 9-60 | 16.8 | 0.6 | 6.5◆ | Tube Voltage Drop: 32 volts at 350 ma d-c | | | | |
| 17BZ3 [Ⓜ] ■ | Half-Wave, High-Vacuum Rectifier | 12FX | 9-60 | 16.8 | 0.45 | 6.5◆ | Tube Voltage Drop: 21 volts at 350 ma d-c | | | | |

■ Compactron.

‡ Plate-to-plate.

◆ Subminiature type.

Ⓜ Total for all similar sections.

† Zero signal.

◆ Maximum.

▲ Without external shield.

Ⓜ Absolute maximum rating.

◆ Per section.

‡ Supply voltage.

◆ Design maximum rating.

Conversion transconductance.

● See X-Radiation Warning, page 4.

| Service | Plate Volts | Screen Volts | Neg Grid Volts | Plate Milli-amperes | Screen Milli-amperes | R_p , Ohms | G_m , μ mhos | μ Factor | Load for Rated Output, Ohms | Power Output, Watts | Tube Type |
|--|--|--------------|----------------------|---------------------|--|--------------|--------------------|-----------------------------|-----------------------------|---------------------|------------------------|
| Class A Amplifier Class A Amplifier | 135 | 120 | 10 | 56 | 3.0 | 12,000 | 9,300 | — | — | — | 16L8-A ∇ ■ |
| | 250 | — | 4.0 | 2.3 | — | 16,000 | 3,600 | 58 | — | — | |
| Class A Amplifier Class A Amplifier | 135 | 120 | 10 | 56 | 3.0 | 12,000 | 9,300 | — | — | — | 16MY8 ∇ ■ |
| | 45 250 | 125 — | 0 4.0 | 200 2.3 | 20 — | 16,000 | 3,600 | 58 | — | — | |
| Class A Amplifier Class A Amplifier | 170 | 170 | 2.6 | 30 | 6.5 | 40,000 | 21,000 | — | — | — | 16Y9 |
| | 150 | 150 | 2.3 | 10 | 3.0 | 160,000 | 8,500 | — | — | — | |
| Class A Amplifier Class A Amplifier | 170 | 170 | 2.0 | 10 | 2.8 | 400,000 | 6,200 | — | — | — | 17A8 |
| | 100 | — | 2.0 | 14 | — | — | 5,000 | 20 | — | — | |
| Class A Amplifier \blacklozenge | 125 | 80 | 1.0 | 8.0 | 2.0 | 110,000 | 10,000 | — | — | — | 17A B9 |
| Class A Amplifier | 145 | 110 | 6.0 | 36† | 3.0† | 30,000 | 8,600 | — | 3,000 | 2.4 | 17AB10 ∇ ■ |
| FM Limiter-Discriminator | 135 | 280‡ | — | 5.0 | (R _{g2} = 33,000 ohms) (E _{c3} = +4.0 volts) | | | | | | |
| Horizontal Amplifier | 250 60 | 150 150 | 22.5 0 | 57 260 | 2.1 26 | 14,500 | 5,900 | — | — | — | 17AV5-GA ∇ |
| | Max positive pulse plate voltage \square = 5,500 volts; max screen dissipation = 2.5 watts; max d-c cathode current = 110 ma | | | | | | | | | | |
| TV Damper | Max d-c output current \blacklozenge = 165 ma; max peak inverse voltage \blacklozenge = 5,000 volts; max peak current \blacklozenge = 1,000 ma | | | | | | | | | | 17AX3 ∇ ■ |
| TV Damper | Max d-c output current \blacklozenge = 125 ma; max peak inverse voltage \square = 4,400 volts; max peak current \blacklozenge = 750 ma | | | | | | | | | | 17AX4-GT ∇ |
| TV Damper | Max d-c output current \blacklozenge = 165 ma; max peak inverse voltage \blacklozenge = 5,000 volts; max peak current \blacklozenge = 1,000 ma | | | | | | | | | | 17AX4-GTA ∇ |
| TV Damper | Max d-c output current \blacklozenge = 175 ma; max peak inverse voltage \blacklozenge = 5,000 volts; max peak current \blacklozenge = 1,100 ma | | | | | | | | | | 17AY3 ∇ |
| TV Damper | Max d-c output current \blacklozenge = 175 ma; max peak inverse voltage \blacklozenge = 5,000 volts; max peak current \blacklozenge = 1,100 ma | | | | | | | | | | 17AY3-A ∇ |
| TV Damper | Max d-c output current \blacklozenge = 200 ma; max peak inverse voltage \blacklozenge = 5,000 volts; max peak current \blacklozenge = 1,200 ma | | | | | | | | | | 17BE3 ∇ ■ |
| TV Damper | Max d-c output current \blacklozenge = 200 ma; max peak inverse voltage \blacklozenge = 5,000 volts; max peak current \blacklozenge = 1,200 ma | | | | | | | | | | 17BE3-A ∇ ■ |
| Class A Amplifier Class A Amplifier | 145 | 110 | 6.0 | 36† | 3.0† | 30,000 | 8,600 | — | 3,000 | 2.4 | 17BF11 ∇ ■ |
| | 150 | 100 | R _k = 560 | 1.3 | 2.0 | 150,000 | 1,000 | E _{c3} = 0 Volts | — | — | |
| Class A Amplifier Class A Amplifier | 145 | 110 | 6.0 | 36† | 3.0† | 30,000 | 8,600 | — | 3,000 | 2.4 | 17BF11-A ∇ ■ |
| | 150 | 100 | R _k = 560 | 1.3 | 2.0 | 150,000 | 1,000 | (E _{c3} = 0 volts) | | | |
| TV Damper | Max d-c output current \blacklozenge = 180 ma; max peak inverse voltage \blacklozenge = 5,500 volts; max peak current \blacklozenge = 1,100 ma | | | | | | | | | | 17BH3 ∇ |
| TV Damper | Max d-c output current \blacklozenge = 180 ma; max peak inverse voltage \blacklozenge = 5,500 volts; max peak current \blacklozenge = 1,100 ma | | | | | | | | | | 17BH3-A ∇ |
| Horizontal Amplifier | 250 60 | 150 150 | 22.5 0 | 57 260 | 2.1 26 | 14,500 | 5,900 | — | — | — | 17BQ6-GTB ∇ |
| | Max positive pulse plate voltage \square = 6,000; max d-c cathode current = 110 ma | | | | | | | | | | |
| TV Damper | Max d-c output current \blacklozenge = 200 ma; max peak inverse voltage \blacklozenge = 5,500; max peak current \blacklozenge = 1,200 ma | | | | | | | | | | 17BR3 ∇ |
| TV Damper | Max d-c output current \blacklozenge = 200 ma; max peak inverse voltage \blacklozenge = 5,000; max peak current \blacklozenge = 1,100 ma | | | | | | | | | | 17BS3 ∇ |
| TV Damper | Max d-c output current \blacklozenge = 200 ma; max peak inverse voltage \blacklozenge = 5,000; max peak current \blacklozenge = 1,100 ma | | | | | | | | | | 17BS3-A ∇ |
| TV Damper | Max d-c output current \blacklozenge = 175 ma; max peak inverse voltage \blacklozenge = 5,000 volts; max peak current \blacklozenge = 1,100 ma | | | | | | | | | | 17BW3 ∇ ■ |
| TV Damper | Max d-c output current \blacklozenge = 200 ma; max peak inverse voltage \blacklozenge = 4,500 volts; max peak current \blacklozenge = 1,200 ma | | | | | | | | | | 17BZ3 ∇ ■ |

Metal tubes are shown in bold-face type, *miniature tubes in italics*.

\blacklozenge G3 and G5 are screen. G4 is signal-input grid. \blacklozenge Maximum screen dissipation appears immediately below the screen voltage.

∇ Heater warm-up time controlled.

1, 2, 3, etc. indicate tube sections.

| Tube Type | Classification by Construction | Base Connections | Out-line Dwg | Fila-ment Volts | Fila-ment Amp | Max Plate Watts | Max Plate Volts | Max Screen Volts pnd Watts | Capacitance in Picofarads | | |
|-----------------------------|----------------------------------|------------------|---------------|-----------------|---------------|--|---|--------------------------------------|---------------------------|---------|-------------------|
| | | | | | | | | | Input | Out-put | Grid-plate |
| 17C5 [†] | Beam Power Amplifier | 7CV | 5-3 | 16.8 | 0.45 | 6.0 | 135 | 117 1.25 | 13▲ | 8.5▲ | 0.6▲ |
| 17C9 17C9-A [†] | Twin Tetrode | 10F | 6-13 | 16.8 | 0.15 | 1.5 [‡] 2.5 [‡] ⊕ | 250 [‡] | 180 [‡] 0.5 [‡] | 4.4 ₁ | 2.2 | .055 ₁ |
| 17CA6 [†] | Beam Power Amplifier | 7CV | 5-3 | 16.8 | 0.45 | 5.0 | 130 | 130 1.4 | 15▲ | 9.0▲ | 0.5▲ |
| 17CK3 [†] | Half-Wave, High-Vacuum Rectifier | 9HP | T-X or 9-86 | 16.8 | 0.45 | 6.5 [‡] | Tube Voltage Drop: 16 volts at 350 ma d-c | | | | |
| 17CL3 [†] | Half-Wave, High-Vacuum Rectifier | 9HP | T-X or 9-86 | 16.8 | 0.45 | 8.5 [‡] | Tube Voltage Drop: 16 volts at 350 ma d-c | | | | |
| 17CT3 [†] | Half-Wave, High-Vacuum Rectifier | 9RX | T-X | 16.8 | 0.45 | 4.75 [‡] | Tube Voltage Drop: 16 volts at 350 ma d-c | | | | |
| 17CU6 [†] | Beam Power Amplifier | 7CV | 5-3 | 16.8 | 0.45 | 7.0 [‡] | 150 [‡] | 130 [‡] 1.4 [‡] | 13▲ | 8.5▲ | 0.6▲ |
| 17D4 [†] | Half-Wave High-Vacuum Rectifier | 4CG | 9-11, 9-41 | 16.8 | 0.45 | 5.5 [‡] | — | — | — | — | — |
| 17D4-A [†] | Half-wave High-Vacuum Rectifier | 4CG | 9-41 | 16.8 | 0.45 | 8.0 [‡] | Tube Voltage Drop: 30 volts at 340 ma d-c | | | | |
| 17DE4 [†] | Half-Wave High-Vacuum Rectifier | 4CG | 9-44 | 17.0 | 0.6 | 6.5 [‡] | Tube Voltage Drop: 32 volts at 350 ma d-c | | | | |
| 17DM4 [†] | Half-Wave High-Vacuum Rectifier | 4CG | 9-44 | 16.8 | 0.45 | 6.5 [‡] | Tube Voltage Drop: 35 volts at 400 ma d-c | | | | |
| 17DM4A [†] | Half-Wave High-Vacuum Rectifier | 4CG | 9-44 | 16.8 | 0.45 | 6.5 [‡] | Tube Voltage Drop: 35 volts at 400 ma d-c | | | | |
| 17DQ4 [†] | Half-Wave High-Vacuum Rectifier | 4CG | 9-43 | 16.8 | 0.45 | 6.0 [‡] | Tube Voltage Drop: 32 volts at 250 ma d-c | | | | |
| 17DQ6 [†] | Beam Power Amplifier | 6AM | T-X | 16.8 | 0.45 | 15 | 550 [‡] | 175 2.5 | 15▲ | 7.0▲ | 0.55▲ |
| 17DQ6-A [†] | Beam Power Amplifier | 6AM | 12-51 | 16.8 | 0.45 | 18 [‡] | 770 [‡] | 220 [‡] 3.6 [‡] | 15▲ | 7.0▲ | 0.5▲ |
| 17DQ6-B [†] | Beam Power Amplifier | 6AM | 12-51 | 16.8 | 0.45 | 18 [‡] | 770 [‡] | 220 [‡] 3.6 [‡] | 15▲ | 7.0▲ | 0.5▲ |
| 17DW4-A [†] | Half-Wave, High-Vacuum Rectifier | 9HP | T-X or 9-86 | 16.8 | 0.45 | 8.5 [‡] | Tube Voltage Drop: 25 volts at 350 ma d-c | | | | |
| 17EW8 | Twin Triode | 9AJ | 6-2 | 17.5 | 0.15 | 2.5 [‡] 4.5 [‡] ⊕ | 250 | — | 3.0▲ | 1.2▲ | 1.5▲ |
| 17GE5 [†] ■ | Beam Power Amplifier | 12BJ | 12-56 | 16.8 | 0.45 | 17.5 [‡] | 770 [‡] | 220 [‡] 3.5 [‡] | 16▲ | 7.0▲ | 0.34▲ |
| 17GJ5 [†] | Beam Power Amplifier | 9QK | T-X | 16.8 | 0.45 | 17.5 [‡] | 770 [‡] | 220 [‡] 3.5 [‡] | 15▲ | 6.5▲ | 0.26▲ |
| 17GJ5-A [†] | Beam Power Amplifier | 9QK | T-X | 16.8 | 0.45 | 17.5 [‡] | 770 [‡] | 220 [‡] 3.5 [‡] | 15▲ | 6.5▲ | 0.26▲ |
| 17GT5 [†] | Beam Power Amplifier | 9NZ | 12-64 | 16.8 | 0.45 | 17.5 [‡] | 770 [‡] | 220 [‡] 3.5 [‡] | 15▲ | 6.5▲ | 0.26▲ |
| 17GT5-A [†] | Beam Power Amplifier | 9NZ | 12-95 | 16.8 | 0.45 | 17.5 [‡] | 770 [‡] | 220 [‡] 3.5 [‡] | 15▲ | 6.5▲ | 0.26▲ |
| 17GV5 [†] ■ | Beam Power Amplifier | 12DR | 12-79 | 16.8 | 0.45 | 17.5 [‡] | 770 [‡] | 220 [‡] 3.5 [‡] | 16▲ | 7.0▲ | 0.6▲ |
| 17GW6 [†] | Beam Power Amplifier | 6AM | 12-51 | 16.8 | 0.45 | 17.5 [‡] | 770 [‡] | 220 [‡] 3.5 [‡] | 17▲ | 7.0▲ | 0.5▲ |
| 17H3 [†] | Half-Wave High-Vacuum Rectifier | 9FK | 6-3 | 17.5 | 0.3 | 3.0 [‡] | Tube Voltage Drop: 22 v at 140 ma d-c | | | | |
| 17HC8 [†] | Triode-Pentode | 9EX | 9-70 | 16.8 | 0.45 | 11 [‡] 1.0 [‡] | 350 [‡] | 315 [‡] 1.5 [‡] | Pentode Section | | |
| | | | | | | | 330 [‡] | — | Triode Section | | |

■ Compactron.

† Zero signal.

◆ Per section.

● See X-Radiation Warning, page 4.

‡ Plate-to-plate.

◆ Maximum.

‡ Supply voltage.

⊕ Subminiature type.

▲ Without external shield.

◆ Design maximum rating.

⊕ Total for all similar sections.

⊕ Absolute maximum rating.

Conversion transconductance.

| Service | Plate Volts | Screen Volts | Neg Grid Volts | Plate Milli-amperes | Screen Milli-amperes | R _p , Ohms | G _m , μmhos | μ Factor | Load for Rated Output, Ohms | Power Output, Watts | Tube Type |
|----------------------|--|--------------|----------------|---------------------|----------------------|-----------------------|------------------------|----------|-----------------------------|---------------------|-----------------|
| Class A Amplifier | 120 | 110 | 8.0 | 49† | 4.0† | 10,000 | 7,500 | — | 2,500 | 2.3 | 17C6¶ |
| Class A Amplifier ♦ | 125 | 80 | 1.0 | 10 | 1.5 | 100,000 | 8,000 | — | — | — | 17C9 17C9-A¶ |
| Class A Amplifier | 125 110 | 125 110 | 4.5 4.0 | 37† 32† | 4.0† 4.5† | 15,000 16,000 | 9,200 8,100 | — | 4,500 3,500 | 1.5 1.1 | 17CA6¶ |
| TV Damper | Max d-c output current ♦ = 250 ma; max peak inverse voltage ♦ = 5,200 volts; max peak current ♦ = 1,200 ma | | | | | | | | | | 17CK3¶ |
| TV Damper | Max d-c output current ♦ = 250 ma; max peak inverse voltage ♦ = 5,500 volts; max peak current ♦ = 1,300 ma | | | | | | | | | | 17CL3¶ |
| TV Damper | Max d-c output current ♦ = 250 ma; max peak inverse voltage ♦ = 5,000 volts; max peak current ♦ = 1,200 ma | | | | | | | | | | 17CT8¶ |
| Class A Amplifier | 120 | 110 | 8.0 | 49† | 4.0† | 10,000 | 7,500 | — | 2,500 | 2.3 | 17CU6¶ |
| TV Damper | Max d-c output current ♦ = 155 ma; max peak inverse voltage ♦ = 4,400 volts; max peak current ♦ = 900 ma | | | | | | | | | | 17D4¶ |
| TV Damper | Max d-c output current ♦ = 185 ma; max peak inverse voltage ♦ = 5,000 volts; max peak current ♦ = 900 ma | | | | | | | | | | 17D4-A¶ |
| TV Damper | Max d-c output current ♦ = 180 ma; max peak inverse voltage ♦ = 5,500 volts; max peak current ♦ = 1,100 ma | | | | | | | | | | 17DE4¶ |
| TV Damper | Max d-c output current ♦ = 175 ma; max peak inverse voltage ♦ = 5,000 volts; max peak current ♦ = 1,100 ma | | | | | | | | | | 17DM4¶ |
| TV Damper | Max d-c output current ♦ = 200 ma; max peak inverse voltage ♦ = 5,000 volts; max peak current ♦ = 1,200 ma | | | | | | | | | | 17DM4A¶ |
| TV Damper | Max d-c output current ♦ = 175 ma; max peak inverse voltage ♦ = 5,500 volts; max peak current ♦ = 1,000 ma | | | | | | | | | | 17DQ4¶ |
| Horizontal Amplifier | 250 60 | 150 150 | 22.5 0 | 75 300 | 2.4 27 | 20,000 | 6,000 | — | — | — | 17DQ6¶ |
| | Max positive pulse plate voltage ♦ = 6,000 volts; max screen dissipation = 2.5 watts; max d-c cathode current = 120 ma | | | | | | | | | | |
| Horizontal Amplifier | 250 60 | 150 150 | 22.5 0 | 55 315 | 1.5 25 | 20,000 | 6,600 | — | — | — | 17DQ6-A¶ |
| | Max positive pulse plate voltage ♦ = 6,000 volts; max d-c cathode current ♦ = 155 ma | | | | | | | | | | |
| Horizontal Amplifier | 250 60 | 150 150 | 22.5 0 | 65 345 | 1.8 27 | 18,000 | 7,300 | — | — | — | 17DQ6-B¶ |
| | Max positive pulse plate voltage ♦ = 6,500; max d-c cathode current ♦ = 175 ma | | | | | | | | | | |
| TV Damper | Max d-c output current ♦ = 250 ma; max peak inverse voltage ♦ = 5,500 volts; max peak current ♦ = 1,300 ma | | | | | | | | | | 17DW4-A¶ |
| Class A Amplifier ♦ | 200 | — | 2.1 | 10 | — | — | 5,800 | 48 | — | — | 17EW8 |
| Horizontal Amplifier | 250 60 | 150 150 | 22.5 0 | 65 345 | 1.8 27 | 18,000 | 7,300 | — | — | — | 17GE5¶■ |
| | Max positive pulse plate voltage ♦ = 6,500; max d-c cathode current ♦ = 175 ma | | | | | | | | | | |
| Horizontal Amplifier | 250 60 | 150 150 | 22.5 0 | 70 390 | 2.1 32 | 15,000 | 7,100 | — | — | — | 17GJ5¶ |
| | Max positive pulse plate voltage ♦ = 6,500; max d-c cathode current ♦ = 175 ma | | | | | | | | | | |
| Horizontal Amplifier | 250 60 | 150 150 | 22.5 0 | 70 390 | 2.1 32 | 15,000 | 7,100 | — | — | — | 17GJ5-A¶ |
| | Max positive pulse plate voltage ♦ = 6,500; max d-c cathode current ♦ = 175 ma | | | | | | | | | | |
| Horizontal Amplifier | 250 60 | 150 150 | 22.5 0 | 70 390 | 2.1 32 | 15,000 | 7,100 | — | — | — | 17GT5¶ |
| | Max positive pulse plate voltage ♦ = 6,500; max d-c cathode current ♦ = 175 ma | | | | | | | | | | |
| Horizontal Amplifier | 250 60 | 150 150 | 22.5 0 | 70 390 | 2.1 32 | 15,000 | 7,100 | — | — | — | 17GT5-A¶ |
| | Max positive pulse plate voltage ♦ = 6,500; max d-c cathode current ♦ = 175 ma | | | | | | | | | | |
| Horizontal Amplifier | 250 60 | 150 150 | 22.5 0 | 65 345 | 1.8 27 | 18,000 | 7,300 | — | — | — | 17GV5¶■ |
| | Max positive pulse plate voltage ♦ = 6,500; max d-c cathode current ♦ = 175 ma | | | | | | | | | | |
| Horizontal Amplifier | 250 60 | 150 150 | 22.5 0 | 70 380 | 2.1 32 | 15,000 | 7,100 | — | — | — | 17GW6¶ |
| | Max positive pulse plate voltage ♦ = 6,500; max d-c cathode current ♦ = 175 ma | | | | | | | | | | |
| TV Damper | Max d-c output current ♦ = 75 ma; max peak inverse voltage ♦ = 2,000 volts; max peak current ♦ = 450 ma | | | | | | | | | | 17H3¶ |
| Vertical Amplifier | 250 60 | 250 250 | 18 0 | 38 180 | 3.0 30 | 55,000 | 5,100 | — | — | — | 17HC8¶ |
| Vertical Oscillator | 250 | — | 3 | 1.4 | — | — | — | — | — | — | |
| | Max positive pulse plate voltage ♦ = 2,200; max d-c cathode current ♦ = 65 ma; max d-c cathode current ♦ = 20 ma; max peak negative grid voltage ♦ = 400 | | | | | | | | | | |

Metal tubes are shown in bold-face type, miniature tubes in italics.

♦ G3 and G5 are screen. G4 is signal-input grid.

¶ G2 and G4 are screen. G3 is signal-input grid.

1, 2, 3, etc. indicate tube sections.

■ Maximum screen dissipation appears immediately below the screen voltage.

¶ Heater warm-up time controlled.

| Tube Type | Classification by Construction | Base Connections | Out-line Dwg | Fila-ment Volts | Fila-ment Amp | Max Plate Watts | Max Plate Volts | Max Screen Volts and Watts* | Capacitance in Picofarads | | |
|-----------|----------------------------------|------------------|--------------------|-----------------|---------------|-----------------|-----------------|-----------------------------|--|---------|------------|
| | | | | | | | | | Input | Out-put | Grid-plate |
| 17JB6† | Beam Power Amplifier | 9QL | 12-70 | 16.8 | 0.45 | 17.5 | 770 | 220 3.5 | 15▲ | 6.0▲ | 0.2▲ |
| 17JB6-A† | Beam Power Amplifier | 9QL | T-X | 16.8 | 0.45 | 17.5 | 770 | 220 3.5 | 15▲ | 6.0▲ | 0.2▲ |
| 17JF6* | Beam Power Amplifier | 9QL | 12-70 or T-X | 16.8 | 0.6 | 17 | 770 | 220 3.5 | 22▲ | 9.0▲ | 1.2▲ |
| 17JG6† | Beam Power Amplifier | 9QU | 12-64 | 16.8 | 0.6 | 17 | 770 | 220 3.5 | 22▲ | 5.0▲ | 0.7▲ |
| 17JG6-A† | Beam Power Amplifier | 9QU | 12-96 | 16.8 | 0.6 | 17 | 770 | 220 3.5 | 22▲ | 9.0▲ | 0.7▲ |
| 17JK8† | Double Triode | 9AJ | 6-2 | 16.8 | 0.15 | 1.0 2.0 | 165 200 | — | Section 1 (Pins 6, 7, 8) Section 2 (Pins 1, 2, 3) | | |
| 17JM6† | Beam Power Amplifier | 12FJ | 12-79 | 16.8 | 0.45 | 17.5 | 770 | 220 3.5 | 16▲ | 7.0▲ | 0.6▲ |
| 17JM6-A† | Beam Power Amplifier | 12FJ | 12-79 | 16.8 | 0.45 | 17.5 | 770 | 220 3.5 | 16▲ | 7.0▲ | 0.6▲ |
| 17JN6† | Beam Power Amplifier | 12FK | 12-56 | 16.8 | 0.45 | 17.5 | 770 | 220 3.5 | 16▲ | 7.0▲ | 0.34▲ |
| 17JN6-A† | Beam Power Amplifier | 12FK | 12-56 | 16.8 | 0.45 | 17.5 | 770 | 220 3.5 | 16▲ | 7.0▲ | 0.34▲ |
| 17JQ6† | Beam Pentode with Integral Diode | 9RA | 6-4 | 17 | 0.45 | 10 | 425 | 330 2.0 | 13▲ | 6.0▲ | 0.32▲ |
| 17JR6† | Beam Power Amplifier | 9QU | 12-96 | 16.8 | 0.6 | 17 | 770 | 220 3.5 | 22▲ | 9.0▲ | 0.7▲ |
| 17JT6† | Beam Power Amplifier | 9QU | T-X | 16.8 | 0.45 | 17.5 | 770 | 220 3.5 | 15▲ | 6.5▲ | 0.26▲ |
| 17JT6-A† | Beam Power Amplifier | 9QU | 12-95 | 16.8 | 0.45 | 17.5 | 770 | 220 3.5 | 15▲ | 6.5▲ | 0.26▲ |
| 17JZ8† | Triode-Pentode | 12DZ | 9-58 | 16.8 | 0.45 | 7.0 1.0 | 250 250 | 200 1.8 | Pentode Section | | |
| | | | | | | | | — | Triode Section | | |
| 17JZ8-A† | Triode-Pentode | 12DZ | 9-58 | 16.8 | 0.45 | 10 1.0 | 250 250 | 200 1.8 | Pentode Section | | |
| | | | | | | | | — | Triode Section | | |
| 17KV6† | Beam Power Pentode | 9QU | 12-97 | 16.8 | 0.6 | 20 | 770 | 220 2.0 | 22▲ | 9.0▲ | 0.6▲ |
| 17KV6-A† | Beam Power Amplifier | 9QU | 12-97 | 16.8 | 0.6 | 28 | 900 | 220 2.0 | 22▲ | 9.0▲ | 0.6▲ |

■ Compactron.

‡ Plate-to-plate.

⊙ Subminiature type.

⊕ Total for all similar sections.

† Zero signal.

♣ Maximum.

▲ Without external shield.

■ Absolute maximum rating.

♣ Per section.

‡ Supply voltage.

⊙ Design maximum rating.

Conversion transconductance.

● See X-Radiation Warning, page 4.

| Service | Plate Volts | Screen Volts | Neg Grid Volts | Plate Milli-amperes | Screen Milli-amperes | R _p , Ohms | G _m , μmhos | μ Factor | Load for Rated Output, Ohms | Power Out-put, Watts | Tube Type |
|--------------------------|--|--------------|----------------|---------------------|----------------------|-----------------------|------------------------|---|-----------------------------|----------------------|-----------|
| Horizontal Amplifier | 250 60 | 150 150 | 22.5 0 | 70 390 | 2.1 32 | 15,000 — | 7,100 — | (g ₃ connected to k at socket) | | | 17JB6¶ |
| | Max positive pulse plate voltage ⬥ = 6,500; max d-c cathode current ⬥ = 175 ma | | | | | | | | | | |
| Horizontal Amplifier | 250 60 | 150 150 | 22.5 0 | 70 390 | 2.1 32 | 15,000 — | 7,100 — | (g ₃ connected to k at socket) | | | 17JB6-A¶ |
| | Max positive pulse plate voltage ⬥ = 6,500; max d-c cathode current ⬥ = 175 ma | | | | | | | | | | |
| Horizontal Amplifier | 130 55 | 125 125 | 20 0 | 80 525 | 2.5 32 | 12,000 — | 10,000 — | (E _{c3} = +25 volts) | | | 17JF6¶ |
| | Max positive pulse plate voltage ⬥ = 6,500 volts; max d-c cathode current ⬥ = 275 ma. | | | | | | | | | | |
| Horizontal Amplifier | 130 50 | 125 125 | 20 0 | 80 525 | 2.5 32 | 12,000 — | 10,000 — | (g ₃ connected to k at socket) | | | 17JG6¶ |
| | Max positive pulse plate voltage ⬥ = 6,500; max d-c cathode current ⬥ = 275 ma | | | | | | | | | | |
| Horizontal Amplifier | 130 55 | 125 125 | 20 0 | 80 525 | 2.5 32 | 12,000 — | 10,000 — | (Ec3 = +25 volts) | | | 17JG6-A¶ |
| | Max positive pulse plate voltage ⬥ = 6,500; max d-c cathode current ⬥ = 275 ma | | | | | | | | | | |
| Class A Amplifier | 100 | — | 1.0 | 5.3 | — | 8,000 | 6,800 | 55 | — | — | 17JK8¶ |
| Class A Amplifier | 135 | — | 1.2 | 10 | — | 5,400 | 13,000 | 70 | — | — | |
| Horizontal Amplifier | 250 60 | 150 150 | 22.5 0 | 65 345 | 1.8 27 | 18,000 — | 7,300 — | (b.p. connected to k at socket) | | | 17JM6¶■ |
| | Max positive pulse plate voltage ⬥ = 6,500; max d-c cathode current ⬥ = 175 ma | | | | | | | | | | |
| Horizontal Amplifier | 250 55 | 150 150 | 22.5 0 | 70 345 | 2.4 30 | 15,000 — | 7,300 — | (b.p. connected to k at socket) | | | 17JM6-A¶■ |
| | Max positive pulse plate voltage ⬥ = 6,500; max d-c cathode current ⬥ = 175 ma | | | | | | | | | | |
| Horizontal Amplifier | 250 60 | 150 150 | 22.5 0 | 65 345 | 1.8 27 | 18,000 — | 7,300 — | (b.p. connected to k at socket) | | | 17JN6¶■ |
| | Max positive pulse plate voltage ⬥ = 6,500; max d-c cathode current ⬥ = 175 ma | | | | | | | | | | |
| Horizontal Amplifier | 250 55 | 150 150 | 22.5 0 | 70 345 | 2.4 30 | 15,000 — | 7,300 — | (b.p. connected to k at socket) | | | 17JN6-A¶■ |
| | Max positive pulse plate voltage ⬥ = 6,500; max d-c cathode current ⬥ = 175 ma | | | | | | | | | | |
| Vertical Amplifier | 140 40 | 140 120 | 18 0 | 35 150 | 2.5 20 | 10,500 — | 4,200 — | — | — | — | 17JQ6¶ |
| | Max positive pulse plate voltage ⬥ = 2,000; max d-c cathode current ⬥ = 70 ma. Instantaneous diode-plate-to-cathode voltage drop for instantaneous diode-plate current of 2.0 ma = 5.0 volts | | | | | | | | | | |
| Horizontal Amplifier | 130 50 | 125 125 | 20 0 | 45 470 | 1.5 32 | 18,000 — | 7,000 — | — | — | — | 17JR6¶ |
| | Max positive pulse plate voltage ⬥ = 6,500; max d-c cathode current ⬥ = 275 ma | | | | | | | | | | |
| Horizontal Amplifier | 250 60 | 150 150 | 22.5 0 | 70 390 | 2.1 32 | 15,000 — | 7,100 — | (g ₃ connected to k at socket) | | | 17JT6¶ |
| | Max positive pulse plate voltage ⬥ = 6,500; max d-c cathode current ⬥ = 175 ma | | | | | | | | | | |
| Horizontal Amplifier | 250 60 | 150 150 | 22.5 0 | 70 390 | 2.1 32 | 15,000 — | 7,100 — | (g ₃ connected to k at socket) | | | 17JT6-A |
| | Max positive pulse plate voltage ⬥ = 6,500; max d-c cathode current ⬥ = 175 ma | | | | | | | | | | |
| Vertical Amplifier | 120 45 | 110 110 | 8.0 0 | 46 122 | 3.5 16.5 | 11,700 — | 7,100 — | — | — | — | 17JZ8¶■ |
| | Max positive pulse plate voltage ⬥ = 2,000; max d-c cathode current ⬥ = 70 ma | | | | | | | | | | |
| Vertical Oscillator | 150 | — | 5.0 | 5.5 | — | 8,500 | 2,350 | 20 | — | — | |
| Vertical Amplifier | 120 45 | 110 110 | 8.0 0 | 46 122 | 3.5 16.5 | 11,700 — | 7,100 — | — | — | — | 17JZ8-A¶■ |
| | Max positive pulse plate voltage ⬥ = 2,200 volts; max d-c cathode current ⬥ = 70 ma. | | | | | | | | | | |
| Vertical Oscillator | 150 | — | 5.0 | 5.5 | — | 8,500 | 2,350 | 20 | — | — | |
| HV Pulse Shunt Regulator | 140 100 | 140 140 | 24.5 0 | 40 440 | 2.4 30 | 10,000 — | 6,000 — | (E _{c3} = 0 volts) | | | 17KV6¶ |
| | Max positive pulse plate voltage ⬥ = 6,500; max d-c cathode current ⬥ = 275 ma | | | | | | | | | | |
| Pulse Regulator | 140 100 | 140 140 | 24.5 0 | 40 440 | 2.4 30 | 10,000 — | 6,000 — | (E _{c3} = 0 volts) | | | 17KV6-A¶ |
| | Max positive pulse plate voltage ⬥ = 6,500 volts; max d-c cathode current ⬥ = 275 ma. | | | | | | | | | | |

Metal tubes are shown in bold-face type, *miniature tubes in italics.*

♦ G3 and G5 are screen. G4 is signal input grid.

♥ G2 and G4 are screen. G3 is signal-input grid.

1, 2, 3, etc. indicate tube sections.

¶ Maximum screen dissipation appears immediately below the screen voltage.

¶ Heater warm-up time controlled.

| Tube Type | Classification by Construction | Base Connections | Out-line Dwg | Fila-ment Volts | Fila-ment Amp | Max Plate Watts | Max Plate Volts | Max Screen Volts and Watts | Capacitance in Picofarads | | |
|-----------|----------------------------------|------------------|--------------|-----------------|---------------|-----------------|-----------------|----------------------------|--|---------|------------|
| | | | | | | | | | Input | Out-put | Grid-plate |
| 17L6-GT | Beam Power Amplifier | 7AC | 9-11 or 9-41 | 16.8 | 0.45 | 10 | 200 | 125 1.25 | 15▲ | 10▲ | 0.8▲ |
| 17LD8 | Triode-Pentode | 9QT | T-X | 16.8 | 0.45 | 7.0◆ | 250◆ | 200◆ 1.8◆ | Pentode Section | | |
| | | | | | | 1.0◆ | 250◆ | — | Triode Section | | |
| 17R5 | Beam Power Amplifier | 7CV | 5-3 | 16.8 | 0.45 | 4.5 | 150 | 150 1.0 | 13▲ | 9.0▲ | 0.55▲ |
| 17W6-GT | Beam Power Amplifier | 7AC | 9-11 or 9-41 | 16.8 | 0.45 | 10 | 300 | 150 1.25 | Pentode Connection | | |
| | | | | | | 7.5 | 300 | — | Triode Connection (G ₂ & P Tied) | | |
| 17X10 | Pentode—Gated-Beam Discriminator | 12BT | 9-58 | 16.8 | 0.45 | 6.5◆ | 165◆ | 150◆ 1.8◆ | Pentode Section (Pins 2, 3, 9, 11) | | |
| | | | | | | — | 330◆ | 110◆ | Gated-Beam Disc (Pins 4, 5, 6, 7, 8) | | |
| 18A5 | Beam Power Amplifier | 6CK | 9-15 or 9-43 | 18.5 | 0.3 | 9.0◆ | 350◆ | 160◆ 2.5◆ | 13▲ | 7.0▲ | 0.7▲ |
| 18AJ10 | Dissimilar-Double Pentode | 12EZ | 9-59 | 18.0 | 0.315 | 6.0◆ | 165◆ | 150◆ 1.25◆ | Section 1 (pins 8, 9, 10, 11) | | |
| | | | | | | 1.7◆ | 300◆ | 300◆ 1.0◆ | Section 2 (pins 2, 3, 5, 6, 7) | | |
| 18DZ8 | Triode-Pentode | 9JE | T-X | 18.0 | 0.3 | 6.5 | 150 | 135 1.5 | Pentode Section | | |
| | | | | | | 0.75 | 150 | — | Triode Section | | |
| 18FW6 | Remote-Cutoff RF Pentode | 7CC | 5-2 | 18.0 | 0.1 | 2.5◆ | 150◆ | 150◆ 0.6◆ | 5.5 | 5.0 | 0.0035◆ |
| 18FW6-A | Remote-Cutoff RF Pentode | 7CC | 5-2 | 18.0 | 0.1 | 2.5◆ | 150◆ | 150◆ 0.6◆ | 5.5 | 5.0 | 0.0035◆ |
| 18FX6 | Pentagrid Converter | 7CH | 5-2 | 18.0 | 0.1 | 1.0◆ | 150◆ | 110◆ 1.2◆ | Osc. I _{c1} = 0.5 ma R _{g1} = 20,000 ohms | | |
| 18FX6-A | Pentagrid Converter | 7CH | 5-2 | 18.0 | 0.1 | 1.0◆ | 150◆ | 110◆ 1.2◆ | Osc. I _{c1} = 0.5 ma R _{g1} = 20,000 ohms | | |
| 18FY6 | Duplex-Diode High-Mu Triode | 7BT | 5-2 | 18.0 | 0.1 | 0.5◆ | 150◆ | — | 2.0 | 2.4 | 1.8 |
| 18FY6-A | Duplex-Diode High-Mu Triode | 7BT | 5-2 | 18.0 | 0.1 | 0.5◆ | 150◆ | — | Diode Section | | |
| | | | | | | | | | 2.0 | 2.4 | 1.8 |
| 18GB5 | Beam Power Amplifier | 9NH | T-X | 18.0 | 0.45 | 17◆ | 275◆ | 275◆ 6.0◆ | Diode Section | | |
| 18GD6 | Sharp-Cutoff RF Pentode | 7BK | 5-2 | 18.0 | 0.1 | 2.5◆ | 150◆ | 150◆ 0.6◆ | 6.0 | 5.0 | 0.0035◆ |
| 18GD6-A | Sharp-Cutoff RF Pentode | 7BK | 5-2 | 18.0 | 0.1 | 2.5◆ | 150◆ | 150◆ 0.6◆ | 6.0 | 5.0 | 0.0035◆ |
| 18GE6 | Duplex-Diode High-Mu Triode | 7BT | 5-2 | 18.0 | 0.1 | 0.5◆ | 150◆ | — | 2.4▲ | 0.2▲ | 1.8▲ |
| 18GE6-A | Duplex-Diode High-Mu Triode | 7BT | 5-2 | 18.0 | 0.1 | 0.5◆ | 150◆ | — | Diode Section | | |
| | | | | | | | | | 2.4▲ | 0.2▲ | 1.8▲ |
| 18GV8 | Triode-Pentode | 9LY | 6-4 | 18 | 0.3 | 7.0 | 250 | 250 2.0 | Diode Section | | |
| | | | | | | 0.5 | 250 | — | Pentode Section | | |
| | | | | | | | | | Triode Section | | |
| 18HB8 | Triode Pentode | 9ME | 6-3 | 18.0 | 0.3 | 6.5◆ | 150◆ | 135◆ 1.5◆ | Pentode Section | | |
| | | | | | | 0.75◆ | 150◆ | — | Triode Section | | |
| 19 | Twin-Triode Power Amplifier | 6C | 12-5 | 2.0 DC | 0.26 | — | 135 | — | Both Sections in Push-pull | | |

■ Compactron. † Plate-to-plate.
 † Zero signal. ◆ Maximum.
 ◆ Per section. ‡ Supply voltage.
 ● See X-Radiation Warning, page 4.

◎ Subminiature type.
 ▲ Without external shield.
 ◆ Design maximum rating.

◎ Total for all similar sections.
 ◆ Absolute maximum rating.
 # Conversion transconductance.

| Service | Plate Volts | Screen Volts | Neg Grid Volts | Plate Milli-amperes | Screen Milli-amperes | R _p , Ohms | G _m , μmhos | μ Factor | Load for Rated Output, Ohms | Power Output, Watts | Tube Type |
|---|--|--------------|-----------------------------|---------------------|----------------------|---------------------------|------------------------|-----------------------------|-----------------------------|---------------------|-----------|
| Class A Amplifier | 200 | 125 | R _k = 180 | 46† | 2.2† | 28,000 | 8,000 | — | 4,000 | 3.8 | 17L6-GT¶ |
| | 110 | 110 | 7.5 | 49† | 4.0† | 13,000 | 8,000 | — | 2,000 | 2.1 | |
| Vertical Amplifier | 120 | 110 | 8.0 | 46 | 4.0 | 11,700 | 7,100 | — | — | — | 17LD8¶ |
| | 45 | 110 | 0 | 122 | 17 | — | — | — | — | — | |
| Vertical Oscillator | Max positive pulse plate voltage ⬥ = 2,000; max d-c cathode current ⬥ = 70 ma | | | | | | | | | | |
| | 150 | — | 5.0 | 3.3 | — | 11,300 | 1,900 | 21.5 | — | — | |
| Vertical Amplifier | 110 | 110 | 8.5 | 40 | 3.3 | 13,000 | 7,000 | — | — | — | 17R5¶ |
| | 45 | 110 | 0 | 120 | 17 | — | — | — | — | — | |
| Max positive pulse plate voltage ⬥ = 1,500; max d-c cathode current = 45 ma | | | | | | | | | | | |
| Class A Amplifier | 200 | 125 | R _k = 180 | 46† | 2.2† | 28,000 | 8,000 | — | 4,000 | 3.8 | 17W6-GT¶ |
| | 110 | 110 | 7.5 | 49† | 4.0† | 13,000 | 8,000 | — | 2,000 | 2.1 | |
| Vertical Amplifier | 225 | — | 30 | 22 | — | 1,600 | 3,800 | 6.2 | — | — | |
| | Max positive pulse plate voltage ⬥ = 1,200; max d-c cathode current ⬥ = 60 ma | | | | | | | | | | |
| Class A Amplifier | 145 | 110 | 6.0 | 36† | 3.0† | 30,000 | 8,600 | — | 3,000 | 2.4 | 17X10¶ |
| | 285¶ | 100 | R _k = 200 to 400 | 0.49 | 9.8 | — | — | — | 330,000 | — | |
| E _{c1} = 1.25 Volts RMS | | | | | | | | | | | |
| Horizontal Amplifier | 200 | 125 | 17 | 40 | 1.1 | 27,000 | 4,800 | — | — | — | 18A5¶ |
| | 60 | 125 | 0 | 165 | 15 | — | — | — | — | — | |
| Max positive pulse plate voltage ⬥ = 3,000 volts; max screen dissipation ⬥ = 2.5 watts; max d-c cathode current ⬥ = 90 ma | | | | | | | | | | | |
| Class A Amplifier | 145 | 110 | 7.0 | 34+ | 6.5- | 33,000 | 5,600 | — | 2,500 | 1.45 | 18A10¶ |
| | 150 | 100 | R _k = 180 | 2.8 | 3.5 | 180,000 | 2,400 | (E _{c3} = 0 volts) | — | — | |
| Class A Amplifier | 145 | 120 | R _k = 180 | 45† | 6.0† | — | 7,500 | — | 2,500 | 2.0 | 18DZ8 |
| Class A Amplifier | 120 | — | R _k = 1500 | 0.8 | — | — | 1,400 | 100 | — | — | |
| Class A Amplifier | 100 | 100 | R _k = 68 | 11 | 4.4 | 250,000 | 4,400 | — | — | — | 18FW6 |
| Class A Amplifier | 100 | 100 | R _k = 68 | 11 | 4.4 | 250,000 | 4,400 | — | — | — | 18FW6-A¶ |
| Converter | 100 | 100 | 1.5 | 2.3 | 6.2 | 400,000 | 480* | — | — | — | 18FX6 |
| Converter | 100 | 100 | 1.5 | 2.3 | 6.2 | 400,000 | 480* | — | — | — | 18FX6-A¶ |
| Class A Amplifier | 100 | — | 1.0 | 0.6 | — | 77,000 | 1,300 | 100 | — | — | 18FY6 |
| AM Det. ⬥ | Max d-c output current ⬥ = 1.0 ma; voltage drop: 10 volts at 2.0 ma d-c | | | | | | | | | | |
| Class A Amplifier | 100 | — | 1.0 | 0.6 | — | 77,000 | 1,300 | 100 | — | — | 18FY6-A¶ |
| AM Det. ⬥ | Max d-c output current ⬥ = 1.0 ma; voltage drop: 10 volts at 2.0 ma d-c | | | | | | | | | | |
| Horizontal Amplifier | 75 | 200 | 10 | 440 | 37 | (Instantaneous Values) | | | | | 18GB5 |
| | Max positive pulse plate voltage ⬥ = 7,700; max d-c cathode current ⬥ = 275 ma | | | | | | | | | | |
| Class A Amplifier | 100 | 100 | R _k = 150 | 5.0 | 2.0 | 500,000 | 4,300 | — | — | — | 18GD6 |
| Class A Amplifier | 100 | 100 | R _k = 150 | 5.0 | 2.0 | 500,000 | 4,300 | — | — | — | 18GD6-A¶ |
| Class A Amplifier | 100 | — | 1.0 | 1.0 | — | 40,000 | 1,700 | 70 | — | — | 18GE6 |
| AM Det. ⬥ | Max d-c output current ⬥ = 1.0 ma; voltage drop: 10 volts at 2.0 ma d-c | | | | | | | | | | |
| Class A Amplifier | 100 | — | 1.0 | 1.0 | — | 40,000 | 1,700 | 70 | — | — | 18GE6-A¶ |
| AM Det. ⬥ | Max d-c output current ⬥ = 1.0 ma; voltage drop: 10 volts at 2.0 ma d-c | | | | | | | | | | |
| Class A Amplifier | 170 | 170 | 15 | 41 | 2.7 | 25,000 | 7,500 | — | — | — | 18GV8 |
| Class A Amplifier | 100 | — | 0.8 | 5.0 | — | 7,000 | 6,500 | 50 | — | — | |
| Class A Amplifier | 115 | 115 | R _k = 150 | 33† | 7.5† | — | 6,250 | — | 3,500 | 1.0 | 18HB8 |
| Class A Amplifier | 115 | — | R _k = 410 | 2.5 | — | — | 3,900 | 74 | — | — | |
| Class B Amplifier | 135 | — | 0 | 5.0† | — | Input Signal = 0.170 watt | | | 10,000 † | 2.1 | 19 |

†etal tubes are shown in bold-face type, miniature tubes in italics.

‡G3 and G5 are screen. G4 is signal-input grid.

¶G2 and G4 are screen. G3 is signal-input grid.

2, 3, etc. indicate tube sections.

*Maximum screen dissipation appears immediately below the screen voltage.

¶ Heater warm-up time controlled.

| Tube Type | Classification by Construction | Base Connections | Outline Dwg | Fila-ment Volts | Fila-ment Amp | Max Plate Watts | Max Plate Volts | Max Screen Volts and Watts * | Capacitance in Picofarads | | |
|---------------------|----------------------------------|------------------|---------------|-----------------|---------------|-----------------|---|------------------------------|-----------------------------|-------------------|------------|
| | | | | | | | | | Input | Out-put | Grid-plate |
| 19AU4 | Half-Wave High-Vacuum Rectifier | 4CG | 9-44 | 18.9 | 0.6 | 6.0 | Tube Voltage Drop: 25 v at 350 ma d-c | | | | |
| 19AU4-GTA | Half-Wave High-Vacuum Rectifier | 4CG | 9-44 | 18.9 | 0.6 | 6.0 | Tube Voltage Drop: 25 v at 350 ma d-c | | | | |
| 19BG6-G 19BG6-GA | Beam Power Amplifier | 5BT | 16-5 12-21 | 18.9 | 0.3 | 20 | 700 | 350 | 12 | 6.5 | 0.34 |
| 19C8 | Triple-Diode, High-Mu Triode | 9E | 6-2 | 18.9 | 0.15 | 1.0 | 250 | — | — | — | — |
| 19CG3 | Half-Wave, High-Vacuum Rectifier | 12HF | 9-62 | 19 | 0.6 | 6.5 | Tube Voltage Drop: 25 volts at 700 ma d-c | | | | |
| 19CL8-A | Triode-Tetrode | 9FX | 6-2 | 18.9 | 0.15 | 3.0 | 330 | 330 | Tetrode Section | | |
| 19CL8-B | | | | | | 2.5 | 330 | — | Triode Section | | |
| 19DE3 | Half-Wave High-Vacuum Rectifier | 12HX | 9-101 | 19.0 | 0.6 | 9.0 | Tube Voltage Drop: 25 volts at 700 ma d-c | | | | |
| 19DE7 | Double Triode | 9HF | 6-3 | 19.4 | 0.3 | 1.5 | 330 | — | Section 1 (Pins 6, 7, 8) | | |
| | | | | | | 7.0 | 275 | — | Section 2 (Pins 1, 2, 3, 9) | | |
| 19DK3 | Half-Wave High-Vacuum Rectifier | 9SG | 9-117 | 19 | 0.6 | 9.0 | Tube Voltage Drop: 16 volts at 400 ma d-c 25 volts at 800 ma d-c | | | | |
| 19DQ3 | Half-Wave High-Vacuum Rectifier | 12HF | 9-62 | 19 | 0.6 | 9.0 | Tube Voltage Drop: 16 volts at 400 ma d-c 25 volts at 800 ma d-c | | | | |
| 19DQ3-A | Half-Wave High-Vacuum Rectifier | 12HF | 9-62 | 19 | 0.6 | 10 | Tube Voltage Drop: 17 volts at 450 ma d-c 27 volts at 900 ma d-c | | | | |
| 19EA8 | Triode-Pentode | 9AE | 6-2 | 18.9 | 0.15 | 3.1 | 330 | 330 | Pentode Section | | |
| 19EA8-A | | | | | | 2.5 | 330 | — | Triode Section | | |
| 19EW7 | Dissimilar Double Triode | 9HF | 9-70 | 18.9 | 0.3 | 1.5 | 330 | — | Section 1 (Pins 6, 7, 8) | | |
| | | | | | | 10 | 330 | — | Section 2 (Pins 1, 2, 3, 9) | | |
| 19EZ8 | Triple-Triode | 9KA | 6-2 | 18.9 | 0.15 | 2.0 | 330 | — | 2.6 | 1.4 1.2 1.2 | 1.5 |
| | | | | | | 5.0 | — | — | — | — | — |
| 19FX5 | Power Amplifier Pentode | 7CV | 5-3 | 18.9 | 0.3 | 5.5 | 150 | 130 | 17 | 9.0 | 0.65 |
| 19GQ7 | Triple Diode | 9QM | 6-2 | 18.9 | 0.15 | — | Tube Voltage Drop: 10 volts at 60 ma d-c | | | | |
| 19HR6 | Semi-Remote-Cutoff RF Pentode | 7BK | 5-2 | 18.9 | 0.15 | 3.0 | 300 | 300 | 8.8 | 5.2 | 0.006 |
| 19HS6 | Sharp-Cutoff RF Pentode | 7BK | 5-2 | 18.9 | 0.15 | 3.0 | 300 | 300 | 8.8 | 5.2 | 0.006 |
| 19HV8 | Triode-Pentode | 9FA | 6-2 | 18.9 | 0.15 | 3.0 | 330 | 330 | Pentode Section | | |
| | | | | | | 0.55 | 330 | — | Triode Section | | |
| 19J6 | Medium-Mu Twin Triode | 7BF | 5-2 | 18.9 | 0.15 | 1.5 | 300 | — | 2.0 | 0.4 | 1.5 |
| 19JN8 | Triode-Pentode | 9FA | 6-2 | 18.9 | 0.15 | 2.5 | 300 | 300 | Pentode Section | | |
| | | | | | | 2.5 | 300 | — | Triode Section | | |
| 19KG8 | Triode-Pentode | 9LY | 6-2 | 18.9 | 0.15 | 2.5 | 300 | 300 | Pentode Section | | |
| | | | | | | 2.5 | 300 | — | Triode Section | | |
| 19Q9 | Triode-Pentode | 10H | 6-13 | 18.9 | 0.15 | 3.0 | 330 | 330 | Pentode Section | | |
| | | | | | | 2.5 | 330 | — | Triode Section | | |
| 19T8 19T8-A | Triple-Diode High-Mu Triode | 9E | 6-2 | 18.9 | 0.15 | 1.1 | 330 | — | 1.7 | 2.4 | 1.7 |
| 19V8 | Triple-Diode, High-Mu Triode | 9AH | 6-2 | 18.9 | 0.15 | 1.0 | 300 | — | — | — | — |

■ Compactron.

† Plate-to-plate.

⊙ Subminiature type.

⊕ Total for all similar sections.

◆ Zero signal.

♣ Maximum.

▲ Without external shield.

⊖ Absolute maximum rating.

♣ Per section.

‡ Supply voltage.

⊙ Design maximum rating.

Conversion transconductance.

● See X-Radiation Warning, page 4.

| Service | Plate Volts | Screen Volts | Neg Grid Volts | Plate Milli-amperes | Screen Milli-amperes | R _p , Ohms | G _m , μmhos | μ Factor | Load for Rated Output, Ohms | Power Output, Watts | Tube Type |
|------------------------------|---|--------------|---------------------------------|---------------------|----------------------|-----------------------|------------------------|----------|-----------------------------|---------------------|----------------------|
| TV Damper | Max d-c output current = 175 ma; max peak inverse voltage \square = 4,500 volts; max peak current = 1,050 ma | | | | | | | | | | 19AU4 \ddagger |
| TV Damper | Max d-c output current = 190 ma; max peak inverse voltage \square = 4,500 volts; max peak current = 1,150 ma | | | | | | | | | | 19AU4-GTA \ddagger |
| Horizontal Amplifier | 250 60 | 250 250 | 15 0 | 75 180 | 4 18 | 25,000 | 6,000 | — | — | — | 19BG6-G 19BG6-GA |
| | Max positive pulse plate voltage \square = 6,600 volts; max screen dissipation = 3.2 watts; max d-c cathode current = 110 ma | | | | | | | | | | |
| Class A Amplifier | 100 | — | 1.0 | 0.5 | — | 80,000 | 1,250 | 100 | — | — | 19C8 |
| TV Damper | Max d-c output current \diamond = 350 ma; max peak inverse voltage \diamond = 5,000 volts; max peak current \diamond = 2,100 ma | | | | | | | | | | 19CG3 \ddagger |
| Class A Amplifier | 125 | 125 | 1.0 | 12 | 4.0 | 200,000 | 6,500 | — | — | — | 19CL8-A |
| Class A Amp | 100 | 70 | 0 | — | — | — | 7,000 | — | — | — | |
| | 125 | — | 1.0 | 14 | — | 5,000 | 8,000 | 40 | — | — | 19CL8-B \ddagger |
| TV Damper | Max d-c output current \diamond = 350 ma; max peak inverse voltage \diamond = 5,000 volts; max peak current \diamond = 1050 ma. | | | | | | | | | | 19DE3 \ddagger |
| Vertical Oscillator | 250 | — | 11 | 5.5 | — | 8,750 | 2,000 | 17.5 | — | — | 19DE7 \ddagger |
| | Max d-c cathode current \diamond = 22 ma | | | | | | | | | | |
| Vertical Amplifier | 150 | — | 17.5 | 35 | — | — | 925 | 6,500 | 6.0 | — | |
| | 60 | — | 0 | 80 | — | — | — | — | — | — | |
| | Max positive pulse plate voltage \diamond = 1,500; max d-c cathode current \diamond = 50 ma | | | | | | | | | | |
| TV Damper | Max d-c output current \diamond = 400 ma; max peak inverse voltage \diamond = 6,500 volts; max peak current \diamond = 1,200 ma. | | | | | | | | | | 19DK3 \ddagger |
| TV Damper | Max d-c output current \diamond = 400 ma; max peak inverse voltage \diamond = 6,500 volts; max peak current \diamond = 1,200 ma. | | | | | | | | | | 19DQ3 \ddagger |
| TV Damper | Max d-c output current \diamond = 450 ma; max peak inverse voltage \diamond = 6,500 volts; max peak current \diamond = 1,200 ma. | | | | | | | | | | 19DQ3-A \ddagger |
| Class A Amplifier | 125 | 125 | 1.0 | 12 | 4.0 | 200,000 | 6,400 | — | — | — | 19EA8 |
| Class A Amplifier | 150 | — | R _k = 56 | 18 | — | 5,000 | 8,500 | 40 | — | — | 19EA8-A \ddagger |
| | 250 | — | 11 | 5.5 | — | 8,750 | 2,000 | 17.5 | — | — | 19EW7 \ddagger |
| Vertical Oscillator | Max d-c cathode current \diamond = 22 ma | | | | | | | | | | |
| Vertical Amplifier | 150 | — | 17.5 | 35 | — | 800 | 7,500 | 6.0 | — | — | |
| | 60 | — | 0 | 80 | — | — | — | — | — | — | |
| | Max positive pulse plate voltage \diamond = 1,500; max d-c cathode current \diamond = 50 ma | | | | | | | | | | |
| Class A Amplifier \diamond | 125 | — | 1.0 | 4.2 | — | 13,600 | 4,200 | 57 | — | — | 19EZ8 |
| Class A Amplifier | 110 | 115 | R _k = 62 | 36 \ddagger | 10 \ddagger | 17,500 | 13,500 | — | 3,000 | 1.3 | 19FX5 \ddagger |
| Half-Wave Rectifier | Max d-c output current per plate \diamond = 9 ma; max peak inverse voltage \diamond = 330 volts; max RMS supply voltage per plate \diamond = 117 volts; max peak current per plate \diamond = 54 ma | | | | | | | | | | 19GQ7 |
| Class A Amplifier | 200 | 115 | R _k = 68 | 13.2 | 4.3 | 500,000 | 8,500 | — | — | — | 19HR6 \ddagger |
| Class A Amplifier | 150 | 75 | R _k = 68 | 8.8 | 2.8 | 500,000 | 9,500 | — | — | — | 19HS6 \ddagger |
| Class A Amplifier | 125 | 125 | 1.0 | 12 | 4.0 | 200,000 | 6,500 | — | — | — | 19HV8 |
| Class A Amp | 100 | — | 1.0 | 0.8 | — | 54,000 | 1,300 | 70 | — | — | |
| Class A Amplifier \diamond | 100 | — | R _k = 150 \diamond | 8.5 | — | 7,100 | 5,300 | 38 | — | — | 19J6 |
| Class A Amplifier | 125 | 125 | 1.0 | 12 | 4.0 | 200,000 | 7,500 | — | — | — | 19JN8 |
| Class A Amp | 125 | — | 1.0 | 13.5 | — | 5,400 | 8,500 | 46 | — | — | |
| Class A Amplifier | 125 | 125 | 1.0 | 12 | 4.0 | 200,000 | 7,500 | — | — | — | 19KC8 |
| Class A Amp | 125 | — | 1.0 | 13.5 | — | 5,400 | 8,500 | 46 | — | — | |
| Class A Amplifier | 125 | 125 | 1.0 | 12 | 4.0 | 200,000 | 6,500 | — | — | — | 19Q9 \ddagger |
| Class A Amp | 100 | 70 | — | — | — | — | 7,000 | — | — | — | |
| | 125 | — | 1.0 | 14 | — | 5,000 | 8,000 | 40 | — | — | |
| Class A Amplifier | 250 | — | 3.0 | 1.0 | — | 58,000 | 1,200 | 70 | — | — | 19T8 |
| Class A Amplifier | 100 | — | 1.0 | 0.8 | — | 54,000 | 1,300 | 70 | — | — | 19T8-A \ddagger |
| | 250 | — | 3.0 | 1.0 | — | 58,000 | 1,200 | 70 | — | — | 19V8 |
| Class A Amplifier | 100 | — | 1.0 | 0.8 | — | 54,000 | 1,300 | 70 | — | — | |

Metal tubes are shown in bold-face type, miniature tubes in italics.

\diamond G3 and G5 are screen. G4 is signal-input grid. \star Maximum screen dissipation appears immediately below the screen voltage.

\heartsuit G2 and G4 are screen. G3 is signal-input grid.

\ddagger Heater warm-up time controlled.

1, 2, 3, etc. indicate tube sections.

| Tube Type | Classification by Construction | Base Connections | Out-line Dwg | Filament Volts | Filament Amp | Max Plate Watts | Max Plate Volts | Max Screen Volts and Watts * | Capacitance in Picofarads | | |
|-----------|--------------------------------|------------------|--------------|----------------|--------------|-----------------|-------------------|------------------------------|-----------------------------|--------------|------------|
| | | | | | | | | | Input | Output | Grid-plate |
| 19X8 | Triode-Pentode Converter | 9AK | 6-2 | 18.9 | 0.15 | 2.0 | 250 | 250 0.4 | Pentode Section | | |
| 20 | Power-Amplifier Triode | 4D | 9-25 | 3.3 DC | 0.132 | — | 1.5 250 135 | — | Triode Section | | |
| 20E07 | Diode-Pentode | 9LQ | 6-3 | 20 | 0.1 | 3.0 | 300 | 300 0.6 | 5.5 | 5.0 | 0.002 |
| 20EW7 | Dissimilar Double Triode | 9HF | 9-70 | 20.5 | 0.3 | 1.5 10 | 330 330 | — | Diode Section | | |
| 20EZ7 | High-Mu Twin Triode | 9PG | 6-2 | 20 | 0.1 | 1.2 | 330 | — | Section 1 (Pins 6, 7, 8) | | |
| 21EX6 | Beam-Power Amplifier | 5BT | 12-21 | 21.5 | 0.6 | 22 | 770 | 195 3.5 | 2.0 | 2.3 | 4.1 |
| 21GY5 | Beam Pentode | 12DR | 12-79 | 21 | 0.45 | 18 | 770 | 220 3.5 | 5.5 | 5.0 | 0.002 |
| 21HB5 | Beam Power Amplifier | 12BJ | 12-58 | 21 | 0.45 | 18 | 770 | 220 3.5 | Section 2 (Pins 1, 2, 3, 9) | | |
| 21HB5-A | Beam Power Amplifier | 12BJ | 12-58 | 21 | 0.45 | 18 | 770 | 220 3.5 | 1.6 | 0.21 0.32 | 1.5 |
| 21HD5 | Beam Power Amplifier | 12ES | 12-59 | 21.5 | 0.6 | 24 | 770 | 220 6.0 | 2.0 | 2.3 | 4.1 |
| 21HJ5 | Beam Pentode | 12FL | 12-59 | 21.5 | 0.6 | 24 | 770 | 220 6.0 | 2.0 | 2.3 | 4.1 |
| 21JS6-A | Beam Power Amplifier | 12FY | 12-89 | 21.0 | 0.6 | 28 | 990 | 190 5.5 | 2.0 | 2.3 | 4.1 |
| 21JV6 | Beam Power Amplifier | 12FK | 12-58 | 21 | 0.45 | 18 | 770 | 220 3.5 | 2.0 | 2.3 | 4.1 |
| 21JZ6 | Beam Power Amplifier | 12GD | 12-79 | 21 | 0.45 | 18 | 770 | 220 3.5 | 2.0 | 2.3 | 4.1 |
| 21KA6 | Beam Power Amplifier | 12GH | 12-79 | 21 | 0.45 | 18 | 770 | 220 3.5 | 2.0 | 2.3 | 4.1 |
| 21KQ6 | Beam Power Amplifier | 9RJ | T-X | 21.5 | 0.45 | 17 | 275 | 275 6.0 | 2.0 | 2.3 | 4.1 |
| 21LG6 | Beam Power Amplifier | 12HL | 12-89 | 21 | 0.6 | 28 | 900 | 200 5.0 | 2.0 | 2.3 | 4.1 |
| 21LG6-A | Beam Power Amplifier | 12HL | 12-89 | 21.0 | 0.6 | 28 | 900 | 200 5.0 | 2.0 | 2.3 | 4.1 |
| 21LR8 | Triode-Pentode | 9QT | 12-65 | 21 | 0.45 | 14 2.5 | 400 400 | 300 2.75 | Pentode Section | | |
| 21LUS | Triode-Pentode | 12DZ | 12-57 | 21 | 0.45 | 14 2.5 | 400 400 | 300 2.75 | Triode Section | | |

■ Compactron.

† Plate-to-plate.

● Subminiature type.

⊕ Total for all similar sections.

◆ Per section.

♣ Maximum.

▲ Without external shield.

⊖ Absolute maximum rating.

‡ Supply voltage.

◆ Design maximum rating.

Conversion transconductance.

● See X-Radiation Warning, page 4.

| Service | Plate Volts | Screen Volts | Neg Grid Volts | Plate Milli-amperes | Screen Milli-amperes | R _p Ohms | G ₁ mhos | μ Factor | Load for Rated Output, Ohms | Power Output, Watts | Tube Type |
|-----------------------------------|---|--------------|----------------------|---------------------|----------------------|-----------------------------|---------------------|---------------------------------|-----------------------------|---------------------|-----------|
| Class A Amplifier | 250 | 150 | R _k = 200 | 7.7 | 1.6 | 750,000 | 4,600 | — | — | — | 19X8 |
| Class A Amplifier | 100 | — | R _k = 100 | 8.5 | — | 6,900 | 5,800 | 40 | — | — | |
| Class A Amplifier | 135 | — | 22.5 | 6.5† | — | 6,300 | 525 | 3.3 | 6,500 | 0.110 | 20 |
| Class A Amplifier AM Det. | 100 | 100 | E _{cc1} = 0 | 9.0 | 3.5 | 250,000 | 3,800 | R _{p1} = 2.2 Meg | — | — | 20EQ7 |
| Vertical Oscillator | 250 | — | 11 | 5.5 | — | 8,750 | 2,000 | 17.5 | — | — | 20EW7† |
| Vertical Amplifier | 150 | — | 17.5 | 4.5 | — | 800 | 7,500 | 6.0 | — | — | |
| | Max d-c output current \diamond = 1.0 ma; voltage drop: 10 volts at 2 ma Max positive pulse plate voltage \diamond = 1,500; max d-c cathode current \diamond = 50 ma | | | | | | | | | | |
| Class A Amplifier \blacklozenge | 250 | — | 2.0 | 1.2 | — | 62,500 | 1,600 | 100 | — | — | 20EZ7† |
| Horizontal Amplifier | 100 | — | 1.0 | 0.5 | — | 80,000 | 1,250 | 100 | — | — | |
| Horizontal Amplifier | 175 | 175 | 30 | 67 | 3.3 | 8,500 | 7,700 | — | — | — | 21EX6† |
| | 60 | 150 | 0 | 460 | 45 | — | — | — | — | — | |
| | 60 | 125 | 0 | 360 | 30 | — | — | — | — | — | |
| | Max positive pulse plate voltage \diamond = 7,000; max d-c cathode current \diamond = 220 ma | | | | | | | | | | |
| Horizontal Amplifier | 130 | 130 | 20 | 50 | 1.75 | 11,000 | 9,100 | — | — | — | 21GY6† |
| | 60 | 130 | 0 | 410 | 24 | — | — | — | — | — | |
| | Max positive pulse plate voltage \diamond = 6,500; max d-c cathode current \diamond = 230 ma | | | | | | | | | | |
| Horizontal Amplifier | 130 | 130 | 20 | 50 | 1.75 | 11,100 | 9,100 | — | — | — | 21HB5† |
| | 60 | 130 | 0 | 410 | 24 | — | — | — | — | — | |
| | Max positive pulse plate voltage \diamond = 6,000; max d-c cathode current \diamond = 230 ma | | | | | | | | | | |
| Horizontal Amplifier | 130 | 130 | 20 | 46 | 1.8 | 9,900 | 9,000 | — | — | — | 21HB5-A† |
| | 50 | 130 | 0 | 450 | 29 | — | — | — | — | — | |
| | Max positive pulse plate voltage \diamond = 6,000; max d-c cathode current \diamond = 230 ma | | | | | | | | | | |
| Horizontal Amplifier | 135 | 135 | 22 | 65 | 4.0 | 5,000 | 10,000 | — | — | — | 21HD5† |
| | 60 | 135 | 0 | 540 | 48 | — | — | — | — | — | |
| | Max positive pulse plate voltage \diamond = 7,000; max d-c cathode current \diamond = 280 ma | | | | | | | | | | |
| Horizontal Amplifier | 135 | 135 | 22 | 80 | 5.5 | 5,000 | 10,000 | (b.p. connected to k at socket) | — | — | 21HJ5† |
| | 60 | 135 | 0 | 540 | 48 | — | — | — | — | — | |
| | Max positive pulse plate voltage \diamond = 7,000; max d-c cathode current \diamond = 280 ma | | | | | | | | | | |
| Horizontal Amplifier | 175 | 125 | 25 | 125 | 4.5 | 5,600 | 11,300 | (b.p. connected to k at socket) | — | — | 21JS6-A† |
| | 62 | 125 | 0 | 570 | 34 | — | — | — | — | — | |
| | Max positive pulse plate voltage \diamond = 7,500 volts; max d-c cathode current \diamond = 315 ma. | | | | | | | | | | |
| Horizontal Amplifier | 130 | 130 | 20 | 50 | 1.75 | 11,000 | 9,100 | (b.p. connected to k at socket) | — | — | 21JV6† |
| | 60 | 130 | 0 | 410 | 24 | — | — | — | — | — | |
| | Max positive pulse plate voltage \diamond = 6,000; max d-c cathode current \diamond = 230 ma | | | | | | | | | | |
| Horizontal Amplifier | 130 | 130 | 20 | 46 | 1.8 | 9,900 | 9,000 | — | — | — | 21JZ6† |
| | 50 | 130 | 0 | 450 | 29 | — | — | — | — | — | |
| | Max positive pulse plate voltage \diamond = 6,500; max d-c cathode current \diamond = 230 ma | | | | | | | | | | |
| Horizontal Amplifier | 130 | 130 | 20 | 50 | 1.75 | 11,000 | 9,100 | (b.p. connected to k at socket) | — | — | 21KA6† |
| | 60 | 130 | 0 | 410 | 24 | — | — | — | — | — | |
| | Max positive pulse plate voltage \diamond = 6,500; max d-c cathode current \diamond = 230 ma | | | | | | | | | | |
| Horizontal Amplifier | 50 | 200 | 12 | 550 | 50 | (E _{c3} = 0 volts) | — | — | — | — | 21KQ6 |
| | 40 | 135 | 0 | 450 | 35 | (E _{c3} = 0 volts) | — | — | — | — | |
| | Max positive pulse plate voltage \diamond = 6,500; max d-c cathode current \diamond = 275 ma | | | | | | | | | | |
| Horizontal Amplifier | 175 | 125 | 23 | 90 | 1.7 | 7,500 | 11,500 | — | — | — | 21LG6† |
| | 60 | 125 | 0 | 600 | 42 | — | — | — | — | — | |
| | Max positive pulse plate voltage \diamond = 7,500; max d-c cathode current \diamond = 375 ma | | | | | | | | | | |
| Horizontal Amplifier | 175 | 125 | 23 | 90 | 1.7 | 7,500 | 11,500 | — | — | — | 21LG6-A† |
| | 50 | 125 | 0 | 600 | 42 | — | — | — | — | — | |
| | Max positive pulse plate voltage \diamond = 7,500 volts; max d-c cathode current \diamond = 315 ma. | | | | | | | | | | |
| Class A Amplifier | 135 | 120 | 10 | 56 | 3.0 | 12,000 | 9,300 | — | — | — | 21LR8† |
| Class A Amplifier | 250 | — | 4.0 | 2.3 | — | 16,000 | 3,600 | 58 | — | — | |
| Class A Amplifier | 135 | 120 | 10 | 56 | 3.0 | 12,000 | 9,300 | — | — | — | 21LU8† |
| Class A Amplifier | 250 | — | 4.0 | 2.3 | — | 16,000 | 3,600 | 58 | — | — | |

Metal tubes are shown in bold-face type, miniature tubes in *italics*.

\blacklozenge G3 and G5 are screen. G4 is signal-input grid.

\heartsuit G2 and G4 are screen. G3 is signal-input grid.

1, 2, 3, etc. indicate tube sections.

\blacklozenge Maximum screen dissipation appears

immediately below the screen voltage.

† Heater warm-up time controlled.

| Tube Type | Classification by Construction | Base Connections | Outline Dwg | Filament Volts | Filament Amp | Max Plate Watts | Max Plate Volts | Max Screen Volts and Watts | Capacitance in Picofarads | | |
|-----------|----------------------------------|------------------|--------------|----------------|--------------|--------------------|---|----------------------------|---|--------|------------|
| | | | | | | | | | Input | Output | Grid-plate |
| 21MY8 | Triode-Pentode | 12DZ | 12-57 | 21.0 | 0.45 | 16 2.5 | 400 400 | 300 2.75 — | Pentode Section Triode Section | | |
| 22 | Sharp-Cutoff RF Tetrode | 4K | 14-2 | 3.3 DC | 0.132 | — | 135 | 67.5 | 3.5 | 10.0 | 0.02 |
| 22BH3 | Half-Wave High-Vacuum Rectifier | 9HP | 9-86 | 22.4 | 0.45 | 6.5 | Tube Voltage Drop: 33 volts at 360 ma d-c | | | | |
| 22BH3-A | Half-Wave High-Vacuum Rectifier | 9HP | T-X | 22.4 | 0.45 | 6.5 | Tube Voltage Drop: 33 volts at 360 ma d-c | | | | |
| 22BW3 | Half-Wave High-Vacuum Rectifier | 12FX | 9-60 | 22.4 | 0.45 | 6.5 | Tube Voltage Drop: 32 volts at 350 ma d-c | | | | |
| 22DE4 | Half-Wave High-Vacuum Rectifier | 4CG | 9-44 | 22.4 | 0.45 | 6.5 | Tube Voltage Drop: 32 volts at 350 ma d-c | | | | |
| 22JF6 | Beam Power Amplifier | 9QL | T-X | 22 | 0.45 | 17 | 770 | 220 3.5 | 22 | 9.0 | 1.2 |
| 22JG6 | Beam Power Amplifier | 9QU | T-X | 22 | 0.45 | 17 | 770 | 220 3.5 | 22 | 9.0 | 0.7 |
| 22JG6-A | Beam Power Amplifier | 9QU | 12-96 | 22 | 0.45 | 17 | 770 | 220 3.5 | 22 | 9.0 | 0.7 |
| 22JR6 | Beam Power Amplifier | 9QU | 12-96 | 22 | 0.45 | 17 | 770 | 220 3.5 | 22 | 9.0 | 0.7 |
| 22JU6 | Beam Power Amplifier | 9QL | T-X | 22 | 0.45 | 17 | 770 | 220 3.5 | 22 | 9.0 | 1.2 |
| 22KM6 | Beam Power Amplifier | 9QL | T-X or 12-70 | 22 | 0.45 | 20 | 770 | 220 3.5 | 22 | 9.0 | 1.2 |
| 22KV6-A | Beam Power Amplifier | 9QU | 12-97 | 22.0 | 0.45 | 28 | 900 | 220 2.0 | 22 | 9.0 | 0.6 |
| 23JS6-A | Beam Power Amplifier | 12FY | 12-89 | 23.6 | 0.6 | 28 | 990 | 190 5.5 | 24 | 10 | 0.7 |
| 23MB6 | Beam Power Amplifier | 12FY | T-X | 23 | 0.6 | 35 | 990 | 225 7.0 | 25 | 17 | 0.5 |
| 23Z9 | Dissimilar-Double-Triode Pentode | 12GZ | 9-58 | 23 | 0.45 | 7.0 1.25 1.0 | 250 330 250 | 200 1.8 — | Pentode Section Triode Section 1 (Pins 7, 10, 11) Triode Section 2 (Pins 2, 3, 7) | | |
| 24A | Sharp-Cutoff RF Tetrode | 5E | 14-2 | 2.5 | 1.75 | — | 250 | 90 | 5.3 | 10.5 | 0.007 |
| 24BF11 | Dissimilar Double Pentode | 12EZ | 9-59 | 24.2 | 0.315 | 6.5 1.7 | 165 330 | 150 1.8 330 1.1 | Section 1 (Pins 8, 9, 10, 11) Section 2 (Pins 2, 3, 5, 6, 7) | | |
| 24JE6-A | Beam Power Amplifier | 9QL | 12-116 | 24 | 0.6 | 30 | 990 | 220 5.0 | 22 | 11 | 0.56 |
| 24JZ8 | Triode-Pentode | 12DZ | 9-58 | 24.2 | 0.315 | 7.0 1.0 | 250 250 | 200 1.8 — | Pentode Section Triode Section | | |

■ Compactron.

† Zero signal.

◆ Per section.

● See X-Radiation Warning, page 4.

‡ Plate-to-plate.

◆ Maximum.

‡ Supply voltage.

⊙ Subminiature type.

▲ Without external shield.

⊙ Design maximum rating.

⊙ Total for all similar sections.

⊙ Absolute maximum rating.

Conversion transconductance.

| Service | Plate Volts | Screen Volts | Neg Grid Volts | Plate Milli-amperes | Screen Milli-amperes | R _p , Ohms | G _m , μmhos | μ Factor | Load for Rated Output, Ohms | Power Output, Watts | Tube Type |
|--|--|--------------|----------------------|---------------------|----------------------|-----------------------|------------------------|----------|-----------------------------|---------------------|------------------------|
| Class A Amplifier | 135 | 120 | 10 | 56 | 3.0 | 12,000 | 9,300 | — | — | — | 21M V8 [†] ■ |
| | 45 | 125 | 0 | 200 | 20 | — | — | — | — | — | |
| Class A Amplifier | 250 | — | 4.0 | 2.3 | — | 16,000 | 3,600 | 58 | — | — | |
| Class A Amplifier | 135 | 67.5 | 1.5 | 3.7 | 1.3 | 325,000 | 500 | — | — | — | 22 |
| TV Damper | Max d-c output current ⬥ = 180 ma; max peak inverse voltage ⬥ = 5,500 volts; max peak current ⬥ = 1,100 ma | | | | | | | | | | 22BH3 ¶ |
| TV Damper | Max d-c output current ⬥ = 180 ma; max peak inverse voltage ⬥ = 5,500 volts; max peak current ⬥ = 1,100 ma | | | | | | | | | | 22BH3-A ¶ |
| TV Damper | Max d-c output current ⬥ = 175 ma; max peak inverse voltage ⬥ = 5,000 volts; max peak current ⬥ = 1,100 ma | | | | | | | | | | 22BW3 ■ |
| TV Damper | Max d-c output current ⬥ = 180 ma; max peak inverse voltage ⬥ = 5,500 volts; max peak current ⬥ = 1,100 ma | | | | | | | | | | 22DE4 ¶ |
| Horizontal Amplifier | 130 | 125 | 20 | 80 | 2.5 | 12,000 | 10,000 | — | — | — | 22JF6 ¶ |
| | 55 | 125 | 0 | 525 | 32 | — | — | — | — | — | |
| Max positive pulse plate voltage ⬥ = 6,500; max d-c cathode current ⬥ = 275 ma | | | | | | | | | | | |
| Horizontal Amplifier | 130 | 125 | 20 | 80 | 2.5 | 12,000 | 10,000 | — | — | — | 22JG6 ¶ |
| | 50 | 125 | 0 | 525 | 32 | — | — | — | — | — | |
| Max positive pulse plate voltage ⬥ = 6,500; max d-c cathode current ⬥ = 275 ma (g ₃ connected to k at socket) | | | | | | | | | | | |
| Horizontal Amplifier | 130 | 125 | 20 | 80 | 2.5 | 12,000 | 10,000 | — | — | — | 22JG6-A ¶ |
| | 55 | 125 | 0 | 525 | 32 | — | — | — | — | — | |
| Max positive pulse plate voltage ⬥ = 6,500; max d-c cathode current ⬥ = 275 ma (E _{c3} = +25 volts) | | | | | | | | | | | |
| Horizontal Amplifier | 130 | 125 | 20 | 45 | 1.5 | 18,000 | 7,000 | — | — | — | 22JR6 ^a |
| | 50 | 125 | 0 | 470 | 32 | — | — | — | — | — | |
| Max positive pulse plate voltage ⬥ = 6,500; max d-c cathode current ⬥ = 275 ma | | | | | | | | | | | |
| Horizontal Amplifier | 130 | 125 | 20 | 45 | 1.5 | 18,000 | 7,000 | — | — | — | 22JU6 ¶ |
| | 50 | 125 | 0 | 470 | 32 | — | — | — | — | — | |
| Max positive pulse plate voltage ⬥ = 6,500; max d-c cathode current ⬥ = 275 ma (b.p. connected to k at socket) | | | | | | | | | | | |
| Horizontal Amplifier | 140 | 140 | 24.5 | 80 | 2.4 | 6,000 | 9,500 | — | — | — | 22KM6 ¶ |
| | 60 | 140 | 0 | 560 | 31 | — | — | — | — | — | |
| Max positive pulse plate voltage ⬥ = 6,500 volts; max d-c cathode current ⬥ = 275 ma (E _{c3} = 0 volts) | | | | | | | | | | | |
| Pulse Regulator | 140 | 140 | 24.5 | 40 | 2.4 | 10,000 | 6,000 | — | — | — | 22KV6-A [†] ¶ |
| | 100 | 140 | 0 | 440 | 30 | — | — | — | — | — | |
| Max positive pulse plate voltage ⬥ = 6,500 volts; max d-c cathode current ⬥ = 275 ma | | | | | | | | | | | |
| Horizontal Amplifier | 175 | 125 | 25 | 125 | 4.5 | 5,600 | 11,300 | — | — | — | 23JS6-A ¶ ■ |
| | 62 | 120 | 0 | 570 | 34 | — | — | — | — | — | |
| Max positive pulse plate voltage ⬥ = 7,500; max d-c cathode current ⬥ = 315 ma (b.p. connected to k at socket) | | | | | | | | | | | |
| Horizontal Amplifier | 150 | 110 | 20 | 110 | 2.0 | 5,000 | 14,000 | — | — | — | 23MB6 [†] ■ |
| | 60 | 110 | 0 | 660 | 42 | — | — | — | — | — | |
| Max positive pulse plate voltage ⬥ = 8,000 volts; max d-c cathode current ⬥ = 400 ma | | | | | | | | | | | |
| Vertical Amplifier | 120 | 110 | 8.0 | 46 | 3.5 | 11,700 | 7,100 | — | — | — | 23Z9 [†] ■ |
| | 45 | 110 | 0 | 122 | 16.5 | — | — | — | — | — | |
| Max positive pulse plate voltage ⬥ = 2,000; total d-c plate and screen current ⬥ = 70 ma | | | | | | | | | | | |
| Class A Amplifier | 150 | — | 2.0 | 5.4 | — | 11,000 | 3,900 | 43 | — | — | 24A |
| | 150 | — | 5.0 | 5.5 | — | 8,500 | 2,350 | 20 | — | — | |
| Max d-c plate current ⬥ = 20 ma | | | | | | | | | | | |
| Class A Amplifier | 250 | 90 | 3.0 | 4.0 | 1.7 | 600,000 | 1,050 | — | — | — | |
| Class A Amplifier | 145 | 110 | 6.0 | 36† | 3.0† | 30,000 | 8,600 | — | 3,000 | 2.4 | 24BF11 [†] ■ |
| | 150 | 100 | R _k = 560 | 1.3 | 2.0 | 150,000 | 1,000 | — | — | — | |
| Max d-c cathode current ⬥ = 20 ma (E _{c3} = 0 volts) | | | | | | | | | | | |
| Horizontal Amplifier | 175 | 125 | 25 | 130 | 2.8 | 5,800 | 9,600 | — | — | — | 24JE6-A ¶ |
| | 55 | 125 | 0 | 580 | 40 | — | — | — | — | — | |
| Max positive pulse plate voltage ⬥ = 7,500; max d-c cathode current ⬥ = 350 ma | | | | | | | | | | | |
| Vertical Amplifier | 120 | 110 | 8.0 | 46 | 3.5 | 11,700 | 7,100 | — | — | — | 24JZ8 [†] ■ |
| | 45 | 110 | 0 | 122 | 16.5 | — | — | — | — | — | |
| Max positive pulse plate voltage ⬥ = 2,000; max d-c cathode current ⬥ = 70 ma | | | | | | | | | | | |
| Vertical Oscillator | 150 | — | 5.0 | 5.5 | — | 8,500 | 2,350 | 20 | — | — | 24JZ8 [†] ■ |
| | 150 | — | 5.0 | 5.5 | — | 8,500 | 2,350 | 20 | — | — | |
| Max d-c cathode current ⬥ = 20 ma | | | | | | | | | | | |

†etal tubes are shown in bold-face type, *miniature tubes in italics.*

G3 and G5 are screen. G4 is signal-input grid.

‡Maximum screen dissipation appears immediately below the screen voltage.

G2 and G4 are screen. G3 is signal-input grid.

¶ Heater warm-up time controlled.

1, 2, 3, etc. indicate tube sections.

| Tube Type | Classification by Construction | Base Connections | Out-line Dwg | Filament Volts | Filament Amp | Max Plate Watts | Max Plate Volts | Max Screen Volts and Watts * | Capacitance in Picofarads | | |
|-----------------------|--|------------------|---------------------|----------------|--------------|-----------------|--|------------------------------|---------------------------|--------|------------|
| | | | | | | | | | Input | Output | Grid-plate |
| 24LQ6 ¶ | Beam Power Amplifier | 9QL | 12-117 | 24 | 0.6 | 30 ⬠ | 990 ⬠ | 220 ⬠ 5.0 ⬠ | 22 ▲ | 11 ▲ | 0.56 ▲ |
| 24LZ6 ¶ | Beam Power Amplifier | 9QL | 12-117 | 24 | 0.6 | 30 ⬠ | 990 ⬠ | 220 ⬠ 5.0 ⬠ | 22 ▲ | 11 ▲ | 0.6 ▲ |
| 25A6 25A6-GT | Power-Amplifier Pentode | 7S | 8-6 9-11 | 25.0 | 0.3 | 5.3 | 160 | 135 1.9 | 8.5 | 12.5 | 0.2 |
| 25A7-GT | Half-Wave Rectifier, Power Amplifier Pentode | 8F | 9-11 | 25.0 | 0.3 | 2.25 | 117 | 117 0.8 | — | — | — |
| 25AC5-GT | Triode Power Amplifier | 6Q | 9-11 | 25.0 | 0.3 | 10 | 180 | — | 2 tubes, Push-pull | | |
| 25AV5-GA | Beam Power Amplifier | 6CK | T-X | 25.0 | 0.3 | 11 | 550 ⬠ | 175 2.5 | 14 ▲ | 7.0 ▲ | 0.5 ▲ |
| 25AV5-GT | Beam Power Amplifier | 6CK | 9-11 or 9-41 | 25.0 | 0.3 | 11 | 550 ⬠ | 175 2.5 | 14 ▲ | 7.0 ▲ | 0.7 ▲ |
| 25AX4-GT | Half-Wave High-Vacuum Rectifier | 4CG | 9-11 9-41 | 25.0 | 0.3 | 4.8 | Tube Voltage Drop: 32 v at 250 ma d-c | | | | |
| 25B5 | Direct-Coupled Power Amplifier | 6D | 12-1 | 25.0 | 0.3 | 8.5 1.1 | 180 | — | — | — | — |
| 25B6-G | Power Amplifier Pentode | 7S | 14-3 | 25.0 | 0.3 | 12.5 | 200 | 135 2.0 | — | — | — |
| 25B8-GT | Triode Remote-Cutoff Pentode | 8T | 9-24 | 25.0 | 0.15 | — | 100 | 100 | Pentode Section | | |
| 25BK6 | Beam Power Amplifier | 9BQ | 6-3 | 25.0 | 0.3 | 9.0 | 250 | 250 2.5 | 13 ▲ | 5.0 ▲ | 0.6 ▲ |
| 25BQ6-GA 25BQ6-GTB | Beam Power Amplifier | 6AM | T-X 9-49 9-50 | 25.0 | 0.3 | 11 | 600 ⬠ | 200 2.5 | 15 ▲ | 7.0 ▲ | 0.6 ▲ |
| 25BQ6-GT | Beam Power Amplifier | 6AM | 9-49 or 9-50 | 25.0 | 0.3 | 11 | 550 ⬠ | 175 2.5 | 15 ▲ | 7.5 ▲ | 0.6 ▲ |
| 25BR3 ¶ | Half-Wave High-Vacuum Rectifier | 9CB | T-X | 25.0 | 0.3 | 6.5 ⬠ | Tube Voltage Drop: 19 volts at 250 ma d-c | | | | |
| 26C5 | Beam Power Amplifier | 7CV | 5-3 | 25.0 | 0.3 | 7.0 ⬠ | 150 ⬠ | 130 ⬠ 1.4 ⬠ | 13 ▲ | 8.5 ▲ | 0.6 ▲ |
| 25C6-G 25C6-GA | Beam Power Amplifier | 7AC | 14-3 12-16 | 25.0 | 0.3 | 12.5 | 200 | 135 1.75 | — | — | — |
| 26CA5 | Beam Power Amplifier | 7CV | 5-3 | 25.0 | 0.3 | 5.0 | 130 | 130 1. | 15 ▲ | 9.0 ▲ | 0.5 ▲ |
| 25CD6-G 25CD6-GA ¶ | Beam Power Amplifier | 5BT | 16-5 | 25.0 | 0.6 | 15 | 700 ⬠ | 175 3.0 | 25 ▲ | 9.5 ▲ | 0.6 ▲ |
| 25CD6-GB ¶ | Beam Power Amplifier | 5BT | 12-21 | 25.0 | 0.6 | 20 | 700 ⬠ | 175 3.0 | 22 ▲ | 8.5 ▲ | 1.1 ▲ |
| 25CG3 ¶ | Half-Wave, High-Vacuum Rectifier | 12HF | 9-62 | 25 | 0.45 | 6.5 ⬠ | Tube Voltage Drop: 25 volts at 700 ma d-c | | | | |
| 25CK3 ¶ | Half-Wave High-Vacuum Rectifier | 9HP | T-X or 9-86 | 25.0 | 0.3 | 6.5 ⬠ | Tube Voltage Drop: 16 volts at 350 ma d-c | | | | |
| 25CM3 ¶ | Half-Wave, High-Vacuum Rectifier | 9HP | T-X | 25 | 0.6 | 12 ⬠ | Tube Voltage Drop: 10 volts at 350 ma d-c | | | | |
| 25CT3 ¶ | Half-Wave High-Vacuum Rectifier | 9RX | T-X | 25.0 | 0.3 | 4.75 ⬠ | Tube Voltage Drop: 16 volts at 350 ma d-c | | | | |

■ Compactron.

† Zero signal.

◆ Per section.

⬠ Maximum.

‡ Supply voltage.

● See X-Radiation Warning, page 4.

⊙ Subminiature type.

▲ Without external shield.

⬠ Design maximum rating.

⊕ Total for all similar sections.

⊖ Absolute maximum rating.

Conversion transconductance.

| Service | Plate Volts | Screen Volts | Neg Grid Volts | Plate Milli-amperes | Screen Milli-amperes | R _p , Ohms | G _m , μmhos | μ Factor | Load for Rated Output, Ohms | Power Output, Watts | Tube Type |
|--|---|--------------|----------------|---------------------|----------------------|-----------------------------------|------------------------|----------------|-----------------------------|---------------------|-----------------|
| Horizontal Amplifier | 175 60 | 145 145 | 35 0 | 95 710 | 2.4 55 | 7,000 | 7,500 | (Ec3=30 volts) | — | — | 24LQ6¶ |
| | Max positive pulse plate voltage ♦ = 7,500; max d-c cathode current ♦ = 350 ma | | | | | | | | | | |
| Horizontal Amplifier | 175 55 | 125 125 | 25 0 | 140 800 | 2.0 56 | 6,000 | 11,000 | — | — | — | 24LZ6¶ |
| | Max positive pulse plate voltage ♦ = 7,500 volts; d-c cathode current ♦ = 350 ma. | | | | | | | | | | |
| Class A Amplifier | 160 | 120 | 18 | 33† | 6.5† | 42,000 | 2,375 | — | 5,000 | 2.2 | 25A6 |
| Class A Amplifier | 100 | 100 | 15 | 20.5† | 4.0† | 50,000 | 1,800 | — | 4,500 | 0.77 | 25A6-GT |
| Class A Amplifier Half-Wave Rectifier | Max d-c output current = 75 ma; max peak inverse voltage = 350 v; max rms supply voltage = 117 v; max peak current = 450 ma | | | | | | | | | | |
| Class B Amplifier | 180 | — | 0 | 4.0† | — | Peak Input Signal = 0.810 watt | — | — | 4,800 | 6.0 | 25A7-GT |
| Horizontal Amplifier | 250 60 | 150 150 | 22.5 0 | 57 260 | 2.1 26 | 14,500 | 5,900 | — | — | — | 25AC5-GT |
| | Max positive pulse plate voltage □ = 5,500 volts; max screen dissipation = 2.5 watts; max d-c cathode current = 110 ma | | | | | | | | | | |
| Horizontal Amplifier | 250 60 | 150 150 | 22.5 0 | 55 225 | 2.1 25 | 20,000 | 5,500 | — | — | — | 25AV5-GA |
| | Max positive pulse plate voltage □ = 5,500 volts; max screen dissipation = 2.5 watts; max d-c cathode current = 110 ma | | | | | | | | | | |
| TV Damper | Max d-c output current = 125 ma; max peak inverse voltage □ = 4,400 volts max peak current = 750 ma | | | | | | | | | | |
| Class A Amplifier | 180 | 100¶ | 0 | 46 | 5.8¶ | 15,000 | 2,300 | — | 4,000 | 3.8 | 25AV5-GT |
| | ¶ Input Plate | | | | | | | | | | |
| Class A Amplifier | 200 | 135 | 23 | 62† | 1.8† | 18,000 | 5,000 | — | 2,500 | 7.1 | 25AX4-GT |
| Class A Amplifier | 100 | 100 | 3.0 | 7.6 | 2.0 | 185,000 | 2,000 | — | — | — | 25B5 |
| Class A Amplifier Class A Amp | 100 | — | 1.0 | 0.6 | — | 75,000 | 1,500 | 112 | — | — | 25B6-G |
| Class A Amplifier | 250 | 250 | 5.0 | 35† | 3.5† | 100,000 | 8,500 | — | 6,500 | 3.5 | 25B8-GT |
| Horizontal Amplifier | 250 60 | 150 150 | 22.5 0 | 57 260 | 2.1 26 | 14,500 | 5,900 | — | — | — | 25BQ6-GA |
| | Max positive pulse plate voltage □ = 6,000 volts; max screen dissipation = 2.5 watts; max d-c cathode current = 110 ma | | | | | | | | | | |
| Horizontal Amplifier | 250 60 | 150 150 | 22.5 0 | 55 225 | 2.1 25 | 20,000 | 5,500 | — | — | — | 25BQ6-GTB |
| | Max positive pulse plate voltage □ = 5,500 volts; max screen dissipation = 2.5 watts; max d-c cathode current = 110 ma | | | | | | | | | | |
| TV Damper | Max d-c output current ♦ = 200 ma; max peak inverse voltage ♦ = 5,500; max peak current ♦ = 1,200 ma | | | | | | | | | | |
| Class A Amplifier | 120 | 110 | 8.0 | 49† | 4.0† | 10,000 | 7,500 | — | 2,500 | 2.3 | 25BQ6-GT |
| Class A Amplifier | 200 | 135 | 14 | 61† | 2.2† | 18,300 | 7,100 | — | 2,600 | 6.0 | 25BR3¶ |
| Class A Amplifier | 125 110 | 125 110 | 4.5 4.0 | 37† 32† | 4.0† 3.5† | 15,000 16,000 | 9,200 8,100 | — | 4,500 3,500 | 1.5 1.1 | 25C5 |
| Horizontal Amplifier | 175 60 | 175 100 | 30* 0 | 75 230 | 5.5 21 | 7,200 | 7,700 | — | — | — | 25C6-G |
| | Max positive pulse plate voltage □ = 6,600 volts; max screen dissipation = 3.0 watts; max d-c cathode current = 200 ma | | | | | | | | | | |
| Horizontal Amplifier | 175 60 | 175 100 | 30 0 | 75 230 | 5.5 21 | 7,200 | 7,700 | — | — | — | 25C6-GA |
| | Max positive pulse plate voltage □ = 7,000 volts; max screen dissipation = 3.0 watts; max d-c cathode current = 200 ma | | | | | | | | | | |
| TV Damper | Max d-c output current ♦ = 350 ma; max peak inverse voltage ♦ = 5,000 volts; max peak current ♦ = 2,100 ma | | | | | | | | | | |
| TV Damper | Max d-c output current ♦ = 250 ma; max peak inverse voltage ♦ = 5,200 volts; max peak current ♦ = 1,200 ma. | | | | | | | | | | |
| TV Damper | Max d-c output current ♦ = 400 ma; max peak inverse voltage ♦ = 5,500 volts; max peak current ♦ = 1,700 ma | | | | | | | | | | |
| TV Damper | Max d-c output current ♦ = 250 ma; max peak inverse voltage ♦ = 5,000 volts; max peak current ♦ = 1,200 ma. | | | | | | | | | | |

Metal tubes are shown in bold-face type, miniature tubes in italics.

♦ G3 and G5 are screen. G4 is signal-input grid.

¶ G2 and G4 are screen. G3 is signal-input grid.

, 2, 3, etc. indicate tube sections.

⊠ Maximum screen dissipation appears

immediately below the screen voltage.

¶ Heater warm-up time controlled.

| Tube Type | Classification by Construction | Base Connections | Out-line Dwg | Filament Volts | Filament Amp | Max Plate Watts | Max Plate Volts | Max Screen Volts and Watts * | Capacitance in Picofarads | | |
|-----------|----------------------------------|------------------|--------------------|----------------|--------------|-----------------|--|------------------------------|---------------------------|--------|------------|
| | | | | | | | | | Input | Output | Grid-plate |
| 25CU6 | Beam Power Amplifier | 6AM | T-X | 25.0 | 0.3 | 11 | 600‡ | 200 2.5 | 15▲ | 7.0▲ | 0.6▲ |
| 25D4‡ | Half-Wave High-Vacuum Rectifier | 4CG | 9-11, 9-41 | 25.0 | 0.3 | 5.5◆ | Tube Voltage Drop: 22 volts at 250 ma d-c | | | | |
| 25D8-GT | Diode-Triode-Pentode | 8AF | 9-23 | 25.0 | 0.15 | — | 100 | 100 | Pentode Section | | |
| | | | | | | — | | | Triode Section | | |
| 25DK3‡ | Half-Wave High-Vacuum Rectifier | 9SG | 9-117 | 25.0 | 0.45 | 9.0◆ | Tube Voltage Drop: 16 volts at 400 ma d-c 25 volts at 800 ma d-c | | | | |
| 25DK4 | Half-Wave High-Vacuum Rectifier | 5BQ | 5-3 | 25 | 0.15 | — | Tube Voltage Drop: 19 volts at 200 ma d-c | | | | |
| 25DN6‡ | Beam Power Amplifier | 5BT | 12-21 | 25.0 | 0.6 | 15 | 700‡ | 175 3.0 | 22▲ | 11.5▲ | 0.8▲ |
| 25DQ6 | Beam Power Amplifier | 6AM | T-X | 25.0 | 0.3 | 15 | 550‡ | 175 2.5 | 15▲ | 7.0▲ | 0.55▲ |
| 25DQ6-A‡ | Beam-Power Amplifier | 6AM | 12-51 | 25.0 | 0.3 | 18◆ | 770◆‡ | 220◆ 3.6◆ | 15▲ | 7.0▲ | 0.5▲ |
| 25DT5‡ | Beam-Power Pentode | 9HN | 6-3 | 25.0 | 0.3 | 9.0◆ | 315◆ | 285◆ 2.0◆ | 12.5▲ | 4.9▲ | 0.57▲ |
| 25E5 | Beam Power Amplifier | 8GT | T-X | 25 | 0.3 | 11 | 250 | 250 5.0 | 17.5▲ | 8.0▲ | 1.1▲ |
| 25EC6‡ | Beam Power Amplifier | 5BT | T-X | 25 | 0.6 | 10◆ | 700◆‡ | 175◆ 4.0◆ | 24▲ | 10▲ | 0.6▲ |
| 25EH5 | Power-Amplifier Pentode | 7CV | 5-3 | 25 | 0.3 | 5.5◆ | 150◆ | 130◆ 2.0◆ | 17▲ | 9.0▲ | 0.65▲ |
| 25F5 | Beam Power Amplifier | 7CV | 5-3 | 25.0 | 0.15 | 4.5 | 135 | 117 1.0 | 12▲ | 8.0▲ | 0.44▲ |
| 25F5A‡ | Beam Pentode | 7CV | 5-3 | 25 | 0.15 | 5.5◆ | 150◆ | 130◆ 1.1◆ | 12▲ | 8.0▲ | 0.44▲ |
| 25FY8 | Triode-Pentode | 9EX | 6-4 | 25 | 0.3 | 8.0◆ | 150◆ | 150◆ 2.0◆ | Pentode Section | | |
| | | | | | | 1.0◆ | 150◆ | — | Triode Section | | |
| 25HX5 | Beam Power Amplifier | 9SB | T-X | 25.0 | 0.3 | 14◆ | 400◆ | 300◆ 3.5◆ | 17.3▲ | 7.7▲ | 1.1▲ |
| 25JQ6‡ | Beam Pentode with Integral Diode | 9RA | 6-4 | 25.2 | 0.3 | 10◆ | 425◆ | 330◆ 2.0◆ | 13▲ | 6.0▲ | 0.32▲ |
| 25JZ8‡■ | Triode-Pentode | 12DZ | 9-58 | 25.2 | 0.3 | 7.0◆ | 250◆ | 200◆ 1.8◆ | Pentode Section | | |
| | | | | | | 1.0◆ | 250◆ | — | Triode Section | | |
| 25L6 | Beam Power Amplifier | 7AC | 8-6 | 25.0 | 0.3 | 10 | 200 | 117 1.25 | 16.0 | 13.5 | 0.3 |
| 25L6-GT | Beam Power Amplifier | 7AC | 9-11 or 9-41 | 25.0 | 0.3 | 10 | 200 | 125 1.25 | 15▲ | 10▲ | 0.8▲ |
| 25N6-G | Direct-Coupled Power Amplifier | 7W | 12-3 | 25.0 | 0.3 | 8.5 1.1 | 180 180 | — | — | — | — |
| 25W4-GT | Half-Wave High-Vacuum Rectifier | 4CG | 9-11, 9-41 | 25.0 | 0.3 | 3.5 | Tube Voltage Drop: 21 v at 250 ma d-c | | | | |

■ Compactron.

† Zero signal.

◆ Per section.

● Sec X-Radiation Warning, page 4.

† Plate-to-plate.

▲ Maximum.

‡ Supply voltage.

◆ Subminiature type.

● Without external shield.

◆ Design maximum rating.

⊙ Total for all similar sections.

▲ Absolute maximum rating.

Conversion transconductance.

| Service | Plate Volts | Screen Volts | Neg Grid Volts | Plate Milli-am-peres | Screen Milli-am-peres | R _p , Ohms | G _m , μmhos | μ Fac-tor | Load For Rated Out-put, Ohms | Power Out-put, Watts | Tube Type |
|----------------------|---|--------------|-------------------------|----------------------|-----------------------|-----------------------|------------------------|-----------|------------------------------|----------------------|-----------|
| Horizontal Amplifier | 250 60 | 150 150 | 22.5 0 | 57 26 | 2.1 26 | 14,500 | 5,900 | — | — | — | 25CU6 |
| | Max positive pulse plate voltage ⊠ = 6,000 volts; max screen dissipation = 2.5 watts; max d-c cathode current = 110 ma | | | | | | | | | | |
| TV Damper | Max d-c output current ⊠ = 155 ma; max peak inverse voltage ⊠ = 4,400 volts; max peak current ⊠ = 900 ma | | | | | | | | | | 25D4† |
| Class A Amplifier | 100 | 100 | 3.0 | 8.5 | 2.7 | 200,000 | 1,900 | — | — | — | 25D8-GT |
| Class A Amp | 100 | — | 1.0 | 0.5 | — | 91,000 | 1,100 | — | — | — | 25DK3† |
| TV Damper | Max d-c output current ⊠ = 400 ma; max peak inverse voltage ⊠ = 6,500 volts; max peak current ⊠ = 1,200 ma. | | | | | | | | | | 25DK4 |
| Half-Wave Rectifier | Max d-c output current ⊠ = 100 ma; max peak inverse voltage ⊠ = 330 volts; max RMS supply voltage ⊠ = 129 volts; max peak current ⊠ = 600 ma | | | | | | | | | | 25DN6† |
| Horizontal Amplifier | 125 50 | 125 100 | 18 0 | 70 240 | 6.3 30 | 4,000 | 9,000 | — | — | — | 25DN6† |
| | Max positive pulse plate voltage ⊠ = 6,600 volts; max screen dissipation = 3.0 watts; max d-c cathode current = 200 ma | | | | | | | | | | |
| Horizontal Amplifier | 250 60 | 150 150 | 22.5 0 | 75 300 | 2.4 27 | 20,000 | 6,000 | — | — | — | 25DQ6 |
| | Max positive pulse plate voltage ⊠ = 6,000 volts; max screen dissipation = 2.5 watts; max d-c cathode current = 120 ma | | | | | | | | | | |
| Horizontal Amplifier | 250 60 | 150 150 | 22.5 0 | 55 315 | 1.5 25 | 20,000 | 6,600 | — | — | — | 25DQ6-A† |
| | Max positive pulse plate voltage ⊠ = 6,000; max d-c cathode current ⊠ = 155 ma | | | | | | | | | | |
| Vertical Amplifier | 250 80 | 250 250 | 16.5 0 | 44 195 | 1.5 19 | — | 6,200 | — | — | — | 25DT6† |
| | Max positive pulse plate voltage ⊠ = 2,200; max d-c cathode current ⊠ = 55 ma | | | | | | | | | | |
| Horizontal Amplifier | 100 | 100 | 8.2 | 100 | 7.0 | 5,000 | 14,000 | — | — | — | 25E5 |
| | Max positive pulse plate voltage = 7,000; max d-c cathode current = 200 ma | | | | | | | | | | |
| Horizontal Amplifier | 135 60 | 135 135 | 22.5 0 | 70 350 | 4.5 40 | 4,700 | 7,500 | — | — | — | 25EC6† |
| | Max positive pulse plate voltage ⊠ = 7,000; max d-c cathode current ⊠ = 200 ma | | | | | | | | | | |
| Class A Amplifier | 110 | 115 | R _k = 62 | 42† | 11.5† | 11,000 | 14,600 | — | 8,000 | 1.4 | 25EH5 |
| Class A Amplifier | 110 | 110 | 7.5 | 36† | 3.0† | 16,000 | 5,800 | — | 2,500 | 1.2 | 25F6 |
| Class A Amplifier | 110 | 110 | 7.5 | 43† | 3.8† | 13,000 | 6,400 | — | 2,500 | 1.5 | 25F5A† |
| Class A Amplifier | 125 | 125 | 13.5 | 50† | 10† | — | 7,500 | — | 2,000 | 2.7 | 25FY8 |
| Class A Amp | 125 | — | 1.5 | 2.5 | — | — | 2,000 | — | — | — | 25HX5 |
| Vertical Amplifier | 100 40 | 100 100 | 8.2 0 | 100 240 | 7.0 19 | 5,000 | 14,000 | — | — | — | 25HX5 |
| | Max positive pulse plate voltage ⊠ = 2,500 volts; max d-c cathode current ⊠ = 220 ma. | | | | | | | | | | |
| Vertical Amplifier | 140 40 | 140 120 | 18 0 | 35 150 | 2.5 20 | 10,500 | 4,200 | — | — | — | 25JQ6* |
| | Max positive pulse plate voltage ⊠ = 2,000 volts; max d-c cathode current ⊠ = 70 ma. Instantaneous diode-plate-to-cathode voltage drop for instantaneous diode-plate current of 2.0 ma = 5.0 volts | | | | | | | | | | |
| Vertical Amplifier | 120 45 | 110 110 | 8.0 0 | 46 122 | 3.5 16.5 | 11,700 | 7,100 | — | — | — | 25JZ8† |
| | Max positive pulse plate voltage ⊠ = 2,000 volts; max d-c cathode current = 70 ma. | | | | | | | | | | |
| Vertical Oscillator | 150 | — | 5.0 | 5.5 | — | 8,500 | 2,350 | 20 | — | — | 25JZ8† |
| | Max d-c cathode current ⊠ = 20 ma. | | | | | | | | | | |
| Class A Amplifier | 200 110 | 110 | 8.0 7.5 | 50† 49† | 2.0† 4.0† | 30,000 13,000 | 9,500 9,000 | — | 3,000 2,000 | 4.3 2.1 | 25L6 |
| Class A Amplifier | 200 | 125 | R _k = 180 | 46† | 2.2† | 28,000 | 8,000 | — | 4,000 | 3.8 | 25L6-GT |
| Class A Amplifier | 110 | 110 | 7.5 | 49† | 4.0† | 13,000 | 8,000 | — | 2,000 | 2.1 | 25L6-G |
| Class A Amplifier | 180 | 100 | 0 | 46 | 5.8 | 15,000 | 2,300 | — | 4,000 | 3.8 | 25N6-G |
| TV Damper | Max d-c output current = 125 ma; max peak inverse voltage ⊠ = 3850 volts; max peak current = 750 ma | | | | | | | | | | 25W4-GT |

Metal tubes are shown in bold-face type, *miniature tubes in italics.*

♦ G3 and G5 are screen. G4 is signal-input grid.

♥ G2 and G4 are screen. G3 is signal-input grid.

1, 2, 3, etc. indicate tube sections.

⊠ Maximum screen dissipation appears immediately below the screen voltage.

† Heater warm-up time controlled.

| Tube Type | Classification by Construction | Base Connections | Out-line Dwg | Fila-ment Volts | Fila-ment Amp | Max Plate Watts | Max Plate Volts | Max Screen Volts and Watts * | Capacitance in Picofarads | | |
|-----------|---------------------------------|------------------|--------------------|-----------------|---------------|-----------------|--|------------------------------|---|---------|------------|
| | | | | | | | | | Input | Out-put | Grid-plate |
| 25W6-GT | Beam Power Amplifier | 7AC | 9-11 or 9-41 | 25.0 | 0.3 | 10 7.5 | 300 | 150 1.25 | Pentode Connection | | |
| 25X6-GT | High-Vacuum Rectifier Doubler | 7Q | 9-11 | 25.0 | 0.15 | — | Tube Voltage Drop: ⬆ 25 v at 120 ma d-c | | | | |
| 25Y5 | High-Vacuum Rectifier Doubler | 6E | 12-5 | 25.0 | 0.3 | — | — | — | — | — | — |
| 25Z4 | Half-Wave High-Vacuum Rectifier | 5AA | 8-1 | 25.0 | 0.3 | — | Tube Voltage Drop: 20.5 v at 250 ma d-c | | | | |
| 25Z5 | High-Vacuum Rectifier Doubler | 6E | 12-5 | 25.0 | 0.3 | — | Tube Voltage Drop: ⬆ 22 v at 150 ma d-c | | | | |
| 25Z6 | High-Vacuum Rectifier Doubler | 7Q | 8-6 9-11 | 25.0 | 0.3 | — | Tube Voltage Drop: ⬆ 22 v at 150 ma d-c | | | | |
| 25Z6-GT | Medium-Mu Triode | 4D | 14-1 | 1.5 | 1.05 | — | 180 | — | 2.8 | 2.5 | 8.1 |
| 26A6 | Remote-Cutoff RF Pentode | 7BK | 5-2 | 26.5 | 0.07 | 5.3 | 250 | 100 0.4 | 5.5 | 5.0 | 0.004 ⬆ |
| 26A7-GT | Twin-Pentode Power Amplifier | 8BU | 9-33, 9-44 | 26.5 | 0.6 | 2.0 ⬆ | 50 | 50 0.5 | 16.0 ⬆ | 13.0 ⬆ | 1.2 ⬆ |
| 26C6 | Duplex-Diode Medium-Mu Triode | 7BT | 5-2 | 26.5 | 0.07 | 2.5 | 250 | — | 1.8 | 1.4 | 2.0 |
| 26CC6 | Remote-Cutoff Pentode | 7BK | 5-2 | 26.5 | 0.07 | 4.0 | 300 | 150 0.75 | 5.0 | 5.0 | 0.008 ⬆ |
| 26D6 | Pentagrid Converter | 7CH ♠ | 5-2 | 26.5 | 0.07 | 1.0 | 300 | 100 1.0 | Osc I _{ct} = 0.5 ma R _{gr} = 20,000 ohms | | |
| 26E6-G | Beam Power Amplifier | 7S | T-X | 26.5 | 0.3 | 12.5 | 200 | 135 1.5 | — | — | — |
| 26HU5 ♣ | Beam Power Amplifier | 8NB | 12-21 | 26.0 | 0.6 | 33 ⬆ | 990 ⬆ | 250 5.0 ⬆ | 40 ⬆ | 17 ⬆ | 1.0 ⬆ |
| 26LW6 ♣ | Beam Power Amplifier | 8NC | 14-7 | 26 | 0.6 | 40 ⬆ | 990 ⬆ | 280 7.0 ⬆ | 40 ⬆ | 14.5 ⬆ | 1.0 ⬆ |
| 26LX6 ♣ | Beam Power Amplifier | 12JA | 12-136 | 26.0 | 0.6 | 33 ⬆ | 990 ⬆ | 250 5.0 ⬆ | 40 ⬆ | 17 ⬆ | 1.0 ⬆ |
| 26Z5 | Full-Wave High-Vacuum Rectifier | 9BS | 6-2 | 26.5 | 0.2 | — | Tube Voltage Drop: ⬆ 22 v at 100 ma d-c | | | | |
| 27 | Medium-Mu Triode | 5A | 12-5 | 2.5 | 1.75 | — | 275 | — | 3.1 | 2.3 | 3.3 |
| FG-27-A | Thyratron | FG-27-A | T-X | 5.0 | 4.5 | — | Anode Voltage Drop = 16 Volts Peak | | | | |
| 27GB5 | Beam Power Amplifier | 9NH | T-X | 27 | 0.3 | 17 ⬆ | 275 ⬆ | 275 6.0 ⬆ | — | — | — |
| 27KG6 | Beam Power Amplifier | 9RJ | T-X | 26.7 | 0.45 | 34 ⬆ | 700 ⬆ | 250 7.0 ⬆ | — | — | — |
| 28D7 | Twin Beam Power Amplifier | 8BS | 9-31 | 28.0 | 0.4 | 3.0 ⬆ | 100 | 67.5 0.5 | — | — | — |
| 28CB5 | Beam Power Amplifier | 9NH | T-X | 28 | 0.3 | 17 ⬆ | 275 ⬆ | 275 6.0 ⬆ | — | — | — |
| 28HA6 | Pentode | 9NW | 6-4 | 28.6 | 0.15 | 8.0 ⬆ | 300 ⬆ | 250 1.5 ⬆ | 13 ⬆ | 8.0 ⬆ | 0.18 ⬆ |
| 28HD5 ♣ | Beam Power Amplifier | 12ES | 12-59 | 28 | 0.45 | 24 ⬆ | 770 ⬆ | 220 6.0 ⬆ | — | — | — |
| 28Z5 | Full-Wave High-Vacuum Rectifier | 6BJ | 9-31 | 28.0 | 0.24 | — | Tube Voltage Drop: ⬆ 40 v at 100 ma d-c | | | | |

■ Compactron.

† Zero signal.

♣ Per section.

● See X-Radiation Warning, page 4.

‡ Plate-to-plate.

♣ Maximum.

♠ Supply voltage.

⊗ Subminiature type.

▲ Without external shield.

◆ Design maximum rating.

⊕ Total for all similar sections.

⊖ Absolute maximum rating.

Conversion transconductance.

| Service | Plate Volts | Screen Volts | Neg Grid Volts | Plate Milli-amperes | Screen Milli-amperes | R _p , Ohms | G _m , μmhos | μ Factor | Load for Rated Output, Ohms | Power Output, Watts | Tube Type |
|----------------------|--|--------------|-------------------------|---------------------|----------------------|------------------------|------------------------|----------|-----------------------------|-----------------------------|------------------------|
| Class A Amplifier | 200 | 125 | R _k = 180 | 46† | 2.2† | 28,000 | 8,000 | — | 4,000 | 3.8 | 25W6-GT |
| | 110 | 110 | 7.5 | 49† | 4.0† | 13,000 | 8,000 | — | 2,000 | 2.1 | |
| Vertical Amplifier | 225 | — | 30 | — | — | 1,600 | 3,800 | 6.2 | — | — | 25X6-GT |
| Rectifier or Doubler | Max positive pulse plate voltage ⊕ = 1200; max d-c cathode current = 60 ma Max d-c output current per plate = 60 ma; rms supply voltage per plate = 125 volts | | | | | | | | | | |
| Rectifier or Doubler | Max d-c output current per plate = 42 ma; max peak inverse voltage = 700 volts; max rms supply voltage per plate = 250 volts | | | | | | | | | | 25Y5 |
| Half-Wave Rectifier | Max d-c output current = 125 ma; max peak inverse voltage = 700 volts, max rms supply voltage = 235 volts; max peak current = 750 ma | | | | | | | | | | 25Z4 |
| Rectifier or Doubler | Max d-c output current per plate = 75 ma; max peak inverse voltage = 700; max rms supply voltage per plate = 235; max peak current per plate = 450 ma | | | | | | | | | | 25Z5 |
| Rectifier or Doubler | Max d-c output current per plate = 75 ma; max peak inverse voltage = 700; max rms supply voltage per plate = 235; max peak current per plate = 450 ma | | | | | | | | | | 25Z6 25Z6-GT |
| Class A Amplifier | 180 | — | 14.5 | 6.2 | — | 7,300 | 1,150 | 8.3 | — | — | 26 |
| Class A Amplifier | 250 | 100 | R _k = 125 | 10.5 | 4.0 | 1,000,000 | 4,000 | — | — | — | 26A6 |
| | 26.5 | 26.5 | R _{gt} = 2 meg | 1.7 | 0.7 | 250,000 | 2,000 | — | — | — | |
| Class A Amplifier | 26.5 | 26.5 | 4.5 | 20† | 1.9† | — | 5,700 | — | 1,500 | 0.165 | 26A7-GT |
| Class A Amplifier | 250 | — | 9.0 | 9.5 | — | 8,500 | 1,900 | 16 | — | — | 26C6 |
| | 26.5 | — | R _{gt} = 2 meg | 1.1 | — | 15,500 | 1,100 | 17 | — | — | |
| Class A Amplifier | 250 | 150 | 8.0 | 9.0 | 2.3 | 720,000 | 2,000 | — | — | — | 26CG6 |
| Converter | 250 | 100 | 1.5 | 3.0 | 7.8 | 1,000,000 | 475 # | — | — | — | 26D6 |
| Class A Amplifier | 200 | 135 | 14 | 61† | 3.0† | 18,000 | 7,100 | — | 2,600 | 6.0 | 26E6-G |
| Horizontal Amplifier | 175 | 110 | 21 | 125 | 3.3 | 6,000 | 14,000 | — | — | — | 26HU5¶ |
| | 60 | 110 | 0 | 750 | 42 | — | — | — | — | — | |
| Horizontal Amplifier | 250 | 250 | 56 | 125 | 4.2 | 6,700 | 12,000 | — | — | — | 26LW6¶ |
| | 60 | 110 | 0 | 650 | 37 | — | — | — | — | — | |
| Horizontal Amplifier | 175 | 110 | 21 | 125 | 3.3 | 6,000 | 14,000 | — | — | — | 26LX6¶■ |
| | 60 | 110 | 0 | 750 | 42 | — | — | — | — | — | |
| Full-Wave Rectifier | Max d-c output current per plate = 50 ma; max peak inverse voltage = 1250; rms supply voltage per plate = 325; max peak current per plate = 300 ma | | | | | | | | | | 26Z5 |
| Class A Amp | 250 | — | 21 | 5.2 | — | 9,250 | 975 | 9.0 | — | — | 27 |
| Controlled Rectifier | Max d-c cathode current ⊕ = 2.5 amperes; max peak inverse voltage ⊕ = 1,000 volts; max peak cathode current ⊕ = 10 amperes | | | | | | | | | | FG-27-A |
| Horizontal Amplifier | 75 | 200 | 10 | 440 | 37 | (Instantaneous Values) | | | | | 27GB5 |
| | Max positive pulse plate voltage ⊕ = 7,700; max d-c cathode current ⊕ = 275 ma | | | | | | | | | | |
| Horizontal Amplifier | 160 | 160 | 0 | 1,400 | 45 | — | — | — | — | (E _{c3} = 0 volts) | 27KG6 |
| | 45 | 160 | 0 | 1,000 | — | — | — | — | — | — | |
| Class A Amplifier | 28 | 28 | 3.5 | 12.5† | 1.0† | 4,200 | 3,400 | — | 4,000 | 0.100 | 28D7 |
| | 75 | 200 | 10 | 440 | 37 | (Instantaneous Values) | | | | | |
| Horizontal Amplifier | Max positive pulse plate voltage ⊕ = 7,700; max d-c cathode current ⊕ = 275 ma | | | | | | | | | | 28GB5 |
| Class A Amplifier | 150 | 100 | R _k = 33 | 28 | 3.5 | 20,000 | 20,000 | — | — | — | 28HA6 |
| | 60 | 100 | 0 | 45 | 9.0 | — | — | — | — | — | |
| Horizontal Amplifier | 135 | 135 | 22 | 65 | 4.0 | 5,000 | 10,000 | — | — | — | 28HD5¶■ |
| | 60 | 135 | 0 | 540 | 48 | — | — | — | — | — | |
| Full-Wave Rectifier | Max positive pulse plate voltage ⊕ = 7,000; max d-c cathode current ⊕ = 280 ma | | | | | | | | | | 28Z5 |
| | Max d-c output current = 100 ma; max peak inverse voltage = 1250 volts; max rms supply voltage per plate = 325 volts; max peak current per plate = 300 ma | | | | | | | | | | |

Metal tubes are shown in bold-face type, miniature tubes in italics.

♦ G3 and G5 are screen. G4 is signal-input grid.

¶ G2 and G4 are screen. G3 is signal-input grid.

1, 2, 3, etc. indicate tube sections.

‡ Maximum screen dissipation appears immediately below the screen voltage.

¶ Heater warm-up time controlled.

| Tube Type | Classification by Construction | Base Connections | Out-line Dwg | Filament Volts | Filament Amp | Max Plate Watts | Max Plate Volts | Max Screen Volts and Watts | Capacitance in Picofarads | | |
|--------------------|----------------------------------|------------------|---------------|----------------|--------------|-----------------|-----------------|----------------------------|---|--------|------------|
| | | | | | | | | | Input | Output | Grid-plate |
| 29GK6 [†] | Beam Power Amplifier | 9GK | 6-4 | 28.6 | 0.15 | 13.2 | 330 | 330 2.0 | Single Tube Two Tubes, Push-Pull Two Tubes, Push-Pull | | |
| 29KQ6 | Beam Power Amplifier | 9RJ | T-X | 29 | 0.3 | 17 | 275 | 275 6.0 | 27 | 11 | 1.5 |
| 29LE6 | Beam Power Amplifier | 9RJ | T-X | 29.0 | 0.3 | 20 | 275 | 275 5.0 | 11 | 27 | 1.5 |
| 30 | Medium-Mu Triode | 4D | 12-5, 9-26 | 2.0 DC | 0.06 | — | 180 | — | 3.0 | 2.2 | 6.0 |
| 30AG11 | Duplex-Diode Twin Triode | 12DA | 9-56 | 30 | 0.15 | 2.0 | 330 | — | Triode Sections | | |
| 30CW5 | Power Amplifier Pentode | 9CV | 6-4 | 30 | 0.15 | 14 | 275 | 220 2.1 | 11.8 | 6.0 | 0.6 |
| 30HJ5 | Beam Pentode | 12FL | 12-59 | 30 | 0.45 | 24 | 770 | 220 6.0 | — | — | — |
| 30KD6 | Beam Power Amplifier | 12GW | 12-119 | 30 | 0.6 | 33 | 990 | 200 5.0 | 40 | 16 | 0.8 |
| 30JZ6 | Beam Power Amplifier | 12GD | 12-79 | 30.0 | 0.3 | 18 | 770 | 220 3.5 | 24 | 8.5 | 0.34 |
| 30MB6 | Beam Power Amplifier | 12FY | T-X | 30 | 0.45 | 35 | 990 | 225 7.0 | 35 | 17 | 0.5 |
| 31 | Power-Amplifier Triode | 4D | 12-5 | 2.0 DC | 0.13 | — | 180 | — | 3.5 | 2.7 | 5.7 |
| 31AL10 | Dissimilar-Double Triode Pentode | 12HR | 9-59 | 31.5 | 0.315 | 7.0 | 250 | 200 1.8 | Pentode Section | | |
| | | | | | | 1.25 | 330 | — | Triode Section 1 (pins 9, 10, 11) | | |
| | | | | | | 1.0 | 250 | — | Triode Section 2 (pins 2, 3, 7) | | |
| 31JS6-A | Beam Power Amplifier | 12FY | 12-89 | 31.5 | 0.45 | 28 | 990 | 190 5.5 | 24 | 10 | 0.7 |

■ Compactron.

† Zero signal.

◆ Per section.

● See X-Radiation Warning, page 4.

‡ Plate-to-plate.

♣ Maximum.

‡ Supply voltage.

⊙ Subminiature type.

▲ Without external shield.

⊙ Design maximum rating.

⊕ Total for all similar sections.

⊖ Absolute maximum rating.

Conversion transconductance.

| Service | Plate Volts | Screen Volts | Neg Grid Volts | Plate Milli-amperes | Screen Milli-amperes | R _p , Ohms | G _m , μmhos | μ Factor | Load for Rated Out-put, Ohms | Power Out-put, Watts | Tube Type |
|------------------------------|---|--------------|----------------------|---------------------|----------------------|-----------------------------|------------------------|----------|------------------------------|----------------------|-------------------|
| Class A Amplifier | 250 | 250 | 7.3 | 48† | 5.5† | 38,000 | 11,300 | — | 5,200 | 5.7 | 29GK6 ¶ |
| | 300 | 300 | R _k = 13C | 72† | 8.0† | — | — | — | 8,000† | 17 | |
| Class AB Amplifier | 250 | 250 | R _k = 13C | 62† | 7.0† | — | — | — | 8,000† | 11 | 29KQ6 |
| | 300 | 300 | 14.7 | 15† | 1.6† | — | — | — | 8,000† | 17 | |
| Class AB Amplifier | 250 | 250 | 11.6 | 20† | 2.2† | — | — | — | 8,000† | 11 | 29LE6 |
| | 50 | 200 | 12 | 550 | 50 | (E _{cs} = 0 volts) | — | — | — | — | |
| Horizontal Amplifier | 40 | 135 | 0 | 450 | 35 | (E _{cs} = 0 volts) | — | — | — | — | 29LE6 |
| Horizontal Amplifier | 40 | 200 | 12 | 550 | 50 | (E _{cs} = 0 volts) | — | — | — | — | |
| Horizontal Amplifier | 180 | — | 13.5 | 3.1 | — | 10,300 | 900 | 9.3 | — | — | 30 |
| Class A Amplifier | 125 | — | 1.0 | 7.5 | — | 8,500 | 7,800 | 66 | — | — | 30AG11 ■ |
| Class A Amplifier Detector ♦ | Max d-c output current ♦ = 5.0 ma | | | | | | | | | | |
| Class A Amplifier | 170 | 170 | 12.5 | 70† | 3.5† | 26,000 | 11,000 | — | 2,400 | 5.6 | 30CW6 |
| Horizontal Amplifier | 135 | 135 | 22 | 80 | 5.5 | 5,000 | 10,000 | — | — | — | 30HJ5 ¶■ |
| | 60 | 135 | 0 | 540 | 48 | — | — | — | — | — | |
| Horizontal Amplifier | Max positive pulse plate voltage ♦ = 7,000; max d-c cathode current ♦ = 280 ma | | | | | | | | | | |
| Horizontal Amplifier | 150 | 110 | 22.5 | 100 | 2.0 | 6,000 | 14,000 | — | — | — | 30KD6 ¶■ |
| | 45 | 160 | 0 | 1,100 | 110 | — | — | — | — | — | |
| Horizontal Amplifier | Max positive pulse plate voltage ♦ = 7,000; max d-c cathode current ♦ = 400 ma | | | | | | | | | | |
| Horizontal Amplifier | 130 | 130 | 20 | 46 | 1.8 | 9,900 | 9,000 | — | — | — | 30JZ6 ■ |
| | 50 | 130 | 0 | 450 | 29 | — | — | — | — | — | |
| Horizontal Amplifier | Max positive pulse plate voltage ♦ = 6,500 volts; max d-c cathode current ♦ = 230 ma. | | | | | | | | | | |
| Horizontal Amplifier | 150 | 110 | 20 | 110 | 2.0 | 5,000 | 14,000 | — | — | — | 30MB6 ¶■ |
| | 60 | 110 | 0 | 660 | 42 | — | — | — | — | — | |
| Horizontal Amplifier | Max positive pulse plate voltage ♦ = 8,000 volts; max d-c cathode current ♦ = 400 ma. | | | | | | | | | | |
| Class A Amplifier | 180 | — | 30 | 12.3† | — | 3,600 | 1,050 | 3.8 | 5,700 | 0.375 | 31 |
| Vertical Amplifier | 120 | 110 | 8.0 | 46 | 3.5 | 11,700 | 7,100 | — | — | — | 31AL10 ¶■ |
| | 45 | 110 | 0 | 122 | 16.5 | — | — | — | — | — | |
| Vertical Amplifier | Max positive pulse plate voltage = 2,000 volts; max d-c cathode current = 70 ma. | | | | | | | | | | |
| Sync. Separator | 150 | — | 2.0 | 5.4 | — | 11,000 | 3,900 | 43 | — | — | 31JS6-A ¶■ |
| Vertical Oscillator | 150 | — | 5.0 | 5.5 | — | 8,500 | 2,350 | 20 | — | — | |
| Vertical Oscillator | Max d-c cathode current ♦ = 20 ma. | | | | | | | | | | |
| Horizontal Amplifier | 175 | 125 | 25 | 125 | 4.5 | 5,600 | 11,300 | — | — | — | 31JS6-A ¶■ |
| | 62 | 120 | 0 | 570 | 34 | — | — | — | — | — | |
| Horizontal Amplifier | Max positive pulse plate voltage ♦ = 7,500; max d-c cathode current ♦ = 315 ma | | | | | | | | | | |

Metal tubes are shown in bold-face type, miniature tubes in italics.

♦ G3 and G5 are screen. G4 is signal-input grid.

♥ G2 and G4 are screen. G3 is signal-input grid.

1, 2, 3, etc. indicate tube sections.

✱ Maximum screen dissipation appears immediately below the screen voltage.

¶ Heater warm-up time controlled.

| Tube Type | Classification by Construction | Base Connections | Out-line Dwg | Fila-ment Volts | Fila-ment Amp | Max Plate Watts | Max Plate Volts | Max Screen Volts and Watts * | Capacitance in Picofarads | | |
|-----------|--|------------------|----------------------|-----------------|---------------|-----------------|-----------------|------------------------------|--|---------|------------|
| | | | | | | | | | Input | Out-put | Grid-plate |
| 31JS6-C† | Beam Power Amplifier | 12FY | 12-89 | 31.5 | 0.45 | 30◆ | 990‡ | 220◆ 5.5◆ | 24▲ | 10▲ | 0.7▲ |
| 31LQ6† | Beam Power Amplifier | 9QL | 12-117 | 31.0 | 0.45 | 30◆ | 990‡◆ | 220◆ 5.0◆ | 22▲ | 11▲ | 0.56▲ |
| 31LR8† | Triode-Pentode | 9QT | 12-65 or 12-96 | 31.5 | 0.3 | 14◆ | 400◆ | 300◆ 2.75◆ | Pentode Section | | |
| 31LZ6† | Beam Power Amplifier | 9QL | 12-117 | 31 | 0.45 | 30◆ | 990‡◆ | 220◆ 5.0◆ | Triode Section | | 0.6▲ |
| 32 | Sharp-Cutoff RF Tetrode | 4K | 14-2 | 2.0 DC | 0.06 | — | 180 | 67.5 | 5.3▲ | 10.5▲ | 0.015 |
| 39ET5 | Beam-Power Amplifier | 7CV | 5-3 | 32.0 | 0.1 | 5.4◆ | 150◆ | 130◆ 1.2◆ | 12▲ | 6.0▲ | 0.6▲ |
| 39ET5-A† | Beam-Power Amplifier | 7CV | 5-3 | 32.0 | 0.1 | 5.4◆ | 150◆ | 130◆ 1.2◆ | 12▲ | 6.0▲ | 0.6▲ |
| 32HQ7† | Diode-Pentode | 12HT | 12-56 | 32.6 | 0.315 | 7.0◆ 3.8◆ | 400‡◆ | 150◆ 3.0◆ | Pentode Section Diode Section Tube Voltage Drop: 16 volts at 200 ma d-c | | |
| 32L7-GT | Half-Wave Rectifier Beam Power Amplifier | 8Z | 9-11 | 32.5 | 0.3 | — | 90 | 90 | — | — | — |
| FG-32 | Half-Wave Mercury-Vapor Rectifier same as 5558 | — | — | — | — | — | — | — | — | — | — |
| 33 | Power-Amplifier Pentode | 5K | 14-1 | 2.0 DC | 0.26 | — | 180 | 180 | 8.0 | 12.0 | 1.0 |
| A33 | Photoconductive Cell | — | T-X | — | — | 0.01■ | 30■ | — | — | — | — |
| 33GT7† | Diode-Pentode | 12FC | 12-56 | 33.6 | 0.45 | 9.0◆ | 400‡◆ | 150◆ 2.5◆ | Pentode Section Diode Section Tube Voltage Drop: 21 volts at 250 ma d-c | | |
| 33GY7† | Diode-Pentode | 12FN | 12-56 | 33.6 | 0.45 | 9.0◆ | 400‡◆ | 150◆ 3.0◆ | Pentode Section Diode Section Tube Voltage Drop: 21 volts at 250 ma d-c | | |

■ Compactron.
† Zero signal.
◆ Per section.

‡ Plate-to-plate.
◆ Maximum.
‡ Supply voltage.

◎ Subminiature type.
▲ Without external shield.
◆ Design maximum rating.

◎ Total for all similar sections.
◎ Absolute maximum rating.
Conversion transconductance.

● See X-Radiation Warning, page 4.

| Service | Plate Volts | Screen Volts | Neg Grid Volts | Plate Milli-amperes | Screen Milli-amperes | R _p , Ohms | G _m , μmhos | μ Factor | Load For Rated Output, Ohms | Power Output, Watts | Tube Type |
|----------------------|---|--------------|----------------|---------------------|----------------------|-----------------------|------------------------|------------------------------|---------------------------------|---------------------|------------------|
| Horizontal Amplifier | 175 60 | 125 125 | 25 0 | 130 600 | 2.8 32 | 5,500 — | 11,500 — | — | (b.p. connected to k at socket) | — | 31JS6-C ¶ |
| | Max positive pulse plate voltage ♦ = 7,500 volts; max d-c cathode current ♦ = 350 ma. | | | | | | | | | | |
| Horizontal Amplifier | 175 60 | 145 145 | 35 0 | 95 710 | 2.4 55 | 7,000 — | 7,500 — | (E _{c2} = 30 volts) | — | — | 31LQ6 ¶ |
| | Max positive pulse plate voltage ♦ = 7,500 volts; max d-c cathode current ♦ = 350 ma. | | | | | | | | | | |
| Class A Amplifier | 135 | 120 | 10 | 56 | 3.0 | 12,000 | 9,300 | — | — | — | 31LR8 ¶ |
| Class A Amplifier | 250 | — | 4.0 | 2.3 | — | 16,000 | 3,600 | 58 | — | — | |
| Horizontal Amplifier | 175 55 | 125 125 | 25 0 | 140 800 | 2.0 56 | 6,000 — | 11,000 — | — | — | — | 31LZ6 ¶ |
| | Max positive pulse plate voltage ♦ = 7,500 volts; d-c cathode current ♦ = 350 ma. | | | | | | | | | | |
| Class A Amplifier | 180 | 67.5 | 3.0 | 1.7 | 0.4 | 1,200,000 | 650 | — | — | — | 32 |
| Class A Amplifier | 110 | 110 | 7.5 | 30† | 2.8† | 21,500 | 5,500 | — | 2,800 | 1.2 | <i>32ET5</i> |
| Class A Amplifier | 110 | 110 | 7.5 | 30† | 2.8† | 21,500 | 5,500 | — | 2,800 | 1.2 | <i>32ET5-A</i> ¶ |
| Horizontal Amplifier | 110 50 | 110 110 | 22.5 0 | 42 240 | 2.4 19 | 8,400 — | 4,500 — | — | — | — | 32HQ7 ¶ ■ |
| | Max positive pulse plate voltage ♦ = 4,000 volts; max d-c cathode current ♦ = 125 ma. | | | | | | | | | | |
| TV Damper | Max d-c output current ♦ = 120 ma; max peak inverse voltage ♦ = 3,300 volts; max peak current ♦ = 600 ma. | | | | | | | | | | |
| Class A Amplifier | 90 | 90 | 7.0 | 27† | 2.0† | 17,000 | 4,800 | — | 2,600 | 1.0 | 32L7-GT |
| Half-Wave Rectifier | 90 | 90 | 5.0 | 38† | 3.0† | 15,000 | 6,000 | — | 2,600 | 0.8 | |
| | Max d-c output current = 60 ma; max rms supply voltage = 125 v | | | | | | | | | | |
| Class A Amplifier | 180 | 180 | 18 | 22† | 5.0† | 55,000 | 1,700 | — | 6,000 | 1.4 | 33 |
| Control | Spectral Response = 5,500 angstrom units; maximum current ⊗ = 10 milliamperes | | | | | | | | | | |
| Horizontal Amplifier | 130 60 | 130 130 | 22.5 0 | 48 320 | 2.9 22 | 10,000 — | 6,500 — | — | — | — | 33G17 ¶ ■ |
| | Max positive pulse plate voltage ♦ = 3,500; max d-c cathode current ♦ = 140 ma | | | | | | | | | | |
| TV Damper | Max d-c output current ♦ = 125 ma; max peak inverse voltage ♦ = 2,500 volts; max peak current ♦ = 750 ma | | | | | | | | | | |
| Horizontal Amplifier | 130 60 | 130 130 | 22.5 0 | 48 320 | 2.9 22 | 10,000 — | 6,500 — | — | — | — | 33GY7 ¶ ■ |
| | Max positive pulse plate voltage ♦ = 5,000; max d-c cathode current ♦ = 155 ma | | | | | | | | | | |
| TV Damper | Max d-c output current ♦ = 135 ma; max peak inverse voltage ♦ = 4,200 volts; max peak current ♦ = 810 ma | | | | | | | | | | |

Metal tubes are shown in bold-face type, *miniature tubes in italics.*

♦ G3 and G5 are screen. G4 is signal-input grid.

¶ G2 and G4 are screen. G3 is signal-input grid.

1, 2, 3, etc. indicate tube sections.

⊗ Maximum screen dissipation appears immediately below the screen voltage.

¶ Heater warm-up time controlled.

| Tube Type | Classification by Construction | Base Connections | Out-line Dwg | Filament Volts | Filament Amp | Max Plate Watts | Max Plate Volts | Max Screen Volts and Wt* | Capacitance in Picofarads | | |
|-------------------|----------------------------------|------------------|--------------------|----------------|--------------|-----------------|--|--------------------------|---|--------|------------|
| | | | | | | | | | Input | Output | Grid-plate |
| 33GY7-A† | Diode-Pentode | 12FN | 12-56 | 33.6 | 0.45 | 9:0◆ | 400†◆ | 150◆ 3.0◆ | Pentode Section | | |
| | | | | | | 3.8◆ | | | Diode Section Tube Voltage Drop: 21 volts at 250 ma d-c | | |
| 33HE7† | Diode-Pentode | 12FS | 12-57 | 33.6 | 0.45 | 10◆ | 500†◆ | 150◆ 3.5◆ | Pentode Section | | |
| | | | | | | | | | Diode Section Tube Voltage Drop: 21 volts at 350 ma d-c | | |
| 33JR6† | Beam Power Amplifier | 9QU | 12-96 | 33.0 | 0.3 | 17◆ | 770†◆ | 220◆ 3.5◆ | 22▲ | 9.0▲ | 0.7▲ |
| 33JV6† | Beam Power Amplifier | 12FK | 12-58 | 33 | 0.3 | 18◆ | 770†◆ | 220◆ 3.5◆ | 22▲ | 9.0▲ | 0.4▲ |
| 34 | Remote-Cutoff RF Pentode | 4M | 14-2 | 2.0 DC | 0.06 | — | 180 | 67.5 | 6.0▲ | 11.0▲ | 0.015 ♣ |
| 34CD3† | Half-Wave, High-Vacuum Rectifier | 12FX | 9-62 | 34.5 | 0.45 | 12◆ | Tube Voltage Drop: 18 volts at 350 ma d-c | | | | |
| 34CE3† | Half-Wave, High-Vacuum Rectifier | 12GK | 9-62 | 34.5 | 0.45 | — | Tube Voltage Drop: 20 volts at 680 ma d-c | | | | |
| 34CM3† | Half-Wave, High-Vacuum Rectifier | 9HP | T-X | 33.5 | 0.45 | 12◆ | Tube Voltage Drop: 10 volts at 350 ma d-c | | | | |
| 34GD5 34GD5-A† | Beam-Power Amplifier | 7CV | 5-3 | 34.0 | 0.1 | 5.0◆ | 150◆ | 130◆ 1.1◆ | 12.0▲ | 9.0▲ | 0.6▲ |
| 34R3 | Half-Wave, High-Vacuum Rectifier | 9CB | 6-8 | 34 | 0.15 | — | Tube Voltage Drop: 16.3 volts at 150 ma d-c | | | | |
| A35 | Photoconductive Cell | — | T-X | — | — | 0.05□ | 50□ | — | — | — | — |
| 35/51 | Remote-Cutoff RF Tetrode | 5E | 14-2 | 2.5 | 1.75 | — | 275 | 90 | 5.3▲ | 10.5▲ | 0.007 ♣ |
| 35A5 | Beam Power Amplifier | 6AA | 9-31 | 35.0 | 0.15 | 8.5 | 200 | 125 1.0 | — | — | — |
| 35B5 | Beam Power Amplifier | 7BZ | 5-3 | 35.0 | 0.15 | 4.5 | 117 | 117 1.0 | 11▲ | 6.5▲ | 0.4▲ |
| 35C5 35C5-A† | Beam Power Amplifier | 7CV | 5-3 | 35.0 | 0.15 | 5.2◆ | 150◆ | 130◆ 1.1◆ | 12▲ | 9.0▲ | 0.6▲ |
| 35CD6- GA† | Beam Power Amplifier | 5BT | 12-21 | 35.0 | 0.45 | 20 | 700† | 175 3.0 | 22▲ | 8.5▲ | 1.1▲ |
| 35DZ8 | Triode-Pentode | 9JE | T-X | 35.0 | 0.15 | 6.5 | 150 | 135 1.5 | Pentode Section | | |
| | | | | | | 0.75 | 150 | — | Triode Section | | |
| 35EH5 35EH5-A† | Beam-Power Amplifier | 7CV | 5-3 | 35.0 | 0.15 | 5.0◆ | 150◆ | 130◆ 1.75◆ | 17▲ | 9.0▲ | 0.65▲ |
| 35GL6 | Beam-Power Amplifier | 7PZ | 5-3 | 35.0 | 0.15 | 5.5◆ | 150◆ | 130◆ 1.1◆ | 14▲ | 9.5▲ | 0.5▲ |
| 35HB8 | Triode-Pentode | 9ME | 6-3 | 35.0 | 0.15 | 6.5◆ | 150◆ | 135◆ 1.5◆ | Pentode Section | | |
| | | | | | | 0.75◆ | 150◆ | — | Triode Section | | |
| 35L6-GT | Beam Power Amplifier | 7AC | 9-11 or 9-41 | 35.0 | 0.15 | 8.5 | 200 | 125 1.0 | — | — | — |
| 35LR6† | Beam Power Amplifier | 12FY | 12-90 | 35 | 0.45 | 30◆ | 990†◆ | 220◆ 5.0◆ | 33▲ | 12▲ | 0.47▲ |
| 36W4 36W4-A† | Half-Wave High-Vacuum Rectifier | 5BQ | 5-3 | 35.0 | 0.15 | — | Tube Voltage Drop: 18 v at 200 ma d-c | | | | |

■ Compactron.

† Plate-to-plate.

● Subminiature type.

⊕ Total for all similar sections.

† Zero signal.

♣ Maximum.

▲ Without external shield.

⊖ Absolute maximum rating.

♣ Per section.

‡ Supply voltage.

◆ Design maximum rating.

Conversion transconductance.

● See X-Radiation Warning, page 4.

| Service | Plate Volts | Screen Volts | Neg Grid Volts | Plate Milli-amperes | Screen Milli-amperes | R _p , Ohms | G _m , μmhos | μ Factor | Load For Rated Output, Ohms | Power Output, Watts | Tube Type |
|----------------------|--|-------------------|-----------------------------|---------------------|----------------------|-----------------------|------------------------|---------------------------------|-----------------------------|---------------------|--------------------|
| Horizontal Amplifier | 130 60 50 | 130 130 130 | 22.5 0 0 | 48 320 315 | 2.9 22 20 | — — — | 6,500 — — | — — — | — — — | — — — | 33GY7-A ¶ |
| TV Damper | Max positive pulse plate voltage ⬢ = 5,000; max d-c cathode current ⬢ = 155 ma Max d-c output current ⬢ = 135 ma; max peak inverse voltage ⬢ = 4,200 volts; max peak current ⬢ = 810 ma | | | | | | | | | | |
| Horizontal Amplifier | 130 50 | 130 130 | 22 0 | 60 450 | 2.8 40 | 6,200 | 8,800 | — — | — — | — — | 33HE7 ¶ |
| TV Damper | Max positive pulse plate voltage = 5,000 volts; max d-c cathode current = 230 ma Max d-c output current ⬢ = 200 ma; max peak inverse voltage ⬢ = 4,200 volts; max peak current ⬢ = 1,200 ma. | | | | | | | | | | |
| Horizontal Amplifier | 130 50 | 125 125 | 20 0 | 45 470 | 1.5 32 | 18,000 | 7,000 | — — | — — | — — | 33JR6 ¶ |
| Horizontal Amplifier | 130 60 | 130 130 | 20 0 | 50 410 | 1.75 24 | 11,000 | 9,100 | (b.p. connected to k at socket) | | — — | 33JV6 ¶ |
| Class A Amplifier | 180 | 67.5 | 3.0 | 2.8 | 1.0 | 1,000,000 | 620 | — | — | — | 34 |
| TV Damper | Max d-c output current ⬢ = 350 ma; max peak inverse voltage ⬢ = 6,000 volts; max peak current ⬢ = 1,500 ma | | | | | | | | | | |
| TV Damper | Max d-c output current ⬢ = 350 ma; max peak inverse voltage ⬢ = 6,000 volts; max peak current ⬢ = 1,500 ma | | | | | | | | | | |
| TV Damper | Max d-c output current ⬢ = 400 ma; max peak inverse voltage ⬢ = 5,500 volts; max peak current ⬢ = 1,700 ma | | | | | | | | | | |
| Class A Amplifier | 110 | 110 | 7.5 | 35† | 3.0† | 13,000 | 5,700 | — | 2,500 | 1.4 | 34GD5 34GD5-A ¶ |
| TV Damper | Max d-c output current = 150 ma; max peak inverse voltage = 4,500 volts; max peak current = 450 ma | | | | | | | | | | |
| Control | Spectral Response = 5,500 angstrom units; maximum current ⬢ = 10 milli-amperes | | | | | | | | | | |
| Class A Amplifier | 250 | 90 | 3.0 | 6.5 | 2.5♣ | 400,000 | 1,050 | — | — | — | 35/51 |
| Class A Amplifier | 200 | 125 | R _k = 180 | 43† | 2.0† | 34,000 | 6,100 | — | 5,000 | 3.0 | 35A5 |
| Class A Amplifier | 110 | 110 | 7.5 | 40† | 3.0† | 14,000 | 5,800 | — | 2,500 | 1.5 | 35B6 |
| Class A Amplifier | 110 | 110 | 7.5 | 40† | 3.0† | — | 5,800 | — | 2,500 | 1.5 | 35C6 35C5-A ¶ |
| Horizontal Amplifier | 175 60 | 175 100 | 30 0 | 75 230 | 5.5 21 | 7,200 | 7,700 | — — | — — | — — | 35CD6-GA ¶ |
| Class A Amplifier | 145 | 120 | R _k = 180 | 45† | 6.0† | — | 7,500 | — | 2,500 | 2.0 | 35DZ8 |
| Class A Amplifier | 120 | — | R _k = 1500 | 0.8 | — | — | 1,400 | 100 | — | — | 35EH5 35EH5-A ¶ |
| Class A Amplifier | 110 | 115 | R _k = 62 | 32† | 7.2† | 14,000 | 12,000 | — | 3,000 | 1.2 | 35GL6 |
| Class A Amplifier | 110 | 110 | 7.5 | 45† | 3.0† | 12,000 | 7,500 | — | 2,500 | 1.8 | 35HB8 |
| Class A Amplifier | 115 | 115 | R _k = 150 | 33† | 7.5† | — | 6,250 | — | 3,500 | 1.0 | 35L6-GT |
| Class A Amplifier | 115 | — | R _k = 410 | 2.5 | — | — | 3,900 | 74 | — | — | 35L6-GT |
| Class A Amplifier | 200 110 | 125 110 | R _k = 180 7.5 | 43† 40† | 2.0† 3.0† | 34,000 14,000 | 6,100 5,800 | — — | 5,000 2,500 | 3.0 1.5 | 35LR6 ¶ |
| Horizontal Amplifier | 175 60 | 110 110 | 20 0 | 140 700 | 2.4 35 | 5,300 | 16,000 | (b.p. connected to k at socket) | | — — | 35LR6 ¶ |
| Half-Wave Rectifier | Max positive pulse plate voltage ⬢ = 7,500; max d-c cathode current ⬢ = 350 ma Max d-c output current ⬢ = 110 ma; max peak inverse voltage ⬢ = 360 volts; rms supply voltage = 117 volts; max peak current ⬢ = 660 ma With panel lamp No. 40 or No. 47 between pins 4 and 6 and no shunting resistor, max d-c output current ⬢ = 66 ma With panel lamp and 250 ohm shunting resistor (max), max d-c output ⬢ = 100 ma | | | | | | | | | | |
| | | | | | | | | | | | 35W4 35W4-A ¶ |

Metal tubes are shown in bold-face type, miniature tubes in italics.

♣ G3 and G5 are screen. G4 is signal-input grid.

♦ G2 and G4 are screen. G3 is signal-input grid.

1, 2, 3, etc. indicate tube sections.

♠ Maximum screen dissipation appears immediately below the screen voltage.

¶ Heater warm-up time controlled.

| Tube Type | Classification by Construction | Base Connections | Out-line Dwg | Fila-ment Volts | Fila-ment Amp | Max Plate Watts | Max Plate Volts | Max Screen Volts and Watts* | Capacitance in Picofarads | | |
|-----------|---------------------------------|------------------|--------------------|-----------------|---------------|-----------------|--|-----------------------------|--|---------|------------|
| | | | | | | | | | Input | Out-put | Grid-plate |
| 35Y4 | Half-Wave High-Vacuum Rectifier | 5AL | 9-31 | 35.0 | 0.15 | — | Tube Voltage Drop: 18 v at 200 ma d-c | | | | |
| 35Z3 | Half-Wave High-Vacuum Rectifier | 4Z | 9-31 | 35.0 | 0.15 | — | Tube Voltage Drop: 18 v at 200 ma d-c | | | | |
| 35Z4-GT | Half-Wave High-Vacuum Rectifier | 5AA | 9-11 | 35.0 | 0.15 | — | Tube Voltage Drop: 18 v at 200 ma d-c | | | | |
| 35Z5-GT | Half-Wave High-Vacuum Rectifier | 6AD | 9-11 or 9-41 | 35.0 | 0.15 | — | Tube Voltage Drop: 18 v at 200 ma d-c | | | | |
| 35Z6-G | High-Vacuum Rectifier Doubler | 7Q | 14-3 | 35.0 | 0.3 | — | Tube Voltage Drop:♣ 20 v at 220 ma d-c | | | | |
| 36 | Sharp-Cutoff RF Tetrode | 5E | 12-6 | 6.3 | 0.3 | 0.8 | 250 | 90.0 0.16 | 3.8▲ | 9.0▲ | 0.007♣ |
| 36AM3 | Half-Wave High-Vacuum Rectifier | 5BQ | 5-3 | 36 | 0.1 | — | Tube Voltage Drop: 20 volts at 150 ma d-c | | | | |
| 36AM3-A | Half-Wave High-Vacuum Rectifier | 5BQ | 5-3 | 36 | 0.1 | — | Tube Voltage Drop: 16 volts at 150 ma | | | | |
| 36AM3-B | Half-Wave High-Vacuum Rectifier | 5BQ | 5-3 | 36 | 0.1 | — | Tube Voltage Drop: 16 volts at 150 ma | | | | |
| 36KD6 | Beam Power Amplifier | 12GW | 12-118 | 36 | 0.45 | 33 | 990 | 200 5.0 | 40▲ | 16▲ | 0.8▲ |
| 36MC6 | Beam Power Amplifier | 9QL | T-X | 36 | 0.45 | 33 | 990 | 250 5.0 | 40▲ | 16▲ | 1.0▲ |
| 37 | Medium-Mu Triode | 5A | 12-5 | 6.3 | 0.3 | — | 250 | — | 3.5 | 2.9 | 2.0 |
| 38 | Power-Amplifier Pentode | 5F | 12-6 | 6.3 | 0.3 | — | 250 | 250 | 3.5 | 7.5 | 0.30 |
| 38HE7 | Diode-Pentode | 12FS | 12-57 | 37.8 | 0.45 | 10 | 500 | 150 3.5 | Pentode Section | | |
| 38HK7 | Diode-Pentode | 12FS | 12-57 | 37.8 | 0.45 | 10 | 500 | 150 3.5 | Diode Section | | |
| | | | | | | | | | Tube Voltage Drop: 21 volts at 350 ma d-c | | |
| 39/44 | Remote-Cutoff RF Pentode | 5F | 12-6 | 6.3 | 0.3 | 1.5 | 250 | 90 0.15 | Diode Section | | |
| | | | | | | | | | Tube Voltage Drop: 16 volts at 350 ma d-c | | |
| 40 | Medium-Mu Triode | 4D | 14-1 | 5.0 DC | 0.25 | — | 180 | — | 2.8 | 2.2 | 2.0 |
| 40FR5 | Beam-Power Amplifier | 7CV | 5-3 | 40.0 | 0.1 | 5.2 | 150 | 130 1.2 | 12▲ | 9.0▲ | 0.3▲ |
| 40KD6 | Beam Power Amplifier | 12GW | 12-119 | 40 | 0.45 | 33 | 990 | 200 5.0 | 40▲ | 16▲ | 0.8▲ |
| 40KG6 | Beam Power Amplifier | 9RJ | T-X | 40 | 0.3 | 34 | 700 | 250 7.0 | — | — | — |

■ Compactron.

† Zero signal.

♣ Per section.

‡ Plate-to-plate.

♣ Maximum.

‡ Supply voltage.

⊙ Subminiature type.

▲ Without external shield.

⊙ Design maximum rating.

⊙ Total for all similar sections.

⊙ Absolute maximum rating.

Conversion transconductance.

● See X-Radiation Warning, page 4.

| Service | Plate Volts | Screen Volts | Neg Grid Volts | Plate Milli- amperes | Screen Milli- amperes | R _p , Ohms | G _m , μmhos | μ Fac- tor | Load for Rated Out- put, Ohms | Power Out- put, Watts | Tube Type |
|----------------------|--|-----------------|-----------------------------|----------------------------|-----------------------------|--------------------------|---------------------------|------------------|--|---------------------------------|--------------|
| Half-Wave Rectifier | Max d-c output current = 100 ma; max peak inverse voltage = 700 volts; max rms supply voltage = 235 volts; max peak current = 600 ma. With panel lamp No. 40 or No. 47 between pins 1 and 4 and no shunting resistor, max d-c output current = 60 ma With panel lamp and 250 ohm shunting resistor (max), max d-c output = 90 ma | | | | | | | | | | 35Y4 |
| Half-Wave Rectifier | Max d-c output current = 100 ma; max peak inverse voltage = 700 volts; rms supply voltage = 235 volts; max peak current = 600 ma | | | | | | | | | | 35Z3 |
| Half-Wave Rectifier | Max d-c output current = 100 ma; max peak inverse voltage = 700 volts; max rms supply voltage = 235 volts; max peak current = 600 ma | | | | | | | | | | 35Z4-GT |
| Half-Wave Rectifier | Max d-c output current = 100 ma; max peak inverse voltage = 700 volts; max rms supply voltage = 235 volts; max peak current = 600 ma With panel lamp No. 40 or No. 47 between pins 2 and 3 and no shunting resistor, max d-c output current = 60 ma With panel lamp and 250 ohm shunting resistor (max), max d-c output = 90 ma | | | | | | | | | | 35Z5-GT |
| Rectifier or Doubler | Max d-c output current per plate = 110 ma; max peak inverse voltage = 700; max rms supply voltage per plate = 235; max peak current per plate = 660 ma | | | | | | | | | | 35Z6-G |
| Class A Amplifier | 250 | 90 | 3.0 | 3.2 | 1.7♣ | 550,000 | 1,080 | — | — | — | 36 |
| Half-Wave Rectifier | Max d-c output current ♠ = 82 ma; max peak inverse voltage ♠ = 365 volts; max RMS supply voltage ♠ = 129 volts; max peak current ♠ = 530 ma | | | | | | | | | | 36AM3 |
| Half-Wave Rectifier | Max d-c output current ♠ = 82 ma; max peak inverse voltage ♠ = 365 volts; max RMS supply voltage ♠ = 129 volts; max peak current ♠ = 530 ma | | | | | | | | | | 36AM3-A |
| Half-Wave Rectifier | Max d-c output current ♠ = 82 ma; max peak inverse voltage ♠ = 365 volts; max RMS supply voltage ♠ = 129 volts; max peak current per plate ♠ = 580 ma | | | | | | | | | | 36AM3-B¶ |
| Horizontal Amplifier | 150 45 | 110 160 | 22.5 0 | 100 1,100 | 2.0 110 | 6,000 | 14,000 | — | — | (b.p. connected to k at socket) | 36KD6¶ |
| Horizontal Amplifier | 175 55 | 125 125 | 25 0 | 130 580 | 2.8 40 | 5,800 | 9,600 | — | — | — | 36MC6¶ |
| Class A Amplifier | 250 | — | 18 | 7.5 | — | 8,400 | 1,100 | 9.2 | — | — | 37 |
| Class A Amplifier | 250 | 250 | 25 | 22 | 3.8 | 100,000 | 1,200 | — | 10,000 | 2.5 | 38 |
| Horizontal Amplifier | 130 50 | 130 130 | 22 0 | 60 450 | 2.8 40 | 6,200 | 8,800 | — | — | — | 38HE7¶■ |
| TV Damper | Max positive pulse plate voltage ♠ = 5,000; max d-c cathode current ♠ = 230 ma Max d-c output current ♠ = 200 ma; max peak inverse voltage ♠ = 4,200; max peak current ♠ = 1,200 ma | | | | | | | | | | |
| Horizontal Amplifier | 130 50 | 130 130 | 22 0 | 60 450 | 2.8 40 | 6,200 | 8,800 | — | — | — | 38HK7¶■ |
| TV Damper | Max d-c output current ♠ = 200 ma; max peak inverse voltage ♠ = 3,700; max peak current ♠ = 1,200 ma | | | | | | | | | | |
| Class A Amplifier | 250 | 90 | 3.0* | 5.8 | 1.4 | 1,000,000 | 1,050 | — | — | — | 39/44 |
| Class A Amplifier | 180 | — | 3.0 | 0.2 | — | 150,000 | 200 | 30 | 250,000 | — | 40 |
| Class A Amplifier | 110 115 | 110 115 | 7.5 R _s = 180 | 32† 34† | 3.0† 3.2† | 20,000 | 6,000 | — | 2,800 3,200 | 1.5 1.3 | 40FR5¶ |
| Horizontal Amplifier | 150 45 | 110 160 | 22.5 0 | 100 1,100 | 2.0 110 | 6,000 | 14,000 | — | — | (b.p. connected to k at socket) | 40KD6¶■ |
| Horizontal Amplifier | 160 45 | 160 160 | 0 0 | 1,400 1,000 | 45 — | — | — | — | — | (E _{c3} = 0 volts) | 40KG6 |
| | Max positive pulse plate voltage ♠ = 7,000; max d-c cathode current ♠ = 500 ma | | | | | | | | | | |

Metal tubes are shown in bold-face type, miniature tubes in italics.

♣ G2 and G5 are screen. G4 is signal-input grid.

♠ G2 and G4 are screen. G3 is signal-input grid.

1, 2, 3, etc. indicate tube sections.

♣ Maximum screen dissipation appears

immediately below the screen voltage.

¶ Heater warm-up time controlled.

| Tube Type | Classification by Construction | Base Connections | Out-line Dwg | Filament Volts | Filament Amp | Max Plate Watts | Max Plate Volts | Max Screen Volts and Watts* | Capacitance in Picofarads | | |
|-----------|---------------------------------|------------------|---------------|----------------|--------------|-----------------|--|-----------------------------|--|--------|------------|
| | | | | | | | | | Input | Output | Grid-plate |
| 41 | Power-Amplifier Pentode | 6B | 12-5 | 6.3 | 0.4 | 8.5 | 315 | 285 2.8 | — | — | — |
| 42 | Power-Amplifier Pentode | 6B | 14-1 | 6.3 | 0.7 | 11 | 375 | 285 3.75 | — | — | — |
| 42KN6† | Beam Power Amplifier | 12GU | 12-82 | 42 | 0.45 | 30◆ | 770◆ | 220◆ 5.0◆ | 44▲ | 18▲ | 1.0▲ |
| 43 | Power-Amplifier Pentode | 6B | 14-1 | 25.0 | 0.3 | 5.3 | 160 | 135 1.9 | 8.5 | 12.5 | 0.2 |
| 45 | Power-Amplifier Triode | 4D | 14-1 | 2.5 | 1.5 | 10 | 275 | — | 4.0 | 3.0 | 7.0 |
| 45B5 | Power Amplifier Pentode | 9CV | 6-4 | 45 | 0.1 | 14◆ | 275◆ | 220◆ 2.1◆ | Single Tube Two Tubes Push-Pull | | |
| 45Z3 | Half-Wave High-Vacuum Rectifier | 5AM | 5-2 | 45.0 | 0.075 | — | Tube Voltage Drop: 23 v at 130 ma d-c | | | | |
| 45Z5-GT | Half-Wave High-Vacuum Rectifier | 6AD | 9-11 | 45.0 | 0.15 | — | Tube Voltage Drop: 16 v at 200 ma d-c | | | | |
| 46 | Dual-Grid Power-Amplifier | 5C | 16-1 | 2.5 | 1.75 | 10 | 400 | — | Single tube (G ₂ & P tied) | | |
| B46 | Photoconductive Cell | — | T-X | — | — | 0.12■ | 60■ | — | — | — | — |
| 47 | Power-Amplifier Pentode | 5B | 16-1 | 2.5 | 1.75 | — | 250 | 250 | 8.6 | 13.0 | 1.2 |
| 48 | Power-Amplifier Tetrode | 6A | 16-1 | 30.0 DC | 0.4 | — | 125 | 100 | — | — | — |
| 49 | Dual-Grid Power-Amplifier | 5C | 14-1 | 2.0 DC | 0.12 | — | 135 | — | Single tube (G ₂ & P tied) | | |
| 50 | Power-Amplifier Triode | 4D | T-X | 7.5 | 1.25 | 25 | 450 | — | 4.2 | 3.4 | 7.1 |
| 50A5 | Beam Power Amplifier | 6AA | 9-31 | 50.0 | 0.15 | 10 | 200 | 125 1.25 | — | — | — |
| 50AX6-G | Full-Wave High-Vacuum Rectifier | 7Q | 14-3 | 50.0 | 0.3 | — | Tube Voltage Drop:◆ 21 v at 250 ma d-c | | | | |
| 60B6 | Beam Power Amplifier | 7BZ | 5-3 | 50.0 | 0.15 | 6.0 | 135 | 117 1.25 | 13.0▲ | 8.5▲ | 0.6▲ |
| 60BK6 | Beam Power Amplifier | 9BQ | 6-3 | 50.0 | 0.15 | 9.0 | 250 | 250 2.5 | 13▲ | 5.0▲ | 0.6▲ |
| 60BM8 | Triode-Pentode | 9EX | 6-4 | 50 | 0.1 | 7.0 | 250 | 250 1.8 | Pentode Section | | |
| 60C5 | Beam Power Amplifier | 7CV | 5-3 | 50.0 | 0.15 | 7.0◆ | 150◆ | 130◆ 1.4◆ | 13.0▲ | 8.5▲ | 0.6▲ |
| 60C5-A† | Beam Power Amplifier | 7AC | 14-3 12-16 | 50 | 0.15 | 12.5 | 200 | 200◆ 1.75 | — | — | — |
| 60C6-G | Beam Power Amplifier | 7CV | 5-3 | 50.0 | 0.15 | 5.0 | 130 | 130 1.4 | 15▲ | 9.0▲ | 0.5▲ |
| 60CA5 | Beam Power Amplifier | 7CV | 5-3 | 50.0 | 0.15 | 5.0 | 130 | 130 1.4 | 15▲ | 9.0▲ | 0.5▲ |
| 60DC4 | Half-Wave High-Vacuum Rectifier | 5BQ | 5-3 | 50.0 | 0.15 | — | Tube Voltage Drop: 21 volts at 240 ma d-c | | | | |
| 50E5 | Beam Power Amplifier | 8GT | T-X | 50 | 0.15 | 11 | 250 | 250 5.0 | 17.5▲ | 8.0▲ | 1.1▲ |
| 50EH5 | Power-Amplifier Pentode | 7CV | 5-3 | 50 | 0.15 | 5.5◆ | 150◆ | 130◆ 2.0◆ | 17▲ | 9.0▲ | 0.65▲ |
| 50EH5-A† | Power-Amplifier Pentode | 7CV | 5-3 | 50 | 0.15 | 5.2◆ | 150◆ | 130◆ 1.1◆ | 11▲ | 8.5▲ | 0.28▲ |

■ Compactron.

† Zero signal.

◆ Per section.

‡ Plate-to-plate.

◆ Maximum.

‡ Supply voltage.

◎ Subminiature type.

▲ Without external shield.

◆ Design maximum rating.

◎ Total for all similar sections.

▲ Absolute maximum rating.

Conversion transconductance.

● See X-Radiation Warning, page 4.

| Service | Plate Volts | Screen Volts | Neg Grid Volts | Plate Milli-amperes | Screen Milli-amperes | R _p , Ohms | G _m , μmhos | μ Factor | Load for Rated Output, Ohms | Power Output, Watts | Tube Type |
|----------------------|--|--------------|----------------------|---------------------|----------------------|-----------------------|------------------------|---------------------------------|-----------------------------|---------------------|-----------|
| Class A Amplifier | 250 | 250 | 18 | 32† | 5.5† | 90,000 | 2,300 | — | 7,600 | 3.4 | 41 |
| Class A Amplifier | 285 | 285 | 20 | 38† | 7.0† | 78,000 | 2,550 | — | 7,000 | 4.8 | 42 |
| Horizontal Amplifier | 130 60 | 130 125 | 20 | 100 800 | 4.0 50 | 4,000 — | 16,000 — | (b.p. connected to k at socket) | — | — | 42KN6† |
| | Max positive pulse plate voltage = 6,500; max d-c cathode current = 400 ma | | | | | | | | | | |
| Class A Amplifier | 160 | 120 | 18 | 33† | 6.5† | 42,000 | 2,375 | — | 5,000 | 2.2 | 43 |
| Class A Amplifier | 275 | — | 56 | 36† | — | 1,700 | 2,050 | 3.5 | 4,600 | 2.0 | 45 |
| Class A Amplifier | 200 | 200 | 17.3 | 60† | 4.1† | 28,000 | 8,800 | — | 2,400 | 5.2 | 46B5 |
| Class AB Amplifier | 170 | 170 | R _k = 120 | 113† | 6.0† | — | — | — | 3,500† | 13 | 46Z3 |
| Half-Wave Rectifier | Max d-c output current = 65 ma; max peak inverse voltage = 350 v; max rms supply voltage = 117 volts; max peak current = 390 ma | | | | | | | | | | |
| Half-Wave Rectifier | Max d-c output current = 100 ma; max peak inverse voltage = 700 volts; max rms supply voltage = 235 volts; max peak current = 600 ma | | | | | | | | | | |
| | With panel lamp No. 40 or No. 47 between pins 2 and 3 and no shunting resistor, max d-c output current = 60 ma | | | | | | | | | | |
| | With panel lamp and 250 ohm shunting resistor (max), max d-c output = 90 ma | | | | | | | | | | |
| Class A Amplifier | 250 | — | 33 | 22† | — | 2,380 | 2,350 | 5.6 | 6,400 | 1.25 | 46 |
| Control | Spectral Response = 6,100 angstrom units; maximum current = 20 milliamperes | | | | | | | | | | |
| Class A Amplifier | 250 | 250 | 16.5 | 31† | 6.0† | 60,000 | 2,500 | — | 7,000 | 2.7 | 47 |
| Class A Amplifier | 125 | 100 | 20 | 56 | 9.5 | — | 3,900 | — | 1,500 | 2.5 | 48 |
| Class A Amplifier | 135 | — | 20 | 6.0 | — | 4,175 | 1,125 | 4.7 | 11,000 | 0.170 | 49 |
| Class A Amp | 450 | — | 84 | 55 | — | 1,800 | 2,100 | 3.8 | 4,350 | 4.6 | 50 |
| Class A Amplifier | 200 | 125 | R _k = 180 | 46† | 2.2† | 28,000 | 8,000 | — | 4,000 | 3.8 | 50A5 |
| | 110 | 110 | 7.5 | 49† | 4.0† | 13,000 | 8,000 | — | 2,000 | 2.1 | 50AX6-G |
| Full-Wave Rectifier | Max d-c output current = 250 ma; max peak inverse voltage = 1250 volts; rms supply voltage per plate = 350 volts; max peak current per plate = 600 ma | | | | | | | | | | |
| TV Damper | Max d-c output current per plate = 125 ma; max peak inverse voltage = 2000 volts; max peak current per plate = 600 ma | | | | | | | | | | |
| Class A Amplifier | 120 | 110 | 8.0 | 49† | 4.0† | 10,000 | 7,500 | — | 2,500 | 2.3 | 50B5 |
| Class A Amplifier | 250 | 250 | 5.0 | 35† | 3.5† | 100,000 | 8,500 | — | 6,500 | 3.5 | 50BK5 |
| Class A Amplifier | 200 | 200 | 16 | 35 | 7.0 | 20,000 | 6,400 | — | 5,600 | 3.5 | 50BM8 |
| Class A Amp | 100 | — | 0 | 3.5 | — | — | 2,500 | 70 | — | — | 50C5 |
| Class A Amplifier | 120 | 110 | 8.0 | 49† | 4.0† | 10,000 | 7,500 | — | 2,500 | 2.3 | 50C5-A† |
| Class A Amplifier | 135 | 135 | 13.5 | 58† | 3.5† | 9,300 | 7,000 | — | 2,000 | 3.6 | 50C6-G |
| Class A Amplifier | 200 | 135 | 14 | 61† | 2.2† | 18,300 | 7,100 | — | 2,600 | 6.0 | 50C6-GA |
| Class A Amplifier | 125 | 125 | 4.5 | 37† | 4.0† | 15,000 | 9,200 | — | 4,500 | 1.5 | 50CA5 |
| Class A Amplifier | 110 | 110 | 4.0 | 32† | 3.5† | 16,000 | 8,100 | — | 3,500 | 1.1 | 50DC4 |
| Half-Wave Rectifier | Max d-c output current = 120 ma; max peak inverse voltage = 330 volts; max rms supply voltage = 117 volts; max peak current = 720 ma. With panel lamp No. 40 or No. 47 between pins 1 and 4 and no shunting resistor, max d-c output current = 70 ma | | | | | | | | | | |
| Horizontal Amplifier | 100 | 100 | 8.2 | 100 | 7.0 | 5,000 | 14,000 | — | — | — | 50E5 |
| | Max positive pulse plate voltage = 7,000; max d-c cathode current = 200 ma | | | | | | | | | | |
| Class A Amplifier | 110 | 115 | R _k = 62 | 42† | 11.5† | 11,000 | 14,600 | — | 8,000 | 1.4 | 50EH5 |
| Class A Amplifier | 110 | 110 | 7.5 | 40† | 3.0† | 13,000 | 5,800 | — | 2,500 | 1.5 | 50EH5-A† |
| Class A Amplifier | 110 | 110 | 7.5 | 40† | 3.0† | 13,000 | 5,800 | — | 2,500 | 1.5 | 50FA5† |

Metal tubes are shown in bold-face type, miniature tubes in italics.

† G3 and G5 are screen. G4 is signal-input grid.
‡ G2 and G4 are screen. G3 is signal-input grid.

* Maximum screen dissipation appears immediately below the screen voltage.

† Heater warm-up time controlled.

1, 2, 3, etc. indicate tube sections.

| Tube Type | Classification by Construction | Base Connections | Out-line Dwg | Filament Volts | Filament Amp | Max Plate Watts | Max Plate Volts | Max Screen Volts and Watts | Capacitance in PicoFarads | | |
|-----------|--------------------------------|------------------|--------------------|----------------------|--------------|-------------------|-----------------|----------------------------|---|--------|------------|
| | | | | | | | | | Input | Output | Grid-plate |
| 50FE5 | Beam-Power Amplifier | 8KB | 9-33 | 50.0 | 0.15 | 14.5 | 175 | 175 2.4 | Single Tube 2 Tubes, Push-Pull | | |
| 50FK5 | Beam-Power Amplifier | 7CV | 5-3 | 50.0 | 0.1 | 5.0 | 150 | 130 1.75 | 17 | 9.0 | 0.65 |
| 50FY8 | Triode-Pentode | 9EX | 6-4 | 50.0 | 0.15 | 10 | 150 | 150 3.0 | Pentode Section | | |
| 50GY7 | Diode-Pentode | 12FN | 12-56 | 50 | 0.3 | 1.0 9.0 3.8 | 150 | 150 3.0 | Triode Section | | |
| | | | | | | | | | Pentode Section | | |
| | | | | | | | | | Diode Section | | |
| | | | | | | | | | Tube Voltage Drop: 21 volts at 250 ma d-c | | |
| 50GY7-A | Diode-Pentode | 12FN | 12-56 | 50 | 0.3 | 9.0 3.8 | 400 | 150 3.0 | Pentode Section | | |
| | | | | | | | | | Diode Section | | |
| | | | | | | | | | Tube Voltage Drop: 21 volts at 250 ma d-c | | |
| 50HC6 | Beam Power Amplifier | 7FZ | 5-3 | 50 | 0.15 | 5.5 | 150 | 130 2.0 | 17 | 9.0 | 0.5 |
| 50HK6 | Beam Pentode | 7FZ | 5-3 | 50 | 0.15 | 5.5 | 150 | 130 1.1 | 14 | 9.0 | 0.5 |
| 50HN5 | Beam Power Amplifier | 9QW | 6-4 | 50 | 0.15 | 12 | 330 | 250 2.5 | — | — | — |
| 50JY6 | Beam Power Amplifier | 8MG | T-X | 50 | 0.15 | 13 | 275 | 275 5.5 | 17.5 | 8.0 | 1.1 |
| 50L6-GT | Beam Power Amplifier | 7AC | 9-11 or 9-41 | 50.0 | 0.15 | 10 | 135 | 125 1.25 | — | — | — |
| 50X6 | High-Vacuum Rectifier-Doubler | 7AJ | 9-31 | 50.0 | 0.15 | — | — | — | Tube Voltage Drop: ♦ 22 v at 150 ma d-c | | |
| 50Y6-GT | High-Vacuum Rectifier-Doubler | 7Q | 9-11 | 50.0 | 0.15 | — | — | — | Tube Voltage Drop: ♦ 22 v at 150 ma d-c | | |
| 50Y7-GT | High-Vacuum Rectifier-Doubler | 8AN | 9-11 or 9-41 | 50.0 | 0.15 | — | — | — | Tube Voltage Drop: ♦ 22 v at 150 ma d-c | | |
| 50Z6-G | High-Vacuum Rectifier-Doubler | 7Q | 14-3 | 50.0 | 0.3 | — | — | — | — | — | — |
| 50Z7-G | High-Vacuum Rectifier-Doubler | 8AN | 12-7 | 50.0 | 0.15 | — | — | — | Tube Voltage Drop: ♦ 21 v at 130 ma d-c | | |
| 53 | Twin-Triode Power Amplifier | 7B | 14-1 | 2.5 | 2.0 | 1.0 | 300 | — | Both Sections in Push-pull Both Sections in Parallel | | |
| 53HK7 | Diode-Pentode | 12FS | 12-57 | 53.2 | 0.315 | 10 | 500 | 150 3.5 | Pentode Section | | |
| | | | | | | | | | Diode Section | | |
| | | | | | | | | | Tube Voltage Drop: 16 volts at 350 ma d-c | | |
| 55 | Duplex-Diode Medium-Mu Triode | 6G | 12-6 | 2.5 | 1.0 | — | 250 | — | — | — | — |
| 56 | Medium-Mu Triode | 5A | 12-5 | 2.5 | 1.0 | 1.3 | 250 | — | — | — | — |
| 56R9 | Triode-Pentode | 12EN | 9-58 | 42 (Pins 7 12) | 0.15 | 6.5 | 150 | 135 1.8 | Pentode Section | | |
| | | | | 14 (Pins 1 6) | 0.15 | 1.0 | 150 | — | Triode Section | | |

■ Compactron.
† Zero signal.
◆ Per section.

‡ Plate-to-plate.
◆ Maximum.
◆ Supply voltage.

● Subminiature type.
▲ Without external shield.
◆ Design maximum rating.

⊕ Total for all similar sections.
⊕ Absolute maximum rating.
Conversion transconductance.

● See X-Radiation Warning, page 4.

| Service | Plate Volts | Screen Volts | Neg Grid Volts | Plate Milliamperes | Screen Milliamperes | R _p , Ohms | G _m , μmhos | μ Factor | Load for Rated Output, Ohms | Power Output, Watts | Tube Type |
|--|--|--------------|-----------------------|--------------------|---------------------|-----------------------|------------------------|---------------------------------|-----------------------------|---------------------|------------|
| Class A Amplifier Class A Amplifier | 130 | 130 | R _k = 120 | 88† | 5.0† | — | — | — | 1,000 | 3.5 | 50FE5 |
| | 130 | 130 | R _k = 75 | 150† | 7.2† | — | — | — | 1,600‡ | 7.0 | |
| Class A Amplifier | 100 | 115 | R _k = 62 | 32† | 8.5† | 14,000 | 12,800 | — | 3,000 | 1.2 | 50FK5 |
| Class A Amplifier Class A Amp | 125 | 125 | R _k = 120 | 70† | 10† | 5,000 | 7,500 | — | 2,000 | 3.0 | 50FY8 |
| | 125 | — | 1.5 | 2.5 | — | 17,000 | 2,700 | 46 | — | — | |
| Horizontal Amplifier | 130 | 130 | 22.5 | 48 | 2.9 | 10,000 | 6,500 | — | — | — | 50GY7‡ ■ |
| TV Damper | 60 | 130 | 0 | 320 | 22 | — | — | — | — | — | |
| Max positive pulse plate voltage ⬥ = 5,000 volts; max d-c cathode current ⬥ = 135 ma. Max d-c output current ⬥ = 135 ma; max peak inverse voltage ⬥ = 4,200 volts; max peak current ⬥ = 810 ma. | | | | | | | | | | | |
| Horizontal Amplifier | 130 | 130 | 22.5 | 48 | 2.9 | 10,000 | 6,500 | — | — | — | 50GY7-A‡ ■ |
| TV Damper | 60 | 130 | 0 | 320 | 22 | — | — | — | — | — | |
| Max positive pulse plate voltage ⬥ = 5,000 volts; max d-c cathode current ⬥ = 135 ma. Max d-c output current ⬥ = 135 ma; max peak inverse voltage ⬥ = 4,200 volts; max peak current ⬥ = 810 ma. | | | | | | | | | | | |
| Class A Amplifier | 110 | 115 | R _k = 62 | 42 | 11.5 | 11,000 | 14,600 | — | 3,000 | 1.4 | 50HC6 |
| Class A Amplifier | 110 | 110 | 7.5 | 49† | 4.0† | 10,000 | 7,500 | — | 2,500 | 1.9 | 50HK6 |
| Class A Amplifier | 130 | 130 | R _k = 56 | 70† | 5.0† | 7,500 | 17,000 | — | 2,000 | 3.0 | 50HN5 |
| Horizontal Amplifier | 100 | 100 | 8.2 | 100 | 7.0 | 5,000 | 14,000 | (b.p. connected to k at socket) | | — | 50JY6 |
| Class A Amplifier | 200 | 125 | R _k = 180 | 46† | 2.2† | 28,000 | 8,000 | — | 4,000 | 3.8 | 50L6-GT |
| | 110 | 110 | 7.5 | 49† | 4.0† | 13,000 | 8,000 | — | 2,000 | 2.1 | |
| Rectifier or Doubler | Max d-c output current per plate = 75 ma; max peak inverse voltage = 700; rms supply voltage per plate = 235; max peak current per plate = 450 ma | | | | | | | | | | 50X6 |
| Rectifier or Doubler | Max d-c output current per plate = 75 ma; max peak inverse voltage = 700; max rms supply voltage per plate = 235; max peak current per plate = 450 ma | | | | | | | | | | 50Y6-GT |
| Rectifier or Doubler | Max d-c output current per plate = 75 ma; max peak inverse voltage = 700 volts; max rms supply voltage per plate = 235 volts; max peak current per plate = 450 ma With panel lamp No. 40 or No. 47 between pins 6 and 7 and no shunting resistor, max d-c output current per plate = 60 ma. With panel lamp and 250 ohm shunting resistor (max), max d-c output per plate = 65 ma. | | | | | | | | | | 50Y7-GT |
| Rectifier or Doubler | Max d-c output current per plate = 125 ma; max peak inverse voltage = 700 volts; max rms supply voltage per plate = 235 volts; max peak current per plate = 750 ma | | | | | | | | | | 50Z6-G |
| Rectifier or Doubler | Max d-c output current per plate = 65 ma; max peak inverse voltage = 700 volts; max rms supply voltage per plate = 235 volts; max peak current per plate = 400 ma. Ratings also apply with panel lamp 292 or 292A between pins 6 and 7. | | | | | | | | | | 50Z7-G |
| Class B Amplifier Class A Amplifier | 300 | — | 0.0 | 17.5† | — | — | — | — | 8,000 | 10 | 53 |
| | 294 | — | 6.0 | 7.0 | — | 11,000 | 3,200 | 35 | — | — | |
| Horizontal Amplifier | 130 | 130 | 22 | 60 | 2.8 | 6,200 | 8,800 | — | — | — | 53HK7‡ ■ |
| TV Damper | 50 | 130 | 0 | 450 | 40 | — | — | — | — | — | |
| Max positive pulse plate voltage ⬥ = 5,000; max d-c cathode current ⬥ = 230 ma. Max d-c output current ⬥ = 200 ma; max peak inverse voltage ⬥ = 3,700 volts; max peak current ⬥ = 1,200 ma | | | | | | | | | | | |
| Class A Amplifier | 250 | — | 20 | 8.0† | — | 7,500 | 1,100 | 8.3 | 20,000 | 0.350 | 55 |
| Class A Amplifier | 250 | — | 13.5 | 5.0 | — | 9,500 | 1,450 | 13.8 | — | — | 56 |
| Class A Amplifier | 120 | 110 | 8.0 | 49† | 4.0† | 10,000 | 7,500 | — | 2,500 | 2.3 | 56R9 ■ |
| Class A Amplifier | 100 | — | R _k = 1500 | 0.6 | — | 55,500 | 1,800 | 100 | — | — | — |

Metal tubes are shown in bold-face type, miniature tubes in italics.

‡ G3 and G5 are screen. G4 is signal-input grid.

♥ G2 and G4 are screen. G3 is signal-input grid.

1, 2, 3, etc. indicate tube sections.

⬥ Maximum screen dissipation appears immediately below the screen voltage.

‡ Heater warm-up time controlled.

| Tube Type | Classification by Construction | Base Connections | Out-line Dwg | Fila-ment Volts | Fila-ment Amp | Max Plate Watts | Max Plate Volts | Max Screen Volts and Watts* | Capacitance in Picofarads | | |
|-----------|--|------------------|--------------|-----------------|---------------|-----------------|---|-----------------------------|--|---------|------------|
| | | | | | | | | | Input | Out-put | Grid-plate |
| 57 | Sharp-Cutoff Pentode | 6F | 12-2 | 2.5 | 1.0 | 0.75 | 300 | 125 | Pentode Connection | | |
| | | | | | | 1.75 | 250 | | Triode Connection (G ₂ , G ₃ , & P Tied) | | |
| FG-57 | Thyratron same as 5559 | | | | | | | | | | |
| 58 | Remote-Cutoff RF Pentode | 6F | 12-2 | 2.5 | 1.0 | 2.25 | 300 | 100 | — | — | — |
| 58HE7 | Diode-Pentode | 12FS | 12-57 | 58 | 0.3 | 10 | 500 | 150 | Pentode Section | | |
| | | | | | | | | 3.5 | Diode Section | | |
| | | | | | | | | | Tube Voltage Drop: 21 volts at 350 ma d-c | | |
| 59 | Power-Amplifier Pentode | 7A | 16-1 | 2.5 | 2.0 | 10 | 250 | 250 | — | — | — |
| 60FX5 | Beam-Power Amplifier | 7CV | 5-3 | 60.0 | 0.1 | 5.5 | 150 | 130 | 17 | 9.0 | 0.65 |
| 60HL5 | Beam Power Amplifier | 9QW | 6-4 | 60 | 0.1 | 12 | 330 | 250 | — | — | — |
| 70A7-GT | Half-Wave Rectifier Beam Power Amplifier | 8AB | 9-11 | 70.0 | 0.15 | — | 110 | 110 | — | — | — |
| | | | | | | | | | Tube Voltage Drop: 14 v at 120 ma d-c | | |
| 70L7-GT | Half-Wave Rectifier Beam Power Amplifier | 8AA | 9-15 | 70.0 | 0.15 | — | 117 | 117 | — | — | — |
| | | | | | | | | 1.0 | Tube Voltage Drop: 20 v at 140 ma d-c | | |
| 71-A | Power-Amplifier Triode | 4D | 14-1 | 5.0 | 0.25 | — | 180 | — | 3.2 | 2.9 | 7.5 |
| 75 | Duplex-Diode High-Mu Triode | 6G | 12-6 | 6.3 | 0.3 | — | 250 | — | — | — | — |
| 76 | Medium-Mu Triode | 5A | 12-5 | 6.3 | 0.3 | — | 250 | — | 3.5 | 2.5 | 2.8 |
| 77 | Sharp-Cutoff Pentode | 6F | 12-6 | 6.3 | 0.3 | 0.75 | 300 | 100 | 4.7 | 11.0 | 0.007 |
| | | | | | | | | 0.1 | | | ♣ |
| 78 | Remote-Cutoff RF Pentode | 6F | 12-6 | 6.3 | 0.3 | 2.75 | 300 | 300 | 4.5 | 11.0 | 0.007 |
| | | | | | | | | 0.35 | | | ♣ |
| 79 | Twin-Triode Power Amplifier | 6H | 12-6 | 6.3 | 0.6 | 11.5 | 250 | — | Both Sections in Push-pull | | |
| 80 | Full-Wave High-Vacuum Rectifier | 4C | 14-1, 9-26 | 5.0 | 2.0 | — | Tube Voltage Drop: ♣ 60 v at 125 ma d-c | | | | |
| 81 | Half-Wave High-Vacuum Rectifier | 4B | T-X, 16-1 | 7.5 | 1.25 | — | Tube Voltage Drop: 91 v at 170 ma d-c | | | | |
| FG-81-A | Thyratron | 3G | T-X | 2.5 | 5.0 | — | Anode voltage drop = 16 volts peak | | | | |
| 82 | Full-Wave Mercury-Vapor Rectifier | 4C | 14-1 | 2.5 | 3.0 | — | Tube Voltage Drop: 15 v | | | | |
| 83 | Full-Wave Mercury-Vapor Rectifier | 4C | 16-1 | 5.0 | 3.0 | — | Tube Voltage Drop: 15 v | | | | |
| 83-V | Full-Wave High-Vacuum Rectifier | 4AD | 14-1 | 5.0 | 2.0 | — | Tube Voltage Drop: ♣ 25 v at 175 ma d-c | | | | |
| 84/6Z4 | Full-Wave High-Vacuum Rectifier | 5D | 12-5 | 6.3 | 0.5 | — | Tube Voltage Drop: ♣ 20 v at 60 ma d-c | | | | |
| 85 | Duplex Diode Medium-Mu Triode | 6G | 12-6 | 6.3 | 0.3 | — | 250 | — | 1.5 | 4.3 | 1.5 |
| 89 | Power-Amplifier Pentode | 6F | 12-6 | 6.3 | 0.4 | — | 250 | — | Triode connection (G ₂ , G ₃ , & P tied) | | |
| | | | | | | | 250 | 250 | Pentode connection | | |

■ Compactron.
† Zero signal.
♣ Per section.

‡ Plate-to-plate.
♣ Maximum.
‡ Supply voltage.

⊗ Subminiature type.
▲ Without external shield.
◆ Design maximum rating.

⊗ Total for all similar sections.
⊗ Absolute maximum rating.
Conversion transconductance.

● See X-Radiation Warning, page 4.

| Service | Plate Volts | Screen Volts | Neg Grid Volts | Plate Milli-amperes | Screen Milli-amperes | R _p , Ohms | G _m , μmhos | μ Factor | Load for Rated Output, Ohms | Power Output, Watts | Tube Type |
|---------------------------------------|--|--------------|---------------------|---------------------|----------------------|--------------------------|------------------------|----------|-----------------------------|---------------------|-----------|
| Class A Amplifier | 250 | 100 | 3.0 | 2.0 | 0.5 | 1,000,000 | 1,225 | — | — | — | 57 |
| Class A Amplifier | 250 | — | 8.0 | 6.5 | — | 10,500 | 1,900 | 20 | — | — | |
| Class A Amplifier | 250 | 100 | 3.0 | 8.2 | 2.0 | 800,000 | 1,600 | — | — | — | 58 |
| Horizontal Amplifier | 130 | 130 | 22 | 60 | 2.8 | 6,200 | 8,800 | — | — | — | 58HE7† |
| TV Damper | 50 | 130 | 0 | 450 | 40 | — | — | — | — | — | |
| | Max positive pulse plate voltage ♦ = 6,500; max d-c cathode current ♦ = 230 ma Max d-c output current ♦ = 200 ma; max peak inverse voltage ♦ = 4,200; max peak current ♦ = 1,200 ma | | | | | | | | | | |
| Class A Amplifier | 250 | 250 | 18 | 35 | 9.0 | 40,000 | 2,500 | — | 6,000 | 3.0 | 59 |
| Class A Amplifier | 110 | 115 | R _k = 62 | 36† | 10† | 17,500 | 13,500 | — | 3,000 | 1.3 | 60FX5 |
| Class A Amplifier | 130 | 130 | R _k = 56 | 70† | 5.0† | 7,500 | 17,000 | — | 2,000 | 3.0 | 60HL5 |
| Class A Amplifier Half-Wave Rectifier | 110 | 110 | 7.5 | 40† | 3.0† | — | 5,800 | — | 2,500 | 1.5 | 70A7-GT |
| | Max d-c output current = 60 ma; max rms supply voltage = 125 volts. A panel lamp must be connected between pins 6 and 7. | | | | | | | | | | |
| Class A Amplifier Half-Wave Rectifier | 110 | 110 | 7.5 | 40† | 3.0† | 15,000 | 7,500 | — | 2,000 | 1.8 | 70L7-GT |
| | Max d-c output current = 70 ma; max peak inverse voltage = 350 volts; max rms supply voltage = 117 volts; max peak current = 420 ma | | | | | | | | | | |
| Class A Amplifier | 180 | — | 40.5 | 20† | — | 1,750 | 1,700 | 3.0 | 4,800 | 0.790 | 71-A |
| Class A Amplifier | 250 | — | 2.0 | 0.9 | — | 91,000 | 1,100 | 100 | — | — | 75 |
| Class A Amplifier | 250 | — | 13.5 | 5.0 | — | 9,500 | 1,450 | 13.8 | — | — | 76 |
| Class A Amplifier | 250 | 100 | 3.0 | 2.3 | 0.5 | 1,000,000 | 1,250 | — | — | — | 77 |
| Class A Amplifier | 250 | 125 | 3.0 | 10.5 | 2.6 | 600,000 | 1,650 | — | — | — | 78 |
| Class B Amplifier | 250 | — | 0 | 10.5† | — | Input signal = .380 watt | | — | 14,000 | 8.0 | 79 |
| | ↓ | | | | | | | | | | |
| Full-Wave Rectifier | Max d-c output current = 125 ma; max peak inverse voltage = 1400 volts; rms supply voltage per plate = 350 volts; max peak current per plate = 400 ma | | | | | | | | | | |
| Half-Wave Rectifier | Max d-c output current = 85 ma; max peak inverse voltage = 2000 volts; max rms supply voltage = 700 volts; max peak current = 500 ma | | | | | | | | | | |
| Controlled Rectifier | Max d-c cathode current □ = 0.5 amperes; max peak inverse voltage □ = 500 volts; max peak cathode current □ = 2.0 amperes | | | | | | | | | | |
| Full-Wave Rectifier | Max d-c output current = 115 ma; max peak inverse voltage = 1,550 volts; max rms supply voltage per plate = 450 volts; max peak current per plate = 600 ma | | | | | | | | | | |
| Full-Wave Rectifier | Max d-c output current = 225 ma; max peak inverse voltage = 1,550; max rms supply voltage per plate = 450; max peak current per plate = 1,000 ma | | | | | | | | | | |
| Full-Wave Rectifier | Max d-c output current = 175 ma; max peak inverse voltage = 1400 volts; max rms supply voltage per plate = 375 volts; max peak current per plate = 525 ma | | | | | | | | | | |
| Full-Wave Rectifier | Max d-c output current = 60 ma; max peak inverse voltage = 1,250 volts; max rms supply voltage per plate = 325 volts; max peak current per plate = 180 ma | | | | | | | | | | |
| Class A Amplifier | 250 | — | 20 | 8† | — | 7,500 | 1,100 | 8.3 | 20,000 | 0.350 | 85 |
| Class A Amplifier | 250 | — | 31 | 32† | — | 2,600 | 1,800 | 4.7 | 5,500 | 0.900 | 89 |
| Class A Amp | 250 | 250 | 25 | 32† | 5.5† | 70,000 | 1,800 | — | 6,750 | 3.4 | |

Metal tubes are shown in bold-face type, *miniature tubes in italics.*

♦ G3 and G5 are screen. G4 is signal-input grid.

♥ G2 and G4 are screen. G3 is signal-input grid.

1, 2, 3, etc. indicate tube sections.

✱ Maximum screen dissipation appears immediately below the screen voltage.

† Heater warm-up time controlled.

| Tube Type | Classification by Construction | Base Connections | Out-line Dwg | Fila-ment Volts | Fila-ment Amp | Max Plate Watts | Max Plate Volts | Max Screen Volts and Watts* | Capacitance in Picofarads | | |
|-----------------|---|------------------|--------------|-----------------|---------------|-----------------|---|-----------------------------|--|---------|------------|
| | | | | | | | | | Input | Out-put | Grid-plate |
| FG-97 | Thyratron | FG-97 | T-X | 2.5 | 5.0 | — | Anode voltage drop = 16 volts peak | | | | |
| FG-98-A | Thyratron | FG-97 | T-X | 2.5 | 5.0 | — | Anode voltage drop = 16 volts peak | | | | |
| V99 X99 | Low-Mu Triode | 4E 4D | T-X 9-25 | 3.3 DC | 0.063 | — | 90 | — | 2.5 | 2.5 | 3.3 |
| FG-105 | Thyratron | FG-105 | T-X | 5.0 | 10 | — | Anode voltage drop = 16 volts peak | | | | |
| 117L7/ M7-GT | Half-Wave Rectifier Beam Power Amplifier | 8A0 | 9-15 | 117 | 0.09 | 6.0 | 117 | 117 1.0 | — | — | — |
| 117N7-GT | Half-Wave Rectifier Beam Power Amplifier | 8AV | 9-15 | 117 | 0.09 | 5.5 | 117 | 117 1.0 | Tube Voltage Drop: 16 v at 150 ma d-c | | |
| 117P7-GT | Half-Wave Rectifier Beam Power Amplifier | 8AV | 9-15 | 117 | 0.09 | 6.0 | 117 | 117 1.0 | Tube Voltage Drop: 16 v at 150 ma d-c | | |
| 117Z3 | Half-Wave High-Vacuum Rectifier | 4CB | 5-3 | 117 | 0.04 | — | Tube Voltage Drop: 22.5 v at 180 ma d-c | | | | |
| 117Z4-GT | Half-Wave High-Vacuum Rectifier | 5AA | 9-5 | 117 | 0.04 | — | Tube Voltage Drop: 22.5 v at 180 ma d-c | | | | |
| 117Z6-GT | High-Vacuum Rectifier Doublers | 7Q | 9-11 | 117 | 0.075 | — | Tube Voltage Drop:♣ 15.5 v at 120 ma d-c | | | | |
| FG-154 | Thyratron | FG-154 | T-X | 5.0 | 7.0 | — | Anode voltage drop = 16 volts | | | | |
| FG172 | Thyratron | FG-172 | T-X | 5.0 | 10 | — | Anode Voltage Drop = 16 Volts | | | | |
| 182-B/ 482B | Power-Amplifier Triode | 4D | 14-1 | 5.0 | 1.25 | — | 250 | — | — | — | — |
| 183/483 | Power-Amplifier Triode | 4D | 14-1 | 5.0 | 1.25 | — | 250 | — | — | — | — |
| 393-A | Thyratron | 5AV | T-X | 2.5 | 7.0 | — | Anode voltage drop = 15 volts | | | | |
| 407A | Medium-Mu Twin Triode | 407A | 6-1 | 40 20 | 0.05 0.1 | 1.35 ♣ | 330 | — | 2.2 | 1.0 | 1.1 |
| 408A | Sharp-Cutoff Pentode | 7BD | 5-1 | 20 | 0.05 | 1.7 | 180 | 180 0.5 | 3.9 | 2.85 | 0.01 |
| 414 | Thyratron | 414 | T-X | 5.0 | 19 | — | Anode Voltage Drop = 20 Volts | | | | |
| B425 | Photoconductive Cell | — | T-X | — | — | 0.25 | 250 | — | — | — | — |
| 482B | Power-Amplifier Triode same as 182B | — | — | — | — | — | — | — | — | — | — |
| 485 | Medium-Mu Triode | 5A | 12-5 | 3.0 | 1.25 | — | 180 | — | — | — | — |
| 502-A | Thyratron | 6BS | 8-1 | 6.3 | 0.6 | — | Anode voltage drop = 8 volts | | | | |
| 512AX | AF Pentode | 512AX | 2-2 | 0.625 | 0.02 | — | 45 | 45 | 2.0 | 1.5 | 0.045 |

■ Compactron.

† Zero signal.

♣ Per section.

‡ Plate-to-plate.

♠ Maximum.

‡ Supply voltage.

◎ Subminiature type.

▲ Without external shield.

◆ Design maximum rating.

⊕ Total for all similar sections.

⊖ Absolute maximum rating.

Conversion transconductance.

● See X-Radiation Warning, page 4.

| Service | Plate Volts | Screen Volts | Neg Grid Volts | Plate Milli-amperes | Screen Milli-amperes | R _p , Ohms | G _m , μmhos | μ Factor | Load for Rated Output, Ohms | Power Output, Watts | Tube Type |
|----------------------|---|--------------|----------------------|---------------------|----------------------|-----------------------|------------------------|----------|-----------------------------|---------------------|-----------------|
| Controlled Rectifier | Max d-c cathode current ⊕ = 0.5 amperes; max peak inverse voltage ⊕ = 1,000 volts; max peak cathode current ⊕ = 2.0 amperes | | | | | | | | | FG-97 | |
| Controlled Rectifier | Max d-c cathode current ⊕ = 0.5 amperes; max peak inverse voltage ⊕ = 500 volts; max peak cathode current ⊕ = 2.0 amperes | | | | | | | | | FG-98-A | |
| Class A Amplifier | 90 | — | 4.5 | 2.5 | — | 15,500 | 425 | 6.6 | — | — | V99 X99 |
| Controlled Rectifier | Max d-c cathode current ⊕ = 6.4 amperes; max peak inverse voltage ⊕ = 2,500 volts; max peak cathode current ⊕ = 40 amperes | | | | | | | | | FG-105 | |
| Class A Amplifier | 105 | 105 | 5.2 | 43† | 4† | 17,000 | 5,300 | — | 4,000 | 0.85 | 117L7/ M7-GT |
| Half-Wave Rectifier | Max d-c output current = 75 ma; max peak inverse voltage = 350 volts; max rms supply voltage = 117 volts; max peak current = 450 ma | | | | | | | | | 117N7-GT | |
| Class A Amplifier | 100 | 100 | 6.0 | 51† | 5† | 16,000 | 7,000 | — | 3,000 | 1.2 | 117N7-GT |
| Half-Wave Rectifier | Max d-c output current = 75 ma; max peak inverse voltage = 350 volts; max rms supply voltage = 117 volts; max peak current = 450 ma | | | | | | | | | 117P7-GT | |
| Class A Amplifier | 105 | 105 | 5.2 | 43† | 4† | 17,000 | 5,300 | — | 4,000 | 0.85 | 117Z3 |
| Half-Wave Rectifier | Max d-c output current = 90 ma; max peak inverse voltage = 330 volts; max rms supply voltage = 117 volts; max peak current = 540 ma | | | | | | | | | 117Z4-GT | |
| Half-Wave Rectifier | Max d-c output current = 90 ma; max peak inverse voltage = 350 volts; max rms supply voltage = 117 volts; max peak current = 540 ma | | | | | | | | | 117Z6-GT | |
| Rectifier or Doubler | Max d-c output current per plate = 60 ma; max peak inverse voltage = 700 volts; max rms supply voltage per plate = 235 volts; max peak current per plate = 360 ma | | | | | | | | | FG-154 | |
| Controlled Rectifier | Max d-c cathode current ⊕ = 2.5 amperes; max peak inverse voltage ⊕ = 500 volts; max peak cathode current ⊕ = 10 amperes | | | | | | | | | FG172 | |
| Mercury Thyatron | Max d-c cathode current ⊕ = 6.4 amperes; max peak inverse voltage ⊕ = 2000 volts; max peak cathode current ⊕ = 40 amperes. | | | | | | | | | 182-B/482B | |
| Class A Amplifier | 250 | — | 35 | 18 | — | — | 1,500 | 5.0 | — | — | 183/483 |
| Class A Amplifier | 250 | — | 60 | 30 | — | 1,750 | 1,700 | 3.0 | — | — | 393-A |
| Controlled Rectifier | Max d-c cathode current ⊕ = 1.5 amperes; max peak inverse voltage ⊕ = 1,250 volts; max peak cathode current ⊕ = 6.0 amperes | | | | | | | | | 407A | |
| Class A Amplifier | 150 | — | R _k = 240 | 8.2 | — | 6,350 | 5,500 | 35 | — | — | 408A |
| Class A Amplifier | 120 | 120 | R _k = 200 | 7.0 | 2.2 | 340,000 | 5,000 | — | — | — | 414 |
| Mercury Thyatron | Max d-c cathode current ⊕ = 5.0 amperes; max peak inverse voltage ⊕ = 3000 volts; max peak cathode current ⊕ = 100 amperes. | | | | | | | | | B425 | |
| Control | Spectral Response = 6,100 angstrom units; maximum current ⊕ = 20 milli-amperes | | | | | | | | | | |
| Class A Amplifier | 180 | — | 9.0 | 5.8 | — | 8,900 | 1,400 | 12.5 | — | — | 485 |
| Controlled Rectifier | Max d-c cathode current ⊕ = 100 ma; max peak inverse voltage ⊕ = 1,300 volts; max peak cathode current ⊕ = 1.0 ampere | | | | | | | | | 502-A | |
| Class A Amplifier | 22.5 | 22.5 | 0.625 | 0.125 | 0.040 | 1,250,000 | 160 | — | — | — | 512AX ⊕ |

Metal tubes are shown in bold-face type, miniature tubes in italics.

♦ G3 and G5 are screen. G4 is signal-input grid.

♥ G2 and G4 are screen. G3 is signal-input grid.

1, 2, 3, etc. indicate tube sections.

⊕ Maximum screen dissipation appears immediately below the screen voltage.

† Heater warm-up time controlled.

| Tube Type | Classification by Construction | Base Connections | Out-line Dwg | Filament Volts | Filament Amp | Max Plate Watts | Max Plate Volts | Max Screen Volts and Watts | Capacitance in Picofarads | | |
|-----------|---------------------------------------|------------------|--------------|----------------|--------------|-----------------|-------------------------------|----------------------------|--|---|------------|
| | | | | | | | | | Input | Output | Grid-plate |
| ● 575-A | Half-Wave Mercury-Vapor Rectifier | 575-A | T-X | 5.0 | 10 | — | Tube voltage drop: 10 volts | | | | |
| 627 | Thyratron | 4BZ | T-X | 2.5 | 6.0 | — | Anode voltage drop = 12 volts | | | | |
| 672-A | Thyratron | 672-A | T-X | 5.0 | 5.0 | — | Anode voltage drop = 12 volts | | | | |
| ● 673 | Half-Wave Mercury-Vapor Rectifier | 2P | T-X | 5.0 | 10 | — | Tube voltage drop: 10 volts | | | | |
| ● 678 | Thyratron | 678 | T-X | 5.0 | 7.5 | — | Anode voltage drop = 15 volts | | | | |
| 710 | Thyratron same as 6011 | | | | | | | | | | |
| 710L | Thyratron same as 7518 | | | | | | | | | | |
| 740 | Thyratron same as 6856 | | | | | | | | | | |
| 760 | Thyratron same as 6858 | | | | | | | | | | |
| 760P | Thyratron same as 6859 | | | | | | | | | | |
| 807 | Beam Power Amplifier | 5AW | 16-2 | 6.3 | 0.9 | 25 ☐ | 400 ☐ | — | Triode Connection Two Tubes, Push-Pull | | |
| 816 | Half-Wave Mercury-Vapor Rectifier | 4P | T-X | 2.5 | 2.0 | — | 25 ☐ | 600 ☐ | 300 ☐ | Pentode Connection Two Tubes, Push-Pull | |
| 866-A | Half-Wave Mercury-Vapor Rectifier | 4P | T-X | 2.5 | 5.0 | — | Tube Voltage Drop = 15 Volts | | | | |
| 872-A | Half-Wave Mercury-Vapor Rectifier | 4AT | T-X | 5.0 | 7.5 | — | Tube Voltage Drop = 10 Volts | | | | |
| 884 | Thyratron | 6Q | 12-7 | 6.3 | 0.6 | — | Anode voltage drop = 16 volts | | | | |
| 950 | Power-Amplifier Pentode | 5K | 14-1 | 2.0 DC | 0.12 | — | 135 | 135 | — | — | — |
| 954 | Detector Amplifier Pentode (Acorn) | 5BB | 4-3 | 6.3 | 0.15 | 1.5 | 250 | 100 | 3.4 | 3.0 | 0.007 |
| 955 | Medium-Mu Triode (Acorn) | 5BC | 4-1 | 6.3 | 0.15 | 1.6 | 250 | — | 1.0 ▲ | 0.4 ▲ | 1.3 ▲ |
| 956 | Remote-Cutoff RF Pentode (Acorn) | 5BB | 4-3 | 6.3 | 0.15 | 1.7 | 180 | — | — | — | — |
| 957 | Medium-Mu Triode (Acorn) | 5BD | 4-1 | 1.25 DC | 0.05 | — | 250 | 100 0.3 | 3.1 | 2.5 | 0.009 |
| 958-A | Medium-Mu Triode (Acorn) | 5BD | 4-1 | 1.25 DC | 0.1 | 0.6 | 135 | — | 0.25 | 0.5 | 1.1 |
| 959 | Sharp-Cutoff Pentode (Acorn) | 5BE | 4-3 | 1.25 DC | 0.05 | — | 135 | — | 0.45 | 0.6 | 2.5 |
| B1035 | Photoconductive Cell | — | T-X | — | — | 0.3 ☐ | 350 ☐ | — | — | — | — |
| 1612 | Pentagrid Mixer (Special 6L7) | 7T | 8-4 | 6.3 | 0.3 | 1.5 | 250 | 100 1.0 | — | — | — |
| 1614 | Beam Power Amplifier | 7AC | 10-1 | 6.3 | 0.9 | 21 ☐ | 375 ☐ | 300 ☐ | 3.5 ☐ | Two tubes, Push-pull | |
| 1620 | Sharp-Cutoff Pentode (Special 6J7) | 7R | 8-4 | 6.3 | 0.3 | — | 250 | 100 | 7.0 | 12.0 | 0.005 |
| 1621 | Power-Amplifier Pentode (Special 6P6) | 7S | 8-6 | 6.3 | 0.7 | 7.9 | 300 | 300 | 2 tubes, Push-pull | | |
| 1622 | Beam Power Amplifier (Special 6L6) | 7AC | 10-1 | 6.3 | 0.9 | 13.8 | 300 | 250 1.4 | 2 tubes, Push-pull | | |
| 1625 | Beam Power Amplifier | 5AZ | 16-2 | 12.6 | 0.45 | 25 ☐ | 400 ☐ | — | Triode Connection Two Tubes, Push-Pull | | |
| | | | | | | 25 ☐ | 600 ☐ | 300 ☐ | 3.5 ☐ | Pentode Connection Two Tubes, Push-Pull | |

■ Compactron.

† Plate-to-plate.

● Subminiature type.

☐ Total for all similar sections.

† Zero signal.

▲ Maximum.

▲ Without external shield.

☐ Absolute maximum rating.

◆ Per section.

‡ Supply voltage.

◆ Design maximum rating.

Conversion transconductance.

● See X-Radiation Warning, page 4.

| Service | Plate Volts | Screen Volts | Neg Grid Volts | Plate Milli-amperes | Screen Milli-amperes | R _p , Ohms | G _m , μmhos | μ Factor | Load for Rated Output, Ohms | Power Output, Watts | Tube Type |
|---------------------------------|---|--------------|----------------|---------------------|----------------------|---------------------------|------------------------|------------------------------|-----------------------------|---------------------|-----------|
| Half-Wave Rectifier | Max d-c output current ⊕ = 2.5 amperes; max peak inverse voltage ⊖ = 15,000 volts; max peak current ⊕ = 10 amperes | | | | | | | | | | 575-A ● |
| Controlled Rectifier | Max d-c cathode current ⊖ = 0.64 amperes; max peak inverse voltage ⊖ = 2,500 volts; max peak cathode current ⊖ = 2.5 amperes | | | | | | | | | | 627 |
| Controlled Rectifier | Max d-c cathode current ⊖ = 3.2 amperes; max peak inverse voltage ⊖ = 2,500 volts; max peak cathode current ⊖ = 40 amperes | | | | | | | | | | 672-A |
| Half-Wave Rectifier | Max d-c output current ⊕ = 2.5 amperes; max peak inverse voltage ⊖ = 15,000 volts; max peak current ⊕ = 10 amperes | | | | | | | | | | 673 ● |
| Controlled Rectifier | Max d-c cathode current ⊖ = 1.6 amperes; max peak inverse voltage ⊖ = 15,000 volts; max peak cathode current ⊖ = 6.0 amperes | | | | | | | | | | 678 ● |
| | | | | | | | | | | | |
| | | | | | | | | | | | |
| | | | | | | | | | | | |
| | | | | | | | | | | | |
| Class AB ₁ Amplifier | 400 | — | 45 | 64† | — | — | — | — | 3,000‡ | 15 | 807 |
| Class AB ₂ Amplifier | 600 | 300 | 29 | 48† | 0.7† | — | — | — | 6,900‡ | 80 | |
| Half-Wave Rectifier | Max d-c output current ⊕ = 0.125 amperes; max peak inverse voltage ⊖ = 5,000 volts; max peak current ⊕ = 0.5 amperes | | | | | | | | | | 816 |
| Half-Wave Rectifier | Max d-c output current ⊕ = 0.25 amperes; max peak inverse voltage ⊖ = 5,000 volts; max peak current ⊕ = 1.0 amperes | | | | | | | | | | 866-A |
| Half-Wave Rectifier | Max d-c output current ⊕ = 1.25 amperes; max peak inverse voltage ⊖ = 5,000 volts; max peak current ⊕ = 5.0 amperes | | | | | | | | | | 872-A |
| Controlled Rectifier | Max d-c cathode current ⊖ = 75 ma; Max peak anode voltage ⊖ = 350 volts; Max peak cathode current ⊖ = 300 ma | | | | | | | | | | 884 |
| Relaxation Oscillator | Max peak anode voltage ⊖ = 300; max peak cathode current ⊖ = 300 ma | | | | | | | | | | |
| Class A Amplifier | 135 | 135 | 16.5 | 7.0† | 2.0† | 105,300 | 950 | — | 13,500 | 0.450 | 950 |
| Class A Amplifier | 250 | 100 | 3.0 | 2.0 | 0.7 | 1,000,000 | 1,400 | — | — | — | 954 |
| | 90 | 90 | 3.0 | 1.2 | 0.5 | 1,000,000 | 1,100 | — | — | — | |
| Class A Amplifier | 250 | — | 7.0 | 6.3 | — | 11,400 | 2,200 | 25 | — | — | 955 |
| | 180 | — | 5.0 | 4.5† | — | 12,500 | 2,000 | 25 | 20,000 | 0.135 | |
| | 90 | — | 2.5 | 2.5 | — | 14,700 | 1,700 | 25 | — | — | |
| Class C Amp | 180 | — | 35 | 7.0† | — | — | — | — | — | 0.5 | |
| Class A Amplifier | 250 | 100 | 3.0 | 6.7 | 2.7 | 700,000 | 1,800 | — | — | — | 956 |
| Class A Amplifier | 135 | — | 5.0 | 2.0 | — | 20,800 | 650 | 13.5 | — | — | 957 |
| Class A Amplifier | 135 | — | 7.5 | 3.0 | — | 10,000 | 1,200 | 12 | — | — | 958-A |
| Class A Amplifier | 135 | — | 20 | 7.0 | — | Input Signal = 0.035 watt | | | — | 0.6 | |
| Class A Amplifier | 135 | 67.5 | 3.0 | 1.7 | 0.4 | 800,000 | 600 | — | — | — | 959 |
| Control | Spectral Response = 6,100 angstrom units; resistance at 1 footcandle = 11,900 ohms; resistance at 20 footcandles = 1,200 ohms | | | | | | | | | | B1035 |
| Class A Amplifier | 250 | 100 | 3.0 | 5.3 | 6.5 | 600,000 | 1,100 | E _{ca} = -3.0 volts | | — | 1612 |
| Class AB ₁ Amplifier | 360 | 270 | 22.5 | 88† | 15† | — | — | — | 6,600‡ | 26.5 | 1614 |
| Class A Amplifier | 250 | 100 | 3.0 | 2.0 | 0.5 | 1,000,000 | 1,225 | — | — | — | 1620 |
| | 100 | 100 | 3.0 | 2.0 | 0.5 | 1,000,000 | 1,185 | — | — | — | |
| Class A Amplifier | 300 | 300 | 30 | 38† | 6.5† | — | — | — | 4,000‡ | 5 | 1621 |
| Class A Amplifier | 300 | 250 | 20 | 86† | 4† | — | — | — | 4,000‡ | 10 | 1622 |
| Class AB ₁ Amplifier | 400 | — | 45 | 64† | — | — | — | — | 3,000‡ | 15 | 1625 |
| Class AB ₂ Amplifier | 600 | 300 | 29 | 48† | 0.7† | — | — | — | 6,900‡ | 80 | |

Metal tubes are shown in bold-face type, *miniature tubes in italics.*

♦ G3 and G5 are screen. G4 is signal-input grid.

♥ G2 and G4 are screen. G3 is signal-input grid.

1, 2, 3, etc. indicate tube sections.

‡ Maximum screen dissipation appears immediately below the screen voltage.

† Heater warm-up time controlled.

| Tube Type | Classification by Construction | Base Connections | Out-line Dwg | Fila-ment Volts | Fila-ment Amp | Max Plate Watts | Max Plate Volts | Max Screen Volts and Watts * | Capacitance in Picofarads | | |
|----------------------------|--|------------------|--------------|-----------------|---------------|-----------------|-----------------|--|----------------------------|---------|------------|
| | | | | | | | | | Input | Out-put | Grid-plate |
| 1629 | Electron-Ray Indicator | 7AL | T-X | 12.6 | 0.15 | — | 250§ | Max target voltage = 250 Min target voltage = 125 | | | |
| 1631 | Beam Power Amplifier | 7AC | 10-1 | 12.6 | 0.45 | 16 | 360 | 270 2.5 | 2 tubes, Push-pull | | |
| 1632 | Beam Power Amplifier | 7AC | 8-6 | 12.6 | 0.6 | 5.5 | 117 | 117 1.25 | — | — | — |
| 1633 | Medium-Mu Twin Triode | 8BD | 9-11 | 25.0 | 0.15 | 2.5♣ | 300 | — | — | — | — |
| 1634 | High-Mu Twin Triode (Special 12SC7) | 8S | 8-1 | 12.6 | 0.15 | — | 250 | — | — | — | — |
| 1635 | Twin-Triode Power Amplifier | 8B | 9-11 | 6.3 | 0.6 | 3.0♣ | 300 | — | Both sections in push-pull | | |
| 1642 | Medium-Mu Twin Triode same as 2C21 | — | — | — | — | — | — | — | — | — | — |
| 1644 | Twin-Pentode Power Amplifier (Special 12L8-GT) | 8BU | 9-11 | 12.6 | 0.15 | 2.5♣ | 180 | 180 1.0 | 5.0▲ | 6.0▲ | 0.7▲ |
| 1654 | Half-Wave High-Vacuum Rectifier | 2Z | T-X | 1.4 | 0.05 | — | — | — | — | — | — |
| 1853 | Remote-Cutoff RF Pentode same as 6AB7 | — | — | — | — | — | — | — | — | — | — |
| 2050 | Thyratron | 6BS | 12-7 | 6.3 | 0.6 | — | — | Anode Voltage Drop = 8.0 Volts | | | |
| 2050-A | Thyratron | 6BS | 9-7 | 6.3 | 0.6 | — | — | Anode Voltage Drop = 8.0 Volts | | | |
| 5544 | Thyratron | 4BZ | T-X | 2.5 | 12 | — | — | Anode Voltage Drop = 16 Volts | | | |
| GL5550 | Ignitron | GL 5550 | TX | — | — | — | — | — | — | — | — |
| GL5551A/ GL5551A -PC | Ignitron | GL 5551A | TX | — | — | — | — | — | — | — | — |
| GL5551A | Ignitron | GL 5551A | TX | — | — | — | — | — | — | — | — |
| GL5551A -PC | Ignitron | GL 5551A | TX | — | — | — | — | — | — | — | — |
| GL5552A/ GL5552A -PC | Ignitron | GL 5552A | TX | — | — | — | — | — | — | — | — |
| GL5553B/ GL5553B -PC | Ignitron | GL 5553B | TX | — | — | — | — | — | — | — | — |
| GL5553B | Ignitron | GL 5553B | TX | — | — | — | — | — | — | — | — |
| GL5553B -PC | Ignitron | GL 5553B | TX | — | — | — | — | — | — | — | — |
| GL5554 | Ignitron | GL 5554 | TX | — | — | — | — | — | — | — | — |
| GL5555 | Ignitron | GL 5555 | TX | — | — | — | — | — | — | — | — |
| 5557 | Thyratron | 3G | T-X | 2.5 | 5.0 | — | — | Anode Voltage Drop = 16 Volts | | | |
| 5558/ FG-32 | Half-Wave Mercury-Vapor Rectifier | 5558/ FG-32 | T-X | 5.0 | 4.5 | — | — | Tube Voltage Drop = 15 Volts | | | |
| 5559/ FG-57 | Thyratron | 4BL | T-X | 5.0 | 4.5 | — | — | Anode Voltage Drop = 16 Volts | | | |
| 5560 | Thyratron | 4CD | T-X | 5.0 | 4.5 | — | — | Anode Voltage Drop = 16 Volts | | | |
| 5561 | Half-Wave Mercury-Vapor Rectifier | 5561 | T-X | 5.0 | 10 | — | — | Tube Voltage Drop = 15 Volts | | | |
| ● 5563-A | Thyratron | 5563-A | T-X | 5.0 | 10 | — | — | Anode Voltage Drop = 15 Volts | | | |

■ Compactron.

† Zero signal.

♣ Per section.

‡ Plate-to-plate.

♣ Maximum.

‡ Supply voltage.

● Subminiature type.

▲ Without external shield.

⊙ Design maximum rating.

⊙ Total for all similar sections.

⊙ Absolute maximum rating.

Conversion transconductance.

● See X-Radiation Warning, page 4.

| Service | Plate Volts | Screen Volts | Neg Grid Volts | Plate Milli-amperes | Screen Milli-amperes | R_p , Ohms | G_m , μ mhos | μ Factor | Load for Rated Output, Ohms | Power Output, Watts | Tube Type |
|---------------------------------|--|--------------|----------------|---------------------|----------------------|--------------|--------------------|--------------|-----------------------------|---------------------|----------------------------|
| Tuning Indicator | Plate voltage = 250 thru 1 meg; Target voltage = 250 ($E_c = -8$ volts; Shadow = 0°) ($E_c = 0$ volts, Shadow = 90°, Plate current = 0.24 ma, Target current = 4 ma) | | | | | | | | | | 1629 |
| Class AB ₁ Amplifier | 360 | 270 | 22.5 | 88† | 5† | — | — | — | 6,600‡ | 26.5 | 1631 |
| Class A Amplifier | 110 | 110 | 7.5 | 49† | 4† | 13,000 | 9,000 | — | 2,000 | 2.1 | 1632 |
| Class A Amplifier ♦ | 250 | — | 8 | 11.5 | — | 6,900 | 2,600 | 18 | — | — | 1633 |
| Class A Amplifier ♦ | 250 | — | 2 | 2.0 | — | 53,000 | 1,325 | 70 | — | — | 1634 |
| Class B Amplifier | 300 | — | 0 | 6.6† | — | — | — | — | 12,000‡ | 10.4 | 1635 |
| | — | — | — | — | — | — | — | — | — | — | |
| Class A Amplifier ♦ | 180 | 180 | 9 | 13† | 2.8† | 160,000 | 2,150 | — | 10,000 | 1.0 | 1644 |
| Half-Wave Rectifier | Max d-c output current = 1.0 ma; max peak inverse voltage = 4,300 volts; rms supply voltage = 1,500 volts; max peak current = 6 ma | | | | | | | | | | 1664 |
| | — | — | — | — | — | — | — | — | — | — | |
| Controlled Rectifier | Max d-c cathode current ☐ = 100 ma; max peak inverse voltage ☐ = 1,300 volts; max peak cathode current ☐ = 1.0 ampere | | | | | | | | | | 2050 |
| Controlled Rectifier | Max d-c cathode current ♦ = 100 ma; max peak inverse voltage ♦ = 1,300 volts; max peak cathode current ♦ = 1.0 ampere | | | | | | | | | | 2050-A |
| Controlled Rectifier | Max d-c cathode current ☐ = 3.2 amperes; max peak inverse voltage ☐ = 1,500 volts; max peak cathode current ☐ = 40 amperes | | | | | | | | | | 5544 |
| Resistance Welding | Max. supply volts RMS 250-600; max. demand KVA 300; corresponding av. anode curr. 12.1 A.; max. av. anode curr. 22.4 A.; corresponding demand KVA 100. | | | | | | | | | | GL5550 |
| Resistance Welding | Max. supply volts RMS 250-600; max. demand KVA 600; corresponding av. anode curr. 30.2 A.; max. av. anode curr. 56 A.; corresponding demand KVA 200. | | | | | | | | | | GL5551A/ GL5551A -PC |
| Frequency Changer | Max. peak inverse voltage 1200 V.; max. peak anode curr. 600 A.; corresponding av. anode curr. 5 A.; max. av. anode curr. 22.5 A.; corresponding peak anode curr. 135 A. | | | | | | | | | | GL5551A |
| Frequency Changer | Max. peak inverse voltage 1500 V.; max. peak anode curr. 480 A.; corresponding av. anode curr. 4 A.; max av. anode curr. 18 A.; corresponding peak anode curr. 108 A. | | | | | | | | | | GL5551A -PC |
| Resistance Welding | Max. supply volts RMS 250-600; max. demand KVA 1200; corresponding av. anode curr. 75.6 A.; max. av. anode curr. 140 A.; corresponding demand KVA 400. | | | | | | | | | | GL5552A/ GL5552A -PC |
| Resistance Welding | Max. supply volts RMS 250-600; max. demand KVA 2400; corresponding av. anode curr. 192 A.; max. av. anode curr. 355 A.; corresponding demand KVA 800. | | | | | | | | | | GL5553B/ GL5553B -PC |
| Frequency Changer | Max. peak inverse voltage 1200 V.; max. peak anode curr. 3000 A.; corresponding av. anode curr. 40 A.; max. av. anode curr. 140 A.; corresponding anode curr. 840 A. | | | | | | | | | | GL5553B |
| Frequency Changer | Max. peak inverse voltage 1500 V.; max. peak anode curr. 2400 A.; corresponding anode curr. 672 A. | | | | | | | | | | GL5553B -PC |
| Resistance Welding | Max. supply volts RMS 2400; max. demand KVA 1200; corresponding av. anode curr. 75 A.; max. av. anode curr. 113 A.; corresponding demand KVA 600. | | | | | | | | | | GL5554 |
| Resistance Welding | Max. supply volts RMS 2400; max. demand KVA 2400; corresponding av. anode curr. 135 A.; max. av. anode curr. 207 A.; corresponding demand KVA 1105. | | | | | | | | | | GL5555 |
| Controlled Rectifier | Max d-c cathode current ☐ = 0.25 amperes; max peak inverse voltage ☐ = 10,000 volts; max peak cathode current ☐ = 1.0 amperes | | | | | | | | | | 5557 |
| Half-Wave Rectifier | Max d-c output current ☐ = 2.5 amperes; max peak inverse voltage ☐ = 5,000 volts; max peak current ☐ = 15 amperes | | | | | | | | | | 5558/FG-32 |
| Controlled Rectifier | Max d-c cathode current ☐ = 2.5 amperes; max peak inverse voltage ☐ = 1,000 volts; max peak cathode current ☐ = 15 amperes | | | | | | | | | | 5559/FG-57 |
| Controlled Rectifier | Max d-c cathode current ☐ = 2.5 amperes; max peak inverse voltage ☐ = 1,000 volts; max peak cathode current ☐ = 15 amperes | | | | | | | | | | 5560 |
| Half-Wave Rectifier | Max d-c output current ☐ = 6.4 amperes; max peak inverse voltage ☐ = 3,000 volts; max peak current ☐ = 40 amperes | | | | | | | | | | 5561 |
| Controlled Rectifier | Max d-c cathode current ☐ = 1.8 amperes; max peak inverse voltage ☐ = 15,000 volts; max peak cathode current ☐ = 10 amperes | | | | | | | | | | 5563-A |

Metal tubes are shown in bold-face type, miniature tubes in italics.

♦ G3 and G5 are screen. G4 is signal-input grid.

◆ G2 and G4 are screen. G3 is signal-input grid.

1, 2, 3, etc. indicate tube sections.

☐ Maximum screen dissipation appears

immediately below the screen voltage.

‡ Heater warm-up time controlled.

| Tube Type | Classification by Construction | Base Connections | Out-line Dwg | Fila-ment Volts | Fila-ment Amp | Max Plate Watts | Max Plate Volts | Max Screen Volts and Watts * | Capacitance in Picofarads | | |
|-------------|--|------------------|--------------|-----------------|---------------|-----------------|--|------------------------------|---------------------------|---------|--------------|
| | | | | | | | | | Input | Out-put | Grid-plate |
| GL5564 | Ignitron | GL 5564 | TX | — | — | — | — | — | — | — | — |
| 5590 | RF Pentode | 7BD | 5-1 | 6.3 | 0.15 | 1.7 | 180 | 140 0.5 | 3.40 | 2.90 | 0.01 |
| 5591 | Sharp-Cutoff RF Pen- tode (Special 6AK5) | 7BD | 5-1 | 6.3 | 0.15 | 1.7 | 180 | 180g 0.5 | 4.0 | 2.8 | 0.02 ♣ |
| 5608-A | Medium-Mu Twin-Triode | 7B | 14-1 | 2.5 | 2.0 | 5.5 ♣ | 350 | — | — | — | — |
| 5610 | Medium-Mu Triode | 6CG | 5-2 | 6.3 | 0.15 | 3.0 | 300 | — | — | — | — |
| GL5630 | Ignitron | GL 5630 | TX | — | — | — | — | — | — | — | — |
| 5632/C3J | Thyratron | FG- 27-A | T-X | 2.5 | 9.0 | — | Anode Voltage Drop = 10 Volts | | | | |
| 5633 ● | Remote-Cutoff RF Pentode | 5633 | T-X | 6.3 | 0.15 | 0.8 | 150 | 140 0.3 | 4.0 ▲ | 2.2 ▲ | 0.015 ♣ ▲ |
| 5634 ● | Sharp-Cutoff RF Pentode | 5633 | T-X | 6.3 | 0.15 | 0.8 | 150 | 140 0.3 | 4.4 ▲ | 2.2 ▲ | 0.015 ♣ ▲ |
| 5635 ● | Medium-Mu Twin Triode | 8DB | 3-1 | 6.3 | 0.45 | 1.25 ♣ | 150 | — | 2.6 | 1.6 | 1.2 |
| 5636 ● | Dual-Control Pentode | 8DC | 3-1 | 6.3 | 0.15 | 0.65 ♣ | 165 ♣ | 155 0.7 ♣ | — | — | — |
| 5637 ● | High-Mu Triode | 5637 | 3-2 | 6.3 | 0.15 | 0.3 | 150 | — | 2.6 ▲ | 0.7 ▲ | 1.4 ▲ |
| 5638 ● | Amplifier Pentode | 5638 | 3-2 | 6.3 | 0.15 | 0.6 | 150 | 140 0.2 | 4.0 | 6.5 | 0.19 |
| 5639 ● | Video Pentode | 8DL | 3-3 | 6.3 | 0.45 | 3.8 ♣ | 165 ♣ | 155 1.0 ♣ | 9.5 | 7.5 | 0.10 ♣ |
| 5640 ● | Beam Power Amplifier | 5640 | 3-4 | 6.3 | 0.45 | 3.5 | 150 | 140 1.0 | 9.0 | 7.0 | 0.18 |
| 5641 ● | Half-Wave Rectifier | 6CJ | 3-3 | 6.3 | 0.45 | — | Tube Voltage Drop: 23 v at 90 ma d-c | | | | |
| 5642 ● | Half Wave High-Voltage Rectifier | 5642 | T-X | 1.25 | 0.2 | — | Tube Voltage Drop: 30 v at 4.0 ma d-c | | | | |
| 5645 ● | Medium-Mu Triode | 5645 | T-X | 6.3 | 0.15 | 1.0 | 150 | — | 2.2 | 3.0 | 1.7 |
| 5646 ● | High-Mu Triode | 5645 | T-X | 6.3 | 0.15 | 0.3 | 150 | — | 2.2 ▲ | 1.0 ▲ | 1.3 ▲ |
| 5647 ● | High-Frequency Diode | 5647 | T-X | 6.3 | 0.15 | — | Tube Voltage Drop: 2.8 v at 18 ma d-c | | | | |
| 5651 | Glow-Discharge Diode Voltage Reference | 5B0 | 5-2 | — | — | — | Anode supply voltage ☐ = 150 Volts, max | | | | |
| 5651-A | Glow-Discharge Diode Voltage Reference | 5B0 | 5-2 | — | — | — | Anode Supply Voltage ☐ = 150 Volts Max | | | | |
| 5654 5 ★ | Sharp-Cutoff RF Pen- tode (Special 6AK5) | 7BD | 5-1 | 6.3 | 0.175 | 1.55 ♣ | 200 ♣ | 155 0.55 ♣ | 4.0 | 2.9 | 0.02 ♣ |
| 5663 | Thyratron | 6CE | T-X | 6.3 | 0.15 | — | Anode voltage drop = 11 volts | | | | |
| 5665/C16J | Thyratron | 5665/ C16J | T-X | 2.5 | 31 | — | Anode Voltage Drop = 11 Volts | | | | |
| 5670 5 ★ | High-Frequency Twin Triode (Special 2C51) | 8CJ | 6-1 | 6.3 | 0.35 | 1.4 ♣ | 330 ♣ | — | 2.2 ▲ | 1.0 ▲ | 1.1 ▲ |
| 5672 ● | Power Amplifier Pentode | 2E31 | 2-1 | 1.25 DC | 0.05 | — | 90 | 90 | — | — | — |
| 5675 | Medium-Mu Triode (Pencil) | 5675 | T-X | 6.3 | 0.135 | 5.0 ☐ | 300 ☐ | — | 2.4 ▲ | 0.09 ▲ | 1.5 ♣ |
| 5676 ● | Medium-Mu Triode | 5676 | T-X | 1.25 DC | 0.12 | — | 135 | — | 1.3 | 4.0 | 2.0 |

■ Compactron.
† Zero signal.
♣ Per section.

† Plate-to-plate.
♣ Maximum.
♣ Supply voltage.

● Subminiature type.
▲ Without external shield.
♣ Design maximum rating.

☐ Total for all similar sections.
☐ Absolute maximum rating.
Conversion transconductance.

| Service | Plate Volts | Screen Volts | Neg Grid Volts | Plate Milli-amperes | Screen Milli-amperes | R _p ' Ohms | G _m ' μmhos | μ Factor | Load for Rated Output, Ohms | Power Output, Watts | Tube Type |
|--|--|--------------|------------------------|---------------------|----------------------|--|------------------------|--------------------------------|-----------------------------|---------------------|------------|
| Resistance Welding | Max. supply volts RMS 2400; max. demand KVA 4800; corresponding av. anode curr. 270 A.; max. av. anode curr. 414 A.; corresponding demand KVA 2210. | | | | | | | | | | GL5564 |
| Class A Amplifier | 90 | 90 | R _k = 820 | 3.9 | 1.4 | 300,000 | 2,000 | — | — | — | 5590 |
| Class A Amplifier | 180 | 120 | R _k = 180 | 7.7 | 2.4 | 500,000 | 5,100 | — | — | — | 5591 |
| | 120 | 120 | R _k = 180 | 7.5 | 2.5 | 300,000 | 5,000 | — | — | — | |
| Class A Amplifier | 300 | — | 6.0 | 6.0 | — | 13,000 | 2,450 | 32 | — | — | 5608-A |
| Class A Amp | 90 | — | 1.5 | 17 | — | 3,500 | 4,000 | 14 | — | — | 5610 |
| Capacitor Discharge | Max. forward peak anode voltage 35000 volts; inverse peak anode voltage 35000 volts; max. peak anode curr. 20000 A.; typical discharge rate pulses per minute 2. | | | | | | | | | | GL5630 |
| Controlled Rectifier | Max d-c cathode current ⊕ = 2.5 amperes; max peak inverse voltage ⊖ = 1,250 volts; max peak cathode current ⊕ = 30 amperes | | | | | | | | | | 5632/C3J |
| Class A Amplifier | 100 | 100 | R _k = 150 | 7.0 | 2.8 | 200,000 | 3,400 | — | — | — | 5633 ⊙ |
| Class A Amplifier | 100 | 100 | R _k = 150 | 6.5 | 2.5 | 240,000 | 3,500 | — | — | — | 5634 ⊙ |
| Class A Amplifier | 100 | — | R _k = 100 ⊕ | 4.8 | — | 10,000 | 3,800 | 38 | — | — | 5635 ⊙ |
| Gated Amplifier | 100 | 100 | R _k = 150 | 5.3 | 3.6 | 110,000 | 3,200 | G ₂ tied to cathode | | | 5636 ⊙ |
| | 100 | 100 | R _k = 150 | 4.0 | 5.8 | 50,000 | 1,950 | E _{cs} = -1.0 volt | | | |
| Class A Amplifier | 100 | — | R _k = 820 | 1.4 | — | 26,000 | 2,700 | 70 | — | — | 5637 ⊙ |
| Class A Amplifier | 100 | 100 | R _k = 270 | 4.8 | 1.25 | 150,000 | 3,300 | — | — | — | 5638 ⊙ |
| Class A Amplifier | 150 | 100 | R _k = 100 | 21 | 4.0 | 50,000 | 9,000 | — | — | — | 5639 ⊙ |
| Class A Amplifier | 100 | 100 | 9.0 | 31† | 2.2† | 15,000 | 5,000 | — | 3,000 | 1.25 | 5640 ⊙ |
| Half-Wave Rectifier | Max d-c output current ⊕ = 50 ma; max peak inverse voltage ⊖ = 930; rms supply voltage per plate = 275; max peak current ⊕ = 300 ma | | | | | | | | | | 5641 ⊙ |
| TV Flyback Rectifier | Max d-c output current = 0.25 ma; max peak inverse voltage = 10,000 volts; max peak current = 5.0 ma | | | | | | | | | | 5642 ⊙ |
| Class A Amplifier | 100 | — | R _k = 560 | 5.0 | — | 7,400 | 2,700 | 20 | — | — | 5645 ⊙ |
| Class A Amplifier | 100 | — | R _k = 820 | 1.4 | — | 29,000 | 2,400 | 70 | — | — | 5646 ⊙ |
| Half-Wave Rectifier | Max d-c output current ⊕ = 10 ma; max peak inverse voltage ⊖ = 460 volts; max rms supply voltage ⊕ = 165 volts; max peak current ⊕ = 60 ma | | | | | | | | | | 5647 ⊙ |
| D-c operating current = 1.5 ma min | Ionization voltage = 115 volts d-c, max | | | | | | | | | | 5651 |
| D-c operating current ⊕ = 3.5 ma max | Operating voltage = 87 volts d-c Regulation (1.5 to 3.5 ma) = 3.0 volts max | | | | | | | | | | |
| { D-c operating current = 1.5 ma, min D-c operating current ⊕ = 3.5 ma, max } | | | | | | Ionization voltage = 115 volts d-c, max Operating voltage = 85.5 volts d-c Regulation (1.5 to 3.5 ma) = 3.0 volts, max | | | | 5651-A | |
| Class A Amplifier | 120 | 120 | R _k = 200 | 7.5 | 2.5 | 340,000 | 5,000 | — | — | — | 5654 5★ |
| Controlled Rectifier | Max d-c cathode current ⊕ = 20 ma; max peak inverse voltage ⊖ = 500 volts; max peak cathode current ⊕ = 60 ma | | | | | | | | | | 5663 |
| Controlled Rectifier | Max d-c cathode current ⊕ = 16 amperes; max peak inverse voltage ⊖ = 1,250 volts; max peak cathode current ⊕ = 160 amperes | | | | | | | | | | 5665/C16J |
| Class A Amplifier | 150 | — | R _k = 240 | 8.2 | — | 6,400 | 5,500 | 35 | — | — | 5670 5★ |
| Class AB ₁ Amplifier | 300 | — | R _k = 800 ⊕ | 9.8† | — | — | — | — | 27,000 ‡ | 1.0 | 5672 ⊙ |
| | 67.5 | 67.5 | 6.5 | 3.25 | 1.1 | — | 650 | — | 20,000 | 0.065 | |
| Class A Amplifier | 135 | — | R _k = 68 | 24 | — | 3,225 | 6,200 | 20 | — | — | 5675 |
| Class A Amplifier | 135 | — | 5.0 | 4.0 | — | — | 1,600 | 15 | — | — | 5676 ⊙ |

Metal tubes are shown in bold-face type, *miniature tubes in italics.*

♦ G3 and G5 are screen. G4 is signal-input grid.

♥ G2 and G4 are screen. G3 is signal-input grid.

1, 2, 3, etc. indicate tube sections.

★ Maximum screen dissipation appears immediately below the screen voltage.

† Heater warm-up time controlled.

| Tube Type | Classification by Construction | Base Connections | Out-line Dwg | Fila-ment Volts | Fila-ment Amp | Max Plate Watts | Max Plate Volts | Max Screen Volts and Watts * | Capacitance in Picofarads | | |
|-----------|---|------------------|--------------|-----------------|-------------------|-----------------|--|------------------------------|---|------------------|------------|
| | | | | | | | | | Input | Out-put | Grid-plate |
| 5677 ● | Medium-Mu Triode | 5676 | T-X | 1.25 DC | 0.06 | — | 135 | — | 1.3 | 3.8 | 2.0 |
| 5678 ● | Pentode Amplifier | 1AD4 | T-X | 1.25 DC | 0.05 | — | 90 | 67.5 | 3.3 | 3.8 | 0.01 ♣ |
| 5679 | Twin Diode (Special 7A6) | 7CX | 9-30 | 6.3 | 0.15 | — | Tube Voltage Drop: ♣ 11 v at 16 ma d-c | | | | |
| 5686 5★ | Beam Power Amplifier | 9G | 6-2 | 6.3 | 0.35 | 8.25 □ | 275 □ | 275 □ | 6.5 | 8.5 | 0.08 ♣ |
| 5687 5★ | Medium-Mu Twin Triode | 9H | 6-2 | { 6.3 12.6 } | { 0.9 0.45 } | 4.2 ♣ | 300 | — | 4.0 ▲ | 0.6 ▲ | 4.0 ▲ |
| 5690 | Full-Wave High-Vacuum Rectifier | 5690 | 12-25 | { 12.6 6.3 } | { 1.2 2.4 } | — | Tube Voltage Drop: ♣ 17 v at 150 ma d-c | | | | |
| 5691 | High-Mu Twin Triode (Special 6SL7-GT) | 8BD | 9-37 | 6.3 | 0.6 | 1.0 ♣ □ | 275 □ | — | — | — | — |
| 5692 | Medium-Mu Twin Triode (Special 6SN7-GT) | 8BD | 9-37 | 6.3 | 0.6 | 1.75 ♣ □ | 275 □ | — | — | — | — |
| 5693 | Sharp-Cutoff Pentode (Special 6SJ7) | 8N | 8-1 | 6.3 | 0.3 | 2.0 □ | 300 □ | 125 □ 0.3 | 5.3 | 6.2 | 0.005 ♣ |
| 5694 | Medium-Mu Twin Triode | 8CS | 14-3 | 6.3 | 0.8 | 5.5 ♣ | 300 | — | Both Sections in Parallel | | |
| 5696 | Thyratron | 7BN | 5-1 | 6.3 | 0.15 | — | Anode voltage drop = 10 volts | | | | |
| 5696-A | Thyratron | 7BN | 5-1 | 6.3 | 0.15 | — | Anode Voltage Drop = 10 volts | | | | |
| 5702 ● | RF Pentode | 5702 | 3-7 | 6.3 | 0.2 | — | 180 | 140 0.5 | 4.4 | 3.5 | 0.03 ♣ |
| 5703 ● | Medium-Mu Triode | 5703 | 3-6 | 6.3 | 0.2 | 3.0 | 250 | — | 2.6 | 0.7 | 1.2 |
| 5704 ● | Diode | 5704 | T-X | 6.3 | 0.15 | — | Tube Voltage Drop: 2 v at 9 ma d-c | | | | |
| 5718 ● | Medium-Mu Triode | 8DK | 3-1 | 6.3 | 0.15 | 1.0 ♣ | 165 ♣ | — | 2.4 | 2.4 | 1.3 |
| 5719 ● | High-Mu Triode | 8DK | 3-1 | 6.3 | 0.15 | 0.3 ♣ | 165 ♣ | — | 1.9 | 2.2 | 0.8 |
| 5720 | Thyratron | 5559 | T-X | 5.0 | 4.5 | — | Anode Voltage Drop = 16 Volts | | | | |
| 5726 5★ | Dual-Control RF Pentode (Special 6AS6) | 7CM | 5-1 | 6.3 | 0.175 | 1.55 ♣ | 200 ♣ | 155 ♣ 0.75 ♣ | 4.0 | 3.0 | 0.01 |
| 5726 5★ | Twin Diode (Special 6AL5) | 6BT | 5-1 | 6.3 | 0.30 | — | Tube Voltage Drop: ♣ 10 v at 60 ma d-c | | | | |
| 5727 5★ | Thyratron (Special 2D21) | 7BN | 5-2 | 6.3 | 0.6 | — | Anode Voltage Drop = 8 Volts | | | | |
| 5728 | Thyratron | 5559 | T-X | 5.0 | 4.5 | — | Anode Voltage Drop = 16 Volts | | | | |
| 5731 | Power Amplifier Triode (Acorn) | 5BC | 4-1 | 6.3 | 0.15 | — | 250 | — | 1.0 | 0.4 | 1.3 |
| 5744 ● | High-Mu Triode | 5744 | 3-6 | 6.3 | 0.2 | — | 250 | — | — | — | — |
| 5749 5★ | Remote-Cutoff RF Pentode (Special 6BA6) | 7BK | 5-2 | 6.3 | 0.3 | 3.1 ♣ | 330 ♣ | 300 ♣ 0.6 ♣ | 5.5 | 5.5 | 0.0035 ♣ |
| 5750 5★ | Pentagrid Converter (Special 6BE6) | 7CH ♡ | 5-2 | 6.3 | 0.3 | 1.1 □ | 330 □ | 110 □ 1.0 □ | Osc I _{cl} = 0.5 ma R _{gt} = 20,000 ohms | | |
| 5751 5★ | High-Mu Twin Triode (Special 12AX7) | 9A | 6-2 | { 6.3 12.6 } | { 0.35 0.175 } | 0.7 ♣ ♣ | 330 ♣ | — | 1.4 ▲ | 0.46 ▲ 0.36 ▲ | 1.4 ▲ |
| 5783 | Beam Power Amplifier | 9K | 6-3 | 6.0 | 0.75 | 8.0 □ | 250 □ | 250 □ 1.5 □ | — | — | — |
| | | | | | | 12 □ | 300 □ | 250 □ 2.0 □ | — | — | — |
| 5767 | UHF Triode (Planar) | 5767 | T-X | 6.3 | 0.4 | 6.0 | 350 | — | 1.3 ▲ | 0.025 ▲ | 1.3 ▲ |

■ Compactron.

† Plate-to-plate.

● Subminiature type.

⊕ Total for all similar sections.

♣ Zero signal.
♣ Per section.♣ Maximum.
♣ Supply voltage.▲ Without external shield.
♣ Design maximum rating.♣ Absolute maximum rating.
Conversion transconductance.

| Service | Plate Volts | Screen Volts | Neg Grid Volts | Plate Milli-amperes | Screen Milli-amperes | R _p ' Ohms | G _m ' μmhos | μ Factor | Load for Rated Output, Ohms | Power Output, Watts | Tube Type |
|---------------------------|--|--------------|------------------------|---------------------|----------------------|---|------------------------|---------------------------|-----------------------------|---------------------|-----------|
| Class A Amplifier | 135 | — | 6.0 | 1.9 | — | — | 650 | 13.5 | — | — | 5677 ● |
| Class A Amplifier | 67.5 | 67.5 | 0 | 1.8 | 0.48 | 1,000,000 | 1,100 | — | — | — | 5678 ● |
| Half-Wave Rectifier | Max d-c output current per plate = 8 ma; max rms supply voltage per plate = 150 volts; max peak current per plate = 45 ma | | | | | | | | | | 5679 |
| Class A Amplifier | 250 | 250 | 12.5 | 27† | 3.0† | 45,000 | 3,100 | — | 9,000 | 2.7 | 5686 |
| Class C Amplifier | 250 | 250 | 50 | 40 | 10.5 | Input Signal = 0.15 watt | | — | — | 6.5 | 5★ |
| Class A Amplifier † | 180 | — | 7.0 | 23 | — | 2,000 | 8,500 | 17 | — | — | 5687 |
| | 250 | — | 12.5 | 12 | — | 3,000 | 5,400 | 16 | — | — | 5★ |
| Full-Wave Rectifier | Max d-c output current = 125 ma; max peak inverse voltage = 1,120; rms supply voltage per plate = 350; max peak current per plate = 375 ma | | | | | | | | | | 5690 |
| Class A Amplifier † | 250 | — | 2.0 | 2.3 | — | 44,000 | 1,600 | 70 | — | — | 5691 |
| Class A Amplifier † | 250 | — | 9.0 | 6.5 | — | 9,100 | 2,200 | 20 | — | — | 5692 |
| Class A Amplifier | 250 | 100 | 3.0 | 3.0 | 0.85 | 1,000,000 | 1,650 | — | — | — | 5693 |
| Class A Amplifier | 294 | — | 6.0 | 7.0 | — | 11,000 | 3,200 | 35 | — | — | 5694 |
| | 250 | — | 5.0 | 6.0 | — | 11,300 | 3,100 | 35 | — | — | |
| Controlled Rectifier | Max d-c cathode current ⊖ = 25 ma; max peak inverse voltage ⊖ = 500 volts; max peak cathode current ⊖ = 100 ma | | | | | | | | | | 5696 |
| Controlled Rectifier | Max d-c cathode current ⊖ = 28 ma; max peak inverse voltage ⊖ = 500 volts; max peak cathode current ⊖ = 125 ma | | | | | | | | | | 5696-A |
| Class A Amplifier | 120 | 120 | R _k = 200 | 7.5 | 2.5 | 340,000 | 5,000 | — | — | — | 5702 ● |
| Class A Amplifier | 120 | — | R _k = 220 | 9.0 | — | — | 5,000 | 25 | — | — | 5703 ● |
| Half-Wave Rectifier | Max d-c output current = 9 ma; max peak inverse voltage = 420 volts; max rms supply voltage = 150 volts; max peak current = 54 ma | | | | | | | | | | 5704 ● |
| Class A Amplifier | 100 | — | R _k = 150 | 8.5 | — | 4,650 | 5,800 | 27 | — | — | 5718 ● |
| Class A Amplifier | 100 | — | R _k = 1,500 | 0.73 | — | 41,000 | 1,700 | 70 | — | — | 5719 ● |
| Controlled Rectifier | Max d-c cathode current ⊖ = 2.5 amperes; max peak inverse voltage ⊖ = 1,000 volts; max peak cathode current ⊖ = 15 amperes | | | | | | | | | | 5720 |
| Class A Amplifier | 120 | 120 | 2.0 | 5.2 | 3.5 | — | 3,200 | E _{cs} = 0 volts | — | — | 5725 |
| | | | | | | | | | | | 5★ |
| Half-Wave Rectifier | Max d-c output current per plate ⊖ = 10 ma; max peak inverse voltage ⊖ = 360; rms supply voltage per plate = 117; max peak current per plate ⊖ = 60 ma | | | | | | | | | | 5726 |
| Controlled Rectifier | Max d-c cathode current ⊖ = 100 ma; max peak inverse voltage ⊖ = 1,300 volts; max peak cathode current ⊖ = 500 ma | | | | | | | | | | 5727 |
| Controlled Rectifier | Max d-c cathode current ⊖ = 2.5 amperes; max peak inverse voltage ⊖ = 1,000 volts; max peak cathode current ⊖ = 15 amperes | | | | | | | | | | 5728 |
| Class A Amplifier | 250 | — | 7.0 | 6.3 | — | 11,400 | 2,200 | 25 | — | — | 5731 |
| Class A Amplifier | 250 | — | R _k = 500 | 4.0 | — | — | 4,000 | 70 | — | — | 5744 ● |
| Class A Amplifier | 250 | 100 | R _k = 68 | 11 | 4.2 | 1,000,000 | 4,400 | — | — | — | 5749 |
| | 100 | 100 | R _k = 68 | 10.8 | 4.4 | 250,000 | 4,300 | — | — | — | 5★ |
| Converter | 250 | 100 | 1.5 | 2.6 | 7.5 | 1,000,000 | 475 # | — | — | — | 5750 |
| | | | | | | | | | | | 5★ |
| Class A Amplifier † | 250 | — | 3.0 | 1.0 | — | 58,000 | 1,200 | 70 | — | — | 5751 |
| | 100 | — | 1.0 | 0.8 | — | 58,000 | 1,200 | 70 | — | — | 5★ |
| Class C Telephony | 250 | 250 | 39 | 40 | 5.6 | (bias obtained from R _{gr} = 39,000) | | | | 6.4 | 5763 |
| Class C Telegraphy | 300 | 250 | 28.5 | 50 | 6.6 | (bias obtained from R _{gr} = 18,000) | | | | 10.3 | |
| UHF Oscillator at 3300 Mc | 200 | — | R _k = 100 | 25 | — | — | — | — | — | 0.45 | 5767 |

Metal tubes are shown in bold-face type, miniature tubes in italics.

♦ G3 and G5 are screen. G4 is signal-input grid.

♣ G2 and G4 are screen. G3 is signal-input grid.

1, 2, 3, etc. indicate tube sections.

⊖ Maximum screen dissipation appears immediately below the screen voltage.

‡ Heater warm-up time controlled.

| Tube Type | Classification by Construction | Base Connections | Out-line Dwg | Filament Volts | Filament Amp | Max Plate Watts | Max Plate Volts | Max Screen Volts and Watts | Capacitance in Picofarads | | |
|----------------------|---------------------------------------|------------------|----------------------------|--------------------|---------------|-----------------|--|----------------------------|---|------------------|------------|
| | | | | | | | | | Input | Out-put | Grid-plate |
| 5784 ● | Dual-Control RF Pentode | 5702 | 3-7 | 6.3 | 0.2 | 1.7 | 180 | 140 0.75 | 3.9 | 3.0 | 0.03 ♣ |
| 5785 ● | Half-Wave High-Voltage Rectifier | 5785 | T-X | 1.25 DC | 0.015 | — | Tube Voltage Drop: 17 v at 0.1 ma d-c | | | | |
| 5797 ● | Semi-Remote-Cutoff RF Pentode | 8CY | 3-2 | 26.5 | 0.045 | 0.8 | 50 | 50 0.25 | 4.2 | 3.2 | 0.024 ♣ |
| 5798 ● | Medium-Mu Twin Triode | 8CZ | 3-2 | 26.5 | 0.09 | 0.2 ♣ | 50 | — | 1.9 | 1.7 | 1.7 |
| 5814 5814-A 5★ | Medium-Mu Twin Triode (Special 12AU7) | 9A | 6-2 | 6.3 12.6 | 0.35 0.175 | 2.7 ♣ | 330 ♣ | — | 1.6 ▲ | 0.51 ▲ 0.42 ▲ | 1.5 ▲ |
| GL5822A | Ignitron | GL 5822A | TX | — | — | — | — | — | — | — | — |
| GL5822A -PC | Ignitron | GL 5822A | TX | — | — | — | — | — | — | — | — |
| 5823 | Gas Triode | 4CK | 5-2 | — | — | — | — | — | — | — | — |
| 5824 | Beam Power Amplifier (Special 25B6-G) | 7AC | 14-3 or 9-11 or 9-41 | 25.0 | 0.3 | 12.5 | 200 | 135 2.0 | — | — | — |
| 5825 | Half-Wave High-Voltage Rectifier | 4P | T-X | 1.6 | 1.25 | — | Tube Voltage Drop: 1.750 v at 40 ma d-c | | | | |
| 5829 ● | Twin Diode | 5829 | 2-5 | 6.3 | 0.15 | — | Tube Voltage Drop: ♣ 5 v at 15 ma d-c | | | | |
| 5830 | Thyratron | 5830 | T-X | 5.0 | 20 | — | Anode Voltage Drop = 16 Volts | | | | |
| 5838 | Full-Wave High-Vacuum Rectifier | 6S | T-X | 12.0 | 0.6 | — | — | — | — | — | — |
| 5839 | Full-Wave High-Vacuum Rectifier | 6S | T-X | 26.5 | 0.285 | — | — | — | — | — | — |
| 5840 ● | Sharp-Cutoff RF Pentode | 8DE | 3-1 | 6.3 | 0.15 | 0.9 ♣ | 165 ♣ | 155 ♣ 0.55 ♣ | 4.2 | 3.4 | 0.015 ♣ |
| 5842 | High-Mu Triode | 9V | 6-1 | 6.3 | 0.3 | 4.0 | 180 | — | — | — | — |
| 5844 5★ | Medium-Mu Twin Triode | 7BF | 5-2 | 6.3 | 0.3 | 1.0 ♣ | 200 | — | 2.4 ▲ | 0.51 ▲ 0.42 ▲ | 2.7 ▲ |
| 5847 | Sharp-Cutoff RF Pentode | 9X | 6-1 | 6.3 | 0.3 | 3.0 | 180 | 150 0.75 | 7.1 | 2.9 | 0.04 |
| 5847-A | Sharp-Cutoff RF Pentode | 9X | 6-1 | 6.3 | 0.3 | 3.0 | 180 | 150 0.75 | 7.1 | 2.9 | 0.04 |
| 5851 ● | Beam Power Amplifier | 6CL | T-X | 1.25 2.50 DC | 0.11 0.055 | 1.5 | 180 | 135 0.3 | 2.5 | 3.0 | 0.055 |
| 5852 | Full-Wave High-Vacuum Rectifier | 6S | T-X | 6.3 | 1.2 | — | — | — | — | — | — |
| 5854 ● | Power Amplifier Pentode | 2E31 | 2-1 | 1.25 | 0.03 | — | 50 | 50 | — | — | — |
| 5855 | Thyratron | 5855 | T-X | 2.5 | 34 | — | Anode Voltage Drop = 16 Volts | | | | |
| 5873 ● | Medium-Mu Twin Triode | 5873 | 3-2 | 6.3 | 0.3 | 1.6 ♣ | 300 | — | — | — | — |
| 5875 ● | Sharp-Cutoff Pentode | 1AD4 | 2-1 | 1.25 DC | 0.1 | — | 90 | 90 | 4.0 | 4.0 | 0.03 ♣ |
| 5876 | High-Mu Triode (Pencil) | 5675 | T-X | 6.3 | 0.135 | 6.25 | 300 | — | 2.5 ▲ | 0.035 ▲ | 1.4 ▲ |
| 5876-A | High-Mu Triode (Pencil) | 5675 | T-X | 6.3 | 0.135 | 6.25 | 300 | — | 2.4 ▲ | 0.035 ▲ | 1.4 ▲ |
| 5879 | Sharp-Cutoff AF Pentode | 9AD | 6-2 | 6.3 | 0.15 | 1.25 ♣ 1.7 ♣ | 330 ♣ 275 ♣ | 330 ♣ 0.25 ♣ | Pentode Connection Triode Connection (G ₂ , G ₃ & P Tied) | | |

■ Compactron.
† Zero signal.
‡ Per section.

‡ Plate-to-plate.
♣ Maximum.
‡ Supply voltage.

● Subminiature type.
▲ Without external shield.
◆ Design maximum rating.

⊕ Total for all similar sections.
⊖ Absolute maximum rating.
Conversion transconductance.

| Service | Plate Volts | Screen Volts | Neg Grid Volts | Plate Milli-amperes | Screen Milli-amperes | R_p , Ohms | G_m , μ mhos | μ Factor | Load for Rated Output, Ohms | Power Output, Watts | Tube Type |
|--|--|--------------|----------------|---------------------|----------------------|--|--------------------|---|-----------------------------|---------------------|----------------------|
| Class A Amplifier | 120 120 | 120 120 | 2.0 2.0 | 5.2 3.6 | 3.5 4.8 | — — | 3,200 1,850 | $E_{cs}=0$ volts $E_{cs}=-3.0$ volts | | | 5784 ● |
| Half-Wave Rectifier | Max d-c output current = 0.1 ma; max peak current = 0.45 ma; max peak inverse voltage = 3,500 volts with supply impedance = 1 meg min. | | | | | | | | | | 5785 ● |
| Class A Amplifier | 26.5 | 26.5 | 0 | 2.8 | 0.9 | 70,000 | 3,450 | — | — | — | 5797 ● |
| Class A Amplifier ♦ | 26.5 | — | 0 | 2.0 | — | 7,100 | 3,400 | 24 | — | — | 5798 ● |
| Class A Amplifier ♦ | 250 100 | — — | 8.5 0 | 10.5 11.8 | — — | 7,700 6,250 | 2,200 3,100 | 17 19.5 | — | — | 5814 5814-A 5★ |
| Frequency Changer | Max. peak inverse voltage 1200 V.; max. peak anode curr. 1500 A.; corresponding av. anode curr. 20 A.; max. av. anode curr. 70 A.; corresponding peak anode curr. 420 A. | | | | | | | | | | GL5822A |
| Frequency Changer | Max. peak inverse voltage 1500 V.; max. peak anode curr. 1200 A.; corresponding av. anode curr. 16 A.; max. av. anode curr. 56 A.; corresponding peak anode curr. 336 A. | | | | | | | | | | GL5822A -PC |
| Peak cathode current □ = 100 ma max; d-c cathode current □ = 25 ma max; starter voltage drop □ = 61 volts; anode drop □ = 62 volts | | | | | | | | | | | 5823 |
| Class A Amplifier | 135 | 135 | 22 | 61† | 2.5† | 15,000 | 5,000 | — | 1,700 | 4.3 | 5824 |
| Half-Wave Rectifier | Max d-c output current □ = 2 ma; max peak inverse voltage □ = 60,000 volts, rms supply voltage = 21,200 volts; max peak current □ = 40 ma | | | | | | | | | | 5825 ● |
| Half-Wave Rectifier | Max d-c output current per plate = 5 ma; max peak inverse voltage = 330; rms supply voltage per plate = 117; max peak current per plate = 30 ma | | | | | | | | | | 5829 ● |
| Mercury Thyratron | Max d-c cathode current □ = 12.5 amperes; max peak inverse voltage □ = 10,000 volts; max peak cathode current □ = 75 amperes. | | | | | | | | | | 5830 |
| Full-Wave Rectifier | Max d-c output current = 65 ma; max peak inverse voltage = 1,375 volts; rms supply voltage per plate = 300 volts; max peak current per plate = 270 ma | | | | | | | | | | 5838 |
| Full-Wave Rectifier | Max d-c output current = 65 ma; max peak inverse voltage = 1,375 volts; rms supply voltage per plate = 300 volts; max peak current per plate = 270 ma | | | | | | | | | | 5839 |
| Class A Amplifier | 100 | 100 | $R_k = 150$ | 7.5 | 2.4 | 260,000 | 5,000 | — | — | — | 5840 ● |
| Class A Amplifier | 150 | — | $R_k = 62$ | 26 | — | 1,800 | 24,000 | 43 | — | — | 5842 |
| Class A Amplifier ♦ | 100 | — | $R_k = 470$ | 4.8 | — | 7,550 | 3,700 | 28 | — | — | 5844 5★ |
| Frequency Halfer ♦ | 150□ 150□ | — — | 0 10 | 4.8 0.1 | — | $R_g = 47,000$ ohms $R_g = 47,000$ ohms | — | — | 20,000 20,000 | — | |
| Class A Amplifier | 150 | 150 | $R_k = 110$ | 13 | 4.5 | — | 12,500 | — | — | — | 5847 |
| Class A Amplifier | 150 | 150 | $R_k = 110$ | 13 | 4.5 | — | 12,500 | — | — | — | 5847-A |
| Class A Amplifier | 150 | 150 | $R_k = 4,000$ | 4.4 | 1.2 | — | 8,500 | $E_{ccl} = +20$ volts | — | — | |
| Class A Amplifier | 125 | 125 | 7.5 | 5.5 | 0.9 | 175,000 | 1,600 | — | — | — | 5851 ● |
| Full-Wave Rectifier | Max d-c output current = 65 ma; max peak inverse voltage = 1,375 volts; rms supply voltage per plate = 300 volts; max peak current per plate = 270 ma | | | | | | | | | | 5852 |
| Class A Amplifier | 45 | 45 | 2.0 | 0.8 | 0.25 | 350,000 | 550 | — | 50,000 | 0.0095 | 5854 ● |
| Controlled Rectifier | Max d-c cathode current □ = 18 amperes; max peak inverse voltage □ = 1,500 volts; max peak cathode current □ = 160 amperes | | | | | | | | | | 5855 |
| Class A Amplifier ♦ | 150 | — | 3.0 | 9.0 | — | — | 2,900 | 22 | — | — | 5873 ● |
| Class A Amplifier | 90 | 90 | 0 | 3.5 | 1.0 | — | 2,500 | — | — | — | 5875 ● |
| Class A Amplifier | 250 | — | $R_k = 75$ | 18 | — | 8,625 | 6,500 | 56 | — | — | 5876 |
| Class A Amplifier | 250 | — | $R_k = 75$ | 18 | — | 8,625 | 6,500 | 56 | — | — | 5876-A |
| Class A Amplifier | 250 | 100 | 3.0 | 1.8 | 0.4 | 2,000,000 | 1,000 | — | — | — | 5879 |
| Class A Amplifier | 250 | — | 8.0 | 5.5 | — | 13,700 | 1,530 | 21 | — | — | |

Metal tubes are shown in bold-face type, miniature tubes in italics.

♦ G3 and G4 are screen. G4 is signal-input grid.

◆ G2 and G4 are screen. G3 is signal-input grid.

1, 2, 3, etc. indicate tube sections.

■ Maximum screen dissipation appears immediately below the screen voltage.

† Heater warm-up time controlled.

| Tube Type | Classification by Construction | Base Connections | Out-line Dwg | Fila-ment Volts | Fila-ment Amp | Max Plate Watts | Max Plate Volts | Max Screen Volts and Watts | Capacitance in Picofarads | | |
|----------------|---|------------------|--------------|-----------------|---------------|-----------------|--|----------------------------|---|---------|------------|
| | | | | | | | | | Input | Out-put | Grid-plate |
| 5881 | Beam Power Amplifier (Special 6L6-G) | 7AC | T-X | 6.3 | 0.9 | 23 | 360 | 270 3.0 | Single Tube | | |
| 5885 | Twin Tetrode | 5885 | 3-2 | 1.25 | 0.02 | — | 22.5 | 22.5 | Two tubes, Push-pull | | |
| 5886 | Electrometer Pentode | 5886 | 2.1 | 1.25 | 0.01 | — | 45 | 45 | Triode Connection (G ₂ and P Tied) | | |
| 5890 | Remote-Cutoff Pentode Regulator | 12J | T-X | 6.3 | 0.6 | 10 | 30,000 | 450 | Pentode Connection Triode Connection (G ₂ and P Tied) | | |
| | | | | | | | | | E _{c3} = 5,500 volts E _{c3} = 5,500 volts E _{c3} = 5,500 volts | | |
| 5894-B | Tetrode | 5894-B | TX | 6.7 | 2.1 | 40 | 600 750 | 300 300 | 11.6 | 3.7 | 0.08 |
| 5896 | High-Frequency Twin Diode | 8DJ | 3-1 | 6.3 | 0.3 | — | Tube Voltage Drop: ♦ 4.5 v at 18 ma d-c | | | | |
| 5897 | Medium-Mu Triode | 8DK | 3-1 | 6.3 | 0.15 | 3.3 | 165 | — | 2.2 | 0.7 | 1.40 |
| 5898 | High-Mu Triode | 8DK | 3-1 | 6.3 | 0.15 | 0.55 | 165 | — | 2.40 | 0.60 | 0.70 |
| 5899 | Semi-Remote-Cutoff RF Pentode | 8DL | 3-1 | 6.3 | 0.15 | 0.85 | 165 | 155 0.55 | 4.2 | 3.4 | 0.015 |
| 5900 | Semi-Remote-Cutoff RF Pentode | 8DL | 3-1 | 6.3 | 0.15 | 1.1 | 165 | 155 0.55 | 4.4 | 3.4 | 0.015 |
| 5901 | Sharp-Cutoff RF Pentode | 8DL | 3-1 | 6.3 | 0.15 | 1.1 | 165 | 155 0.55 | 4.2 | 3.4 | 0.015 |
| 5902 | Beam Power Amplifier | 8DL | 3-3 | 6.3 | 0.45 | 4.1 | 165 | 155 0.4 | 6.5 | 7.5 | 0.11 |
| 5903 | High-Frequency Twin Diode | 8DJ | 3-1 | 26.5 | 0.075 | — | Tube Voltage Drop: ♦ 4.5 v at 18 ma d-c | | | | |
| 5904 | Medium-Mu Triode | 8DK | 3-1 | 26.5 | 0.045 | — | 55 | — | 2.4 | 2.2 | 1.8 |
| 5905 | Sharp-Cutoff RF Pentode | 8DL | 3-1 | 26.5 | 0.045 | — | 55 | 55 | 4.4 | 3.4 | 0.015 |
| 5906 | Sharp-Cutoff RF Pentode | 8DL | 3-1 | 26.5 | 0.045 | 1.1 | 165 | 155 0.55 | 4.2 | 3.4 | 0.015 |
| 5907 | Remote-Cutoff RF Pentode | 8DL | 3-1 | 26.5 | 0.045 | — | 55 | 55 | 4.0 | 3.4 | 0.015 |
| 5908 | Dual-Control RF Pentode | 8DC | 3-1 | 26.5 | 0.045 | — | 55 | 55 | E _{c3} = 0 volts | | |
| 5910 | Sharp-Cutoff Pentode | 6AR | 5-2 | 1.4 DC | 0.05 | — | 90 | 90 | 3.6 | 7.5 | 0.008 |
| 5915 5915-A | Pentagrid Amplifier | 7CH ▼ | 5-2 | 6.3 | 0.3 | 1.0 | 250 | 250 1.0 | E _{c3} = 0 volts E _{c3} = -10 volts E _{c3} = 0 volts | | |
| 5916 | Dual-Control Pentode | 8DC | 3-1 | 26.5 | 0.045 | 1.1 | 165 | 155 0.7 | G ₂ tied to cathode E _{c3} = -1 volt | | |
| 5930 | Low-Mu Power-Amplifier Triode (Special 2A3) | 4D | T-X | 2.5 | 2.5 | 15 | 360 | — | — | — | — |
| 5931 | Full-Wave High-Vacuum Rectifier (Special 5U4-G) | 5T | T-X | 5.0 | 3.0 | — | Tube Voltage Drop: ♦ 47 volts at 275 ma d-c | | | | |
| 5932 | Beam Power Amplifier (Special 6L6-G) | 7AC | T-X | 6.3 | 0.9 | 21 | 400 | 300 2.75 | — | — | — |

■ Compactron.
† Zero signal.
♦ Per section.

‡ Plate-to-plate.
♣ Maximum.
‡ Supply voltage.

⊙ Subminiature type.
▲ Without external shield.
⊠ Design maximum rating.

⊕ Total for all similar sections.
⊞ Absolute maximum rating.
Conversion transconductance.

| Service | Plate Volts | Screen Volts | Neg Grid Volts | Plate Milli-amperes | Screen Milli-amperes | R _p ' Ohms | G _m ' μmhos | μ Factor | Load for Rated Out-put, Ohms | Power Out-put, Watts | Tube Type |
|---|---|--------------|---------------------------|---------------------|----------------------|--|---------------------------------------|----------|------------------------------|----------------------|-----------|
| Class A Amplifier Class AB ₁ Amplifier | 350 | 250 | 18 | 53† | 2.5† | 48,000 | 5,200 | — | 4,200 | 11.3 | 5881 |
| | 250 | 250 | 14 | 75† | 4.3† | 30,000 | 6,100 | — | 2,500 | 6.7 | |
| | 360 | 270 | 22.5 | 88† | 5.0† | — | — | — | 3,800 | 18 | |
| Electrometer | 13.5 | — | 3.0 | 0.185 | — | — | 160 | 2.4 | — | — | 5885 ● |
| Electrometer Electrometer | 12 | 4.5 | 2.0 | 6.0 | 3.6 | 18,000,000 | 14 | — | — | — | 5886 ● |
| | 10.5 | — | 3.0 | 200 | — | — | 160 | 2.0 | — | — | |
| Shunt Regulator | 30,000 | 200 | 60 | 0 | 0 | — | Peak G ₁ signal = 0 volts | | | — | 5890 ● |
| | 30,000 | 200 | 60 | 0.06 | 0 | — | Peak G ₁ signal = 20 volts | | | | |
| | 30,000 | 200 | 60 | 0.50 | 0 | — | Peak G ₁ signal = 45 volts | | | | |
| Amplifier Class B Amplifier- Oscillator Telegraphy Class C Telegraphy | 450 | 300 | 2b | 200 | 26 | — | — | — | — | 86 | 5894-B |
| | 500 | 250 | 80 | 200 | 16 | — | — | 8.2 | — | 90 | |
| | 600 | 250 | 80 | 150 | 20 | — | — | — | — | 71 | |
| Full-Wave Rectifier | Max d-c output current per plate ☐ = 10 ma; max peak inverse voltage ☐ = 460; rms supply voltage per plate ☐ = 150; max peak current per plate ☐ = 60 ma | | | | | | | | | | 5896 ● |
| Class A Amplifier RF Oscillator | 100 | — | R _k = 150 | 8.5 | — | — | 5,800 | 27 | — | — | 5897 ● |
| | 150 | — | — | 20 | — | Frequency = 500 mc | | 70 | — | 0.9 | |
| Class A Amplifier | 150 | — | R _k = 680 | 1.7 | — | — | 2,700 | — | — | — | 5898 ● |
| Class A Amplifier | 100 | 100 | R _k = 120 | 7.2 | 2.0 | 260,000 | 4,500 | — | — | — | 5899 ● |
| Class A Amplifier | 100 | 100 | R _k = 120 | 7.2 | 2.2 | 260,000 | 4,500 | — | — | — | 5900 ● |
| Class A Amplifier | 100 | 100 | R _k = 150 | 7.5 | 2.4 | 230,000 | 5,000 | — | — | — | 5901 ● |
| Class A Amplifier | 110 | 110 | R _k = 270 | 30 | 2.2 | 15,000 | 4,200 | — | 3,000 | 1.0 | 5902 ● |
| Full-Wave Rectifier | Max d-c output current per plate ☐ = 10 ma; max peak inverse voltage ☐ = 460; rms supply voltage per plate ☐ = 165; max peak current per plate ☐ = 60 ma | | | | | | | | | | 5903 ● |
| Class A Amplifier | 26.5 | — | R _g = 2.2 meg | 3.0 | — | 4,250 | 5,000 | 20 | — | — | 5904 ● |
| Class A Amplifier | 26.5 | 26.5 | R _g = 2.2 meg | 2.1 | 0.9 | 110,000 | 2,850 | — | — | — | 5905 ● |
| Class A Amplifier | 100 | 100 | R _k = 150 | 7.5 | 2.4 | 260,000 | 5,000 | — | — | — | 5906 ● |
| Class A Amplifier | 26.5 | 26.5 | R _{g1} = 2.2 meg | 2.7 | 1.1 | 100,000 | 3,000 | — | — | — | 5907 ● |
| Class A Amplifier | 26.5 | 26.5 | R _{g1} = 2.2 meg | 3.3 | 2.0 | 31,000 | 2,200 | — | — | — | 5908 ● |
| Class A Amplifier | 90 | 90 | 0 | 1.6 | 0.45 | 1,500,000 | 900 | — | — | — | 5910 |
| Gated Amplifier | 150● | 75 | 10 | 0 | 0 | R _{g1} = R _{g3} = 47,000 | | — | 20,000 | — | 5915 |
| | 150● | 69 | 0 | 0 | 14 | R _{g1} = R _{g3} = 47,000 | | — | 20,000 | — | 5915-A |
| | 150● | 71 | 0 | 5.8 | 9.0 | R _{g1} = R _{g3} = 47,000 | | — | 20,000 | — | — |
| Class A Amplifier | 100 | 100 | R _k = 150 | 5.3 | 3.6 | 110,000 | 3,200 | — | — | — | 5916 ● |
| | 100 | 100 | R _k = 150 | 4.0 | 5.8 | 50,000 | 1,950 | — | — | — | |
| Class A Amplifier | 250 | — | 45 | 60† | — | 800 | 5,250 | 4.2 | 2,500 | 3.5 | 5930 |
| Full-Wave Rectifier | Max d-c output current ☐ = 300 ma; max peak inverse voltage ☐ = 1,700 volts; max rms supply voltage per plate ☐ = 600 volts; max peak current per plate ☐ = 1100 ma | | | | | | | | | | 5931 |
| Class A Amplifier | 250 | 250 | 14 | 72† | 5.0† | 22,500 | 6,000 | — | 2,500 | 6.5 | 5932 |

Metal tubes are shown in bold-face type, miniature tubes in italics.

◆ G3 and G5 are screen. G4 is signal-input grid. * Maximum screen dissipation appears immediately below the screen voltage.
 ♦ G2 and G4 are screen. G3 is signal-input grid. † Heater warm-up time controlled.
 1, 2, 3, etc. indicate tube sections.

| Tube Type | Classification by Construction | Base Connections | Out-line Dwg | Fila-ment Volts | Fila-ment Amp | Max Plate Watts | Max Plate Volts | Max Screen Volts and Watts * | Capacitance in Picofarads | | |
|--------------|---------------------------------------|------------------|--------------|-----------------|-----------------|----------------------|--|------------------------------|-----------------------------------|------------------|------------|
| | | | | | | | | | Input | Out-put | Grid-plate |
| 5963 | Medium-Mu Twin Triode | 9A | 6-2 | {12.6 6.3} | {0.15 0.3} | 2.5 ♣ | 250 | — | 1.9▲ | 0.51▲ 0.352▲ | 1.5▲ |
| 5964 | High-Mu Twin Triode | 7BF | 5-2 | 6.3 | 0.45 | 1.5 ♣ | 250 | — | 2.1▲ | 0.4▲ | 1.3▲ |
| 5965 | Twin Triode | 9A | 6-2 | {12.6 6.3} | {0.225 0.45} | 2.4 ♣ 4.4 ⊕ | 300 | — | 3.8▲ | 0.51▲ 0.382▲ | 3.0▲ |
| 5965-A 5★ | Twin Triode | 9A | 6-2 | 12.6 6.3 | 0.225 0.45 | 2.2 ♣ 4.0 ⊕ | 330 | — | 4.0▲ | 0.51▲ 0.367▲ | 3.0▲ |
| 5967 | Medium-Mu Twin Triode | 8DQ | 3-8 | 1.25 | 0.12 | — | 50 | — | 0.9▲ | 0.9▲ | 1.7▲ |
| 5968 | Twin Triode | 8DQ | 3-8 | 1.25 | 0.12 | — | 45 | — | 0.9▲ | 0.9▲ | 2.3▲ |
| 5969 | Twin Tetrode | 8DR | 3-8 | 1.25 | 0.2 | 0.96 ♣ | 150 | 50 | 2.5▲ | 2.5▲ | 0.3▲ |
| 5970 | Twin Pentode | 8DS | 3-3 | 1.25 | 0.16 | — | 45 | 45 | 3.3▲ | 2.4▲ | 0.1▲ ♣ |
| 5971 | Medium-Mu Triode | 5971 | 2-1 | 1.25 DC | 0.08 | 0.7 | 135 | — | 1.6▲ | 1.7▲ | 2.3▲ ♣ |
| 5972 | Remote-Cutoff RF Pentode | 1AD4 | 2-1 | 1.25 | 0.06 | — | 75 | 75 | 4.3▲ | 4.1▲ | 0.01▲ ♣ |
| 5975 | Medium-Mu Triode | 5975 | 3-6 | 6.3 | 0.175 | 3.0 | 250 | — | — | — | — |
| 5977 | Medium-Mu Triode | 8DK | 3-1 | 6.3 | 0.15 | 1.2 ♣ | 180 | — | 2.0 | 2.2 | 1.3 |
| 5987 | Low-Mu Triode | 8DM | 3-4 | 6.3 | 0.45 | 4.0 ♣ | 165 | — | 3.2 | 5.0 | 3.2 |
| 5992 | Beam Power Amplifier (Special 6V6-GT) | 7AC | 9-9 | 6.3 | 0.6 | 10 | 300 | 275 2.0 | — | — | — |
| 5993 | Full-Wave High-Vacuum Rectifier | 5993 | 6-3 | 6.3 | 0.8 | — | — | — | — | — | — |
| 5995 | Half-Wave High-Vacuum Rectifier | 5995 | T-X | 6.3 | 0.3 | — | Tube Voltage Drop: 25 volts at 100 ma d-c | | | | |
| 5998 | Low-Mu Twin Triode | 8BD | 16-3 | 6.3 | 2.4 | 13 ♣ | 250 | — | — | — | — |
| 5998A | Low-Mu Twin Triode | 8BD | 12-15 | 6.3 | 2.4 | 15 ♣ | 275 | — | 6.5▲ | 2.0▲ | 14.5▲ |
| 6000 | Beam-Power Amplifier | 6CK | T-X | 26.5 | 0.28 | 25 | 600 | 300 4.0 | 15▲ | 7.0▲ | 0.18▲ |
| 6004 | Full-Wave High-Vacuum Rectifier | 2AJ | T-X | 5.0 | 2.0 | — | Tube Voltage Drop: ♣ 60 volts at 145 ma d-c | | | | |
| 6005 5★ | Beam Power Amplifier (Special 6AQ5) | 7BZ | 5-3 | 6.3 | 0.45 | 11 | 275 | 275 2.0 | Single Tube 2 Tubes, Push-pull | | |
| 6011/710 | Thyratron | FG-27-A | T-X | 2.5 | 9.0 | — | Anode Voltage Drop = 15 Volts | | | | |
| 6012 | Thyratron | 6CO | 12-24 | 6.3 | 2.6 | — | Anode Voltage Drop = 10 Volts | | | | |
| 6014/C1K | Thyratron | 4AX | T-X | 2.5 | 6.3 | — | Anode Voltage Drop = 14 Volts | | | | |
| 6021 | Medium-Mu Twin Triode | 8DG | 3-1 | 6.3 | 0.3 | 0.8 ♣ | 165 | — | 2.4▲ | 0.281▲ 0.322▲ | 1.5▲ |
| 6028 | Sharp-Cutoff RF Pentode | 7BD | 5-1 | 20.0 | 0.05 | 1.7 | 180 | 180 0.5 | 4.0 | 2.8 | 0.02 |
| 6029 | Medium-Mu Triode | 5676 | 2-1 | 1.25 DC | 0.2 | 1.0 | 135 | — | 1.3▲ | 1.4▲ | 1.6▲ ♣ |
| 6045 | Medium-Mu Twin Triode | 7BF | 5-2 | 6.3 | 0.35 | 1.6 ♣ | 330 | — | 2.0▲ | 0.451▲ 0.342▲ | 1.3▲ |

■ Compactron.
† Zero signal.
‡ Per section.

‡ Plate-to-plate.
♣ Maximum.
§ Supply voltage.

⊕ Subminiature type.
▲ Without external shield.
◆ Design maximum rating.

⊕ Total for all similar sections.
⊕ Absolute maximum rating.
Conversion transconductance.

| Service | Plate Volts | Screen Volts | Neg Grid Volts | Plate Milli-amperes | Screen Milli-amperes | R _p ' Ohms | G _m ' μmhos | μ Factor | Load for Rated Output, Ohms | Power Output, Watts | Tube Type |
|---------------------------------------|---|--------------|-----------------------|---------------------|----------------------|-------------------------|---------------------------|----------|-----------------------------|---------------------|--------------|
| Class A Amplifier Frequency Halfer | 67.5 | — | 0 | 8.5 | — | 6,600 | 3,200 | 21 | — | — | 5963 |
| | 150 | — | 15 | 0 | — | R _g = 47,000 | — | — | 20,000 | — | |
| Class A Amplifier Frequency Halfer | 150 | — | 0 | 5.1 | — | R _g = 47,000 | — | — | 20,000 | — | 5964 |
| | 100 | — | R _k = 50 ⊕ | 9.5 | — | 6,500 | 6,000 | 39 | — | — | |
| Class A Amplifier Frequency Halfer | 150 | — | 10 | 0 | — | R _g = 47,000 | — | — | 20,000 | — | 5965 |
| | 150 | — | 0 | 5.0 | — | R _g = 47,000 | — | — | 20,000 | — | |
| Class A Amplifier Frequency Halfer | 150 | — | R _k = 220 | 8.5 | — | 7,000 | 6,700 | 47 | — | — | 5965 |
| | 150 | — | 5.5 | 10.5 | — | — | I _c = 140 μamp | — | 7,200 | — | |
| Class A Amplifier Frequency Halfer | 150 | — | 2.0 | 0.15 | — | — | — | — | 7,200 | — | 5965-A 5★ |
| | 150 | — | — | — | — | — | — | — | — | — | |
| Class A Amplifier Frequency Halfer | 150 | — | 2.0 | 8.5 | — | 6,700 | 7,000 | 47 | — | — | 5965-A 5★ |
| | 100 | — | — | 17.8 | — | — | I _c = 200 μamp | — | — | — | |
| Class A Amplifier | 45 | — | E _{cc} = 0 | 3.0 | — | 8,500 | 2,000 | 17 | R _g = 5.0 meg | — | 5967 ● |
| | 45 | — | 0 | 0.7 | — | — | — | — | — | — | |
| Class A Amplifier | 45 | — | 0 | 0.7 | — | — | 1,300 | 50 | — | — | 5968 ● |
| | 135 | 45 | 3.0 | 6.0 | 0.6 | — | 1,700 | — | — | — | |
| Class A Amplifier | 135 | 45 | 3.0 | 6.0 | 0.6 | — | 1,700 | — | — | — | 5969 ● |
| | 45 | 45 | 0 | 3.0 | 0.9 | 170,000 | 1,850 | — | — | — | |
| Class A Amplifier | 135 | — | 2.5 | 4.0 | — | — | 2,150 | 23 | — | — | 5970 ● |
| | 67.5 | 67.5 | 0 | 2.5 | 0.8 | 1,000,000 | 1,300 | — | — | — | |
| Class A Amplifier | 45 | 45 | 0 | 1.5 | 0.4 | 800,000 | 1,100 | — | — | — | 5972 ● |
| | 200 | — | R _k = 680 | 12 | — | 4,000 | 4,000 | 16 | — | — | |
| Class A Amplifier | 200 | — | R _k = 680 | 12 | — | 4,000 | 4,000 | 16 | — | — | 5975 ● |
| | 100 | — | R _k = 270 | 10 | — | — | 4,500 | 16 | — | — | |
| Class A Amp | 100 | — | 18 | 9.0 | — | — | 1,850 | 4.1 | — | — | 5987 ● |
| | 250 | 250 | 12.5 | 45† | 4.5† | 45,000 | 4,000 | — | 5,000 | 4.0 | |
| Class A Amplifier | 250 | 250 | 12.5 | 45† | 4.5† | 45,000 | 4,000 | — | 5,000 | 4.0 | 5992 |
| | — | — | — | — | — | — | — | — | — | — | |
| Full-Wave Rectifier | Max d-c output current = 60 ma; max peak inverse voltage = 1,250 volts; rms supply voltage per plate = 260 volts; max peak current per plate = 230 ma | | | | | | | | | | 5993 |
| Half-Wave Rectifier | Max d-c output current = 45 ma; max peak inverse voltage = 850 volts; max rms supply voltage = 300 volts; max peak current = 275 ma | | | | | | | | | | 5995 ● |
| Class A Amplifier | 110 | — | R _k = 105 | 100 | — | 350 | 15,500 | 5.4 | — | — | 5998 |
| | 110 | — | R _k = 105 | 100 | — | 350 | 15,500 | 5.4 | — | — | |
| Class A Amplifier | 110 | — | R _k = 105 | 100 | — | 350 | 15,500 | 5.4 | — | — | 5998A |
| | 600 | 225 | 60 | 100 | 18 | — | — | — | — | 35 | |
| Class C Amplifier | 400 | 200 | 60 | 125 | 16 | — | — | — | — | 28 | 6000 |
| | — | — | — | — | — | — | — | — | — | — | |
| Full-Wave Rectifier | Max d-c output current = 120 ma; max peak inverse voltage = 1400 volts; rms supply voltage per plate = 375 volts; max peak current per plate = 375 ma | | | | | | | | | | 6004 |
| Class A Amplifier | 250 | 250 | 12.5 | 45† | 4.5† | 52,000 | 4,100 | — | 5,000 | 4.5 | 6005 5★ |
| | 180 | 180 | 8.5 | 29† | 3.0† | 58,000 | 3,700 | — | 5,500 | 2.0 | |
| | 250 | 250 | 15 | 70† | 5† | — | — | — | 10,000 | 10 | |
| Class AB ₁ Amplifier | 250 | 250 | 15 | 70† | 5† | — | — | — | 10,000 | 10 | 6005 5★ |
| Controlled Rectifier | Max d-c cathode current ⊠ = 2.5 amperes; max peak inverse voltage ⊠ = 1,500 volts; max peak cathode current ⊠ = 30 amperes | | | | | | | | | | 6011/710 |
| Controlled Rectifier | Max d-c cathode current ⊠ = 0.5 amperes; max peak inverse voltage ⊠ = 1,300 volts; max peak cathode current ⊠ = 5.0 amperes | | | | | | | | | | 6012 |
| Controlled Rectifier | Max d-c cathode current ⊠ = 1.0 amperes; max peak inverse voltage ⊠ = 1,250 volts; max peak cathode current ⊠ = 8.0 amperes | | | | | | | | | | 6014/C1K |
| Class A Amplifier | 100 | — | R _k = 150 | 6.5 | — | 6,500 | 5,400 | 35 | — | — | 6021 ● |
| | 120 | 120 | R _k = 180 | 7.5 | 2.5 | 300,000 | 5,000 | — | — | — | |
| Class A Amplifier | 120 | 120 | R _k = 180 | 7.5 | 2.5 | 300,000 | 5,000 | — | — | — | 6028 |
| | 90 | — | 4.0 | 11 | — | 4,250 | 2,000 | 8.5 | — | — | |
| Class A Amplifier | 90 | — | 4.0 | 11 | — | 4,250 | 2,000 | 8.5 | — | — | 6029 ● |
| | 100 | — | R _k = 50 ⊕ | 9.0 | — | 5,900 | 6,400 | 38 | — | — | |
| Class A Amplifier | 100 | — | R _k = 50 ⊕ | 9.0 | — | 5,900 | 6,400 | 38 | — | — | 6045 |

Metal tubes are shown in bold-face type, miniature tubes in italics.

♦ G3 and G5 are screen. G4 is signal-input grid.

♥ G2 and G4 are screen. G3 is signal-input grid.

1, 2, 3, etc. indicate tube sections.

✱ Maximum screen dissipation appears immediately below the screen voltage.

‡ Heater warm-up time controlled.

| Tube Type | Classification by Construction | Base Connections | Out-line Dwg | Fila-ment Volts | Fila-ment Amp | Max Plate Watts | Max Plate Volts | Max Screen Volts and Watts | Capacitance in Picofarads | | |
|-------------|---|------------------|--------------|-----------------|---------------|-----------------|---|----------------------------|---------------------------|---------------------------------------|------------|
| | | | | | | | | | Input | Out-put | Grid-plate |
| 6046 | Beam Power Amplifier (Special 25L6-GT) | 7AC | 9-11 | 25.0 | 0.3 | 10 | 200 | 125 1.5 | — | — | — |
| 6049 | Semi-remote Cutoff RF Pentode | 8DL | 3-1 | 6.3 | 0.15 | 1.1 | 165 | 155 0.55 | 3.6 | 3.8 | 0.009 ♣ |
| 6050 | High-Frequency Medium-Mu Triode | 5676 | 2-1 | 1.25 DC | 0.12 | — | 135 | — | 1.3 | 3.4 | 1.4 |
| 6051 | Pentode | 6051 | T-X | 1.25 | 0.1 | 0.37 | 67.5 | 67.5 0.11 | 3.65 | 3.0 | 0.25 ♣ |
| 6072 | Twin Triode (Special 12AY7) | 9A | 6-2 | 12.6 6.3 | 0.175 0.35 | 1.5 | 330 | — | 1.4 | 0.5 ₁ 0.38 ₂ | 1.5 ♣ |
| 6072A 5★ | Twin Triode (Special 12AY7) | 9A | 6-2 | 12.6 6.3 | 0.175 0.35 | 1.5 | 330 | — | 1.4 | 0.5 ₁ 0.38 ₂ | 1.5 ♣ |
| 6080 | Low-Mu Twin Triode Power Amplifier (Special 6AS7-G) | 8BD | 12-43 | 6.3 | 2.5 | 13 | 250 | — | 6.0 | 2.2 | 8.0 |
| 6082 | Low-Mu Twin Triode Power Amplifier | 8BD | 12-43 | 26.5 | 0.6 | 13 | 250 | — | 8.0 | 2.2 | 8.0 |
| 6082-A | Low-Mu Twin Triode | 8BD | 12-25 | 26.5 | 0.6 | 13 | 250 | — | — | — | — |
| 6087 5★ | Full-Wave High-Vacuum Rectifier (Special 5Y3-GT) | 5L | 9-41 | 5.0 | 2.0 | — | Tube Voltage Drop: ♣ 50 v at 125 ma d-c | | | | |
| 6088 | Power Amplifier Pentode | 512- AX | 2-1 | 1.25 DC | 0.02 | — | 67.5 | 67.5 | — | — | — |
| 6092 | Power Amplifier Pentode | 2E31 | 2-1 | 1.25 | 0.05 | — | 67.5 | 67.5 | — | — | — |
| 6094 | Beam Power Amplifier | 9DH | T-X | 6.3 | 0.6 | 12.5 | 275 | 275 2.0 | 8.5 | 5.3 | 1.45 |
| 6096 | Beam Power Amplifier | 7BZ | 5-3 | 6.3 | 0.45 | 12 | 275 | 275 2.0 | 8.0 | 8.5 | 0.4 |
| 6096 | Sharp-Cutoff RF Pentode | 7DB | 5-1 | 6.3 | 0.175 | 1.55 | 200 | 155 0.55 | 4.0 | 2.9 | 0.02 |
| 6097 | Twin Diode | 6BT | 5-1 | 6.3 | 0.3 | — | Tube Voltage Drop: ♣ 10 volts at 60 ma d-c | | | | |
| 6098 | Beam Power Tetrode | 6BQ | T-X | 6.3 | 1.2 | 21 | 630 | 315 3.5 | 11 | 7.0 | 0.8 ♣ |
| 6100 | Medium-Mu Triode | 6BG | 5-2 | 6.3 | 0.15 | 3.5 | 300 | — | 1.8 | 2.5 | 1.4 |
| | | | | | | 5.0 | 300 | — | — | — | — |
| 6101 | Medium-Mu Twin Triode (Special 6J6) | 7BF | 5-2 | 6.3 | 0.45 | 0.85 ♣ | 330 | — | 2.0 | 0.4 | 1.5 |
| 6106 | Full-Wave High-Vacuum Rectifier (Special 5Y3-GT) | 5L | T-X | 5.0 | 1.7 | — | Tube Voltage Drop: ♣ 60 v at 125 ma d-c | | | | |
| 6110 | Twin Diode | 8DJ | 3-1 | 6.3 | 0.15 | — | Tube Voltage Drop: ♣ 10 v at 15 ma d-c | | | | |
| 6111 | Medium-Mu Twin Triode | 8DG | 3-1 | 6.3 | 0.3 | 1.0 ♣ | 165 | — | 2.1 | 1.3 ₁ 1.4 ₂ | 1.4 |
| 6112 | High-Mu Twin Triode | 8DG | 3-1 | 6.3 | 0.3 | 0.3 ♣ | 165 | — | 1.9 | 1.5 | 1.0 |

■ Compactron.
† Zero signal.
♣ Per section.

‡ Plate-to-plate.
♣ Maximum.
‡ Supply voltage.

⊙ Subminiature type.
▲ Without external shield.
♣ Design maximum rating.

⊙ Total for all similar sections.
⊙ Absolute maximum rating.
Conversion transconductance.

| Service | Plate Volts | Screen Volts | Neg Grid Volts | Plate Milli-amperes | Screen Milli-amperes | R _p , Ohms | G _m , μmhos | μ Factor | Load for Rated Output, Ohms | Power Output, Watts | Tube Type |
|---------------------|---|--------------|------------------------|---------------------|----------------------|-----------------------------|------------------------|----------|-----------------------------|---------------------|-------------|
| Class A Amplifier | 200 | 125 | R _k = 180 | 46† | 2.2† | 28,000 | 8,000 | — | 4,000 | 3.8 | 6046 |
| Relay Energizer | 110 | 110 | 7.5 | 49† | 4.0† | 13,000 | 8,000 | — | 2,000 | 2.1 | |
| | 115 | 115 | 0 | 105 | 12.8 | R _{g1} = 2 meg | | — | 500 | — | |
| | 115 | 115 | 25 | 0.1 | — | R _{g2} = 1000 ohms | | — | 500 | — | |
| Class A Amplifier | 100 | 100 | R _k = 150 | 7.5 | 2.5 | 400,000 | 3,550 | — | — | — | 6049 ● |
| Class A Amplifier | 135 | — | 5 | 4.0 | — | — | 1,600 | 16 | — | — | 6050 ● |
| Class A Amplifier | 45 | 45 | 4.0 | 4.0 | 1.1 | 35,000 | 1,350 | — | — | — | 6051 ● |
| Class A Amplifier ♦ | 250 | — | 4.0 | 3.0 | — | 25,000 | 1,750 | 44 | — | — | 6072 |
| Class A Amplifier ♦ | 250 | — | 4.0 | 3.0 | — | 25,000 | 1,750 | 44 | — | — | 6072A 5★ |
| DC Amplifier ♦ | 135 | — | R _k = 250 | 125 | — | 280 | 7,000 | 2 | — | — | 6080 |
| DC Amplifier ♦ | 135 | — | R _k = 250 | 125 | — | 280 | 7,000 | 2 | — | — | 6082 |
| Class A Amplifier ♦ | 135 | — | R _k = 250 | 125 | — | 280 | 7,000 | 2.0 | — | — | 6082-A |
| Full-Wave Rectifier | Max d-c output current = 125 ma; max peak inverse voltage = 1400 volts; rms supply voltage per plate = 350 volts; max peak current per plate = 375 ma | | | | | | | | | | 6087 5★ |
| Class A Amplifier | 45 | 45 | 1.25 | 0.65† | 0.15† | 700,000 | 625 | — | 80,000 | 0.0105 | 6088 ● |
| Class A Amplifier | 45 | 45 | 4.5 | 1.4 | 0.4 | — | 600 | — | 30,000 | 0.025 | 6092 ● |
| Class A Amplifier | 250 | 250 | 12.5 | 45 | 3.5 | 32,000 | 4,100 | — | — | 4.5 | 6094 |
| Class A Amplifier | 250 | 250 | 12.5 | 45† | 4.5† | 52,000 | 4,100 | — | 5,000 | 4.5 | 6095 |
| Class A Amplifier | 120 | 120 | R _k = 200 | 7.5 | 2.5 | 340,000 | 5,000 | — | — | — | 6096 |
| Half-Wave Rectifier | Max d-c output current per plate ⊕ = 10 ma; max peak inverse voltage ⊕ = 360; max rms supply voltage per plate ⊕ = 117; max peak current per plate ⊕ = 60 ma | | | | | | | | | | 6097 |
| Class A Amplifier | 300 | 300 | 36 | 58 | 4.0 | 22,000 | 4,300 | 95 | — | — | 6098 |
| Class A Amplifier | 250 | — | 8.5 | 10.5 | — | 7,700 | 2,200 | 17 | — | — | 6100 |
| Class C Amplifier | 100 | — | 0 | 11.8 | — | 6,250 | 3,100 | 19.5 | — | — | |
| | 300 | — | 27 | 25 | — | Input Signal = 0.35 watts | | | | 5.5 | |
| Class A Amplifier ♦ | 100 | — | R _k = 50 ⊕ | 8.5 | — | 6,300 | 6,000 | 38 | — | — | 6101 |
| Full-Wave Rectifier | Max d-c output current = 125 ma; max peak inverse voltage = 1,550 volts; rms supply voltage per plate = 350 volts; max peak current per plate = 415 ma | | | | | | | | | | 6106 |
| Full-Wave Rectifier | Max d-c output current per plate ⊕ = 4.4 ma; max peak inverse voltage ⊕ = 460; max rms supply voltage per plate ⊕ = 165; max peak current per plate ⊕ = 26.5 ma | | | | | | | | | | 6110 ● |
| Class A Amplifier ♦ | 100 | — | R _k = 220 | 8.5 | — | 4,000 | 5,000 | 20 | — | — | 6111 ● |
| Class A Amplifier ♦ | 150 | — | R _k = 820 | 1.75 | — | 28,000 | 2,500 | 70 | — | — | 6112 ● |
| | 100 | — | R _k = 1,500 | 0.8 | — | 39,000 | 1,800 | 70 | — | — | |

Metal tubes are shown in bold-face type, *miniature tubes in italics.*

♦ G3 and G5 are screen. G4 is signal-input grid.

◆ G2 and G4 are screen. G3 is signal-input grid.

1, 2, 3, etc. indicate tube sections.

★ Maximum screen dissipation appears immediately below the screen voltage.

† Heater warm-up time controlled.

| Tube Type | Classification by Construction | Base Connections | Out-line Dwg | Filament Volts | Filament Amp | Max Plate Watts | Max Plate Volts | Max Screen Volts and Watts | Capacitance in Picofarads | | | |
|------------|---|------------------|--------------|---------------------|-------------------|-----------------|--|----------------------------|--|---------|------------|---|
| | | | | | | | | | Input | Out-put | Grid-plate | |
| 6113 | High-Mu Twin Triode (Special 6SL7-GT) | 8BD | 9-11 | 6.3 | 0.3 | 1.0♣ | 250 | — | 3.0 | 3.8 | 2.8 | |
| 6121● | Medium-Mu Triode | 5676 | 2-1 | 1.25 | 0.12 | 1.1□ | 185 | — | 1.4▲ | 1.9▲ | 1.4▲ | |
| 6134 5★ | Sharp-Cutoff RF Pentode (Special 6AC7) | 8N | 8-1 | 6.3 | 0.45 | 3.0◆ | 330◆ | 330◆ 3.0 0.4◆ | 11 | 5.0 | 0.015♣ | |
| 6135 5★ | Medium-Mu Triode (Special 6C4) | 6BG | 5-2 | 6.3 | 0.175 | 3.4◆ | 330◆ | — | 1.5▲ | 0.7▲ | 1.4▲ | |
| 6136 5★ | Sharp-Cutoff RF Pentode (Special 6AU6) | 7BK | 5-2 | 6.3 | 0.3 | 3.3◆ | 330 | 330◆ 0.7 | 6.0▲ | 5.0▲ | 0.0035♣▲ | |
| 6137 5★ | Remote-Cutoff RF Pentode (Special 6SK7) | 8N | 8-1 | 6.3 | 0.3 | 3.0◆ | 330◆ | 330◆ 0.45◆ | 5.0 | 7.0 | 0.003♣ | |
| 6145 | Sharp-Cutoff Pentode | 8V | 9-31 | 6.3 | 0.6 | 10 | 300 | 300◆ 2.5 | 14 | 7.5 | 0.06♣ | |
| 6146 | Beam Power Amplifier | 7CK | T-X | 6.3 | 1.25 | 20□ | 400□ | — | Triode Connection Two Tubes, Push-Pull | | | |
| 6146-A | Beam Power Amplifier | 7CK | T-X | 6.3 | 1.25 | 20□ | 600□ | 250□ 3.0□ | Pentode Connection Two Tubes, Push-Pull | | | |
| 6146-B | Beam Power Amplifier | 7CK | T-X | 6.3 | 1.125 | 27□ | 600□ | 250□ 3.0□ | Pentode Connection Two Tubes, Push-Pull | | | |
| 6147● | RF Pentode | 6CL | 3-8 | {1.25 2.5} | {0.125 0.0625} | 1.5□ | 180 | 125 0.6 | 2.6 | 3.0 | 0.055♣ | |
| 6152● | Low-mu Triode | 5975 | 3-6 | 6.3 | 0.2 | 1.1□ | 180 | — | 2.9▲ | 1.28▲ | 1.32▲ | |
| 6159-A | Beam Power Amplifier | 7CK | T-X | 26.5 | 0.3 | 20□ | 600□ | 250□ 3.0□ | Pentode Connection Two Tubes, Push-Pull | | | |
| 6159-B | Beam Power Amplifier | 7CK | T-X | 26.5 | 0.3 | 27□ | 600□ | 250□ 3.0□ | Pentode Connection Two Tubes, Push-Pull | | | |
| 6169● | High-Frequency Triode | 8EE | 3-1 | 6.3 | 0.15 | 3.0 | 250 | — | 2.5 | 2.6 | 1.6 | |
| 6173 | UHF Diode (Pencil) | 6173 | T-X | 6.3 | 0.135 | — | — | — | — | — | — | |
| 6184● | UHF Twin Diode | 8EH | T-X | 6.3 | 0.15 | — | Tube Voltage Drop:♣ 5.0 v at 8.0 ma | | | — | — | — |
| 6186 | Sharp-Cutoff RF Pentode | 7BD | 5-2 | 6.3 | 0.3 | 2.5□ | 330 | 250□ 0.55□ | 6.5▲ | 1.8▲ | 0.03▲ | |
| 6187 | Sharp-Cutoff RF Pentode | 7CM | 5-1 | 6.3 | 0.175 | 1.65□ | 200 | 150□ 0.55□ | 4.0 | 3.0 | 0.02♣ | |
| 6188 | High-Mu Twin Triode | 8BD | 9-11 | 6.3 | 0.3 | 1.1□ | 275 | — | — | — | — | |
| 6189 5★ | Medium-Mu Twin Triode | 9A | 6-2 | {12.6 6.3} | {0.15 0.3} | 2.75♣ | 300 | — | 1.8 | 2.0 | 1.5 | |
| 6193● | High-Frequency Twin Triode | 6193 | 3-3 | 6.3 | 0.3 | 2.0♣ | 250 | — | 2.75 | 2.20 | 1.46 | |
| 6195● | Beam Power Amplifier | 6CL | T-X | {1.25 2.5 DC} | {0.22 0.11} | 2.5 | 180 | 150 0.6 | 2.4 | 1.3 | 0.045 | |
| 6197 | Sharp-Cutoff Power Amplifier Pentode | 9BV | 6-3 | 6.3 | 0.65 | 7.5□ | 300 | 250□ 2.5□ | — | — | — | |

■ Compactron.

† Plate-to-plate.

● Subminiature type.

⊕ Total for all similar sections.

♣ Zero signal.

▲ Maximum.

▲ Without external shield.

⊖ Absolute maximum rating.

♣ Per section.

♣ Supply voltage.

◆ Design maximum rating.

Conversion transconductance.

● See X-Radiation Warning, page 4.

| Service | Plate Volts | Screen Volts | Neg Grid Volts | Plate Milli-amperes | Screen Milli-amperes | R _p , Ohms | G _m , μ mhos | μ Factor | Load for Rated Output, Ohms | Power Output, Watts | Tube Type |
|-----------------------------------|--|--------------|----------------------|---------------------|----------------------|-----------------------|-----------------------------|--------------|-----------------------------|---------------------|--------------------------|
| Class A Amplifier \blacklozenge | 250 | — | 2.0 | 2.3 | — | 44,000 | 1,600 | 70 | — | — | 6113 |
| Class A Amplifier | 135 | — | 5.0 | 4.0 | — | 9,400 | 1,600 | 15 | — | — | 6121 \odot |
| Class A Amplifier | 300 | 150 | R _k = 160 | 10 | 2.5 | 1,000,000 | 9,000 | — | — | — | 6134 5 \star |
| Class A Amplifier | 250 | — | 8.5 | 10.5 | — | 7,700 | 2,200 | 17 | — | — | <i>6135</i> |
| Class A Amplifier | 100 | — | 0 | 11.8 | — | 6,250 | 3,100 | 19.5 | — | — | 5 \star |
| Class A Amplifier | 250 | 150 | R _k = 68 | 10.6 | 4.3 | 1,000,000 | 5,200 | — | — | — | <i>6136</i> |
| Class A Amplifier | 100 | 100 | R _k = 150 | 5.0 | 2.1 | 500,000 | 3,900 | — | — | — | 5 \star |
| Class A Amplifier | 250 | 100 | 3 | 9.2 | 2.6 | 800,000 | 2,000 | — | — | — | 6137 |
| Class A Amplifier | 100 | 100 | 1 | 13 | 4.0 | 120,000 | 2,350 | — | — | — | 5 \star |
| Pulse Amplifier | 150 | 100 | 0 | 34 | 8 | 100,000 | — | — | — | — | 6145 |
| | 150 | 100 | 5.3 | 2.0 | — | — | — | — | — | — | |
| | 60 | 100 | 0 | — | 12 | — | — | — | — | — | |
| Class AB ₁ Amplifier | 400 | — | 100 | 40† | — | — | — | — | 8,000‡ | 22 | 6146 |
| Class AB ₂ Amplifier | 600 | 165 | 44 | 22† | 0.6† | — | — | — | 6,800‡ | 90 | |
| Class AB ₁ Amplifier | 400 | 190 | 40 | 63† | 2.5† | — | — | — | 4,000‡ | 55 | 6146-A |
| Class AB ₁ Amplifier | 600 | 180 | 45 | 26† | 1.0† | — | — | — | 7,000‡ | 82 | |
| Class AB ₁ Amplifier | 600 | 200 | 47 | 48† | 14.8† | — | — | — | 5,600‡ | 96 | 6146-B |
| Class A Amplifier | 125 | 125 | 7.5 | 5.5 | 0.9 | 175,000 | 1,600 | — | — | — | 6147 \odot |
| Class A Amplifier | 100 | — | R _k = 270 | 10 | — | 3,400 | 5,100 | 17.5 | — | — | 6152 \odot |
| Class AB ₁ Amplifier | 400 | 190 | 40 | 63† | 2.5† | — | — | — | 4,000‡ | 55 | 6159-A |
| Class AB ₁ Amplifier | 600 | 180 | 45 | 26† | 1.0† | — | — | — | 7,000‡ | 82 | |
| Class AB ₁ Amplifier | 600 | 200 | 47 | 48† | 14.8† | — | — | — | 5,600‡ | 96 | 6159-B |
| Class A Amplifier | 180 | — | 1.0 | 11.5 | — | 8,500 | 6,500 | 55 | — | — | 6169 \odot |
| Half-Wave Rectifier | Max d-c output current \square = 5.5 ma; max peak inverse voltage \square = 375 volts; max peak current \square = 50 ma | | | | | | | | | | 6173 |
| Full-Wave Rectifier | Max d-c output current = 20 ma; max peak inverse voltage = 450; max rms supply voltage per plate = 200; max peak current per plate = 50 ma | | | | | | | | | | 6184 \odot |
| Class A Amplifier | 250 | 150 | R _k = 200 | 7.0 | 2.0 | — | 5,000 | — | — | — | <i>6186</i> |
| Class A Amplifier | 120 | 120 | 2.0 | 5.2 | 3.5 | — | 3,200 | — | — | — | 6187 |
| Class A Amplifier \blacklozenge | 250 | — | 2.0 | 2.3 | — | 44,000 | 1,600 | 70 | — | — | 6188 |
| Class A Amplifier \blacklozenge | 250 | — | 8.5 | 10.5 | — | 7,700 | 2,200 | 17 | — | — | <i>6189</i> |
| Class A Amplifier \blacklozenge | 100 | — | 0 | 11.8 | — | 6,500 | 3,100 | 20 | — | — | 5 \star |
| Class A Amplifier \blacklozenge | 180 | — | 1.0 | 11.5 | — | 8,500 | 6,500 | 55 | — | — | 6193 \odot |
| Class A Amplifier \blacklozenge | 90 | — | 0.50 | 4.5 | — | 9,000 | 5,800 | 50 | — | — | |
| Class A Amplifier | 125 | 125 | 7.5 | 9.0 | 1.5 | 120,000 | 2,100 | — | — | — | 6195 \odot |
| Class A Amplifier | 250 | 150 | 3.0 | 30 | 7.0 | 90,000 | 11,000 | — | — | — | 6197 |

Metal tubes are shown in bold-face type, miniature tubes in italics.

\blacklozenge G3 and G5 are screen. G4 is signal-input grid.

\star Maximum screen dissipation appears immediately below the screen voltage.

\heartsuit G2 and G4 are screen. G3 is signal-input grid.

\ddagger Heater warm-up time controlled.

1, 2, 3, etc. indicate tube sections.

| Tube Type | Classification by Construction | Base Connections | Out-line Dwg | Fila-ment Volts | Fila-ment Amp | Max Plate Watts | Max Plate Volts | Max Screen Volts and Watts * | Capacitance in Picofarads | | |
|--------------|---|------------------|--------------|-----------------|---------------|-----------------|---|------------------------------|---|----------------|-------------|
| | | | | | | | | | Input | Out-put | Grid-plate |
| 6201 5★ | High-Frequency Twin Triode (Special 12AT7) | 9A | 6-2 | {12.6 6.3} | {0.15 0.3} | 2.5 ♣ | 330 | — | 2.5▲ | 0.45▲ 0.38▲ | 1.6▲ |
| 6202 5★ | Full-Wave High-Vacuum Rectifier (Special 6X4) | 5BS | 5-3 | 6.3 | 0.6 | — | Tube Voltage Drop: ♣ 22 v at 50 ma d-c | | | | |
| 6203 5★ | Full-Wave High-Vacuum Rectifier | 9CD | 6-3 | 6.3 | 0.9 | — | Tube Voltage Drop: ♣ 22 v at 70 ma d-c | | | | |
| 6205 | Sharp-Cutoff RF Pentode | 8DC | 3-1 | 6.3 | 0.15 | 0.9 | 165 | 155 0.55 | 4.2 | 3.4 | 0.015 ♣ |
| 6206 | Semi-Remote-Cutoff RF Pentode | 8DC | 3-1 | 6.3 | 0.15 | 0.85 | 165 | 155 0.55 | 4.2 | 3.4 | 0.015 ♣ |
| 6211 | Medium-Mu Twin Triode | 9A | 6-2 | {12.6 6.3} | {0.15 0.3} | 1.5 ♣ | 200 | — | 2.9▲ | 0.54▲ 0.46▲ | 2.22▲ |
| 6211-A 5★ | Medium-Mu Twin Triode | 9A | 6-2 | 12.6 6.3 | 0.15 0.3 | 1.3 ♣ | 200 | — | 2.9▲ | 0.54▲ 0.46▲ | 2.22▲ |
| 6215 | Half-Wave High-Voltage Rectifier | 3C | T-X | 1.25 | 0.2 | — | Tube Voltage Drop: 56 v at 2.0 ma d-c | | | | |
| 6216 5★ | Beam Power Amplifier | 9CE | 6-3 | 6.3 | 1.2 | 10 | 300 | 200 2.0 | 13.2▲ | 6.7▲ | 0.37 ♣ |
| 6221 | Medium-Mu Triode | 8HF | 3-1 | 6.3 | 0.175 | 3.3 | 165 | — | — | — | — |
| 6222 | High-Mu Triode | 8HF | 3-1 | 6.3 | 0.175 | 0.55 | 165 | — | — | — | — |
| 6223 | Sharp-Cutoff Pentode | 8DL | 3-1 | 6.3 | 0.175 | 1.1 | 165 | 155 0.55 | 4.2 | 3.4 | 0.015 |
| 6224 | Beam Power Amplifier | 8DL | 3-3 | 6.3 | 0.45 | 5.0 | 165 | 155 0.6 | 6.5 | 7.5 | 0.2 |
| 6225 | Semi-remote Cutoff Pentode | 8DL | 3-1 | 6.3 | 0.175 | 1.1 | 165 | 155 0.55 | 4.1 | 3.4 | 0.015 |
| GL6228 | Ignitron | GL 6228 | TX | — | — | — | — | — | — | — | — |
| 6245 | Sharp-Cutoff Pentode | 5702 | 3-6 | 6.3 | 0.2 | 1.85 | 200 | 155 0.55 | 4.35 | 3.15 | 0.03 ♣ |
| 6247 | High-Mu Triode | 8FO | 3-2 | 6.3 | 0.2 | 1.6 | 275 | — | — | — | — |
| GL-6251 | Tetrode | GL- 6251 | TX | 5.5 | 19.0 | 25000 | 7000 | 700 | Cathode-Plate 0.06; Input 75; Output 27 | | |
| 6265 5★ | Sharp-Cutoff RF Pentode (Special 6BH6) | 7CM | 5-2 | 6.3 | 0.175 | 2.0 | 300 | 300 0.5 | 5.2▲ | 4.4▲ | 0.004 ♣▲ |
| 6267 | AF Pentode | 9CQ | 6-2 | 6.3 | 0.2 | 1.0 | 300 | 200 0.2 | — | — | — |
| 6281 | Sharp-Cutoff AF Pentode | 2E31 | 2-2 | 0.625 | 0.02 | — | 25 | 25 | 2.5 | 3.4 | 0.01 ♣ |
| GL-6283 | Tetrode | GL- 6283 | TX | 6.3 | 3.6 | 300 | 2000 | 320 | Cathode-Plate 0.006; Input 18.25; Output 6.4 | | |
| 6286 | Medium-Mu Triode | 5676 | 2-1 | 1.25 | 0.125 | 0.45 | 100 | — | 1.3▲ | 2.1▲ | 1.6▲ |
| 6287 | Beam Power Amplifier | 9CT | T-X | 6.3 | 0.6 | 13.2 | 275 | 275 3.2 | 8.0▲ | 9.0▲ | 1.1 ♣ |
| 6299 | High-Mu UHF Triode (Planar) | 6299 | T-X | 6.3 | 0.3 | 2.0 | 200 | — | 3.5▲ | 0.015 ▲ | 1.7▲ |
| 6320 | High-mu Twin Triode | 8DG | T-X | 6.3 | 0.085 | 0.6 | 150 | — | 1.0 | 1.4 | 0.6 |

■ Compactron.
† Zero signal.
♣ Per section.

‡ Plate-to-plate.
♣ Maximum.
‡ Supply voltage.

◎ Subminiature type.
▲ Without external shield.
♣ Design maximum rating.

⊕ Total for all similar sections.
⊕ Absolute maximum rating.
Conversion transconductance.

● See X-Radiation Warning, page 4.

| Service | Plate Volts | Screen Volts | Neg Grid Volts | Plate Milli-amperes | Screen Milli-amperes | R_p , Ohms | G_m , μ mbhos | μ Factor | Load for Rated Output, Ohms | Power Output, Watts | Tube Type |
|--|--|--------------|--------------------------|---------------------|----------------------|---------------------|---------------------|--------------------|-----------------------------|---------------------|---------------------|
| Class A Amplifier ♦ | 250 | — | $R_k = 200$ | 10 | — | 10,900 | 5,500 | 60 | — | — | 6201 5★ |
| | 100 | — | $R_k = 270$ | 3.3 | — | 14,300 | 4,000 | 57 | — | — | |
| Full-Wave Rectifier | Max d-c output current $\boxtimes = 55$ ma; max peak inverse voltage $\boxtimes = 1375$ volts; rms supply voltage per plate $\boxtimes = 325$ volts; max peak current per plate $\boxtimes = 220$ ma | | | | | | | | | | 6202 5★ |
| Full-Wave Rectifier | Max d-c output current $\boxtimes = 77$ ma; max peak inverse voltage $\boxtimes = 1375$ volts; rms supply voltage per plate $\boxtimes = 325$ volts; max peak current per plate $\boxtimes = 300$ ma | | | | | | | | | | 6203 5★ |
| Class A Amplifier | 100 | 100 | $R_k = 150$ | 7.5 | 2.4 | 260,000 | 5,000 | — | — | — | 6205 ● |
| Class A Amplifier | 100 | 100 | $R_k = 120$ | 7.2 | 2.2 | 260,000 | 4,500 | — | — | — | 6206 ● |
| Class A Amplifier ♦ Frequency Halfer ♦ | 100 | — | $R_k = 470$ | 4.6 | — | 7,500 | 3,600 | 27 | — | — | 6211 |
| | 150 \boxtimes | — | 0 | 4.8 | — | $R_g = 47,000$ ohms | — | — | 20,000 | — | |
| Class A Amplifier ♦ Frequency Halfer ♦ | 150 \boxtimes | — | 10 | 0.1 | — | $R_g = 47,000$ ohms | — | — | 20,000 | — | |
| Class A Amplifier ♦ Frequency Halfer ♦ | 85 | — | 2.0 | 6.6 | — | 6,500 | 4,700 | 30 | — | — | 6211-A 5★ |
| Class A Amplifier ♦ Frequency Halfer ♦ | 85 | — | — | 16 | — | — | ($I_c = 0.2$ ma) | — | — | — | |
| Half-Wave Rectifier | Max d-c output current = 1.0 ma; max peak inverse voltage = 18,000 volts; max peak current = 8.0 ma | | | | | | | | | | 6215 ● |
| Class A Amp Filter Reactor | 200 | 100 | 6.0 | 47† | 2.0† | 38,000 | 8,800 | — | 4,500 | 3.8 | 6216 5★ |
| | 100 | 100 | 3.0 | 72 | 3.0 | 18,500 | 12,500 | $R_{g1} = 0.1$ meg | — | — | |
| Class A Amplifier | 100 | — | $R_k = 150$ | 8.5 | — | 4,700 | 5,800 | 27 | — | — | 6221 ● |
| Class A Amplifier | 100 | — | $R_k = 1500$ | 0.7 | — | 41,000 | 1,700 | 70 | — | — | 6222 ● |
| Class A Amplifier | 100 | 100 | $R_k = 150$ | 7.5 | 2.4 | 175,000 | 5,000 | — | — | — | 6223 ● |
| Class A Amplifier | 110 | 110 | $R_k = 270$ | 30 | 2.0 | 10,000 | 4,200 | — | — | — | 6224 ● |
| Class A Amplifier | 100 | 100 | $R_k = 120$ | 7.2 | 2.0 | 175,000 | 4,500 | — | — | — | 6225 ● |
| Capacitor Discharge | Max. forward peak anode voltage 50000 volts; max. inverse peak anode voltage 50000 volts; max. peak anode curr. 30000 A.; typical discharge rate pulses per minute 2. | | | | | | | | | | GL6228 |
| Class A Amplifier | 120 | 120 | $R_k = 200$ | 7.5 | 2.6 | — | 5,000 | $E_{c3} = 0$ volts | — | — | 6245 ● |
| | 20 | 30 | 0 | 2.5 | 1.5 | — | 3,275 | $E_{c3} = 0$ volts | — | — | |
| Class A Amplifier | 250 | — | $R_k = 500$ | 4.2 | — | 22,600 | 2,650 | 60 | — | — | 6247 ● |
| VHF Amplifier-Oscillator | 6800 | 600 | 20 | 7500 | 50 | — | — | 20 | — | 25000 | GL-6251 |
| Class A Amplifier | 250 | 150 | $R_k = 100$ | 7.4 | 2.9 | 1,000,000 | 4,600 | — | — | — | 6265 5★ |
| Class A Amplifier | 250 | 140 | 2.0 | 3.0 | 0.6 | 2,500,000 | 2,000 | $E_{c3} = 0$ volts | — | — | 6267 |
| Class A Amplifier | 15 | 15 | 1.0 | 0.05 | 0.02 | 2,000,000 | 105 | — | — | — | 6281 ● |
| Oscillator/Amplifier Class C Amplifier Class B | 1600 | 250 | 40 | 290 | — | — | — | 10 | — | 154 | GL-6283 |
| | 1500 | 250 | 25 | 400 | 7 | — | — | — | — | 260 | |
| Class A Amplifier | 67.5 | — | 2.0 | 6.0 | — | 5,500 | 2,100 | 11.5 | — | — | 6286 ● |
| Class A Amplifier | 250 | 250 | 12.5 | 46† | 5.0† | 55,000 | 4,100 | — | 6,000 | 4.5 | 6287 |
| Class A Amplifier | 175 | — | Adjust for $I_b = 10$ ma | 10 | — | 9,600 | 15,000 | 115 | — | — | 6299 |
| Class A Amplifier ♦ | 100 | — | $R_k = 680$ | — | — | 33,000 | 1,800 | 60 | — | — | 6320 ● |

Metal tubes are shown in bold-face type, miniature tubes in italics.

♦ G3 and G5 are screen. G4 is signal-input grid.

♥ G2 and G4 are screen. G3 is signal-input grid.

1, 2, 3, etc. indicate tube sections.

★ Maximum screen dissipation appears immediately below the screen voltage.

† Heater warm-up time controlled.

| Tube Type | Classification by Construction | Base Connections | Out-line Dwg | Filament Volts | Filament Amp | Max Plate Watts | Max Plate Volts | Max Screen Volts and Watts * | Capacitance in Picofarads | | |
|------------|-------------------------------------|------------------|---|-----------------|---------------------|--------------------------|-----------------|------------------------------|---|--|------------|
| | | | | | | | | | Input | Output | Grid-plate |
| 6321 ● | Low-Mu Twin Triode | 8DG | T-X | 6.3 | 0.085 | 0.6 ♣ | 150 | — | 1.0 | 1.4 | 0.55 |
| 6325 | Full-Wave High-Vacuum Rectifier | 6325 | T-X | 6.3 | 2.7 | — | — | — | — | — | — |
| 6327 | Beam Power Amplifier | 6327 | T-X | 6.3 | 1.8 | 35 ☐ | 1,650 ☐ | 330 ☐ 6.0 ☐ | 13 ▲ | 13 ▲ | 0.6 ♣ |
| 6336 | Low-Mu Twin Triode | 8BD | T-X | 6.3 | 4.75 | 30 ☐ ♣ | 400 ☐ | — | 13.7 ▲ | 4.7 ▲ | 15.2 ▲ |
| 6336-A | Low-Mu Twin Triode | 8BD | T-X | 6.3 | 5.0 | 30 ☐ ♣ | 400 ☐ | — | 16.7 ▲ | 3.8 ▲ | 21.8 ▲ |
| 6350 | Medium-Mu Twin Triode | 9CZ | 6-3 | { 6.3 12.6 } | { 0.6 0.3 } | 4.0 ☐ ↑ | 330 ☐ | — | 3.6 ▲ | 0.6 ▲ | 3.2 ▲ |
| 6352 ● | Temperature-Limited Twin Diode | 8EY | 3-2 | 3.0 AC | 0.36 | — | — | — | Max filament voltage ☐ = 4.0 a-c Max plate voltage ☐ = 250 d-c Max plate current ☐ = 1.1 ma ⊕ | | |
| 6355 | Twin Electron-Ray Indicator | 6355 | T-X | 6.3 | 0.14 | — | — | — | Max target voltage = 275 v | | |
| 6360 | Twin Tetrode | 9PW | 6-4 | 12.6 6.3 | 0.41 0.82 | 7.0 ☐ ↑ | 300 ☐ | 200 ☐ 2.0 ☐ | Two Sections, Push-Pull | | |
| 6384 | Beam Power Amplifier | 6BQ | T-X | 6.3 | 1.2 | 30 ☐ | 750 ☐ | 325 ☐ 3.5 ☐ | — | — | — |
| 6386 | High-Frequency Twin Triode | 8CJ | 6-2 | 6.3 | 0.5 | 1.5 ♣ | 300 | — | 2.4 ▲ | 1.1 ▲ | 1.7 ▲ |
| 6386 5★ | Medium-Mu Remote-Cutoff Twin Triode | 8CJ | 6-1 | 6.3 | 0.35 | 1.5 ♣ | 300 | — | 2.0 ▲ | 1.1 ▲ | 1.2 ▲ |
| 6394 | Low-Mu Twin Triode | 8BD | T-X | 26.5 | 1.2 | 30 ☐ ♣ | 400 ☐ | — | 13.7 ▲ | 4.7 ▲ | 15.2 ▲ |
| 6394-A | Low-Mu Twin Triode | 8BD | T-X | 26.5 | 1.3 | 30 ☐ ♣ | 400 ☐ | — | 16.7 ▲ | 3.8 ▲ | 21.8 ▲ |
| 6397 ● | Power-Amplifier Pentode | 6CL | T-X | { 2.5 1.25 } | { 0.0625 0.125 } | 1.5 ☐ | 135 ☐ | 135 ☐ 0.6 ☐ | 2.75 | 3.0 | 0.055 |
| 6414 5★ | Twin Triode | 9A | 6-3 | { 12.6 6.3 } | { 0.225 0.45 } | 2.0 ☐ ↑ 3.6 ☐ ⊕ | 200 ☐ | — | 4.0 ▲ | 0.47 ₁ ▲ 0.38 ₂ ▲ | 3.0 ▲ |
| 6418 ● | Power-Amplifier Pentode | 512-AX | T-X | 1.25 | 0.01 | — | 30 ☐ | 30 ☐ | — | — | — |
| 6419 ● | Power-Amplifier Pentode | 512-AX | T-X | 0.625 | 0.01 | — | 25 ☐ | 25 ☐ | — | — | — |
| 6442 | Medium-Mu UHF Triode (Planar) | 6442 | T-X | 6.3 | 0.9 | 8.0 ☐ | 350 ☐ | — | 5.5 ▲ | 0.035 ▲ | 2.3 ▲ |
| 6463 | Medium-Mu Twin Triode | 9CZ | 6-3 | { 12.6 6.3 } | { 0.3 0.6 } | 4.0 ♣ 7.0 ⊕ | 300 | — | 3.0 ▲ | 0.61 ▲ 0.52 ▲ | 5.0 ▲ |
| 6485 | Sharp-Cutoff RF Pentode | 7BK | 5-2 | 6.3 | 0.45 | 3.2 | 300 | 150 0.6 | 10 | 3.6 | 0.02 ♣ |
| 6486 | Dual-Control Pentode | 9DV | 6-2 | 6.3 | 0.25 | 2.0 | 180 | 140 0.75 | 4.5 ♣ | 3.3 | 0.035 ♣ |
| 6486-A | Dual-Control Pentode | 9DV | 6-2 | 6.3 | 0.25 | 2.0 ☐ | 200 ☐ | 155 ☐ 0.85 ☐ | 4.4 ♣ | 3.7 | 0.04 ♣ |
| GL6512 | Ignitron | GL 6512 | Integral thermostat version of GL-5554. Same ratings apply. | | | | | | | | |
| GL6513 | Ignitron | GL 6513 | Integral thermostat version of GL-5555. Same ratings apply. | | | | | | | | |
| GL6515 | Ignitron | GL 6515 | Integral thermostat version of GL-5564. Same ratings apply. | | | | | | | | |
| 6519 ● | Power-Amplifier Pentode | 512AX | T-X | 1.25 | 0.01 | — | 30 ☐ | 30 ☐ | R _{g1} = 10 meg | | |
| 6520 | Low-Mu Twin Triode | 8BD | 16-3 | 6.3 | 2.5 | 14 ☐ ♣ | 300 ☐ | — | 8.4 ▲ | 2.2 ▲ | 9.4 ▲ |

☐ Compactron.
† Zero signal.
♣ Per section.

‡ Plate-to-plate.
♣ Maximum.
‡ Supply voltage.

● Subminiature type.
▲ Without external shield.
◆ Design maximum rating.

⊕ Total for all similar sections.
⊕ Absolute maximum rating.
Conversion transconductance.

| Service | Plate Volts | Screen Volts | Neg Grid Volts | Plate Milli-amperes | Screen Milli-amperes | R _p , Ohms | G _m , μmhos | μ Factor | Load for Rated Output, Ohms | Power Output, Watts | Tube Type |
|---------------------------------|---|--------------|-----------------------|---------------------|----------------------|-----------------------|-------------------------|----------------------------|-----------------------------|---------------------|------------|
| Class A Amplifier ♣ | 100 | — | R _k = 680 | — | — | 9,400 | 1,700 | 16 | — | — | 6321 ⊙ |
| Full-Wave Rectifier | Max d-c output current ⊠ = 250 ma; max peak inverse voltage ⊠ = 2200; rms supply voltage per plate ⊠ = 780; max peak current per plate ⊠ = 550 ma | | | | | | | | | | 6325 |
| Class A Amplifier | 400 | 300 | 40 | 75 | 3.5 | 20,000 | 5,500 | — | — | — | 6327 |
| | 250 | 250 | 22.5 | 120 | 7.0 | — | 8,000 | — | — | — | |
| DC Amplifier ♣ | 190 | — | R _k = 185 | — | — | 250 | 11,000 | 2.7 | — | — | 6336 |
| DC Amplifier ♣ | 190 | — | R _k = 200 | 185 | — | — | 13,500 | 2.7 | — | — | 6336-A |
| Class A Amplifier ♣ | 150 | — | 5.0 | 11 | — | 3,900 | 4,600 | 18 | — | — | 6360 |
| Control Service | Plate voltage = 250 d-c thru 1 meg; plate current = 50 μa ⊕ | | | | | | | | | | 6352 ⊙ |
| Tuning Indicator | Target voltage = 250 v; Focus-electrode-1 voltage = 120 to 190 v; Focus-electrode-2 voltage = 120 to 190 v | | | | | | | | | | 6355 |
| Class AB ₁ Amplifier | 300 | 200 | 21.5 | 30† | 1.2† | — | — | — | 10,000 | 12 | 6360 |
| Horizontal Amplifier | 250 | 250 | 22.5 | 77 | 3.5 | — | 5,400 | — | — | — | 6384 |
| | Max positive pulse plate voltage = 1,500 volts; max screen dissipation = 3.5 watts; max d-c cathode current = 125 ma | | | | | | | | | | |
| Class A Amplifier ♣ | 150 | — | 2.0 | 8.0 | — | 7,000 | 5,000 | 35 | — | — | 6385 |
| Class A Amplifier ♣ | 100 | — | R _k = 200 | 9.6 | — | 4,250 | 4,000 | 17 | — | — | 6386 5★ |
| DC Amplifier ♣ | 190 | — | R _k = 200 | 185 | — | 200 | 13,500 | 2.7 | — | — | 6394 |
| DC Amplifier ♣ | 190 | — | R _k = 200 | 185 | — | — | 13,500 | 2.7 | — | — | 6394-A |
| Class A Amplifier | 125 | 125 | 7.5 | 7.25 | 1.2 | — | 1,950 | — | — | — | 6397 ⊙ |
| Class A Amplifier ♣ | 180 | — | 2.0 | 8.0 | — | 7,650 | 5,550 | 42.5 | — | — | 6414 5★ |
| | 150 | — | 4.8 | 0.15 | — | — | — | — | — | — | |
| | 100 | — | — | 17 | — | — | I _c = 0.2 ma | — | — | — | |
| Class A Amplifier | 22.5 | 22.5 | 1.2 | 0.24† | 0.06† | 420,000 | 300 | — | 100,000 | 0.0022 | 6418 ⊙ |
| Class A Amplifier | 15 | 15 | 0.625 | 0.055 | 0.02 | 2,000,000 | 100 | — | — | — | 6419 ⊙ |
| Class C Amplifier | 250 | — | I _c = 6 ma | 23 | — | — | — | — | — | 2.8 | 6442 |
| Class A Amplifier ♣ | 250 | — | R _k = 620 | 14.5 | — | 3,850 | 5,200 | 20 | — | — | 6468 |
| Frequency Halfer ♣ | 100 | — | — | 29 | — | — | I _c = 200 μa | — | — | — | |
| | 200 | — | 11 | 1.0 | — | — | — | — | — | — | |
| Class A Amplifier | 300 | 150 | R _k = 160 | 10 | 2.5 | 500,000 | 9,000 | — | — | — | 6485 |
| Class A Amplifier | 120 | 120 | -2.0 | 3.5 | 3.3 | — | 3,250 | E _{cs} = 0 volts | — | — | 6486 |
| Class A Amplifier | 120 | 120 | 2.0 | 3.5 | 3.3 | — | 3,250 | E _{cs} = 0 volts | — | — | 6486-A |
| | 120 | 120 | 2.0 | 4.2 | 5.1 | — | 2,100 | E _{cs} = -3 volts | — | — | |
| | — | — | — | — | — | — | — | — | — | — | GL6512 |
| | — | — | — | — | — | — | — | — | — | — | GL6513 |
| | — | — | — | — | — | — | — | — | — | — | GL6515 |
| Class A Amplifier | 22.5 | 22.5 | E _{cc1} = 0 | 0.4 | 0.1 | 300,000 | 450 | — | 100,000 | 0.0015 | 6519 ⊙ |
| DC Amplifier ♣ | 135 | — | R _k = 250 | 112 | — | 280 | 7,000 | 2.0 | — | — | 6520 |

Metal tubes are shown in bold-face type, miniature tubes in italics.

† G3 and G5 are screen. G4 is signal-input grid.

★ Maximum screen dissipation appears immediately below the screen voltage.

‡ G2 and G4 are screen. G3 is signal-input grid.

‡ Heater warm-up time controlled.

1, 2, 3, etc. indicate tube sections.

| Tube Type | Classification by Construction | Base Connections | Outline Dwg | Filament Volts | Filament Amp | Max Plate Watts | Max Plate Volts | Max Screen Volts and Watts | Capacitance in Picofarads | | |
|-----------|---|------------------|-------------|-----------------|-----------------|-----------------|--------------------------------------|----------------------------|-----------------------------------|--------------------------------------|------------|
| | | | | | | | | | Input | Output | Grid-plate |
| 6525 | Thyratron | 7BN | 5-1 | 6.3 | 0.15 | — | 500 | ◆ | Anode voltage drop = 8 volts | | |
| 6526 | Power-Amplifier Pentode | 512-AX | 2-1 | 1.25 | 0.125 | 1.1 | 135 | 135 0.4 | — | — | — |
| 6528 | Twin Triode | 8BD | T-X | 6.3 | 5.0 | 30 | 400 | ◆ | 17.8 | 2.9 | 23.8 |
| 6533 | High-Mu Triode | 8FY | 3-1 | 6.3 | 0.2 | 0.35 | 150 | ◆ | 1.75 | 0.6 | 1.6 |
| 6540 | Sharp-Cutoff Pentode | 5702 | 3-6 | 6.3 | 0.2 | 1.1 | 165 | 155 0.4 | 4.8 | 3.5 | 0.03 |
| 6550 | Beam Power Amplifier | 7AC | T-X | 6.3 | 1.8 | 42 | 660 | 440 6.0 | 15 | 10 | 0.8 |
| 6582 | RF Pentode | 9EJ | 6-2 | 6.3 | 0.25 | 2.0 | 200 | 155 0.85 | 5.0 | 3.4 | 0.03 |
| 6582-A | Sharp-Cutoff RF Pentode | 9EJ | 6-2 | 6.3 | 0.25 | 2.0 | 200 | 155 0.85 | 4.5 | 3.0 | 0.03 |
| 6611 | RF Pentode | 512AX | 2-1 | 1.25 | 0.02 | 0.1 | 50 | 50 0.02 | 4.0 | 4.0 | 0.008 |
| 6612 | RF Pentode | 512AX | 2-1 | 1.25 | 0.08 | 0.2 | 50 | 50 0.05 | 5.5 | 4.2 | 0.01 |
| 6660 | Remote-Cutoff RF Pentode (Special 6BA6) | 7BK | 5-2 | 6.3 | 0.3 | 3.3 | 330 | 330 0.65 | 5.5 | 5.5 | 0.0035 |
| 6661 | Sharp-Cutoff RF Pentode (Special 6BH6) | 7CM | 5-2 | 6.3 | 0.15 | 3.3 | 330 | 330 0.55 | 5.4 | 4.4 | 0.0035 |
| 6662 | Remote-Cutoff RF Pentode (Special 6BJ6) | 7CM | 5-2 | 6.3 | 0.15 | 3.3 | 330 | 330 0.65 | 4.5 | 5.5 | 0.0035 |
| 6663 | Twin Diode (Special 6AL5) | 6BT | 5-1 | 6.3 | 0.3 | — | Tube Voltage Drop: 10 v at 60 ma d-c | | | | |
| 6664 | High-Frequency Triode | 5CE | 5-2 | 6.3 | 0.15 | 2.9 | 330 | — | 2.2 | 1.4 | 1.5 |
| 6669 | Beam Power Amplifier (Special 6AQ5) | 7BZ | 5-3 | 6.3 | 0.45 | 12 | 250 | 250 2.0 | Single Tube 2 Tubes, Push Pull | | |
| 6676 | Sharp-Cutoff RF Pentode | 7CM | 5-2 | 6.3 | 0.3 | 2.3 | 330 | 330 0.55 | 6.5 | 3.0 | 0.015 |
| 6677 | Power-Amplifier Pentode (Special 6CL6) | 9BV | 6-3 | 6.3 | 0.65 | 8.5 | 330 | 330 2.0 | 11 | 5.5 | 0.12 |
| 6678 | Triode-Pentode (Special 6U8) | 9AE | 6-2 | 6.3 | 0.45 | 3.0 | 330 | 330 0.55 | Pentode Section Triode Section | | |
| 6679 | High-Mu Twin Triode (Special 12AT7) | 9A | 6-2 | { 12.6 6.3 } | { 0.15 0.3 } | 2.8 | 330 | — | 2.2 | 1.2 ₁ 1.5 ₂ | 1.5 |
| 6680 | Medium-Mu Twin Triode (Special 12AU7) | 9A | 6-2 | { 12.6 6.3 } | { 0.15 0.3 } | 3.0 | 330 | — | 1.8 | 2.0 | 1.5 |
| 6681 | High-Mu Twin Triode (Special 12AX7) | 9A | 6-2 | { 12.6 6.3 } | { 0.15 0.3 } | 1.1 | 330 | — | 1.8 | 1.9 | 1.7 |

■ Compactron.
† Zero signal.
◆ Per section.

† Plate-to-plate.
◆ Maximum.
◆ Supply voltage.

● Subminiature type.
▲ Without external shield.
◆ Design maximum rating.

● Total for all similar sections.
◆ Absolute maximum rating.
Conversion transconductance.

| Service | Plate Volts | Screen Volts | Neg Grid Volts | Plate Milli-am-peres | Screen Milli-am-peres | R_p , Ohms | G_m , μ mhos | μ Factor | Load for Rated Output, Ohms | Power Output, Watts | Tube Type | |
|---------------------------------|---|--------------|----------------|----------------------|-----------------------|--------------|--------------------|--------------------|-----------------------------|---------------------|---------------|------|
| Relay Energizer | DC control-grid supply voltage for anode conduction: -2.5 volts at $E_{bb} = 105$ volts d-c. $E_{c2} = 0$ volts, $R_L = 22,000$ ohms, $R_{g2} = 1.0$ meg $R_{g1} = 0$ | | | | | | | | | | <i>6626</i> | |
| Class A Amplifier | 110 | 110 | 6.0 | 6.5† | 1.15† | 140,000 | 1,900 | — | 10,000 | 0.375 | 6526 ● | |
| DC Amplifier † | 100 | — | 4.0 | 185 | — | 245 | 37,000 | 9.0 | — | — | 6528 | |
| Class A Amplifier | 120 | — | $R_k = 1500$ | 0.9 | — | 31,000 | 1,750 | 54 | — | — | 6533 ● | |
| Class A Amplifier | 120 | 120 | $R_k = 200$ | 7.5 | 2.6 | 150,000 | 5,000 | — | $E_{c3} = 0$ volts | | 6540 ● | |
| Class A Amplifier | 400 | 225 | 16.5 | 87 | 4.0 | — | — | — | 3,000 | 20 | 6550 | |
| Class A Amplifier | 250 | 250 | 14 | 140 | 12 | 15,000 | 11,000 | — | 1,500 | 12.5 | | |
| Class A Amplifier | 120 | 120 | 2.0 | 7.5 | 2.5 | — | 4,500 | — | — | — | <i>6582</i> | |
| Class A Amplifier | 120 | 120 | $R_k = 180$ | 7.5 | 2.5 | 500,000 | 4,500 | — | — | — | <i>6582-A</i> | |
| Class A Amplifier | 30 | 30 | $E_{cct} = 0$ | 1.0 | 0.35 | 400,000 | 1,000 | $R_{g1} = 5.0$ meg | | | 6611 ● | |
| Class A Amplifier | 30 | 30 | $E_{cct} = 0$ | 3.0 | 1.0 | 180,000 | 3,000 | $R_{g1} = 2.0$ meg | | | 6612 ● | |
| Class A Amplifier | 250 | 100 | $R_k = 68$ | 11 | 4.2 | 1,000,000 | 4,400 | $E_{c3} = 0$ volts | | | 6660 | |
| Class A Amplifier | 100 | 100 | $R_k = 68$ | 10.8 | 4.4 | 250,000 | 4,300 | $E_{c3} = 0$ volts | | | | |
| Class A Amplifier | 250 | 150 | $R_k = 100$ | 7.4 | 2.6 | 1,400,000 | 4,600 | $E_{c3} = 0$ volts | | | 6661 | |
| Class A Amplifier | 250 | 100 | $R_k = 80$ | 9.2 | 3.3 | 1,300,000 | 3,600 | $E_{c3} = 0$ volts | | | 6662 | |
| Class A Amplifier | 100 | 100 | $R_k = 80$ | 9.0 | 3.5 | 250,000 | 3,650 | $E_{c3} = 0$ volts | | | | |
| Rectifier Service | Max d-c output current per plate ♦ = 10 ma; max peak inverse voltage ♦ = 275 volts; max peak current per plate ♦ = 60 ma | | | | | | | | | | 6663 | |
| Class A Amplifier | 250 | — | $R_k = 200$ | 10 | — | 10,900 | 5,500 | 60 | — | — | 6664 | |
| Class A Amplifier | 100 | — | $R_k = 270$ | 3.7 | — | 15,000 | 4,000 | 60 | — | — | | |
| Class A Amplifier | 250 | 250 | 12.5 | 45† | 4.5† | 52,000 | 4,100 | — | 5,000 | 4.5 | 6669 | |
| Class AB ₁ Amplifier | 250 | 250 | 15 | 70† | 5.0† | — | — | — | 10,000 | 10 | | |
| Class A Amplifier | 125 | 125 | $R_k = 56$ | 13 | 3.7 | 280,000 | 8,000 | — | — | — | 6676 | |
| Class A Amplifier | 125 | 125 | 3.0 | 2.8 | — | — | — | — | — | — | | |
| Class A Amplifier | 250 | 150 | 3.0 | 30† | 7.0† | 150,000 | 11,000 | G_2 tied to K | | 7,500 | 2.8 | 6677 |
| Class A Amplifier | 250 | 110 | $R_k = 68$ | 10 | 3.5 | 400,000 | 5,200 | — | — | — | 6678 | |
| Class A Amplifier | 150 | — | $R_k = 56$ | 18 | — | 5,000 | 8,500 | 40 | — | — | | |
| Class A Amplifier † | 250 | — | $R_k = 200$ | 10 | — | 10,900 | 5,500 | 60 | — | — | 6679 | |
| Class A Amplifier | 250 | — | 8.5 | 10.5 | — | 7,700 | 2,200 | 17 | — | — | 6680 | |
| Class A Amplifier | 100 | — | 0 | 11.8 | — | 6,500 | 3,100 | 20 | — | — | | |
| Class A Amplifier † | 250 | — | 2.0 | 1.2 | — | 62,000 | 1,600 | 100 | — | — | 6681 | |
| Class A Amplifier † | 100 | — | 1.0 | 0.5 | — | 80,000 | 1,250 | 100 | — | — | | |

Metal tubes are shown in bold-face type, *miniature tubes in italics.*

♦ G3 and G5 are screen. G4 is signal-input grid.

‡ G2 and G4 are screen. G3 is signal-input grid.

1, 2, 3, etc. indicate tube sections.

‡ Maximum screen dissipation appears immediately below the screen voltage.

¶ Heater warm-up time controlled.

| Tube Type | Classification by Construction | Base Connections | Out-line Dwg | Filament Volts | Filament Amp | Max Plate Watts | Max Plate Volts | Max Screen Volts and Watts | Capacitance in Picofarads | | |
|------------|----------------------------------|------------------|--------------|----------------|---------------|-----------------|---|----------------------------|--|--------------|------------|
| | | | | | | | | | Input | Output | Grid-plate |
| 6888 5★ | RF Pentode | 9EQ | 6-1 | 6.3 | 0.3 | 3.0 | 210 | 175 0.9 | 7.5 | 3.0 | 0.03 |
| 6890 | Medium-Mu Twin Triode | 8GQ | T-X | 6.3 | 0.3 | 1.1 | 120 | — | 2.6 | 1.7 2.1 | 1.8 |
| 6764 | Full-Wave High-Vacuum Rectifier | 9ET | T-X | 6.3 | 1.0 | — | — | — | — | — | — |
| 6763 | Cold-Cathode Half-Wave Rectifier | 6763 | T-X | — | — | — | Tube Voltage Drop: 100 volts | | | | |
| 6771 | High-Mu UHF Triode (Planar) | 6442 | T-X | 6.3 | 0.57 | 6.25 | 300 | — | 4.05 | 0.018 | 2.0 |
| 6788 | Sharp-Cutoff Pentode | 8DL | 3-11 | 6.3 | 0.175 | 0.5 | 250 | 150 0.15 | 2.4 | 3.3 | 0.032 |
| 6792 | High-Vacuum Beam Tetrode | 8GL | T-X | 6.3 | 0.45 | 25 | 25,000 | — | 2.0 | 4.0 | 0.03 |
| 6807 | Thyratron | 6807 | T-X | 2.5 | 21 | — | Anode Voltage Drop = 16 Volts | | | | |
| 6808 | Thyratron | 6808 | T-X | 2.5 | 21 | — | Anode Voltage Drop = 16 Volts | | | | |
| 6809 | Thyratron | 6807 | T-X | 2.5 | 21 | — | Anode Voltage Drop = 16 Volts | | | | |
| 6814 | Medium-Mu Triode | 8DK | 3-1 | 6.3 | 0.15 | 2.0 | 250 | — | 2.4 | 2.4 | 1.3 |
| 6829 5★ | Twin Triode | 9A | 6-3 | 12.6 6.3 | 0.225 0.45 | 2.2 4.0 | 275 | — | 4.0 | 0.51 0.38 | 3.0 |
| 6832 | Medium-Mu Twin Triode | 8DG | 3-2 | 6.3 | 0.4 | 0.1 | 165 | — | — | — | — |
| 6840 | Medium-Mu Twin Triode | 9CZ | 6-3 | 12.6 6.3 | 0.4 0.8 | 4.0 7.0 | 300 | — | 4.0 | 0.70 0.65 | 5.5 |
| 6842 | High-Voltage Regulator | 7EQ | T-X | 6.3 | 0.15 | 8.0 | 4000 | 150 | 3.95 | 1.34 | 0.067 |
| GL6848 | Tetrode | GL 6848 | TX | 7.0 | 13.5 | 2000 | 4500 7000 | 500 750 | Cathode-Plate 0.01; Input 27.8; Output 6.4 | | |
| 6851 | High-Mu Twin Triode | 9A | 6-2 | 6.3 | 0.25 | 1.0 | 330 | — | 1.6 | 0.46 0.36 | 1.4 |
| 6853 | Full-Wave High-Vacuum Rectifier | 8HE | 9-42 | 5.0 | 1.7 | — | Tube Voltage Drop: 60 volts at 125 ma d-c | | | | |
| 6854 | Medium-Mu Twin Triode | 8CJ | 6-2 | 6.3 | 0.5 | 1.5 | 300 | — | 2.4 | 1.1 | 1.7 |
| 6856/740 | Thyratron | 6856 | T-X | 2.5 | 16 | — | Anode Voltage Drop = 12 Volts | | | | |
| 6858/760 | Thyratron | 6807 | T-X | 2.5 | 21 | — | Anode Voltage Drop = 12 Volts | | | | |
| 6859/760-P | Thyratron | 6808 | T-X | 2.5 | 21 | — | Anode Voltage Drop = 12 Volts | | | | |
| 6872 | Pentode | 5702 | 3-7 | 6.3 | 0.2 | 1.1 | 165 | 155 0.4 | 5.0 | 3.5 | 0.03 |
| 6877 | Low-Mu Triode | 9GB | 6-4 | 6.3 | 0.8 | 12 | 200 | — | — | — | — |
| 6883 | Beam Power Amplifier | 7CK | T-X | 12.6 | 0.625 | 20 | 400 | — | Triode Connection Two Tubes, Push-Pull | | |
| 6883-A | Beam Power Amplifier | 7CK | T-X | 12.6 | 0.625 | 20 | 400 | 250 | Pentode Connection Two Tubes, Push-Pull | | |
| | | | | | | 20 | 600 | 3.0 | Pentode Connection Two Tubes, Push-Pull | | |

■ Compactron.

† Zero signal.

♣ Per section.

‡ Plate-to-plate.

▲ Maximum.

‡ Supply voltage.

◎ Subminiature type.

▲ Without external shield.

◆ Design maximum rating.

◎ Total for all similar sections.

▲ Absolute maximum rating.

Conversion transconductance.

| Service | Plate Volts | Screen Volts | Neg Grid Volts | Plate Milli-amperes | Screen Milli-amperes | R _p , Ohms | G _m , μ mhos | μ Factor | Load for Rated Output, Ohms | Power Output, Watts | Tube Type |
|--|---|--------------|-----------------------|---------------------|----------------------|-----------------------|------------------------------|-------------------------------|-----------------------------|---------------------|----------------|
| Class A Amplifier | 190 | 160 | R _k = 630 | 13 | 3.3 | 90,000 | 16,500 | E _{cc1} = +9.0 volts | — | — | 6888 5★ |
| Class A Amplifier ♦ | 100 | — | R _k = 100 | 8.0 | — | — | 4,800 | — | — | — | 6690 ● |
| Full-Wave Rectifier | Max d-c output current = 90 ma; max peak inverse voltage = 1,450 volts; rms supply voltage = 325 volts; max peak current per plate = 330 ma | | | | | | | | | | 6764 |
| Half-Wave Rectifier | Max d-c output current ⊕ = 12 ma; max peak inverse voltage ⊕ = 2,800 volts; min plate supply voltage ⊕ = 500 volts | | | | | | | | | | 6763 |
| Class A Amplifier | 250 | — | 1.6 | 25 | — | — | 23,000 | 90 | — | — | 6771 |
| Class A Amplifier | 100 | 100 | R _k = 1500 | 0.7 | 0.1 | 1,200,000 | 1,100 | — | — | — | 6788 ● |
| HV Shunt Regulator | 25,000 | 200 | 18 | 1.0 | 0.1 | 10,000,000 | 195 | — | — | — | 6792 ● |
| Controlled Rectifier | Max screen dissipation = 1.0 watt; max d-c cathode current = 10 ma | | | | | | | | | | 6807 |
| Controlled Rectifier | Max d-c cathode current ⊕ = 6.4 amperes; max peak inverse voltage ⊕ = 1,500 volts; max peak cathode current ⊕ = 80 amperes | | | | | | | | | | 6808 |
| Controlled Rectifier | Max d-c cathode current ⊕ = 6.4 amperes; max peak inverse voltage ⊕ = 1,500 volts; max peak cathode current ⊕ = 80 amperes | | | | | | | | | | 6809 |
| Controlled Rectifier | Max d-c cathode current ⊕ = 6.4 amperes; max peak inverse voltage ⊕ = 1,500 volts; max peak cathode current ⊕ = 80 amperes | | | | | | | | | | 6814 ● |
| Class A Amplifier | 100 | — | R _k = 150 | 10 | — | 4,800 | 6,000 | 29 | — | — | 6829 5★ |
| Class A Amplifier ♦ | 150 | — | R _k = 220 | 8.5 | — | 7,000 | 6,700 | 47 | — | — | 6829 5★ |
| | 150 | — | 4.8 | 0.15 | — | — | — | — | — | — | |
| | 100 | — | 17 | — | — | — | I _c = 0.2 ma | — | — | — | |
| Class A Amplifier ♦ | 100 | — | R _k = 3000 | 0.8 | — | — | 1,050 | 26 | — | — | 6832 ● |
| Class A Amplifier ♦ | 250 | — | R _k = 620 | 14 | — | 3,400 | 5,900 | 20 | — | — | 6840 |
| | 100 | — | 6.5 | 0.1 | — | — | — | — | — | — | |
| | 80 | — | 31 | — | — | — | I _c = 200 μ a | — | — | — | |
| Class A Amplifier | 1500 | 100 | 1.0 | 4.5 | 0.5 | 930,000 | 2,500 | — | — | — | 6842 |
| RF Amplifier Class C RF Amp/Osc Class C | 4000 6500 | 400 700 | 100 100 | 570 800 | 20 25 | — — | — — | — — | — — | 1250 3200 | GL6848 |
| Class A Amplifier ♦ | 250 | — | R _k = 3100 | 1.0 | — | 60,000 | 1,200 | 70 | — | — | 6851 |
| Full-Wave Rectifier | Max d-c output current = 125 ma; max peak inverse voltage = 1550 volts; max RMS supply voltage per plate = 350 volts; max peak current per plate = 415 ma | | | | | | | | | | 6853 |
| Class A Amplifier ♦ | 150 | — | R _k = 240 | 8.2 | — | 6,500 | 5,225 | 35 | — | — | 6854 |
| Controlled Rectifier | Max d-c cathode current ⊕ = 2.5 amperes; max peak inverse voltage ⊕ = 1,500 volts; max peak cathode current ⊕ = 50 amperes | | | | | | | | | | 6856/740 |
| Controlled Rectifier | Max d-c cathode current ⊕ = 6.4 amperes; max peak inverse voltage ⊕ = 1,500 volts; max peak cathode current ⊕ = 77 amperes | | | | | | | | | | 6858/760 |
| Controlled Rectifier | Max d-c cathode current ⊕ = 6.4 amperes; max peak inverse voltage ⊕ = 1,500 volts; max peak cathode current ⊕ = 77 amperes | | | | | | | | | | 6859/ 760-P |
| Class A Amplifier | 120 | 120 | R _k = 200 | 7.75 | 2.7 | 340,000 | 4,100 | — | — | — | 6872 ● |
| Class A Amplifier | 150 | — | 12 | 75 | — | 2,000 | 6,500 | 3.75 | — | — | 6877 |
| Class AB ₁ Amplifier | 400 | — | 100 | 40† | — | — | — | — | 8,000 | 22 | 6883 |
| Class AB ₂ Amplifier | 600 | 165 | 44 | 22† | 0.6† | — | — | — | 6,800 | 90 | |
| Class AB ₁ Amplifier | 400 | 190 | 40 | 63† | 2.5† | — | — | — | 4,000† | 55 | 6883-A |
| | 600 | 180 | 45 | 26† | 1.0† | — | — | — | 7,000† | 82 | |

Metal tubes are shown in bold-face type, miniature tubes in italics.

♦ G3 and G5 are screen. G4 is signal-input grid.

♥ G2 and G4 are screen. G3 is signal-input grid.

1, 2, 3, etc. indicate tube sections.

● Maximum screen dissipation appears immediately below the screen voltage.

† Heater warm-up time controlled.

| Tube Type | Classification by Construction | Base Connections | Out-line Dwg | Filament Volts | Filament Amp | Max Plate Watts | Max Plate Volts | Max Screen Volts and Watts * | Capacitance in Picofarads | | |
|------------|-----------------------------------|------------------|--------------|----------------|-----------------|----------------------|----------------------|---|---|--|------------|
| | | | | | | | | | Input | Out-put | Grid-plate |
| 6883-B | Beam Power Amplifier | 7CK | T-X | 12.6 | 0.562 | 27 | 600 | 250 3.0 | Pentode Connection Two Tubes, Push-Pull | | |
| 6887 | Twin Diode | 6BT | 5-1 | 6.3 | 0.2 | — | — | Tube Voltage Drop: \blacklozenge 1.2 volts at 6.0 ma d-c | | | |
| 6888 | Dual-Control Pentode | 8N | 9-12 | 6.3 | 0.8 | 8.0 | 250 150 2.0 | 12 | 6.5 | 0.7 | |
| 6889 | Beam-Power Amplifier | 8HG | T-X | 6.3 | 1.2 | 30 | 3,000 | 850 3.5 | — | — | — |
| 6897 | High-Mu UHF Triode (Planar) | 2C39-B | T-X | 6.3 | 1.05 | 100 | 1,000 | — | 6.5 | 0.023 | 2.01 |
| 6900 | Medium-Mu Twin Triode | 9H | 6-3 | {12.6 6.3} | {0.5 1.0} | 4.25 | 600 | — | 6.5 | 0.81 0.61 | 4.0 |
| 6913 | Medium-Mu Twin Triode | 9A | 6-3 | {12.6 6.3} | {0.3 0.6} | 3.5 | 300 | — | 3.6 | 0.5 | 3.4 |
| 6919 5★ | Twin Diode | 6BT | 5-1 | 6.3 | 0.2 | — | — | Tube Voltage Drop: \blacklozenge 1.2 volts at 6.0 ma d-c | | | |
| 6922 | Twin Triode | 9AJ | 6-2 | 6.3 | 0.3 | 1.5 | 220 | — | 3.3 | 1.75 ₁ 1.65 ₂ | 1.4 |
| GL6942 | Tetrode | GL 6942 | TX | 5.7 | 24 | 1500 1200 1500 | 4000 3200 4000 | 600 | Cathode-Plate 0.04; Input 18.5; Output 5.8 | | |
| 6943 | Sharp-Cutoff RF Pentode | 8DC | 3-11 | 6.3 | 0.175 | 1.0 | 250 | 150 0.33 | 3.0 | 3.0 | 0.015 |
| 6944 | Semi-Remote Cutoff RF Pentode | 8DC | 3-11 | 6.3 | 0.175 | 1.0 | 250 | 150 0.36 | 2.9 | 3.1 | 0.015 |
| 6945 | Beam Power Amplifier | 8DL | 3-3 | 6.3 | 0.35 | 3.0 | 250 | 150 0.33 | 5.0 | 5.5 | 0.13 |
| 6946 | Medium-Mu Triode | 8DK | 3-11 | 6.3 | 0.175 | 1.5 | 250 | — | 1.6 | 0.75 | 1.0 |
| 6947 | Medium-Mu Twin Triode | 8DG | 3-11 | 6.3 | 0.35 | 0.75 | 250 | — | 1.6 | 0.20 0.25 | 1.2 |
| 6948 | High-Mu Twin Triode | 8DG | 3-11 | 6.3 | 0.35 | 0.5 | 250 | — | 1.6 | 0.20 0.25 | 0.75 |
| 6954 | Dual-Control Sharp-Cutoff Pentode | 7CM | 5-2 | 6.3 | 0.3 | 3.0 | 300 | 300 1.0 | 6.0 | 5.0 | 0.0035 |
| 6956 | Medium-Mu Twin Triode | 9A | 6-2 | {12.6 6.3} | {0.175 0.35} | 2.75 | 300 | — | 1.5 | 0.5 0.4 | 1.4 |
| 6968 | Sharp-Cutoff Pentode | 7BD | 5-1 | 6.3 | 0.175 | 1.65 | 200 | 155 0.55 | 4.0 | 2.85 | 0.02 |
| 6973 | Beam Power Amplifier | 9EU | 6-4 | 6.3 | 0.45 | 12 | 400 | 300 2.0 | Single Tube Two Tubes, Push-Pull | | |
| 6999 | Power Amplifier Pentode | 6999 | T-X | 2.64 | 0.05 | 0.75 | 145 | 95 0.12 | — | — | — |
| 7085 | High-Mu Twin Triode | 9A | 6-2 | {12.6 6.3} | {0.15 0.3} | 1.0 | 300 | — | 1.8 | 1.9 | 1.7 |
| 7027 | Beam Pentode | 8HY | T-X | 6.3 | 0.9 | 25 | 450 | 400 3.5 | Two Tubes, Push-Pull | | |
| | | | | | | 25 | 450 | 450 3.0 | Two Tubes, Push-Pull (With Screen Tap Transformer) | | |

■ Compactron.
† Zero signal.
◆ Per section.

† Plate-to-plate.
◆ Maximum.
‡ Supply voltage.

⊙ Subminiature type.
▲ Without external shield.
◆ Design maximum rating.

⊙ Total for all similar sections.
⊙ Absolute maximum rating.
Conversion transconductance.

● See X-Radiation Warning, page 4.

| Service | Plate Volts | Screen Volts | Neg Grid Volts | Plate Milli-amperes | Screen Milli-amperes | R _p , Ohms | G _m , μmhos | μ Factor | Load for Rated Output, Ohms | Power Output, Watts | Tube Type |
|---------------------------------|--|----------------------|-----------------------|----------------------------|----------------------|---|------------------------|------------------------------|---|---------------------|------------|
| Class AB ₁ Amplifier | 600 | 200 | 47 | 48† | 14.8† | — | — | — | 5,600† | 96 | 6883-B |
| Gating and Clamping | Max d-c output current per plate ⊖ = 10 ma; max peak inverse voltage ⊖ = 360 volts; max peak current per plate ⊖ = 30 ma | | | | | | | | | | 6887 |
| Gated Amplifier | 150 150 150 150 | 90 90 90 90 | — 9.4 13.8 0 | 37.5 2.5 0.03 2.0 | 19 — — — | I _{ct} = 190 μa — — — | — — — — | — — — — | E _{c3} = 0 volts E _{c3} = 0 volts E _{c3} = 0 volts E _{c3} = -8.6 volts | — — — — | 6888 |
| Class A Amplifier | 250 | 250 | 22.5 | 77 | 3.5 | — | 5,400 | — | — | — | 6889 |
| Class C Amplifier | 900 | — | 40 | 90 | — | — | — | — | — | 40 | 6897 |
| Class A Amplifier ♠ | 120 | — | 2.0 | 36 | — | 1,600 | 11,500 | 18.5 | — | — | 6900 |
| Class A Amplifier ♠ | 150 | — | 5.0 | 11 | — | 3,900 | 4,600 | 18 | — | — | 6913 |
| Gating and Clamping | Max d-c output current per plate ⊖ = 10 ma; max peak inverse voltage ⊖ = 300 volts; max peak current per plate ⊖ = 30 ma | | | | | | | | | | 6919 5★ |
| Class A Amplifier | 90 | — | R _k = 120 | 12 | — | — | 11,500 | 33 | — | — | 6922 |
| RF Amplifier | 3500 | 500 | 40 | 520 | 35 | — | — | — | — | 1000 | GL6942 |
| Class B | 3000 | — | 100 | 250 | 10 | — | — | — | — | 565 | |
| Class C | — | — | — | — | — | — | — | — | — | — | |
| Telephony | 3800 | — | 120 | 500 | 22 | — | — | — | — | 1200 | |
| Class A Amplifier | 100 | 100 | R _k = 150 | 8.0 | 2.3 | 300,000 | 3,600 | — | — | — | 6943 ● |
| Class A Amplifier | 100 | 100 | R _k = 150 | 7.0 | 2.0 | 280,000 | 3,200 | — | — | — | 6944 ● |
| Class A Amplifier | 100 | 100 | R _k = 270 | 25 | 1.5 | 20,000 | 3,500 | — | — | — | 6945 ● |
| Class A Amplifier | 100 | — | R _k = 270 | 9.0 | — | — | 3,800 | 16.5 | — | — | 6946 ● |
| Class A Amplifier ♠ | 150 | — | R _k = 270 | 6.5 | — | — | 4,000 | 35 | — | — | 6947 ● |
| Class A Amplifier ♠ | 100 | — | R _k = 1500 | 0.8 | — | — | 1,650 | 70 | — | — | 6948 ● |
| Class A Amplifier | 150 | 150 | 1.0 | 5.8 | 6.6 | 50,000 | 2,050 | E _{c3} = -3.0 volts | | — | 6954 |
| Class A Amplifier ♠ | 250 | — | 8.5 | 11.5 | — | 7,000 | 2,350 | 16.5 | — | — | 6955 |
| Class A Amplifier | 100 | — | 0 | 13 | — | 5,800 | 3,500 | 21.3 | — | — | 6958 |
| Class A Amplifier | 120 | 120 | 2.0 | 7.5 | 2.5 | — | 5,000 | — | — | — | 6968 |
| Class A Amplifier | 250 | 250 | 15 | 46 | 3.5 | 73,000 | 4,800 | — | — | — | 6973 |
| Class A Amplifier | 400 | 290 | 25 | 50† | 2.5† | — | — | — | 8,000† | 24 | |
| Class AB ₁ Amplifier | 350 | 280 | 22 | 58† | 3.5† | — | — | — | 7,500† | 20 | |
| | 250 | 250 | 15 | 92† | 7.0† | — | — | — | 8,000† | 12.5 | |
| Class A Amplifier | 67.5 | 67.5 | 4.0 | 4.0 | 0.9 | — | 1,650 | — | 12,000 | 0.135 | 6999 ● |
| Class A Amplifier ♠ | 100 | — | 1.0 | 0.5 | — | 80,000 | 1,250 | 100 | — | — | 7025 |
| | 250 | — | 2.0 | 1.2 | — | 62,500 | 1,600 | 100 | — | — | |
| Class AB ₁ Amplifier | 450 | 350 | 30 | 95† | 3.4† | — | — | — | 6,000† | 50 | 7027 |
| | 400 | 300 | 25 | 102† | 6.0† | — | — | — | 6,600† | 34 | |
| | 330 | 330 | 24 | 122† | 5.6† | — | — | — | 4,500† | 31.5 | |
| Class AB ₁ Amplifier | 410♯ | 410♯ | R _k = 220 | I _k = 134 ma† | — | — | — | — | 8,000† | 24 | |

Metal tubes are shown in bold-face type, *miniature tubes in italics.*

♠ G3 and G5 are screen. G4 is signal-input grid.

★ Maximum screen dissipation appears immediately below the screen voltage.

♥ G2 and G4 are screen. G3 is signal-input grid.

† Heater warm-up time controlled.

1, 2, 3, etc. indicate tube sections.

| Tube Type | Classification by Construction | Base Connections | Out-line Dwg | Filament Volts | Filament Amp | Max Plate Watts | Max Plate Volts | Max Screen Volts and Watts | Capacitance in Picofarads | | |
|------------|------------------------------------|------------------|--------------|----------------|--------------|-----------------|-----------------|----------------------------|--|--------------------------------------|------------|
| | | | | | | | | | Input | Output | Grid-plate |
| 7027-A | Beam Pentode | 8HY | T-X | 6.3 | 0.9 | 35 | 600 | 500 | Two Tubes, Push-Pull | | |
| 7036 5★ | Pentagrid Amplifier | 7CH ▼ | 5-3 | 6.3 | 0.3 | 0.9 | 250 | 250 | Two Tubes, Push-Pull (With Screen Tap Transformer) | | |
| 7044 | Medium-Mu Twin Triode | 9H | 6-3 | 6.3 12.6 | 0.9 0.45 | 4.5 8.0 | 300 | — | 4.8 | 0.65 ₁ | 6.0 |
| 7054 | RF Pentode | 9GT | 6-3 | 13.5 | 0.275 | 5.0 | 330 | 180 | 10.2 | 3.5 | 0.063 |
| 7055 | Twin Diode | 6BT | 5-1 | 13.5 | 0.155 | — | — | 1.0 | — | — | — |
| 7056 | Sharp-Cutoff Pentode | 7CM | 5-2 | 13.5 | 0.15 | 2.0 | 330 | 330 | 6.5 | 3.0 | 0.015 |
| 7057 | Medium-Mu Twin Triode | 9AJ | 6-2 | 13.5 | 0.18 | 2.2 | 275 | 0.5 | — | — | — |
| 7058 | High-Mu Twin Triode | 9AJ | 6-2 | 13.5 | 0.155 | 1.0 | 330 | — | 1.6 | 0.46 ₁ | 1.7 |
| 7059 | Triode-Pentode | 9AE | 6-2 | 13.5 | 0.195 | 2.8 | 300 | 300 | Pentode Section | | |
| 7060 | Triode-Pentode | 9DA | 6-2 | 13.5 | 0.28 | 3.0 | 300 | 300 | Triode Section | | |
| 7061 | Beam Power Amplifier | 9EU | 6-3 | 13.5 | 0.21 | 9.0 | 345 | 310 | 8.0 | 8.5 | 0.7 |
| 7077 | High-Mu UHF Triode (Planar) | 7077 | 3-16 | 6.3 | 0.24 | 1.0 | 250 | 2.0 | — | — | — |
| 7079 | Twin Triode | 8DG | 3-1 | 6.3 | 0.3 | 1.1 | 165 | — | 2.1 | 1.3 ₁ 1.4 ₂ | 0.01 |
| 7083 | Sharp-Cutoff RF Pentode | 5702 | 3-6 | 6.3 | 0.2 | 1.1 | 165 | 155 | 5.0 | 3.75 | 0.03 |
| 7105 | Low-Mu Twin Triode Power Amplifier | 8BD | T-X | 12.6 | 1.25 | 13 | 250 | 0.55 | 6.2 | 2.2 | 8.4 |
| 7137 | Medium-Mu Triode | 7BQ | 5-2 | 6.3 | 0.225 | 2.25 | 150 | — | 6.0 | 4.5 | 1.7 |
| GL7151 | Ignitron | GL 7151 | TX | — | — | — | — | — | — | — | — |
| 7167 | Tetrode | 7EW | 5-2 | 13.5 | 0.09 | 2.0 | 180 | 180 | 4.4 | 2.74 | 0.03 |
| GL7171 | Ignitron | GL 7171 | TX | — | — | — | — | — | — | — | — |
| 7189 | Beam Pentode | 9CV | 6-4 | 6.3 | 0.76 | 12 | 400 | 300 | Single Tube | | |
| 7189-A | Beam Pentode | 9LE | 6-4 | 6.3 | 0.76 | 13.2 | 440 | 400 | Two Tubes, Push-Pull | | |

■ Compactron.
† Zero signal.
♣ Per section.

‡ Plate-to-plate.
♣ Maximum.
‡ Supply voltage.

⊙ Subminiature type.
▲ Without external shield.
⊙ Design maximum rating.

⊕ Total for all similar sections.
⊙ Absolute maximum rating.
Conversion transconductance.

| Service | Plate Volts | Screen Volts | Neg Grid Volts | Plate Milli-amperes | Screen Milli-amperes | R_p , Ohms | G_m , μ mhos | μ Factor | Load for Rated Output, Ohms | Power Output, Watts | Tube Type |
|--|--|--------------|----------------|---------------------|----------------------|--|--------------------|--------------|-----------------------------|---------------------|------------|
| Class AB ₁ Amplifier | 425 | 425 | $R_k = 200$ | 150† | 8.0† | — | — | — | 3,800 | 44 | 7027-A |
| | 400 | 300 | $R_k = 200$ | 112† | 7.0† | — | — | — | 6,600 | 32 | |
| Class AB ₁ Amplifier | 410 | 410 | $R_k = 220$ | $I_k = 134†$ | — | — | — | — | 8,000 | 24 | |
| Gated Amplifier | 150 | 75 | 10 | 0 | 0 | $R_{g1} = R_{g2} = 47,000$ $R_{g1} = R_{g2} = 47,000$ $R_{g1} = R_{g2} = 47,000$ | — | — | 20,000 | — | 7036 5★ |
| | 150 | 69 | 0 | 0 | 14 | | — | — | 20,000 | — | |
| | 150 | 71 | 0 | 5.8 | 9.0 | | — | — | 20,000 | — | |
| Class A Amplifier ♦ | 120 | — | 2.0 | 36 | — | 1,750 | 12,000 | 21 | — | — | 7044 |
| Class A Amplifier | 250 | 150 | $R_k = 120$ | 19 | 3.5 | 100,000 | 11,500 | — | — | — | 7064 |
| Half-Wave Rectifier | Max d-c output current per plate $\square = 10$ ma; max peak inverse voltage $\square = 250$; max rms supply voltage per plate $\square = 117$; max peak current per plate $\square = 60$ ma | | | | | | | | | | 7055 |
| Class A Amplifier | 200 | 150 | $R_k = 180$ | 9.5 | 2.8 | 600,000 | 6,200 | — | — | — | 7056 |
| Class A Amplifier ♦ | 150 | — | $R_k = 220$ | 10 | — | 5,300 | 6,800 | 36 | — | — | 7057 |
| Class A Amplifier ♦ | 250 | — | 2.0 | 1.25 | — | 61,000 | 1,650 | 100 | — | — | 7058 |
| Class A Amplifier | 250 | 110 | $R_k = 68$ | 10 | 3.5 | 400,000 | 5,200 | — | — | — | 7059 |
| Class A Amplifier | 150 | — | $R_k = 56$ | 18 | — | 4,700 | 8,500 | 40 | — | — | |
| Class A Amplifier | 200 | 125 | $R_k = 82$ | 15 | 3.4 | 150,000 | 7,000 | — | — | — | 7060 |
| Class A Amplifier | 150 | — | $R_k = 150$ | 9.0 | — | 8,200 | 4,900 | 40 | — | — | |
| Class A Amplifier | 200 | 200 | 10.0 | 35.5† | 9.0† | 60,000 | 4,200 | — | 5,000 | 3.0 | 7061 |
| Class A Amplifier | 250 | — | $R_k = 82$ | 6.5 | — | 9,000 | 10,000 | 90 | — | — | 7077 |
| (With 18,000-ohm bypassed resistor in plate circuit) | | | | | | | | | | | |
| Class A Amplifier ♦ | 100 | — | $R_k = 220$ | 8.5 | — | 4,000 | 5,000 | 20 | — | — | 7079 ● |
| Class A Amplifier | 120 | 120 | $R_k = 200$ | 7.5 | 2.6 | 340,000 | 5,000 | — | — | — | 7083 ● |
| DC Amplifier ♦ | 135 | — | $R_k = 250$ | 125 | — | — | 7,000 | 2.0 | — | — | 7105 |
| Class A Amplifier | 150 | — | $R_k = 100$ | 13.5 | — | — | 8,500 | 40 | — | — | 7137 |
| Resistance Welding | Max. supply volts RMS 250-600; max demand KVA 4800; corresponding av. anode curr. 486 A.; max. av. anode curr. 900 A.; corresponding demand KVA 1600. | | | | | | | | | | GL7151 |
| Class A Amplifier | 125 | 80 | 1.0 | 10 | 1.4 | 125,000 | 8,000 | — | — | — | 7167 |
| Capacitor Discharge | Max. forward peak anode voltage 15000 volts; max. inverse peak anode voltage 15000 volts; max. peak anode curr. 35000 A.; typical discharge rate pulses per minute 2. | | | | | | | | | | GL7171 |
| Class A Amplifier | 250 | 250 | 7.3 | 48 | 5.5 | 40,000 | 11,300 | — | — | — | 7189 |
| Class AB ₁ Amplifier | 400 | 300 | 15 | 15† | 1.6† | — | — | — | 8,000 | 24 | 7189-A |
| Class AB ₁ Amplifier | 375 | 375 | $R_k = 220$ | $I_k = 70†$ | — | — | — | — | 11,000 | 16.5 | |
| Class A Amplifier | 250 | 250 | 7.3 | 48 | 5.5 | 40,000 | 11,300 | — | — | — | |
| Class AB ₁ Amplifier | 400 | 300 | 15 | 15† | 1.6† | — | — | — | 8,000 | 24 | |

Metal tubes are shown in bold-face type, miniature tubes in italics.

♦ G3 and G5 are screen. G4 is signal-input grid.

◆ G2 and G4 are screen. G3 is signal-input grid.

1, 2, 3, etc. indicate tube sections.

★ Maximum screen dissipation appears immediately below the screen voltage.

† Heater warm-up time controlled.

| Tube Type | Classification by Construction | Base Connections | Out-line Dwg | Filament Volts | Filament Amp | Max Plate Watts | Max Plate Volts | Max Screen Volts and Watts | Capacitance in Picofarads | | |
|---------------|------------------------------------|------------------|--------------|----------------|----------------|-----------------|---|----------------------------|--|-------------------|------------|
| | | | | | | | | | Input | Out-put | Grid-plate |
| 7199 | Triode Pentode | 9JT | 6-2 | 6.3 | 0.45 | 3.0 | 330 | 330 | Pentode Section | | |
| | | | | | | 2.4 | 330 | — | Triode Section | | |
| 7211 | High-Mu Triode (Planar) | 7815R | T-X | 6.3 | 1.3 | 10 | 1000 | — | 8.0 | 0.06 | 2.25 |
| 7212 | Beam Power Amplifier | 7CK | T-X | 6.3 | 1.25 | 20 | 400 | — | Triode Connection | | |
| | | | | | | 20 | 600 | 250 | Two Tubes, Push-Pull | | |
| | | | | | | | | 3.0 | Pentode Connection | | |
| | | | | | | | | | Two Tubes, Push-Pull | | |
| 7216/ C3JL | Control Rectifier | 7216/ C3JL | TX | 2.5 | 9 | — | Average Arc Drop = 10 Volts | | | | |
| 7233 | Low-Mu Triode | 9FR | 6-4 | 6.3 | 1.0 | 8.0 | 330 | — | 7.5 | 2.2 | 14 |
| 7234 | Pentode | 9KD | T-X | 6.3 | 0.15 | 10 | 8,000 | 200 | 4.06 | 2.23 | 0.0159 |
| | | | | | | | | 0.5 | | | |
| 7235 | Triode | 9KE | T-X | 6.3 | 0.3 | 10 | 10,000 | — | 2.24 | 1.03 | 1.03 |
| 7236 | Low-Mu Twin Triode Power Amplifier | 8BD | 12-25 | 6.3 | 2.4 | 15 | 300 | — | 9.0 | 3.3 | 10 |
| 7239 | Beam Pentode | 9KH | 6-6 | 6.3 | 0.3 | 4.0 | 2,000 | 220 | 7.0 | 4.0 | 0.12 |
| | | | | | | | | 0.5 | | | |
| 7244 | Medium-mu Twin Triode | 7BF | 5-2 | 6.3 | 0.45 | 1.1 | 300 | — | 3.0 | 0.34 ₁ | 1.4 |
| | | | | | | | | | | 0.28 ₂ | |
| 7244-A | Medium-Mu Twin Triode | 7BF | 5-1 | 6.3 | 0.45 | 1.1 | 300 | — | 3.0 | 0.34 ₁ | 1.4 |
| | | | | | | | | | | 0.28 ₂ | |
| 7245 | High-Mu Triode | 7BQ | 5-2 | 6.3 | 0.4 | 2.25 | 150 | — | — | — | — |
| 7245-A | High-Mu Triode | 7BQ | 5-1 | 6.3 | 0.4 | 2.25 | 150 | — | — | — | — |
| 7246 | Triode | 5676 | 2-1 | 1.25 | 0.15 | 0.7 | 150 | — | 1.6 | 1.9 | 1.5 |
| 7247 | Double Triode | 9A | 6-2 | 12.6 6.3 | 0.15 0.3 | 1.2 3.0 | 330 330 | — | Section 1 (Pins 6, 7, 8) Section 2 (Pins 1, 2, 3) | | |
| 7258 | Triode-Pentode | 9DA | 6-2 | 13.5 | 0.21 | 2.3 2.8 | 330 330 | 330 | Pentode Section | | |
| | | | | | | | | 0.55 | Triode Section | | |
| 7266 | High-Frequency Diode (Planar) | 7266 | T-X | 6.3 | 0.215 | — | Tube Voltage Drop: 1.0 volts at 1.0 ma d-c | | | | |
| 7289 | High-Mu Triode (Planar) | 7289 | T-X | 6.0 | 1.0 | 100 | 1,000 | — | 6.3 | 0.035 | 2.0 |
| 7296 | High-Mu Triode (Planar) | 7296 | T-X | 6.3 | 0.4 | 5.5 | 330 | — | 5.0 | 0.075 | 2.2 |
| 7310 | Half-Wave, High-Voltage Rectifier | 4P | T-X | 5.0 | 6.5 | — | — | — | — | — | — |
| 7311 | Beam Power Amplifier | 7311 | T-X | 6.3 | 0.8 | 21 | 300 | 300 | — | — | — |
| | | | | | | | | 2.75 | | | |
| 7312 | Low-Mu Triode | 7312 | T-X | 6.3 | 1.25 | 20 | 275 | — | — | — | — |
| 7313 | Half-Wave High-Vacuum Rectifier | 7313 | T-X | 6.3 | 1.55 | — | — | — | — | — | — |
| 7314 | Power Amplifier Pentode | 7314 | T-X | 6.3 | 0.6 | 10 | 300 | 300 | — | — | — |
| 7318 | Twin Triode | 9A | 6-2 | 12.6 6.3 | 0.175 0.350 | 3.0 | 330 | — | 1.5 | 0.5 | 1.4 |

■ Compactron.
† Zero signal.
♣ Per section.

‡ Plate-to-plate.
♠ Maximum.
♣ Supply voltage.

⊙ Subminiature type.
▲ Without external shield.
⊙ Design maximum rating.

⊙ Total for all similar sections.
⊙ Absolute maximum rating.
Conversion transconductance.

● See X-Radiation Warning, page 4.

| Service | Plate Volts | Screen Volts | Neg Grid Volts | Plate Milli-amperes | Screen Milli-amperes | R _p , Ohms | G _m , μmhos | μ Factor | Load for Rated Output, Ohms | Power Output, Watts | Tube Type |
|---------------------------------|--|-------------------|-----------------------|---------------------|----------------------|----------------------------------|--|--------------|-----------------------------|---------------------|---------------|
| Class A Amplifier | 220 | 130 | R _k = 62 | 12.5 | 3.5 | 400,000 | 7,000 | — | — | — | 7199 |
| | 100 | 50 | R _k = 1000 | 1.1 | 0.35 | 1,000,000 | 1,500 | — | — | — | |
| Class A Amp | 215 | — | 8.5 | 9.0 | — | 8,100 | 2,100 | 17 | — | — | |
| RF Oscillator | 900 | — | 20 | 140 | — | — | — | — | — | 25 | 7211 |
| Class AB ₁ Amplifier | 400 | — | 100 | 40† | — | — | — | — | 8,000‡ | 22 | 7212 |
| Class AB ₂ Amplifier | 600 | 165 | 44 | 22† | 0.6† | — | — | — | 6,800‡ | 90 | |
| Grid Control Rectifier | Max peak inverse voltage (max. instantaneous) = 900 volts; max peak forward voltage (max. instantaneous) = 1250 volts. | | | | | | | | | | 7216/ C3JL |
| DC Amplifier | 50‡ | — | R _k = 22 | 120 | — | 230 | 17,500 | 4.0 | — | — | 7233 |
| DC Amplifier | 1,500 | 150 | 1.0 | 5.0 | 2.0 | 1,000,000 | 3,800 | — | — | — | 7234 |
| DC Amp | 1,500 | — | 1.0 | 1.5 | — | — | 850 | — | — | — | 7236 |
| DC Amplifier | 150 120 | — | 24 14 | 60 100 | — | — | — | — | — | — | 7236 |
| DC Amplifier | 300 100 1,500 | 100 100 100 | 5.0 — 12 | 10.5 43 0.2 | 2.6 13.5 — | 300,000 I _{ct} = 400 | 4,200 microamperes; E _{ca} = 0 | — | — | — | 7239 |
| Class A Amplifier ♦ | 100 | — | R _k = 50 ⊕ | 9.0 | — | 6,300 | 6,000 | 38 | — | — | 7244 |
| Class A Amplifier ♦ | 100 | — | R _k = 50 ⊕ | 9.0 | — | 6,300 | 6,000 | 38 | — | — | 7244-A |
| Class A Amplifier | 150 | — | R _k = 100 | 13.5 | — | — | 11,000 | 50 | — | — | 7245 |
| Class A Amplifier | 150 | — | R _k = 100 | 13.5 | — | — | 11,000 | 50 | — | — | 7245-A |
| Class A Amp | 105 | — | 2.5 | 4.5 | — | 8,150 | 2,700 | 22 | — | — | 7246 ● |
| Class A Amplifier | 250 | — | 2.0 | 1.2 | — | 62,500 | 1,600 | 100 | — | — | 7247 |
| Class A Amplifier | 100 | — | 1.0 | 0.5 | — | 80,000 | 1,250 | 100 | — | — | |
| Class A Amplifier | 250 | — | 8.5 | 10.5 | — | 7,700 | 2,200 | 17 | — | — | |
| Class A Amplifier | 100 | — | 0 | 11.8 | — | 6,500 | 3,100 | 20 | — | — | |
| Class A Amplifier | 125 | 125 | R _k = 56 | 12 | 3.8 | 170,000 | 7,800 | — | — | — | 7258 |
| Class A Amplifier | 150 | — | -3 | 15 | — | 4,700 | 4,500 | 21 | — | — | |
| Detector | Max d-c output current ♦ = 2.0 ma; max peak inverse voltage ♦ = 600 volts; max peak current ♦ = 10 ma | | | | | | | | | | 7266 |
| Class C Amp at 500 Mc | 900 | — | 40 | 90 | — | — | — | — | — | 40 | 7289 |
| Class A Amplifier | 200 | — | R _k = 68 | 17 | — | 5,450 | 16,500 | 90 | — | — | 7296 |
| Half-Wave Rectifier | Max d-c output current = 115 ma; max peak inverse voltage = 20,000 volts; max peak current = 450 ma | | | | | | | | | | 7310 ● |
| Class A Amplifier | 300 | 200 | 12.5 | 48† | 2.5† | 35,000 | 5,300 | — | 4,500 | 6.5 | 7311 |
| Class A Amplifier | 135 | — | R _k = 250 | 125 | — | 280 | 7,000 | 2 | — | — | 7312 |
| Half-Wave Rectifier | Max d-c output current = 140 ma; max peak inverse voltage = 2,800 volts; max RMS supply voltage = 700 volts; max peak current = 1,000 ma | | | | | | | | | | 7313 |
| Class A Amplifier | 300 | 150 | 3.0 | 30† | 7.0† | 130,000 | 11,000 | — | 10,000 | 3.0 | 7314 |
| Class A Amplifier ♦ | 250 100 | — | 8.5 0 | 11.5 13 | — | 7,000 5,800 | 2,350 3,500 | 16.5 21.3 | — | — | 7318 |

Metal tubes are shown in bold-face type, miniature tubes in italics.

♦ G3 and G5 are screen. G4 is signal-input grid.

◆ G2 and G4 are screen. G3 is signal-input grid.

1, 2, 3, etc. indicate tube sections.

‡ Maximum screen dissipation appears

immediately below the screen voltage.

¶ Heater warm-up time controlled.

| Tube Type | Classification by Construction | Base Connections | Out-line Dwg | Filament Volts | Filament Amp | Max Plate Watts | Max Plate Volts | Max Screen Volts and Watts | Capacitance in Picofarads | | |
|-----------|--------------------------------|------------------|--------------|----------------|--------------|-----------------|-------------------------------|----------------------------|--|-------------------|------------|
| | | | | | | | | | Input | Output | Grid-plate |
| 7327 | Twin Triode | 8DG | 3-1 | 6.3 | 0.3 | 0.95 | 250 | — | 2.0 | 0.28 | 1.5 |
| 7355 | Beam-Power Amplifier | 8KN | 9-15 | 6.3 | 0.8 | 18 | 500 | 400 3.5 | 0.30 | — | — |
| 7357 | Beam-Power Amplifier | 7CK | T-X | 26.5 | 0.3 | 20 | 400 | — | Two Tubes, Push-Pull | — | — |
| | | | | | | 20 | 600 | 250 3.0 | Triode Connection | — | — |
| | | | | | | | | | Two Tubes, Push-Pull | — | — |
| 7358 | Beam Power Amplifier | 7CK | T-X | 6.3 | 1.25 | 10 | 3,500 | 500 | 13.0 | 8.5 | 0.24 |
| 7360 | Double Plate Sheet-Beam Tube | 9KS | 6-3 | 6.3 | 0.35 | 1.5 | 300 | 1.75 0.5 | — | — | — |
| 7370 | Medium-Mu Twin Triode | 9H | 6-2 | 20 | 0.26 | 4.75 | 330 | — | 4.0 | 0.6 | 4.0 |
| | | | | 40 | 0.13 | 8.5 | | | | 0.5 | |
| 7391 | High-Mu UHF Triode (Planar) | 6299 | T-X | 6.3 | 0.385 | 2.0 | 200 | — | 3.25 | 0.016 | 1.58 |
| GL7399 | Tetrode | GL 7399 | TX | 6.3 | 5.6 | 500 | 10000 | 2000 | Cathode-Plate 0.012; Input 21.5; Output 9.3 | | |
| 7403 | Beam-Power Amplifier | 8JU | T-X | 6.3 | 1.7 | 40 | 4,000 | 850 3.5 | — | — | — |
| 7408 | Beam-Power Amplifier | 7AC | 9-41 | 6.3 | 0.45 | 14 | 350 | 315 2.2 | 9.0 | 7.5 | 0.7 |
| 7427 | Photoconductive Cell | 9LN | 6-3 | — | — | 0.4 | 350 | — | — | — | — |
| 7430 | Sharp-Cutoff RF Pentode | 7430 | T-X | 6.3 | 0.2 | 1.7 | 180 | 140 0.5 | — | — | — |
| 7462 | High-Mu Triode (Planar) | 7462 | T-X | 6.3 | 0.24 | 1.0 | 250 | — | 1.8 | 0.032 | 1.2 |
| 7486 | High-Mu Triode (Planar) | 7077 | 3-16 | 6.3 | 0.24 | 1.0 | 250 | — | 1.7 | 0.01 | 1.0 |
| 7518/710L | Thyratron | 7518/ 710L | T-X | 2.5 | 9.0 | — | Anode Voltage Drop = 15 Volts | | | | |
| 7543 | Sharp-Cutoff RF Pentode | 7BK | 5-2 | 6.3 | 0.3 | 3.0 | 300 | 300 0.65 | Pentode Connection (G ₂ tied to K at socket) | | |
| | | | | | | 3.2 | 250 | — | Triode Connection (G ₂ , G ₁ , and P tied) | | |
| 7548 | Secondary Emission Hexode | 9LJ | 6-4 | 6.3 | 0.7 | 3.5 | 1,000 | 300 1.5 | 8.0 | 3.1 | 0.027 |
| 7550 | Twin Triode | 8DG | 3-3 | 6.3 | 0.500 | 2.0 | 150 | — | 4.0 | 0.24 ₁ | 4.0 |
| | | | | | | 3.6 | — | — | — | 0.28 ₂ | — |
| 7551 | Beam-Power Amplifier | 9LK | 6-3 | 13.5 | 0.36 | 10 | 375 | 300 2.0 | Single Tube | | |
| | | | | | | | | | Two Tubes, Push-Pull | | |

■ Compactron.
† Zero signal.
♣ Per section.

‡ Plate-to-plate.
♠ Maximum.
‡ Supply voltage.

⊙ Subminiature type.
▲ Without external shield.
◆ Design maximum rating.

⊕ Total for all similar sections.
⊖ Absolute maximum rating.
Conversion transconductance.

| Service | Plate Volts | Screen Volts | Neg Grid Volts | Plate Milli- am- peres | Screen Milli- am- peres | R _p , Ohms | G _m , μmhos | μ Fac- tor | Load for Rated Out- put, Ohms | Power Out- put, Watts | Tube Type |
|---|--|-----------------|--|---------------------------------|----------------------------------|---------------------------|---------------------------|---|--|--------------------------------|---------------|
| Pulse Applications ♦ | Max peak cathode current ⊕ = 1.25 amperes at 0.25% duty cycle; pulse width 2.5 μsec | | | | | | | | | | 7327 ⊕ |
| Class A Amplifier | 250 | 225 | 15 | 62† | 3.2† | 42,000 | 7,600 | — | 2,500 | 9.0 | 7355 |
| Class AB ₁ Amplifier | 400 | 300 | 34 | 56† | 3.5† | — | — | — | 5,000† | 40 | 7357 |
| Class AB ₂ Amplifier | 300 | 250 | 21 | 100† | 5.5† | — | — | — | 4,000† | 28.5 | |
| Class AB ₁ Amplifier | 400 | — | 100 | 40† | — | — | — | — | 8,000 | 22 | 7357 |
| Class AB ₂ Amplifier | 600 | 165 | 44 | 22† | 0.6† | — | — | — | 6,800† | 90 | |
| Pulse Modulator | Max pulse cathode current ⊕ = 3.0 amperes (for duty cycle up to 0.3%) | | | | | | | | | | 7358 |
| Balanced Modulator and Product Detector | 150 | 175 | R _k = 150 | 8.5 ⊕ | 2.1 | — | 5,400 | — | — | — | 7360 |
| Deflector voltage = 25 volts d-c | | | | | | | | | | | |
| Class A Amplifier ♦ | 250 | — | 12.5 | 12 | — | 3,000 | 5,400 | 16 | — | — | 7370 |
| | 180 | — | 7.0 | 23 | — | 2,000 | 8,500 | 17 | — | — | |
| | 120 | — | 2.0 | 36 | — | 1,560 | 11,500 | 18 | — | — | |
| Class A Amplifier | 175 | — | 1.5 | 10 | — | — | 11,000 | 62 | — | — | 7391 |
| RF Amp/Osc | 9000 | 1400 | 125 | — | 470 | — | — | — | — | 52000 | GL7399 |
| Class B | — | — | — | — | — | — | — | — | — | — | |
| Class C | 4800 | 1000 | 200 | 4200 | 100 | — | — | — | — | 11000 | |
| DC Amplifier | 600 | 300 | R _k = 825 | 32.5 | 1.5 | — | 6,000 | — | — | — | 7403 |
| Class A Amplifier | 250 | 250 | 12.5 | 45† | 4.5† | 50,000 | 4,100 | — | 5,000 | 4.5 | 7408 |
| | 60 | 250 | 0 | 100 | 22 | — | — | — | — | — | 7427 |
| Relay Control | Spectral Response, S-15; sensitivity, 4,000 microamperes per foot-candle (with polarizing voltage = 50); maximum current ⊕ = 20 milliamperes | | | | | | | | | | |
| Class A Amplifier | 180 | 120 | 2.0 | 7.7 | 2.4 | 500,000 | 5,100 | — | — | — | 7430 |
| | 120 | 120 | 2.0 | 7.5 | 2.5 | 300,000 | 5,000 | — | — | — | 7462 |
| Class A Amplifier | 150 | — | R _k = 910, E _{g1} = +6.0 | 7.2 | — | 9,000 | 10,500 | 94 | — | — | |
| Class A Amplifier | 150 | — | R _k = 82 | 7.5 | — | — | 10,500 | 90 | — | — | 7486 |
| | 100 | — | 0 | 8.0 | — | — | 11,500 | — | — | — | |
| Controlled Rectifier | Max d-c cathode current ⊕ = 2.5 amperes; max peak inverse voltage ⊕ = 1,500 volts; max peak cathode current ⊕ = 30 amperes | | | | | | | | | | 7518/ 710L |
| Class A Amplifier | 250 | 150 | R _k = 68 | 10.6 | 4.3 | 1,000,000 | 5,200 | — | — | — | 7543 |
| | 250 | 125 | R _k = 100 | 7.6 | 3.0 | 1,500,000 | 4,500 | — | — | — | 7548 |
| Class A Amplifier | 100 | 100 | R _k = 150 | 5.0 | 2.1 | 500,000 | 3,900 | — | — | — | |
| Class A Amplifier | 250 | — | R _k = 330 | 12.2 | — | — | 4,800 | 36 | — | — | 7548 |
| | 300 | 50 | 1.5 | 18.0 | 2.0 | — | 26,000 | Dynode voltage = 150 volts Dynode current = -12 ma | | — | |
| Pulse Applications ♦ | Max peak cathode current ⊕ = 3.0 amperes at 0.25% duty cycle; pulse width 2.5 μsec | | | | | | | | | | 7550 ⊕ |
| Class A Amplifier | 250 | 250 | 18 | 40 | 3.0 | — | 5,300 | E _{g1} = 0 Volts | — | — | 7551 |
| Class AB ₁ Amplifier | 300 | 250 | 21 | 40† | 2.0† | E _{g3} = 0 Volts | — | — | 5,000† | 20.5 | |

Metal tubes are shown in bold-face type, miniature tubes in italics.

♦ G3 and G5 are screen. G4 is signal-input grid.

⊕ Maximum screen dissipation appears

♦ G2 and G4 are screen. G3 is signal-input grid.

immediately below the screen voltage.

1, 2, 3, etc. indicate tube sections.

† Heater warm-up time controlled.

| Tube Type | Classification by Construction | Base Connections | Out-line Dwg | Filament Volts | Filament Amp | Max Plate Watts | Max Plate Volts | Max Screen Volts and Watts* | Capacitance in Picofarads | | |
|--------------------------|---------------------------------|------------------|--------------|----------------|--------------|-----------------|-----------------|-----------------------------|---------------------------|------------|-------------|
| | | | | | | | | | Input | Out-put | Grid-plate |
| 7558 | Beam-Power Amplifier | 9LK | 6-3 | 6.3 | 0.8 | 10☐ | 375☐ | 300☐ 2.0☐ | Single Tube | | |
| 7576⊙ | High-Mu Triode | 8KM | 3-3 | 6.3 | 0.45 | 4.1☐ | 250☐ | — | Two Tubes, Push-Pull | | |
| 7581 | Beam-Power Amplifier | 7AC | 12-15 | 6.3 | 0.9 | 30◆ | 500◆ | 450◆ 5.0◆ | Single Tube | | |
| 7581-A | Beam Power Amplifier | 7AC | 12-15 | 6.3 | 0.9 | 30◆ | 450◆ | — | Two Tubes, Push-Pull | | |
| | | | | | | 35◆ | 450◆ | — | Two Tubes, Push-Pull | | |
| 7586 | Medium-Mu Triode (Nuvistor) | 12AQ | 4-4 | 6.3 | 0.14 | 1.0☐ | 110☐ | — | 4.2▲ | 1.4▲ | 2.2▲ |
| 7587 | Sharp-Cutoff Tetrode (Nuvistor) | 12AS | 4-5 | 6.3 | 0.15 | 2.2☐ | 250☐ | 110☐ 0.2☐ | 7.0▲ | 1.4▲ | 0.015▲ ♣ |
| 7588 | High-Mu Triode (Planar) | 7296 | T-X | 6.3 | 0.4 | 5.5◆ | 300◆ | — | 6.5▲ | 0.075▲ | 2.8▲ |
| 7591 | Beam-Power Amplifier | 8KQ | 9-41 | 6.3 | 0.8 | 19◆ | 550◆ | 440◆ 3.3◆ | Single Tube | | |
| 7591-A | Beam Power Amplifier | 8KQ | 9-41 | 6.3 | 0.8 | 19◆ | 550◆ | 440◆ 3.3◆ | Two Tubes, Push-Pull | | |
| | | | | | | | | | Single Tube | | |
| 7607 | Beam-Power Amplifier | 7CK | 12-44 | 6.3 | 1.6 | 23☐ | 600☐ | 400☐ 4.0☐ | 15▲ | 8.5▲ | 0.28▲ |
| 7623 | Beam Pentode | 6AM | T-X | 6.3 | 1.6 | 37.5☐ | 1,250☐ | 600☐ 6.0☐ | 17▲ | 13.5▲ | 0.25▲ |
| 7624 | Beam Pentode | 6AM | T-X | 12.6 | 0.8 | 37.5☐ | 1,250☐ | 600☐ 6.0☐ | 17▲ | 13.5▲ | 0.25▲ |
| 7625 | High-Mu Triode (Planar) | 7462 | T-X | 6.3 | 0.215 | 0.8◆ | 275◆ | — | 1.5▲ | 0.03▲ | 1.5▲ |
| 7626⊙ | Power Amplifier Pentode | 7626 | 2-1 | 1.25 | 0.125 | 1.1☐ | 135☐ | 135☐ 0.4☐ | 3.2▲ | 2.9▲ | 0.1▲ |
| 7644 | High-Mu UHF Triode (Planar) | 6299 | T-X | 6.3 | 0.3 | 2.0☐ | 200☐ | — | 3.65▲ | 0.02 ♣▲ | 1.75▲ |
| 7646 | Twin Tetrode | 9HL | 6-2 | 6.3 12.6 | 0.6 0.3 | 2.75☐ ♣ | 250☐ | 200☐ 3.0☐ ⊕ | Two Sections, Push-Pull | | |
| GL7669/ GL7669 -PC | Ignitron | GL 7669 | TX | — | — | — | — | — | — | — | — |
| GL7669 | Ignitron | GL 7669 | TX | — | — | — | — | — | — | — | — |
| GL7669 -PC | Ignitron | GL 7669 | TX | — | — | — | — | — | — | — | — |
| GL7671/ GL7671 -PC | Ignitron | GL 7671 | TX | — | — | — | — | — | — | — | — |

☐ Compactron.

† Zero signal.

♣ Per section.

‡ Plate-to-plate.

♣ Maximum.

‡ Supply voltage.

⊙ Subminiature type.

▲ Without external shield.

◆ Design maximum rating.

⊕ Total for all similar sections.

☐ Absolute maximum rating.

Conversion transconductance.

| Service | Plate Volts | Screen Volts | Neg Grid Volts | Plate Milli-amperes | Screen Milli-amperes | R _p , Ohms | G _m , μmhos | μ Factor | Load for Rated Output, Ohms | Power Output, Watts | Tube Type |
|---|--|--------------|--|---------------------|----------------------|---------------------------|------------------------|---------------------------|-----------------------------|---------------------|--------------------------|
| Class A Amplifier | 250 | 250 | 18 | 40 | 3.0 | — | 5,300 | E _{cs} = 0 Volts | — | — | 7558 |
| Class AB ₁ Amplifier | 300 | 250 | 21 | 40† | 2.0† | E _{cs} = 0 Volts | — | — | 5,000‡ | 20.5 | — |
| Class A Amplifier | 200 | — | R _k = 150 | 15.5 | — | — | 10,700 | 46 | — | — | 7576⊙ |
| Class A Amplifier | 350 | 250 | 18 | 54† | 2.5† | 33,000 | 5,200 | — | 4,200 | 10.8 | 7581 |
| Class A Amplifier | 300 | 200 | 12.5 | 48† | 2.5† | 35,000 | 5,300 | — | 4,500 | 6.5 | — |
| Class A Amplifier | 250 | 250 | 14 | 72† | 5.0† | 22,500 | 6,000 | — | 2,500 | 6.5 | — |
| Class A Amplifier | 270 | 270 | 17.5 | 134† | 11† | — | — | — | 5,000‡ | 17.5 | — |
| Class A Amplifier | 250 | 250 | 16 | 120† | 10† | — | — | — | 5,000‡ | 14.5 | — |
| Class AB ₁ Amplifier | 450 | 400 | 37 | 116† | 5.6† | — | — | — | 5,600‡ | 55 | — |
| Class AB ₁ Amplifier | 360 | 270 | 22.5 | 88† | 5.0† | — | — | — | 3,800‡ | 18 | — |
| Class AB ₁ Amplifier | 360 | 270 | 22.5 | 88† | 5.0† | — | — | — | 6,600‡ | 26.5 | — |
| Class AB ₂ Amplifier | 360 | 270 | 22.5 | 88† | 5.0† | — | — | — | 3,800‡ | 47 | — |
| Class AB ₂ Amplifier | 360 | 225 | 18 | 78† | 3.5† | — | — | — | 6,000‡ | 31 | — |
| Class A Amplifier | 250 | — | 20 | 40† | — | 1,700 | 4,700 | 8 | 5,000 | 1.4 | — |
| Service, operating conditions, and characteristics given above for 7581 apply | | | | | | | | | | | 7581-A |
| Class A Amplifier | 75‡ | — | R _k = 100 | 10.5 | — | 3,000 | 11,500 | 35 | — | — | 7586 |
| Class A Amplifier | 125 | 50 | R _k = 68 | 10 | 2.7 | 200,000 | 10,600 | — | — | — | 7587 |
| Class A Amplifier | 200 | — | R _k = 270; E _{cs} = +6 | 24 | — | 3,900 | 45,000 | 175 | — | — | 7588 |
| Class A ₁ Amplifier | 300 | 300 | 10 | 60† | 8.0† | 29,000 | 10,200 | — | 3,000 | 11 | 7591 |
| Class AB ₁ Amplifier | 450 | 400 | 21 | 66† | 9.4† | — | — | — | 6,600‡ | 45 | — |
| Class A Amplifier | 300 | 300 | 10 | 60† | 8.0† | 29,000 | 10,200 | — | 3,000 | 11 | 7591-A |
| Class AB ₁ Amplifier | 450 | 400 | 21 | 66† | 9.4† | — | — | — | 6,600‡ | 45 | — |
| Class A Amplifier | 300 | 225 | 17.0 | 80 | 6.0 | 40,000 | 8,000 | — | — | — | 7607 |
| Class C Amplifier | 1,250 | 300 | 115 | 160 | 20 | — | — | — | — | 162.5 | 7623 |
| Class C Amplifier | 1,250 | 300 | 115 | 160 | 20 | — | — | — | — | 162.5 | 7624 |
| Class A Amplifier | 150 | — | R _k = 1000 | 0.95 | — | 57,000 | 1,400 | 80 | — | — | 7625 |
| Class C Amplifier | 120 | 120 | 20 | 10 | 2.0 | — | — | — | — | 0.6 | 7626⊙ |
| Class A Amplifier | 175 | — | Adjust for I _b = 10 ma | 10 | — | — | 15,000 | 110 | — | — | 7644 |
| Frequency Tripler | 170 | 150 | 100 | 40 | 10 | — | — | — | — | 1.5 | 7646 |
| Resistance Welding | Max. supply volts RMS 250-600; max. demand KVA 600; corresponding av. anode curr. 30.2 A.; max. av. anode curr. 56 A.; corresponding demand KVA 200. | | | | | | | | | | GL7669/ GL7669 -PC |
| Frequency Changer | Max. peak inverse voltage 1200 V.; max. peak anode curr. 600 A.; corresponding av. anode curr. 5 A.; max. av. anode curr. 22.5 A.; corresponding peak anode curr. 135 A. | | | | | | | | | | GL7669 |
| Frequency Changer | Max. peak inverse voltage 1500 V.; max. peak anode curr. 480 A.; corresponding av. anode curr. 4 A.; max. av. anode curr. 18 A.; corresponding peak anode curr. 108 A. | | | | | | | | | | GL7669 -PC |
| Resistance Welding | Max. supply volts RMS 250-600; max. demand KVA 1200; corresponding av. anode curr. 75.6 A.; max. av. anode curr. 140 A.; corresponding demand KVA 400. | | | | | | | | | | GL7671/ GL7671 -PC |

Metal tubes are shown in bold-face type, *miniature tubes in italics*.

♦ G3 and G5 are screen. G4 is signal-input grid.

◆ G2 and G4 are screen. G3 is signal-input grid.

1, 2, 3, etc. indicate tube sections.

⊙ Maximum screen dissipation appears immediately below the screen voltage.

‡ Heater warm-up time controlled.

| Tube Type | Classification by Construction | Base Connections | Out-line Dwg | Fila-ment Volts | Fila-ment Amp | Max Plate Watts | Max Plate Volts | Max Screen Volts and Watts | Capacitance in Picofarads | | |
|-------------------|--------------------------------|------------------|--------------|-----------------|---------------|-----------------|-----------------|----------------------------|-------------------------------------|---------|------------|
| | | | | | | | | | Input | Out-put | Grid-plate |
| GL7672 | Ignitron | GL 7672 | TX | — | — | — | — | — | — | — | — |
| GL7672-PC | Ignitron | GL 7672 | TX | — | — | — | — | — | — | — | — |
| GL7673/ GL7673-PC | Ignitron | GL 7673 | TX | — | — | — | — | — | — | — | — |
| GL7673 | Ignitron | GL 7673 | TX | — | — | — | — | — | — | — | — |
| GL7673-PC | Ignitron | GL 7673 | TX | — | — | — | — | — | — | — | — |
| GL7681/ GL7681-PC | Ignitron | GL 7681 | TX | — | — | — | — | — | — | — | — |
| GL7681 | Ignitron | GL 7681 | TX | — | — | — | — | — | — | — | — |
| GL7681-PC | Ignitron | GL 7681 | TX | — | — | — | — | — | — | — | — |
| 7683 | High Voltage Pentode | 9MN | 6-3 | 6.3 | 0.15 | 15 | 1,000 | 250 0.7 | — | — | — |
| 7687 | Triode-Pentode | 9AE | 6-3 | 6.3 | 0.5 | 3.0 2.4 | 330 330 | 330 0.6 | Pentode Section Triode Section | | |
| 7688 | Medium-Mu Triple Triode | 12BA | 7-3 | 6.3 | 0.45 | 3.0 | 330 | — | — | — | — |
| 7689 | High-Mu Triple Triode | 12BA | 7-3 | 6.3 | 0.45 | 1.1 | 330 | — | — | — | — |
| 7690 | Medium-Mu Triple Triode | 12BA | 7-3 | 6.3 | 0.45 | 2.8 | 330 | — | — | — | — |
| 7695 | Beam-Power Amplifier | 9PX | T-X | 50 | 0.15 | 16 | 150 | 150 2.5 | Single Tube Two Tubes, Push-Pull | | |
| 7701 | Beam-Power Amplifier | 9MS | 6-3 | 13.6 | 0.16 | 9.0 | 350 | 300 3.5 | 7.0 | 3.6 | 0.15 |
| GL7703 | Ignitron | GL 7703 | TX | — | — | — | — | — | — | — | — |
| 7716 | Triode Pentode | 9DX | 6-3 | 13.6 | 0.35 | 5.0 1.0 | 330 330 | 330 1.1 | Pentode Section Triode Section | | |
| 7717 | Sharp-Cutoff RF Tetrode | 7EW | 5-2 | 6.3 | 0.2 | 2.0 | 180 | 180 0.5 | 4.4 | 2.74 | 0.3 |
| 7719 | Medium-Mu Triode | 9MX | 6-3 | 6.3 12.6 | 0.45 0.225 | 6.0 | 330 | — | 6.5 | 1.0 | 5.5 |
| 7720 | High-Mu Triode (Planar) | 7462 | T-X | 6.3 | 0.24 | 1.0 | 250 | — | 1.8 | 0.032 | 1.3 |
| 7721 | RF Pentode | 9EQ | 6-3 | 6.3 | 0.32 | 4.0 | 220 | 180 0.9 | 10 | 2.0 | 0.035 |
| 7722 | RF Pentode | 9EQ | 6-3 | 6.3 | 0.32 | 4.0 | 220 | 180 1.1 | 9.3 | 2.6 | 0.035 |
| 7724 | Duplex-Diode Triode | 9KR | 6-2 | 14.0 | 0.15 | 1.1 | 330 | — | 1.6 | 0.24 | 1.8 |
| | | | | | | | | | Diode Section | | |

■ Compactron.
† Zero signal.
♣ Per section.

‡ Plate-to-plate.
♣ Maximum.
♠ Supply voltage.

⊙ Subminiature type.
▲ Without external shield.
⊙ Design maximum rating.

⊕ Total for all similar sections.
⊙ Absolute maximum rating.
Conversion transconductance.

| Service | Plate Volts | Screen Volts | Neg Grid Volts | Plate Milli-am-peres | Screen Milli-am-peres | R _p , Ohms | G _m , μmhos | μ Factor | Load for Rated Output, Ohms | Power Output, Watts | Tube Type |
|---------------------------------|---|-------------------|---|----------------------|-----------------------|----------------------------|-------------------------|-------------------------|-----------------------------|---------------------|--------------------|
| Frequency Changer | Max. peak inverse voltage 1200 V.; max. peak anode curr. 1500 A.; corresponding av. anode curr. 20 A.; max. av. anode curr. 70 A.; corresponding peak anode curr. 420 A. | | | | | | | | | | GL7672 |
| Frequency Changer | Max. peak inverse voltage 1500 V.; max. peak anode curr. 1200 A.; corresponding av. anode curr. 16 A.; max. av. anode curr. 56 A.; peak anode curr. 336 A. | | | | | | | | | | GL7672-PC |
| Resistance Welding | Max. supply volts RMS 250-600; max. demand KVA 2400; corresponding av. anode curr. 192 A.; max. av. anode curr. 355 A.; corresponding demand KVA 800. | | | | | | | | | | GL7673 / GL7673-PC |
| Frequency Changer | Max. peak inverse voltage 1200 V.; max. peak anode curr. 3000 A.; corresponding av. anode curr. 40 A.; max. av. anode curr. 140 A.; corresponding peak anode curr. 840 A. | | | | | | | | | | GL7673 |
| Frequency Changer | Max. peak inverse voltage 1500 V.; max. peak anode curr. 2400 A.; corresponding av. anode curr. 32 A.; max. av. anode curr. 112 A.; corresponding peak anode curr. 672 A. | | | | | | | | | | GL7673-PC |
| Resistance Welding | Max. supply volts RMS 250-600; max. demand KVA 1800; corresponding av. anode curr. 135 A.; max. av. anode curr. 220 A.; corresponding demand KVA 600. | | | | | | | | | | GL7681 / GL7681-PC |
| Frequency Changer | Max. peak inverse voltage 1200 V.; max. peak anode curr. 2250 A.; corresponding av. anode curr. 30 A.; max. av. anode curr. 105 A.; corresponding peak anode curr. 630 A. | | | | | | | | | | GL7681 |
| Frequency Changer | Max. peak inverse voltage 1500 V.; max. peak anode curr. 1800 A.; corresponding av. anode curr. 24 A.; max. av. anode curr. 84 A.; corresponding peak anode curr. 502 A. | | | | | | | | | | GL7681-PC |
| DC Amplifier | 800 600 300 | 250 250 250 | 1.0 1.0 0.5 | 12 10.6 12.6 | 1.6 1.7 2.2 | 35,000 34,000 28,000 | 4,200 4,200 4,200 | — — — | — — — | — — — | 7683 |
| Class A Amplifier | 220 | 130 | R _k = 10 | — | 3.4 | 500,000 | 5,800 | — | — | — | 7687 |
| Class A Amplifier | 215 | — | 8.5 | 7.5 | — | 7,200 | 2,500 | 18 | — | — | |
| Class A Amplifier | 250 | — | 8.5 | 10.5 | — | 7,700 | 2,200 | 17 | — | — | 7688 |
| Class A Amplifier ♦ | 100 | — | 0 | 11.8 | — | 6,500 | 3,100 | 20 | — | — | |
| Class A Amplifier | 250 | — | 2.0 | 1.2 | — | 62,500 | 1,600 | 100 | — | — | 7689 |
| Class A Amplifier | 100 | — | 1.0 | 0.5 | — | 80,000 | 1,250 | 100 | — | — | |
| Class A Amplifier ♦ | 250 | — | 2.0 | 10 | — | 10,900 | 5,500 | 60 | — | — | 7690 |
| Class A Amplifier | 100 | — | 1.0 | 3.7 | — | 15,000 | 4,000 | 60 | — | — | |
| Class A Amplifier | 130 | 130 | 11.0 | 100† | 5.0† | 7,000 | 11,000 | — | 1,100 | 4.5 | 7695 |
| Class AB ₁ Amplifier | 140 | 140 | R _k = 50 | 210† | 9.0† | — | — | — | 1,500† | 10 | |
| Class A Amplifier | 130 | 130 | 12.0 | 195† | 9.0† | — | — | — | 1,800† | 10 | |
| Class A Amplifier | 250 | 250 | 12.5 | 28 | 3.1 | 31,000 | 3,600 | — | — | — | 7701 |
| Capacitor Discharge | Max. forward peak anode voltage 20000 volts; max. inverse peak anode voltage 20000 volts; max. peak anode curr. 100,000 A.; typical discharge rate pulses per minute 2. | | | | | | | | | | GL7703 |
| Class A Amplifier | 200 | 125 | R _k = 68 | 24 | 5.2 | 70,000 | 10,000 | — | — | — | 7716 |
| Class A Amp | 125 | — | 1.0 | 1.5 | — | 35,000 | 2,900 | 102 | — | — | |
| Class A Amplifier | 125 | 80 | 1.0 | 10 | 1.4 | 125,000 | 8,000 | — | — | — | 7717 |
| Class A Amplifier | 300 | — | 10.5 | 4.0 | — | 7,100 | 3,500 | 25 | — | — | 7719 |
| Class A Amplifier | 150 | — | R _k = 82 | 7.5 | — | — | 10,500 | 90 | — | — | 7720 |
| Class A Amplifier | 100 | — | 0 | 9.0 | — | — | 11,500 | — | — | — | |
| 450 Mc UHF Oscillator | 150 | — | R _k = 7,500 | 4.0 | — | — | — | I _c = 0.5 ma | — | 0.1 | |
| Class A Amplifier | 190 | 160 | R _k = 400; E _{ci} = +10 | 22 | 6.0 | 120,000 | 35,000 | — | — | — | 7721 |
| Class A Amplifier | 190 | 160 | R _k = 370; E _{ci} = +8 | 20 | 6.0 | 100,000 | 26,000 | — | — | — | 7722 |
| Class A Amplifier FM Det. | 250 | — | 3.0 | 0.7 | — | 72,000 | 1,000 | 72 | — | — | 7724 |
| | Max d-c output current ♦ = 5.0 ma; tube voltage drop ♣ = 5.0 volts at 18 ma d-c | | | | | | | | | | |

Metal tubes are shown in bold-face type, *miniature tubes in italics.*

♦ G3 and G5 are screen. G4 is signal-input grid.

♥ G2 and G4 are screen. G3 is signal-input grid.

1, 2, 3, etc. indicate tube sections.

✱ Maximum screen dissipation appears immediately below the screen voltage.

¶ Heater warm-up time controlled.

| Tube Type | Classification by Construction | Base Connections | Out-line Dwg | Filament Volts | Filament Amp | Max Plate Watts | Max Plate Volts | Max Screen Volts and Watts * | Capacitance in Picofarads | | |
|-----------|--------------------------------|------------------|--------------|----------------|--------------|-----------------|--|------------------------------|---------------------------|------------|------------|
| | | | | | | | | | Input | Out-put | Grid-plate |
| 7725 | Thyratron | FG-27-A | T-X | 2.5 | 9.0 | — | Anode Voltage Drop = 15 Volts | | | | |
| 7726 | Thyratron | 7518/710L | T-X | 2.5 | 9.0 | — | Anode Voltage Drop = 15 Volts | | | | |
| 7728 | Medium-Mu Twin Triode | 9A | 6-2 | 12.6 6.3 | 0.15 0.3 | 2.8 ◆ | 330 ◆ | — | 2.2 ▲ | 0.51 ▲ | 1.5 ▲ |
| 7729 | High-Mu Twin Triode | 9A | 6-2 | 12.6 6.3 | 0.15 0.3 | 1.1 ◆ | 330 ◆ | — | 1.6 ▲ | 0.461 ▲ | 1.7 ▲ |
| 7730 | Medium-Mu Twin Triode | 9A | 6-2 | 12.6 6.3 | 0.15 0.3 | 3.0 ◆ | 330 ◆ | — | 1.8 | 2.0 | 1.5 |
| 7731 | Triode-Pentode | 9AE | 6-2 | 6.3 | 0.45 | 3.0 ◆ | 330 ◆ | 330 ◆ | Pentode Section | | |
| | | | | | | 3.0 ◆ | 330 ◆ | 0.6 ◆ | Triode Section | | |
| 7732 | Sharp-Cutoff RF Pentode | 7CM | 5-2 | 6.3 | 0.3 | 2.3 ◆ | 330 ◆ | 330 ◆ | 6.5 | 3.0 | 0.15 |
| 7733 | Sharp-Cutoff Pentode | 9BF | 6-3 | 12.6 6.3 | 0.3 0.6 | 6.5 ◆ | 330 ◆ | 190 ◆ | 10.7 ◆ | 4.0 ▲ | 0.063 ▲ |
| 7734 | Triode-Pentode | 9LC | 6-3 | 6.3 | 0.9 | 1.0 ◆ | 330 ◆ | 275 ◆ | Pentode Section | | |
| | | | | | | 7.0 ◆ | 275 ◆ | 0.5 ◆ | Triode Section | | |
| 7737 | RF Pentode | 9MZ | 6-1 | 6.3 | 0.32 | 3.0 ◆ | 210 ◆ | 175 ◆ | 7.6 ▲ | 3.3 ▲ | 0.03 ▲ |
| 7738 | High-Frequency Triode | 7DK | 5-1 | 6.3 | 0.225 | 5.0 ◆ | 330 ◆ | — | 3.0 | 1.8 | 1.7 |
| 7751 | Beam-Power Amplifier | 8KB | T-X | 6.3 | 1.2 | 10 ◆ | 250 ◆ | 250 ◆ | 17.5 ▲ | 9.0 ▲ | 1.3 ▲ |
| 7754 | Beam-Power Amplifier | 9PX | T-X | 6.3 | 1.2 | 16 ◆ | 150 ◆ | 150 ◆ | Single Tube | | |
| | | | | | | | | 2.5 ◆ | Two Tubes, Push-Pull | | |
| 7767 | Beam Power Amplifier | 9NE | T-X | 6.3 | 0.6 | 14 ◆ | 3,000 ◆ | 700 ◆ | — | — | — |
| 7759 | Medium-Mu Twin Triode | 8DG | 3-1 | 26.5 | 0.09 | 1.1 ◆ | 165 ◆ | — | 2.2 | 1.3 | 1.4 |
| 7760 | Medium-Mu Twin Triode | 8DG | 3-1 | 26.5 | 0.09 | — | 55 ◆ | — | 2.5 | 1.3 | 1.8 |
| 7761 | Semi-Remote Cutoff Pentode | 8DL | 3-3 | 26.5 | 0.11 | 4.0 ◆ | 165 ◆ | 155 ◆ | 8.5 | 8.0 | 0.18 ◆ |
| 7762 | Power Amplifier Pentode | 8DL | 3-3 | 26.5 | 0.11 | 4.0 ◆ | 165 ◆ | 155 ◆ | 6.5 | 7.5 | 0.11 |
| 7763 | Double-Plate Sheet-Beam Tube | 9NF | 6-3 | 6.3 | 0.3 | 0.75 ◆ | 330 ◆ | 330 ◆ | — | — | — |
| 7768 | High-Mu Triode (Ceramic) | 7768 | T-X | 6.3 | 0.4 | 5.5 ◆ | 330 ◆ | — | 6.0 ▲ | 0.025 ▲ | 1.7 ▲ |
| 7784 | High-Mu UHF Triode (Planar) | 7784 | T-X | 6.3 | 0.3 | 2.0 ◆ | 200 ◆ | — | 3.65 ▲ | 0.02 ▲ | 1.75 ▲ |
| 7788 | Pentode | 9NK | 6-2 | 6.3 | 0.34 | 5.0 ◆ | 250 ◆ | 200 ◆ | 16 | 4.1 | 0.035 ◆ |
| 7802 | Low-Mu Twin Triode | 8BD | 12-43 | 6.3 | 2.5 | 13 ◆ | 250 ◆ | — | — | — | — |
| 7803 | Medium-Mu Twin Triode | 9AJ | 6-2 | 6.3 | 0.365 | 3.5 ◆ | 200 ◆ | — | 3.3 | 2.5 | 1.4 |
| 7815 | High-Mu Triode (Planar) | 7815 | T-X | 6.0 | 1.0 | 10 ◆ | 3500 ◆ | Peak | 6.3 ▲ | 0.035 ▲ | 2.05 ▲ |
| 7815R | High-mu Triode (Planar) | 7815R | T-X | 6.0 | 1.0 | 10 ◆ | 3500 ◆ | Peak | 6.3 ▲ | 0.035 ▲ | 2.05 ▲ |
| 7841 | Diode (Planar) | 7266 | T-X | 6.3 | 0.215 | — | Tube Voltage Drop: 2.6 volts at 5.0 ma d-c | | | | |

■ Compactron.
† Zero signal.
◆ Per section.

† Plate-to-plate.
◆ Maximum.
◆ Supply voltage.

◎ Subminiature type.
▲ Without external shield.
◆ Design maximum rating.

◎ Total for all similar sections.
◆ Absolute maximum rating.
Conversion transconductance.

● See X-Radiation Warning, page 4.

| Service | Plate Volts | Screen Volts | Neg Grid Volts | Plate Milli-amperes | Screen Milli-amperes | R_p , Ohms | G_m , μ mhos | μ Factor | Load for Rated Output, Ohms | Power Output, Watts | Tube Type |
|------------------------------------|--|--------------|--|---------------------|----------------------|------------------|--------------------|---|-----------------------------|---------------------|--------------|
| Controlled Rectifier | Max d-c cathode current \oplus = 2.5 amperes; max peak 3,500 volts; max peak cathode current \oplus = 30 amperes | | | | | | | inverse voltage \oplus = | | 7725 | |
| Controlled Rectifier | Max d-c cathode current \oplus = 2.5 amperes; max peak 3,500 volts; max peak cathode current \oplus = 30 amperes | | | | | | | inverse voltage \oplus = | | 7726 | |
| Class A Amplifier \clubsuit | 250 100 | — | 2.0 1.0 | 10 3.7 | — | 10,900 15,000 | 5,500 4,000 | 60 60 | — — | — — | 7728 |
| Class A Amplifier \clubsuit | 250 100 | — | 2.0 1.0 | 1.2 0.5 | — | 62,500 80,000 | 1,600 1,250 | 100 100 | — — | — — | 7729 |
| Class A Amplifier \clubsuit | 250 100 | — | 8.5 0 | 10.5 11.8 | — | 7,700 6,500 | 2,200 3,100 | 17 20 | — — | — — | 7730 |
| Class A Amplifier | 250 | 110 | $R_k =$ 68 | 10 | 3.5 | 400,000 | 5,200 | — | — | — | 7731 |
| Class A Amplifier | 150 | — | $R_k =$ 56 | 18 | — | 5,000 | 8,500 | 40 | — | — | 7732 |
| Class A Amplifier | 250 | 150 | $R_k =$ 200 | 8.5 | 2.5 | 600,000 | 6,000 | G ₂ connected to cathode at socket | | 7732 | |
| Class A Amplifier | 250 | 180 | $R_k =$ 100 | 24 | 5.0 | 90,000 | 12,000 | G ₂ connected to cathode at socket | | 7733 | |
| Class A Amplifier Series Regulator | 150 150 | 150 — | 2.0 21 | 5.5 35 | 1.7 — | 340,000 1,080 | 3,200 5,000 | — 5.4 | — — | — — | 7734 |
| Class A Amplifier | 180 | 150 | $R_k =$ 100 | 11.5 | 2.9 | — | 15,900 | E _{c3} = 0 volts | | 7737 | |
| Class A Amplifier | 200 | — | $R_k =$ 100 | 12 | — | — | 9,500 | 80 | — | — | 7738 |
| Class A Amplifier | 100 | 100 | 8.2 | 100 | 7.0 | 5,000 | 14,000 | — | — | — | 7751 |
| Class A Amplifier | 130 | 130 | 11.0 | 100† | 5.0† | 7,000 | 11,000 | — | 1,100 | 4.5 | 7754 |
| Class AB ₁ Amplifier | 140 | 140 | $R_k =$ 50 | 210† | 9.0† | — | — | — | 1,500† | 10 | 7754 |
| DC Amplifier | 130 | 130 | 12.0 | 195† | 9.0† | — | — | — | 1,800† | 10 | 7754 |
| DC Amplifier | 250 | 250 | 12.5 | 45 | 3.5 | — | 4,100 | — | — | — | 7767 |
| Class A Amplifier \clubsuit | 100 | — | $R_k =$ 150 | 6.5 | — | — | 5,400 | 35 | — | — | 7759 \odot |
| Class A Amplifier \clubsuit | 26.5 | — | $R_k =$ 2.2 meg. | 3.0 | — | — | 5,000 | 20 | — | — | 7760 \odot |
| Class A Amplifier | 150 | 100 | $R_k =$ 100 | 21 | 4.0 | 50,000 | 9,000 | — | — | — | 7761 \odot |
| Class A Amplifier | 110 | 110 | $R_k =$ 270 | 30† | 2.2† | 15,000 | 4,200 | — | 3,000 | 1.0 | 7762 \odot |
| IF Amplifier-Limiter | 135 | 300 | 0 | 4.2 \oplus | 4.0 | — | — | — | — | — | 7763 |
| | Deflector Voltage = 135 volts d-c (each deflector); deflector-to-deflector voltage = 10 volts RMS | | | | | | | | | | |
| Class A Amplifier | 200 | — | $R_k =$ 270 E _{c1} = +6 | 24 | — | 4,500 | 50,000 | 225 | — | — | 7768 |
| Class A Amplifier | 175 | — | Adjust for I _b = 10 ma | 10 | — | — | 15,000 | 110 | — | — | 7784 |
| Class A Amplifier | 135 | 165 | $R_k =$ 360; E _{c1} = +12.5 | 35 | 5.0 | — | 50,000 | — | — | — | 7788 |
| DC Amplifier \clubsuit | 100 | — | 4 | 115 | — | — | 20,000 | 8.5 | — | — | 7802 |
| Class A Amplifier \clubsuit | 90 | — | 1.3 | 15 | — | — | 12,500 | 33 | — | — | 7808 |
| Plate-Pulsed Oscillator | 3500 | — | — | 9.0 | — | — | — | — | — | 2,000 Peak | 7815 |
| Plate-Pulsed Oscillator | 3500 | — | — | 9.0 | — | — | — | — | — | 2,000 Peak | 7815R |
| Half-Wave Rectifier | Max d-c output current \diamond = 5.0 ma; max peak inverse voltage \diamond = 350 volts; max peak current \diamond = 20 ma | | | | | | | | | | 7841 |

Metal tubes are shown in bold-face type, miniature tubes in italics.

\clubsuit G3 and G5 are screen. G4 is signal-input grid.

\heartsuit G2 and G4 are screen. G3 is signal-input grid.

, 1, 2, etc. indicate tube sections.

\odot Maximum screen dissipation appears immediately below the screen voltage.

\ddagger Heater warm-up time controlled.

| Tube Type | Classification by Construction | Base Connections | Out-line Dwg | Filament Volts | Filament Amp | Max Plate Watts | Max Plate Volts | Max Screen Volts and Watts* | Capacitance in Picofarads | | |
|-----------|--|------------------|--------------|----------------|--------------|-----------------|-----------------|-----------------------------|--|--------------------------------------|------------|
| | | | | | | | | | Input | Out-put | Grid-plate |
| 7851 | Tetrode | 7GE | T-X | 2.5 | 0.2 | — | 12 | 12 | 2.6▲ | 1.8▲ | 0.19▲ |
| 7855 | High-Mu UHF Triode (Planar) | 7815R | T-X | 6.0 | 1.0 | 20⊞ | 2500⊞ | — | 6.3▲ | 0.06♣ | 2.5▲ |
| 7861 5★ | High-Frequency Twin Triode | 8CJ | 6-1 | 12.6 | 0.175 | 1.35♣ | 330♣ | — | 2.2▲ | 1.0▲ | 1.1▲ |
| 7867 | Beam-Power Amplifier | 5BT | 12-21 | 6.3 | 2.5 | 24♣ | 700♣ | 175♣ 3.6♣ | Single Tube | | |
| 7868 | Power Amplifier Pentode | 9RW | 9-85 | 6.3 | 0.8 | 19♣ | 550♣ | 440♣ 3.3♣ | Two Tubes, Push-Pull | | |
| 7887 Ⓞ | Medium-Mu Twin Triode | 8DG | 3-1 | 26.5 | 0.09 | 1.1♣ | 165⊞ | — | 2.1 | 1.3 ₁ 1.4 ₂ | 1.4 |
| 7888 Ⓞ | Medium-Mu Triode | 8DK | 3-1 | 26.5 | 0.045 | 3.3♣ | 165⊞ | — | 2.4 | 2.4 | 1.3 |
| 7889 Ⓞ | Medium-Mu Twin Triode | 8DG | 3-1 | 26.5 | 0.09 | 0.55♣ | 165⊞ | — | 2.2 | 1.3 ₁ 1.4 ₂ | 1.0 |
| 7892 | Twin Triode | 9H | 6-2 | 12.6 | 0.45 | 4.2♣ | 330♣ | — | 4.0▲ | 0.61▲ | 4.0▲ |
| | | | | 6.3 | 0.9 | 7.5♣ | | | | 0.52▲ | |
| 7894 Ⓞ | Glow-Discharge Diode Voltage Regulator | 7894 | T-X | — | — | — | — | — | — | — | — |
| 7895 | High-Mu Triode (Nuvistor) | 12AQ | 4-4 | 6.3 | 0.135 | 1.0⊞ | 110⊞ | — | 4.2▲ | 1.7▲ | 0.9▲ |
| 7898 | High-Mu Twin Triode | 9EP | 6-2 | 13.5 | 0.15 | 2.75♣ | 330⊞ | — | 2.5 | 1.2 ₁ 1.3 ₂ | 1.6 |
| 7905 | Beam Power Amplifier | 9PB | 6-3 | 6.3 | 0.65 | 10⊞ | 300⊞ | 250⊞ 1.5⊞ | 8.5▲ | 5.5▲ | 0.14▲ |
| 7910 | Plate-Pulsed UHF Oscillator (Planar) | 7910 | T-X | 6.3 | 0.275 | 1.5⊞ | 1200⊞ Peak | — | 2.1▲ | 0.02▲ | 1.0▲ |
| 7911 | Plate-Pulsed UHF Oscillator (Planar) | 7911 | T-X | 6.3 | 0.55 | 6.5⊞ | 3000⊞ Peak | — | 5.0▲ | 0.05▲ | 1.4▲ |
| 7913 | High-Mu Triode (Planar) | 7768 | T-X | 6.3 | 0.4 | 5.5⊞ | 330⊞ | — | 6.0▲ | 0.03▲ | 2.4▲ |
| 7962 Ⓞ | Twin Triode | 8DG | 3-1 | 6.3 | 0.24 | 1.0⊞ | 100⊞ | — | 3.0 | 1.1 | 2.4 |
| 7963 Ⓞ | Twin Triode | 8DG | 3-1 | 6.3 | 0.35 | 1.1♣ | 165⊞ | — | 4.0 | 1.0 ₁ 1.3 ₂ | 2.7 |
| 7979 Ⓞ | Gas Triode | 7979 | T-X | 1.25 | 0.25 | — | — | — | — | — | — |
| 7983 | Twin Tetrode | 9PS | 6-4 | 3.15 | 1.65 | 7.0⊞ | 300⊞ | 200⊞ 1.0⊞ | Two Sections, Push-Pull | | |
| 7984 ■ | Beam Power Amplifier | 12EÜ | 12-56 | 13.5 | 0.58 | 35⊞ | 750⊞ | 250⊞ 3.0⊞ | 16▲ | 6.0▲ | 0.16▲ |
| GL7985 | Tetrode | GL 7985 | TX | 6.7 | 13.5 | 3500 | 7000 | 750 | Cathode-Plate 0.01; Input 28.0; Output 6.6 | | |
| | | | | | | | 4500 7000 | 500 750 | | | |
| 7994 Ⓞ | Triode | 8KM | 3-1 | 6.3 | 0.25 | 2.0⊞ | 200⊞ | — | — | — | — |
| 7995 Ⓞ | Sharp-Cutoff Pentode | 8KZ | 3-1 | 6.3 | 0.25 | 1.6⊞ | 200⊞ | 165⊞ 0.6⊞ | 8.5 | 2.75 | 0.035♣ |

Ⓞ Compactron.

† Plate-to-plate.

Ⓞ Subminiature type.

Ⓞ Total for all similar sections.

† Zero signal.

♣ Maximum.

▲ Without external shield.

⊞ Absolute maximum rating.

♣ Per section.

♣ Supply voltage.

♣ Design maximum rating.

Conversion transconductance.

● See X-Radiation Warning, page 4.

| Service | Plate Volts | Screen Volts | Neg Grid Volts | Plate Milli-amperes | Screen Milli-amperes | R_p Ohms | G_m , μ mhos | μ Factor | Load for Rated Output, Ohms | Power Output, Watts | Tube Type |
|---|--|--------------|----------------|---------------------|----------------------|------------|--------------------|--------------|-----------------------------|---------------------|----------------|
| Class A Amplifier | 11.0 | 11.0 | 2.2 | 0.016 | — | 1,700,000 | 40 | 5 | — | — | <i>7861</i> |
| Grid-Pulsed Oscillator | 1700 | — | 45 | 1900 peak | — | — | — | — | — | 1,500 peak | 7855 |
| Class A Amplifier \clubsuit | 150 | — | $R_k = 240$ | 8.2 | — | 6,400 | 5,500 | 35 | — | — | <i>7861 5*</i> |
| Class A ₁ Amplifier | 250 | 90 | $R_k = 120$ | 80† | 1.0† | 12,000 | 10,000 | — | 3,000 | 7.5 | 7867 |
| Class AB ₁ Amplifier | 450 | 150 | 35 | 58† | 1.4† | — | — | — | 5,000† | 65 | |
| Class A Amplifier | 300 | 300 | 10 | 60† | 8.0† | 29,000 | 10,200 | — | 3,000 | 11 | 7868 |
| Class AB ₁ Amplifier | 450 | 400 | 21 | 40† | 5.0† | — | — | — | 6,600† | 44 | |
| | 450 | 400 | $R_k = 170$ | 86† | 10† | — | — | — | 10,000 † | 28 | |
| Class A Amplifier \clubsuit | 100 | — | $R_k = 220$ | 8.5 | — | — | 5,000 | 20 | — | — | 7887 ● |
| Class A Amplifier | 150 | — | $R_k = 180$ | 13 | — | — | 6,500 | 27 | — | — | 7888 ● |
| | 100 | — | $R_k = 150$ | 8.5 | — | — | 5,800 | 27 | — | — | |
| Class A Amplifier | 150 | — | $R_k = 820$ | 1.75 | — | — | 2,500 | 70 | — | — | 7889 ● |
| | 100 | — | $R_k = 1500$ | 0.8 | — | — | 1,800 | 70 | — | — | |
| Pulse Amplifier \clubsuit | Max pulse cathode current $\clubsuit = 5.0$ amperes (for duty cycle up to 0.25%) | | | | | | | | | | 7898 |
| { d-c operation current = 0.03 ma min. } Ionization voltage = 3,300 volts d-c { d-c operation current = 1.6 ma max. } Operating voltage = 3,000 volts d-c Regulation (0.03 to 0.85 milliamperes = 85 volts) | | | | | | | | | | | 7894 ● |
| Class A Amplifier | 110 | — | $R_k = 150$ | 7.0 | — | 6,800 | 9,400 | 64 | — | — | 7895 |
| Class A Amplifier \clubsuit | 250 | — | $R_k = 200$ | 10 | — | 10,900 | 5,500 | 60 | — | — | 7898 |
| Class C Amplifier | 300 | 160 | 36 | 50 | 2.5 | — | — | — | — | 5.5 | 7906 |
| Plate-Pulsed Oscillator at 5,900 Mc | Peak plate voltage = 1,000 volts; PRF = 1,000; PD = 1.0 microsecond; peak power output = 100 watts | | | | | | | | | | 7910 |
| Plate-Pulsed Oscillator at 4,100 Mc | Peak plate voltage = 3,000 volts; PRF = 1,000; PD = 1.0 microsecond; peak power output = 2.2 kilowatts | | | | | | | | | | 7911 |
| Class A Amplifier | 200 | — | $R_k = 47$ | 25 | — | 2,500 | 40,000 | 100 | — | — | 7913 |
| Class A Amplifier \clubsuit | 60 | — | $R_k = 220$ | 7.8 | — | 2,100 | 10,000 | 21 | — | — | 7962 ● |
| Class A Amplifier \clubsuit | 100 | — | $R_k = 270$ | 7.5 | — | 3,100 | 13,000 | 40 | — | — | 7963 ● |
| Indicator | Peak anode current $\clubsuit = 11$ ma max; d-c anode current $\clubsuit = 3$ ma max | | | | | | | | | | 7979 ● |
| Class C Amplifier | 250 | 250 | 40 | 90 | 8.4 | — | — | — | — | 11 | 7985 |
| | $R_{st} = 22,000$ ohms | | | | | | | | | | |
| Class A Amplifier | 200 | 125 | 20 | 125 | 4.5 | — | 7,300 | — | — | — | 7984 ■ |
| Class C Amp | 450 | 200 | 60 | 180 | 12 | — | — | — | — | 46 | |
| RF Amplifier | 7000 | 600 | 35 | 475 | 10 | — | — | — | — | 1100 | GL7985 |
| Class B | 4000 | 400 | 100 | 570 | 20 | — | — | — | — | 1250 | |
| Class C | 6500 | 700 | 100 | 800 | 25 | — | — | — | — | 3200 | |
| Telephony Amp/Osc Telegraphy | 100 | — | $R_k = 82$ | 13 | — | 22,000 | 18,000 | 42 | — | — | 7994 ● |
| Class A Amplifier | 150 | 150 | $R_k = 160$ | 8.0 | 2.0 | 85,000 | 13,000 | — | — | — | 7995 ● |

metal tubes are shown in bold-face type, miniature tubes in italics.

† G3 and G5 are screen. G4 is signal-input grid.

‡ G2 and G4 are screen. G3 is signal-input grid.

*, †, etc. indicate tube sections.

● Maximum screen dissipation appears immediately below the screen voltage.

‡ Heater warm-up time controlled.

| Tube Type | Classification by Construction | Base Connections | Out-line Dwg | Filament Volts | Filament Amp | Max Plate Watts | Max Plate Volts | Max Screen Volts and Watts | Capacitance in Picofarads | | |
|----------------------|-----------------------------------|------------------|--------------|----------------|----------------|-----------------|------------------------------|----------------------------|--|--------|------------|
| | | | | | | | | | Input | Output | Grid-plate |
| GL7998/ GL7998-PC | Ignitron | GL7998 | TX | — | — | — | — | — | — | — | — |
| GL7998 | Ignitron | GL7998 | TX | — | — | — | — | — | — | — | — |
| GL7998-PC | Ignitron | GL7998 | TX | — | — | — | — | — | — | — | — |
| 8008 | Half-Wave Mercury-Vapor Rectifier | 2P | T-X | 5.0 | 7.5 | — | Tube Voltage Drop = 10 Volts | | | | |
| 8032 | Beam Power Amplifier | 7CK | T-X | 13.5 | 0.585 | 20 | 400 | — | Triode Connection Two Tubes, Push-Pull | | |
| | | | | | | 20 | 400 | 250 | Pentode Connection Two Tubes, Push-Pull | | |
| | | | | | | | | 3.0 | | | |
| 8032-A | Beam Power Amplifier | 7CK | T-X | 12.6 | 0.562 | 27 | 600 | 250 | Pentode Connection Two Tubes, Push-Pull | | |
| | | | | | | | | 3.0 | | | |
| 8042 | Beam Power Amplifier | 8LJ | T-X | 1.6 | 3.2 | 25 | 650 | 200 | 13.5 | 8.5 | 0.24 |
| | | | | | | | | 5.0 | | | |
| 8056 | Medium-Mu Triode (Nuvistor) | 12AQ | 4-4 | 6.3 | 0.135 | 0.45 | 50 | — | 4.0 | 1.7 | 2.1 |
| 8058 | High-Mu Triode (Nuvistor) | 12CT | 4-6 | 6.3 | 0.135 | 1.5 | 150 | — | — | — | — |
| 8064 | Semi-Remote-Cutoff Pentode | 8DL | 3-1 | 26.5 | 0.045 | 0.75 | 165 | 155 | 4.0 | 3.4 | 0.015 |
| | | | | | | | | 0.35 | | | ♣ |
| 8068 | Beam Pentode | 8LC | 12-20 | 6.3 | 0.9 | 35 | 3500 | 250 | 10 | 5.5 | 0.6 |
| | | | | | | | | 1.0 | | | ♣ |
| 8070 | High-Mu Triode | 8LD | 3-1 | 6.3 | 0.125 | 1.0 | 165 | — | 3.3 | 2.1 | 1.7 |
| 8071 | High-Mu Triode | 8LE | 3-1 | 6.3 | 0.125 | 2.0 | 165 | — | 4.0 | 1.8 | 2.4 |
| 8077 | Pentode | 9GK | 6-2 | 13.5 | 0.275 | 5.0 | 330 | 180 | 10.2 | 3.5 | 0.063 |
| | | | | | | | | 1.0 | | | ♣ |
| 8081 | Triode (Ceramic) | 8081 | T-X | 6.3 | 0.22 | 0.85 | 275 | — | 1.5 | 0.03 | 1.0 |
| 8082 | Triode (Planar) | 8081 | T-X | 6.3 | 0.24 | 1.0 | 250 | — | 1.8 | 0.032 | 1.3 |
| | | | | | | | | | | | ♣ |
| 8083 | Triode (Planar) | 8081 | T-X | 6.3 | 0.24 | 1.1 | 250 | — | 1.8 | 0.032 | 1.2 |
| | | | | | | | | | | | ♣ |
| 8084 | Sharp-Cutoff RF Pentode | 7CM | 5-2 | 13.5 | 0.16 | 2.3 | 250 | 180 | 8.0 | 3.0 | 0.04 |
| | | | | | | | | 0.5 | | | ♣ |
| 8096 | Triode | 8FY | 3-1 | 6.3 | 0.2 | 0.5 | 150 | — | 1.75 | 0.6 | 2.0 |
| | | | | | | | | | | | ♣ |
| 8100 | Photoconductive Cell | 8100 | T-X | — | — | 0.3 | 400 | — | — | — | — |
| 8102 | Triode-Pentode | 9PJ | 6-2 | 13.5 | 0.23 | 2.5 | 330 | 330 | Pentode Section | | |
| | | | | | | 2.5 | 330 | 0.55 | Triode Section | | |
| 8103 | Medium-Mu Twin Triode | 8DG | 3-1 | 26.5 | 0.075 | — | 55 | — | 3.8 | 1.3 | 2.7 |
| 8106 | Beam Pentode | 9PL | 6-2 | 13.5 | 0.25 | 6.0 | 330 | 300 | 10 | 2.8 | 0.09 |
| | | | | | | | | 1.25 | | | ♣ |
| 8108 | Medium-Mu Triode (Planar) | 8108 | T-X | 6.3 | 0.735 | 12.5 | 300 | — | 3.0 | 0.035 | 1.4 |
| 8113 5★ | Sharp-Cutoff RF Tetrode | 7EW | 5-2 | 6.3 | 0.2 | 2.0 | 180 | 180 | 4.3 | 2.8 | 0.035 |
| | | | | | | | | 0.5 | | | ♣ |
| 8116 | Tetrode | 8116 | TX | 26.5 13.25 | 0.433 0.866 | 2x30 | 1000 | 300 | 11.8 | 3.7 | 0.09 |
| 8116A | Tetrode | 8116A | TX | 13.25 | 1.0 | 2x30 | 1000 | 360 | 11.8 | 3.7 | 0.09 |
| 8117 | Tetrode | 8117 | TX | 12.6 6.3 | 0.9 1.8 | 2x30 | 1000 | 360 | 11.8 | 3.7 | 0.09 |
| 8117A | Tetrode | 8117A | TX | 13.25 | 1.0 | 2x30 | 1000 | 360 | 11.8 | 3.7 | 0.09 |

■ Compactron.

† Zero signal.

● Per section.

♣ See X-Radiation Warning, page 4.

† Plate-to-plate.

♣ Maximum.

‡ Supply voltage.

● Subminiature type.

▲ Without external shield.

◆ Design maximum rating.

⊕ Total for all similar sections.

⊖ Absolute maximum rating.

Conversion transconductance.

| Service | Plate Volts | Screen Volts | Neg Grid Volts | Plate Milli-amperes | Screen Milli-amperes | R _p , Ohms | G _m , μmhos | μ Factor | Load for Rated Output, Ohms | Power Output, Watts | Tube Type |
|--|---|--------------|---|---------------------|----------------------|-----------------------|------------------------|----------|-----------------------------|---------------------|--------------------------|
| Resistance Welding | Max. supply volts RMS 250-600; max. demand KVA 1800; corresponding av. anode curr. 135 A.; max. av. anode curr. 220 A.; corresponding demand KVA 600. | | | | | | | | | | GL7998/ GL7998 -PC |
| Frequency Changer | Max. peak inverse voltage 1200 V.; max. peak anode curr. 2250 A.; corresponding av. anode curr. 30 A.; max. av. anode curr. 105 A.; corresponding peak anode curr. 630 A. | | | | | | | | | | GL7998 |
| Frequency Changer | Max. peak inverse voltage 1500 V.; max. peak anode curr. 1800 A.; corresponding av. anode curr. 24 A.; max. av. anode curr. 84 A.; corresponding peak anode curr. 502 A. | | | | | | | | | | GL7998 -PC |
| Half-Wave Rectifier | Max d-c output current \square = 1.25 amperes; max peak inverse voltage \square = 5,000 volts; max peak current \square = 5.0 amperes | | | | | | | | | | 8008 |
| Class AB ₁ Amplifier | 400 | — | 100 | 40† | — | — | — | — | 8,000† | 22 | 8032 |
| Class AB ₂ Amplifier | 600 | 165 | 44 | 22† | 0.6† | — | — | — | 6,000† | 90 | 8032-A |
| Class AB ₁ Amplifier | 600 | 200 | 47 | 48† | 14.8† | — | — | — | 5,600† | 96 | 8032-A |
| Class C Amplifier | 600 | 180 | 71 | 150 | 15 | — | — | — | — | 65 | 8042 |
| Class A Amplifier | 24 | — | R _k = 100 | 8.7 | — | 1,530 | 7,500 | 11.5 | — | — | 8056 |
| Class A Amplifier | 110 | — | R _k = 47 | 10 | — | 5,600 | 12,400 | 70 | — | — | 8058 |
| Class A Amplifier | 100 | 100 | R _k = 120 | 7.2 | 2.0 | 275,000 | 4,500 | — | — | — | 8064 ● |
| Series Regulator | 600 | 125 | 7.5 | 36 | 1.0 | 54,500 | 5,200 | — | — | — | 8068 |
| Max d-c cathode current \square = 100 ma | | | | | | | | | | | |
| Class A Amplifier | 110 | — | R _k = 130 | 7.5 | — | 5,300 | 10,500 | 55 | — | — | 8070 |
| Class A Amplifier | 150 | — | R _k = 100 | 13 | — | 4,670 | 12,750 | 55 | — | — | 8071 ● |
| Class A Amplifier | 250 | 150 | R _k = 120 | 19 | 3.5 | 100,000 | 11,500 | — | — | — | 8077 |
| Class A Amplifier | 150 | — | R _k = 1,000 | 0.95 | — | 57,000 | 1,400 | 80 | — | — | 8081 |
| Class A Amplifier | 150 | — | R _k = 82 | 7.5 | — | — | 10,500 | 90 | — | — | 8082 |
| Class A Amplifier | 150 | — | R _k = 910; E _c = +6.0 | 7.2 | — | 9,000 | 10,500 | 94 | — | — | 8083 |
| Class A Amplifier | 125 | 80 | 1.0 | 7.0 | 1.7 | — | 10,500 | — | — | — | 8084 |
| Class A Amplifier | 120 | — | R _k = 1,500 | 0.9 | — | — | 1,750 | 54 | — | — | 8096 ● |
| TV Brightness Control | Wave length of maximum response = 6,100 angstroms; cell resistance (dark) = 500,000 ohms; cell resistance (2 foot-candles) = 5,000 ohms | | | | | | | | | | 8100 |
| Class A Amplifier | 125 | 125 | 1.0 | 12 | 4.0 | 200,000 | 7,500 | — | — | — | 8102 |
| Class A Amp | 125 | — | 1.0 | 13.5 | — | 5,400 | 8,500 | 46 | — | — | 8103 |
| Class A Amplifier ♦ | 26.5 | — | R _g = 2.2meg | 5.5 | — | — | 11,000 | 20 | — | — | 8103 |
| Class A Amplifier | 300 | 150 | 3.5 | 16 | 3.2 | 90,000 | 9,000 | — | — | — | 8106 |
| Class A Amplifier | 180 | — | 2.8 | 30 | — | — | 18,000 | 43 | — | — | 8108 |
| Class A Amplifier | 120 | 120 | 2.0 | 10 | 2.3 | 20,000 | 7,000 | — | — | — | 8113 5★ |
| Amp/Osc (Parallel) | 800 | 250 | 34 | 50 | 1.2 | — | — | 7.0 | — | — | 8116 |
| Class AB ₁ Amplifier | 1000 | 265 | 41 | 30 | — | — | — | 7.0 | — | — | 8116A |
| Class AB ₁ Amplifier | 800 | 250 | 34 | 50 | 1.2 | — | — | 7.0 | — | — | 8117 |
| Class AB ₁ Amplifier | 1000 | 265 | 41 | 30 | — | — | — | 7.0 | — | — | 8117A |

Metal tubes are shown in bold-face type, miniature tubes in italics.

♦ G3 and G5 are screen. G4 is signal-input grid.

★ Maximum screen dissipation appears immediately below the screen voltage.

♥ G2 and G4 are screen. G3 is signal-input grid.

‡ Heater warm-up time controlled.

1, 2, 3, etc. indicate tube sections.

| Tube Type | Classification by Construction | Base Connections | Out-line Dwg | Filament Volts | Filament Amp | Max Plate Watts | Max Plate Volts | Max Screen Volts and Watts * | Capacitance in Picofarads | | |
|-----------|--------------------------------|------------------|--------------|-----------------|------------------|---------------------------|-------------------------|------------------------------|-----------------------------------|----------------|------------|
| | | | | | | | | | Input | Output | Grid-plate |
| 8118 | Tetrode | 8118 | TX | 1.6 | 4.25 | 2x10 ☐ 2x7 ☐ 2x10 ☐ | 600 ☐ 500 ☐ 600 ☐ | 300 ☐ | 4.5 | 1.8 | — |
| 8196 | Sharp-Cutoff Pentode | 7CM | 5-2 | 6.3 | 0.3 | 2.2 ☐ | 330 ☐ | 165 ☐ 0.65 ☐ | 7.0 ▲ | 2.2 ▲ | 0.02 ▲ |
| 8142 | Photoconductive Cell | 8100 | T-X | — | — | 0.3 ☐ | 400 ☐ | — | — | — | — |
| 8143 | Photoconductive Cell | 8100 | T-X | — | — | 0.3 ☐ | 400 ☐ | — | — | — | — |
| 8149 ■ | Beam Power Amplifier | 12DT | 12-57 | 13 6.5 | 0.6 1.2 | 35 ☐ | 750 ☐ | 250 ☐ 3.3 ☐ | 13 ▲ | 6.0 ▲ | 0.35 ▲ |
| 8150 ■ | Beam Power Amplifier | 12DU | 12-86 | 13 6.5 | 0.6 1.2 | 35 ☐ | 750 ☐ | 250 ☐ 3.3 ☐ | 13 ▲ | 6.5 ▲ | 0.2 ▲ |
| 8156 ■ | Beam Pentode | 12EU | T-X | 13.5 | 0.3 | 15 ☐ | 600 ☐ | 250 ☐ 2.5 ☐ | 11 ▲ | 5.0 ▲ | 0.07 ▲ |
| 8185 ● | Medium-Mu Triode | 8KM | 3-8 | 6.3 | 0.3 | 4.25 ☐ | 250 ☐ | — | — | — | — |
| 8186 ● | Medium-Mu Triode | 8KM | 3-8 | 26.5 | 0.075 | 4.25 ☐ | 250 ☐ | — | — | — | — |
| 8203 | Medium-Mu Triode (Nuvistor) | 12AQ | 4-4 | 6.3 | 0.16 | 1.5 ☐ | 250 ☐ | — | 4.2 ▲ | 1.6 ▲ | 2.2 ▲ |
| GL8205 | Ignitron | GL 8205 | TX | — | — | — | — | — | — | — | — |
| 8210 ● | Sharp-Cutoff RF Pentode | 8LS | T-X | 6.3 | 0.125 | 1.1 ☐ | 165 ☐ | 155 ☐ 0.55 ☐ | 5.0 | 3.8 | 0.012 ♣ |
| 8211 ● | Video Pentode | 8DL | 3-3 | 6.3 | 0.36 | 4.0 ☐ | 165 ☐ | 155 ☐ 1.0 ☐ | 12 | 8.0 | 0.16 ♣ |
| 8212 | Medium-Mu Triode | 9PY | 6-2 | { 6.3 12.6 } | { 0.46 0.23 } | 10 ☐ | 300 ☐ | — | 10 ▲ | 1.2 ▲ | 2.9 ▲ |
| 8213 ● | Medium-Mu Triode | 8LT | 3-8 | { 6.3 12.6 } | { 0.38 0.19 } | 5.0 ☐ | 300 ☐ | — | 7.0 | 3.2 | 1.9 |
| 8217 | Photoconductive Cell | 8100 | T-X | — | — | 0.4 ☐ | 300 ☐ | — | — | — | — |
| 8318-A | Photoconductive Cell | 8100 | T-X | — | — | 0.075 ☐ | 300 ☐ | — | — | — | — |
| 8223 | Medium-Mu Twin Triode | 9AJ | T-X | 6.3 | 0.475 | 3.0 ♣ | 250 ☐ | — | 4.7 ▲ | 1.9 ▲ 1.8 ▲ | 1.8 ▲ |
| 8228 ● | Glow-Discharge Diode | 7894 | T-X | — | — | — | — | — | — | — | — |
| 8233 | Power Amplifier Pentode | 9PZ | T-X | 6.3 | 0.6 | 10 ☐ | 200 ☐ | 175 ☐ 1.5 ☐ | 18 | 6.0 | 0.08 |
| 8236 | Beam Power Amplifier | 8JC | T-X | 6.3 | 2.5 | 50 ☐ | 1,000 ☐ | 200 ☐ 3.2 ☐ | 23 ▲ | 11 ▲ | 0.5 ▲ |
| 8254 ● | Triode | 8LW | T-X | 6.3 | 0.185 | 1.5 ☐ | 110 ☐ | — | 3.5 ▲ | 0.5 ▲ | 1.9 ▲ |
| 8255 | High-Mu Triode | 9NY | T-X | 6.3 | 0.16 | 1.8 | 175 | — | — | — | — |
| 8278 | Beam Power Amplifier | 9QB | T-X | 6.3 | 1.2 | 25 | 300 | 300 4.0 | Single Tube 2 Tubes, Push-Pull | | |

■ Compactron.

† Zero signal.

♣ Per section.

● See X-Radiation Warning, page 4.

† Plate-to-plate.

♣ Maximum.

‡ Supply voltage.

● Subminiature type.

▲ Without external shield.

◆ Design maximum rating.

● Total for all similar sections.

☐ Absolute maximum rating.

Conversion transconductance.

| Service | Plate Volts | Screen Volts | Neg Grid Volts | Plate Milli-amperes | Screen Milli-amperes | R _p , Ohms | G _m , μmhos | μ Factor | Load for Rated Output, Ohms | Power Output, Watts | Tube Type |
|---------------------------------|--|--|--|---------------------|----------------------|-----------------------|------------------------|----------|-----------------------------|---------------------|-----------|
| Amp-Class C Telegraphy | 400 | 250 | 50 | 2x50 | 2x3.5 | — | 2500 | 9 | — | 28 | 8118 |
| Class C Modulation | 500 | 250 | 80 | 2x40 | 2x4.0 | — | — | — | — | 29 | |
| Class C Freq Tripler | 300 | 250 | 175 | 2x45 | 3.5 | — | — | — | — | 9 | |
| Class A Amplifier | 125 | 125 | R _k = 56 | 10.8 | 2.9 | — | 9,800 | — | — | — | 8136 |
| Relay Control | Wavelength of maximum response = 6,100 angstroms; cell resistance: 1,500 ohms with an illumination of 2 foot-candles at a color temperature of 2,870 K | | | | | | | | | | 8142 |
| Relay Control | Wavelength of maximum response = 6,100 angstroms; cell resistance: 9,000 ohms with an illumination of 2 foot-candles at a color temperature of 2,870 K | | | | | | | | | | 8143 |
| Class A Amplifier | 200 | 200 | — | 100 | — | — | 7,500 | — | — | — | 8149 ■ |
| Class C Amp | 380 | E _{cc2} = 380 R _{g2} = 10,000 | 78 | 180 | 12 | — | — | — | — | 40 | |
| Class A Amplifier | 200 | 200 | — | 100 | — | — | 7,500 | — | — | — | 8150 ■ |
| Class C Amp | 380 | E _{cc2} = 380 R _{g2} = 10,000 | 78 | 180 | 12 | — | — | — | — | 40 | |
| Class A Amplifier | 200 | 125 | 9.0 | 75 | 3.5 | — | 7,600 | — | — | — | 8156 ■ |
| Class C Amp | 400 | 170 | 60 | 90 | 10 | — | — | — | — | 21 | |
| Class A Amplifier | 200 | — | R _k = 220 | 17 | — | — | 19,000 | 42 | — | — | 8185 ● |
| Class A Amplifier | 200 | — | R _k = 220 | 17 | — | — | 19,000 | 42 | — | — | 8186 ● |
| Class A Amplifier | 150 | — | R _k = 560 | 7.0 | — | 5,000 | 6,000 | 30 | — | — | 8203 |
| Resistance Welding | Max. supply volts 250-600; max. demand KVA 4800; corresponding av. anode curr. 486 A.; max. av. anode curr. 900 A.; corresponding demand KVA 1600. | | | | | | | | | | GL8205 |
| Class A Amplifier | 100 | 100 | R _k = 100 | 8.5 | 2.8 | 260,000 | 9,000 | — | — | — | 8210 ● |
| Class A Amplifier | 150 | 100 | R _k = 62 | 17 | 4.2 | 65,000 | 15,500 | — | — | — | 8211 ● |
| Class A Amplifier | 105 | — | R _k = 75 | 25 | — | 965 | 29,000 | 28 | — | — | 8212 |
| Class A Amplifier | 105 | — | R _k = 75 | 23 | — | 1,348 | 23,000 | 31 | — | — | 8213 ● |
| Relay Control | Spectral response, S-15; minimum dark resistance = 1.0 megohm; resistance with 10 foot-candles, average = 7,000 ohms; maximum current (I) = 20 ma | | | | | | | | | | 8217 |
| Relay Control | Wavelength of maximum response = 6,100 Å; minimum dark resistance = 10 megohms; resistance with 2 foot-candles, average = 32,000 ohms | | | | | | | | | | 8318-A |
| Class A Amplifier ♦ | 100 | — | R _k = 350 E _{ct} = +9.0 | 30 | — | 1,400 | 18,000 | 25 | — | — | 8223 |
| Voltage Reference | D-c operating current = 3.0 ma; Ionization voltage = 115 volts d-c, min; operating voltage = 81 volts d-c | | | | | | | | | | 8228 ● |
| Class A Amplifier | 125 | 125 | 3.0 | 50 | 5.5 | 20,000 | 45,000 | — | — | — | 8233 |
| Class C Amplifier | 700 | 140 | 75 | 200 | 14 | — | — | — | — | 105 | 8236 |
| Class A Amplifier | 80 | — | 2.0 | 14 | — | — | 14,500 | 24 | — | — | 8254 ● |
| Class A Amplifier | 150 | — | R _k = 100 | 12 | — | — | 13,500 | 65 | — | — | 8255 |
| Class A Amplifier | 250 | 250 | 12.5 | 100 | 8.0 | 7,300 | 24,000 | — | — | — | 8278 |
| Class AB ₁ Amplifier | 265 | 265 | R _k = 56 | 200† | 16† | — | — | — | 2,400† | 40 | |

Metal tubes are shown in bold-face type, miniature tubes in italics.

♦ G3 and G5 are screen. G4 is signal-input grid.

♥ G2 and G4 are screen. G3 is signal-input grid.

1, 2, 3, etc. indicate tube sections.

* Maximum screen dissipation appears

immediately below the screen voltage.

† Heater warm-up time controlled.

| Tube Type | Classification by Construction | Base Connections | Out-line Dwg | Filament Volts | Filament Amp | Max Plate Watts | Max Plate Volts | Max Screen Volts and Watts * | Capacitance in Picofarads | | |
|--------------|--------------------------------|------------------|--------------|----------------|--------------|----------------------------------|----------------------------------|--|---|-----------------------|------------------------|
| | | | | | | | | | Input | Output | Grid-plate |
| 8298 | Beam Power Amplifier | 7CK | T-X | 6.75 | 1.165 | 20 \square 20 \square | 400 \square 400 \square | — 250 \square 3.0 \square | Triode Connection Two Tubes, Push-Pull Pentode Connection Two Tubes, Push-Pull | | |
| 8298-A | Beam Power Amplifier | 7CK | T-X | 6.3 | 1.125 | 27 \square | 600 \square | 250 \square 3.0 \square | Pentode Connection Two Tubes, Push-Pull | | |
| 8318 | Photoconductive Cell | 8100 | T-X | — | — | 0.05 \square | 300 \square | — | — | — | — |
| 8319 \odot | High-Mu Triode | 8LD | 3-1 | 6.3 | 0.15 | 1.0 \square | 165 \square | — | 4.2 | 2.2 | 1.8 |
| 8327 | Power Amplifier Pentode | 9CV | 6-4 | 6.3 | 0.76 | 13.2 \diamond | 450 \diamond | 400 \diamond 2.2 \diamond | 10.8 \blacktriangle | 6.5 \blacktriangle | 0.5 \blacktriangle |
| 8334 | High-Mu Triode | 7DK | 5-1 | 6.3 | 0.225 | 4.4 \square | 330 \square | — | 3.3 | 1.8 | 1.7 |
| 8345 | Photoconductive Cell | 8100 | T-X | — | — | 0.3 \square | 400 \square | — | — | — | — |
| 8346 | Photoconductive Cell | 8100 | T-X | — | — | 0.3 \square | 400 \square | — | — | — | — |
| 8347 | Photoconductive Cell | 8100 | T-X | — | — | 0.3 \square | 400 \square | — | — | — | — |
| 8348 | Twin Tetrode | 9QN | 6-4 | 1.6 | 2.5 | 5.0 \square \blacklozenge | 300 \square | 200 \square 2.0 \square \oplus | Two Sections, Push-Pull | | |
| 8358 | Twin Pentode | 9QR | 6-3 | 1.9 | 3.15 | 7.5 \square \oplus | 250 \square | 200 \square 3.5 \square \oplus | Two Sections, Push-Pull | | |
| 8380 | Power Tetrode (Nuvistor) | 12AS | 4-5 | 6.0-8.5 | — | 1.6 \square | 250 \square | 100 \square 0.2 \square | 7.0 \blacktriangle | 1.4 \blacktriangle | 0.015 \blacktriangle |
| 8382 | Triode (Nuvistor) | 12AQ | 4-4 | 6.0-8.5 | — | 2.0 \square | 250 \square | — | 4.2 \blacktriangle | 1.6 \blacktriangle | 2.2 \square |
| 8393 | Medium-Mu Triode (Nuvistor) | 12AQ | 4-4 | 13.5 | 0.06 | 1.0 \square | 110 \square | — | 4.4 \blacktriangle | 1.6 \blacktriangle | 2.4 \blacktriangle |
| 8403 | High-Mu UHF Triode (Planar) | 7815R | T-X | 6.3 | 1.25 | 33 \square | 2,500 \square | — | 8.0 \blacktriangle | 0.065 \blacklozenge | 3.1 \blacktriangle |
| 8408 | Twin Tetrode | 9QV | T-X | 1.1 | 3.0 | 4.0 \square \blacklozenge | 300 \square | 200 \square 2.5 \square \oplus | Two Sections, Push-Pull | | |
| 8412 | High-Mu Triode (Planar) | 8412 | T-X | 6.0 | 0.8 | 30 \square | 600 \square | — | 2.6 \blacktriangle | 0.02 \blacktriangle | 1.7 \blacktriangle |
| 8413 | High-Mu Triode (Planar) | 8413 | T-X | 6.0 | 0.8 | 25 \square | 600 \square | — | 2.6 \blacktriangle | 0.02 \blacktriangle | 1.7 \blacktriangle |
| 8414 \odot | Sharp-Cutoff RF Pentode | 8DC | 3-1 | 26.5 | 0.045 | — | 55 \square | 55 \square | 4.9 | 3.0 | 0.02 \blacklozenge |
| 8417 | Beam Power Amplifier | 7S | T-X | 6.3 | 1.6 | 35 \diamond | 660 \diamond | 500 \diamond 5.0 \diamond | Single Tube 2 Tubes, Push-Pull | | |
| 8425 | Sharp-Cutoff RF Pentode | 7BK | 5-2 | 6.3 | 0.3 | 3.5 \diamond 3.5 \diamond | 330 \diamond 275 \diamond | 330 \diamond 0.75 \diamond — | Pentode Connection Triode Connection (G ₂ , G ₃ , & P tied) | | |
| 8425-A | Sharp-Cutoff RF Pentode | 7BK | 5-2 | 6.3 | 0.3 | 3.5 \diamond 3.5 \diamond | 330 \diamond 275 \diamond | 330 \diamond 0.75 \diamond — | Pentode Connection Triode Connection (G ₂ , G ₃ , & P tied) | | |

 \blacksquare Compactron. \dagger Zero signal. \blacklozenge Per section. \ddagger Plate-to-plate. \blacklozenge Maximum. \blacklozenge Supply voltage. \odot Subminiature type. \blacktriangle Without external shield. \diamond Design maximum rating. \oplus Total for all similar sections. \square Absolute maximum rating.

Conversion transconductance.

| Service | Plate Volts | Screen Volts | Neg Grid Volts | Plate Milli-am-peres | Screen Milli-am-peres | R _p , Ohm | G _m , μmhos | μ Factor | Load for Rated Out-put, Ohms | Power Out-put, Watts | Tube Type |
|---------------------------------|---|--------------|----------------------|----------------------|-----------------------|-------------------------------|------------------------|---------------------------|------------------------------|----------------------|-----------|
| Class AB ₁ Amplifier | 400 | — | 100 | 40† | — | — | — | — | 8,000‡ | 22 | 8298 |
| Class AB ₂ Amplifier | 600 | 165 | 44 | 22† | 0.6† | — | — | — | 6,000‡ | 90 | |
| Class AB ₁ Amplifier | 600 | 200 | 47 | 48† | 14.8† | — | — | — | 5,600 | 96 | 8298-A |
| Relay Control | Wave length of maximum response □ = 6,100 Å; minimum dark resistance □ = 10 megohm; resistance with 2 foot-candles, average □ = 48,000 ohms | | | | | | | | | | 8318 |
| Class A Amplifier | 100 | — | R _k = 160 | 7.5 | — | — | 14,000 | 55 | — | — | 8319 ⊙ |
| Class C Amplifier | 250 | 250 | 30 | 20 | 4.5 | Input Signa = 0.1 watts | | — | — | 3.0 | 8327 |
| Class A Amplifier | 200 | — | R _k = 100 | 18 | — | — | 10,750 | 55 | — | — | 8334 |
| Relay Control | Wavelength of maximum response = 6,100 angstroms; cell resistance (Dark) = 75,000 ohms; cell resistance (2 foot-candles) = 750 ohms | | | | | | | | | | 8345 |
| Relay Control | Spectral response = 6,100 angstrom units; cell resistance at 2 foot-candles = 3,000 ohms | | | | | | | | | | 8346 |
| Relay Control | Spectral response = 6,100 angstrom units; cell resistance at 2 foot-candles = 16,000 ohms | | | | | | | | | | 8347 |
| Class C Amplifier | 300 | 300‡ | 40 | 75 | 2.3 | R _{gt} = 56,000 ohms | | — | — | 12 | 8348 |
| Class C Amplifier | 180 | 180 | 20 | 50 | 11.5 | — | — | — | — | 4.5 | 8358 |
| Class A Amplifier | 100 | 50 | R _k = 68 | 11 | 2.9 | — | 11,000 | — | — | — | 8380 |
| Class A Amplifier | 75 | — | R _k = 100 | 15 | — | 2,200 | 12,800 | 28 | — | — | 8382 |
| Class A Amplifier | 75 | — | R _k = 100 | 10.5 | — | 3,000 | 11,500 | 35 | — | — | 8393 |
| Grid-Pulsed Oscillator | 2,000 | — | 150 | 4000 Peak | — | — | — | — | — | 1,000 Peak | 8403 |
| Class C Amplifier | 275 | 275‡ | 25 | 80 | 13 | R _{gt} = 8,200 ohms | | — | — | 15 | 8408 |
| Class A Amplifier | 420 | — | R _k = 390 | 60 | — | — | 16,000 | 60 | E _{cc1} = +20 volts | | 8412 |
| Class A Amplifier | 420 | — | R _k = 390 | 60 | — | — | 16,000 | 60 | E _{cc1} = +20 volts | | 8413 |
| Class A Amplifier | 26.5 | 26.5 | E _{cc1} = 0 | 4.5 | 1.5 | 50,000 | 5,000 | R _{gt} = 2.2 meg | | — | 8414 ⊙ |
| Class A Amplifier | 300 | 300 | 12 | 100 | 5.5 | 16,000 | 23,000 | — | — | — | 8417 |
| Class AB ₁ Amplifier | 560 | 300 | 15.5 | 100 | 3.4 | — | — | — | 4,200‡ | 100 | |
| Class A Amplifier | 250 | 150 | R _k = 68 | 10.5 | 4.1 | 1,100,000 | 6,200 | — | — | — | 8425 |
| | 250 | 125 | R _k = 100 | 7.4 | 2.8 | 1,300,000 | 5,500 | — | — | — | |
| | 250 | — | R _k = 330 | 11.2 | — | — | 6,000 | 41 | — | — | |
| Class A Amplifier | 250 | 150 | R _k = 68 | 10.5 | 4.1 | 1,100,000 | 6,200 | — | — | — | 8425-A |
| | 100 | 100 | R _k = 150 | 4.8 | 1.9 | 600,000 | 4,500 | — | — | — | |
| | 250 | — | R _k = 330 | 11.2 | — | — | 6,000 | 41 | — | — | |

Metal tubes are shown in bold-face type, *miniature tubes in italics*.

♦ G3 and G5 are screen. G4 is signal-input grid.

♥ G2 and G4 are screen. G3 is signal-input grid.

1, 2, 3, etc. indicate tube sections.

✱ Maximum screen dissipation appears immediately below the screen voltage.

† Heater warm-up time controlled.

| Tube Type | Classification by Construction | Base Connections | Out-line Dwg | Filament Volts | Filament Amp | Max Plate Watts | Max Plate Volts | Max Screen Volts and Watts | Capacitance in Picofarads | | |
|-----------|--------------------------------|------------------|--------------|------------------|------------------|-----------------|-----------------|----------------------------|--|--------|------------|
| | | | | | | | | | Input | Output | Grid-plate |
| 8426 | Sharp-Cutoff RF Pentode | 7BK | 5-2 | 12.6 | 0.15 | 3.5 ⬥ | 330 ⬥ | 330 ⬥ 0.75 ⬥ | Pentode Connection | | |
| | | | | | | 3.5 ⬥ | 275 ⬥ | — | Triode Connection (G ₂ , G ₃ , & P tied) | | |
| 8426-A | Sharp-Cutoff RF Pentode | 7BK | 5-2 | 12.6 | 0.15 | 3.5 ⬥ | 330 ⬥ | 330 ⬥ 0.75 ⬥ | Pentode Connection | | |
| | | | | | | 3.5 ⬥ | 275 ⬥ | — | Triode Connection (G ₂ , G ₃ , & P tied) | | |
| 8431 | Medium-Mu Twin Triode | 9AJ | 6-2 | 12.6 | 0.18 | 3.5 ⬥ ⬆ | 200 ⬥ | — | 3.3 | 2.5 | 1.4 |
| 8441 | Triode (Nuvistor) | 12AQ | 4-4 | 6.0-8.5 | — | 1.0 ⬤ | 250 ⬤ | — | 4.2 ▲ | 1.7 ▲ | 0.9 ▲ |
| 8444 Ⓞ | Sharp-Cutoff RF Pentode | 8DC | 3-1 | 6.3 | 0.125 | 1.1 ⬤ | 165 ⬤ | 155 ⬤ 0.55 ⬤ | 5.2 | 3.8 | 0.016 ⬆ |
| 8446 | Triode-Pentode | 9AE | 6-2 | 6.75 | 0.44 | 1.7 ⬥ | 330 ⬥ | 200 ⬥ 0.5 ⬥ | Pentode Section | | |
| | | | | | | 2.0 ⬥ | 330 ⬥ | — | Triode Section | | |
| 8446 | Triode-Pentode | 9FA | 6-2 | 6.75 | 0.44 | 1.7 ⬥ | 330 ⬥ | 200 ⬥ 0.5 ⬥ | Pentode Section | | |
| | | | | | | 2.0 ⬥ | 330 ⬥ | — | Triode Section | | |
| 8447 | Duplex-Diode High-Mu Triode | 9CF | 6-2 | { 6.75 13.5 } | { 0.38 0.19 } | 2.5 ⬥ | 300 ⬥ | — | 2.8 | 1.0 | 1.9 |
| 8448 | Sharp-Cutoff Pentode | 9BF | 6-3 | { 6.75 13.5 } | { 0.52 0.26 } | 6.5 ⬥ | 330 ⬥ | 190 ⬥ 1.2 ⬥ | 10.2 ▲ | 3.5 ▲ | 0.063 ⬆▲ |
| 8456 | Triode (Nuvistor) | 12AQ | 4-4 | 6.0-8.5 | — | 0.45 ⬤ | 50 ⬤ | — | 4.0 ▲ | 1.7 ▲ | 2.1 ▲ |
| 8457 | Twin Tetrode | 9PW | 6-4 | { 6.75 13.5 } | { 0.76 0.38 } | 7.0 ⬥ ⬆ | 300 ⬥ | 200 ⬥ 2.0 ⬥ | Two Sections, Push-Pull | | |
| 8458 | Twin Tetrode | 9PW | T-X | { 6.75 13.5 } | { 0.76 0.38 } | 7.5 ⬥ ⬆ | 400 ⬥ | 200 ⬥ 2.0 ⬥ | Two Sections, Push-Pull | | |
| 8463 | Pentode | 9QX | 6-3 | 1.1 | 1.05 | 5.0 ⬤ | 300 ⬤ | 300 ⬤ 1.0 ⬤ | 6.5 ▲ | 3.8 ▲ | 0.15 ▲ |
| 8474 | Photoconductive Cell | 8100 | T-X | — | — | 0.05 ⬤ | 150 ⬤ | — | — | — | — |
| 8475 | Photoconductive Cell | 8100 | T-X | — | — | 0.05 ⬤ | 200 ⬤ | — | — | — | — |
| 8475-A | Photoconductive Cell | 8100 | T-X | — | — | 0.075 ⬤ | 200 ⬤ | — | — | — | — |
| 8476 | Photoconductive Cell | 8100 | T-X | — | — | 0.05 ⬤ | 300 ⬤ | — | — | — | — |
| 8477 | Photoconductive Cell | 8100 | T-X | — | — | 0.05 ⬤ | 300 ⬤ | — | — | — | — |
| 8477-A | Photoconductive Cell | 8100 | T-X | — | — | 0.075 ⬤ | 300 ⬤ | — | — | — | — |
| 8478 | Photoconductive Cell | 8100 | T-X | — | — | 0.05 ⬤ | 300 ⬤ | — | — | — | — |
| 8489 | Triode-Pentode | 9DA | 6-2 | 6.3 | 0.45 | 2.3 ⬥ | 330 ⬥ | 330 ⬥ 0.55 ⬥ | Pentode Section | | |
| | | | | | | 2.8 ⬥ | 330 ⬥ | — | Triode Section | | |
| GL8500 | Tetrode | GL 8500 | TX | 6.3 | 3.8 | 500 | 2000 1600 | 320 | Cathode-Plate 0.006; Input 19.5; Output 6.4 | | |

⬤ Compactron.
⬆ Zero signal.
⬆ Per section.

⬆ Plate-to-plate.
⬆ Maximum.
⬆ Supply voltage.

Ⓞ Subminiature type.
▲ Without external shield.
⬆ Design maximum rating.

Ⓞ Total for all similar sections.
⬆ Absolute maximum rating.
Conversion transconductance.

| Service | Plate Volts | Screen Volts | Neg Grid Volts | Plate Milli-amperes | Screen Milli-amperes | R _p , Ohms | G _m , μmhos | μ Factor | Load for Rated Output, Ohms | Power Output, Watts | Tube Type |
|---------------------------------|---|--------------|----------------------|---------------------|----------------------|-----------------------|------------------------|----------|-----------------------------|---------------------|---------------|
| Class A Amplifier | 250 | 150 | R _k = 68 | 10.5 | 4.1 | 1,100,000 | 6,200 | — | — | — | <i>8426</i> |
| Class A Amplifier | 250 | 125 | R _k = 100 | 7.4 | 2.8 | 1,300,000 | 5,500 | — | — | — | |
| Class A Amplifier | 250 | — | R _k = 330 | 11.2 | — | — | 6,000 | 41 | — | — | |
| Class A Amplifier | 250 | 150 | R _k = 68 | 10.5 | 4.1 | 1,100,000 | 6,200 | — | — | — | <i>8426-A</i> |
| Class A Amplifier | 100 | 100 | R _k = 150 | 4.8 | 1.9 | 600,000 | 4,500 | — | — | — | |
| Class A Amplifier | 250 | — | R _k = 330 | 11.2 | — | — | 6,000 | 41 | — | — | |
| Class A Amplifier ♦ | 90 | — | 1.3 | 15 | — | — | 12,500 | 33 | — | — | <i>8431</i> |
| Class A Amplifier | 110 | — | R _k = 150 | 7.0 | — | 6,800 | 9,400 | 64 | — | — | 8441 |
| Class A Amplifier | 100 | 100 | R _k = 100 | 8.5 | 2.8 | 260,000 | 9,000 | — | — | — | 8444 ● |
| Class A Amplifier | 170 | 170 | 2.0 | 10 | 2.5 | 400,000 | 6,200 | — | — | — | <i>8445</i> |
| Class A Amplifier | 100 | — | 1.0 | 12.5 | — | — | 7,000 | 43 | — | — | |
| Class A Amplifier | 170 | 170 | 2.0 | 10 | 2.5 | 400,000 | 6,200 | — | — | — | <i>8446</i> |
| Class A Amplifier | 100 | — | 1.0 | 12.5 | — | — | 7,000 | 43 | — | — | |
| Class A Amplifier | 250 | — | R _k = 200 | 10 | — | 10,900 | 5,500 | 60 | — | — | <i>8447</i> |
| Class A Amplifier | 250 | 180 | R _k = 100 | 26 | 5.7 | 93,000 | 11,000 | — | — | — | <i>8448</i> |
| Class A Amplifier | 24 | — | R _k = 100 | 8.7 | — | 1,530 | 7,500 | 11.5 | — | — | 8456 |
| Class AB _i Amplifier | 300 | 200 | 21.5 | 30† | 1.2† | — | — | — | 10,000 ‡ | 12 | <i>8457</i> |
| Class C Amplifier | 400 | 155 | 59 | 85 | 2.3 | — | — | — | — | 20 | 8458 |
| Class C Amplifier | 300 | 150 | 35 | 40 | 3.5 | — | — | — | — | 8.0 | <i>8463</i> |
| Relay Control | Spectral response = 6,100 angstrom units; cell resistance at 2 foot-candles = 1,500 ohms; minimum dark resistance = 150,000 ohms | | | | | | | | | | 8474 |
| Relay Control | Spectral response = 6,100 angstrom units; cell resistance at 2 foot-candles = 3,000 ohms; minimum dark resistance = 300,000 ohms | | | | | | | | | | 8475 |
| Relay Control | Wavelength of maximum response = 6,100 Å; minimum dark resistance = 0.2 megohms; resistance with 2 foot-candles, average = 2,000 ohms | | | | | | | | | | 8475-A |
| Relay Control | Spectral response = 6,100 angstrom units; cell resistance at 2 foot-candles = 6,000 ohms; minimum dark resistance = 600,000 ohms | | | | | | | | | | 8476 |
| Relay Control | Spectral response = 6,100 angstrom units; cell resistance at 2 foot-candles = 12,000 ohms; minimum dark resistance = 1,200,000 ohms | | | | | | | | | | 8477 |
| Relay Control | Wavelength of maximum response = 6,100 Å; minimum dark resistance = 0.8 megohms; resistance with 2 foot-candles, average = 8,000 ohms | | | | | | | | | | 8477-A |
| Relay Control | Spectral response = 6,100 angstrom units; cell resistance at 2 foot-candles = 24,000 ohms; minimum dark resistance = 2,400,000 ohms | | | | | | | | | | 8478 |
| Class A Amplifier | 125 | 125 | 1.0 | 12 | 3.8 | 170,000 | 7,000 | — | — | — | <i>8489</i> |
| Class A Amplifier | 150 | — | 3.0 | 15 | — | 4,700 | 4,500 | 21 | — | — | |
| RF Amplifier | 1750 | 250 | 20 | 200 | 5 | — | — | 14 | — | 110 | GL8500 |
| Class B Telegraphy | 2000 | 225 | 40 | 250 | 10 | — | — | — | — | 300 | |
| Class C | | | | | | | | | | | |

Metal tubes are shown in bold-face type, *miniature tubes in italics.*

♦ G3 and G5 are screen. G4 is signal-input grid.

♥ G2 and G4 are screen. G3 is signal-input grid.

1, 2, 3, etc. indicate tube sections.

✱ Maximum screen dissipation appears immediately below the screen voltage.

† Heater warm-up time controlled.

| Tube Type | Classification by Construction | Base Connections | Outline Dwg | Filament Volts | Filament Amp | Max Plate Watts | Max Plate Volts | Max Screen Volts and Watts | Capacitance in Picofarads | | |
|-----------|--------------------------------|------------------|-------------|----------------|--------------|-----------------|-------------------------|----------------------------|--|--------|------------|
| | | | | | | | | | Input | Output | Grid-plate |
| 8506 | Triode (Planar) | 8506 | T-X | 6.3 | 0.4 | 5.0 | 300 | — | 4.8 | 0.025 | 2.5 |
| GL8513 | Tetrode | GL 8513 | TX | 7.0 | 13.5 | 4000 | 9000 | 800 | Cathode-Plate 0.01; Input 27.8; Output 6.7 | | |
| | | | | | | | 4500 | 500 | | | |
| | | | | | | | 7000 | 750 | | | |
| 8517 | Pentode | 8DC | 3-1 | 6.3 | 0.15 | 0.8 | 165 | 155 | 4.3 | 3.5 | 0.02 |
| | | | | | | | 165 | 0.55 | | | |
| 8522 | Dual-Control Pentode | 8DC | 3-1 | 6.3 | 0.15 | 0.7 | 165 | 155 | — | — | — |
| | | | | | | | | 0.55 | | | |
| 8524 | Sharp-Cutoff Pentode | 8DC | T-X | 6.3 | 0.15 | 0.55 | 165 | 155 | — | — | — |
| | | | | | | | | 0.45 | | | |
| 8525 | Medium-Mu Twin Triode | 8DG | T-X | 6.3 | 0.3 | 0.7 | 165 | — | 2.1 | 1.31 | 1.4 |
| | | | | | | | | | | 1.42 | |
| 8526 | Medium-Mu Twin Triode | 8DG | T-X | 6.3 | 0.3 | 0.95 | 165 | — | 2.1 | 1.31 | 1.4 |
| | | | | | | | | | | 1.42 | |
| 8527 | Medium-Mu Triode | 8DK | T-X | 6.3 | 0.15 | 3.3 | 165 | — | 2.4 | 2.4 | 1.3 |
| 8528 | Beam Power Amplifier | 8DE | T-X | 6.3 | 0.45 | 3.7 | 165 | 155 | 6.5 | 7.5 | 0.11 |
| | | | | | | | | 0.4 | | | |
| 8529 | Semi-Remote-Cutoff Pentode | 8DE | T-X | 6.3 | 0.15 | 0.85 | 165 | 155 | 4.2 | 3.4 | 0.015 |
| | | | | | | | | 0.25 | | | |
| 8530 | Sharp-Cutoff Pentode | 8DE | T-X | 6.3 | 0.15 | 1.1 | 165 | 155 | 4.2 | 3.4 | 0.015 |
| | | | | | | | | 0.55 | | | |
| 8532 | High-Mu Triode | 7BQ | 5-2 | 6.3 | 0.4 | 2.5 | 150 | — | — | — | — |
| 8533 | Triode (Planar) | 8533 | TX | 6.3 | 1.3 | 100 | 8000 | — | 8.0 | .06 | 1.65 |
| 8534 | Triode (Planar) | 8534 | TX | 6.3 | 1.3 | 10 | 2500 | — | 9.5 | .06 | 2.25 |
| | | | | | | 60 | Grid 2500 Plate 3500 | — | — | — | — |
| 8535 | Triode (Planar) | 8535 | TX | 6.3 | 1.3 | 150 | 2500 | — | 9.5 | .06 | 2.25 |
| | | | | | | 60 | 2500 3500 | — | — | — | — |
| 8536 | Triode (Planar) | 8536 | TX | 6.0 | 1.0 | 10 | 2500 | — | 7.5 | 0.4 | 1.65 |
| | | | | | | | 2500 3500 | — | — | — | — |
| 8537 | Triode (Planar) | 8537 | TX | 6.0 | 1.0 | 150 | 2500 | — | 7.5 | .04 | 1.65 |
| | | | | 5.8 | | 35 | — | — | — | — | — |
| 8538 | Hi Mu Triode (Planar) | 8538 | TX | 6.3 | 1.3 | 10 | 8000 | — | 9.5 | .06 | 1.40 |
| | | | | | | | 10000 | — | — | — | — |
| 8539 | Hi Mu Triode (Planar) | 8539 | TX | 6.3 | 1.3 | 100 | 8000 | — | 9.5 | .06 | 1.40 |
| | | | | | | | 10000 | — | — | — | — |
| 8552 | Beam Power Amplifier | 7CK | T-X | 12.6 | 0.562 | 27 | 600 | 250 | Pentode Connection Two Tubes, Push-Pull | | |
| | | | | | | | | 3.0 | | | |

■ Compactron.
 † Zero signal.
 ♣ Per section.

† Plate-to-plate.
 ♣ Maximum.
 ‡ Supply voltage.

● Subminiature type.
 ▲ Without external shield.
 Ⓢ Design maximum rating.

⊕ Total for all similar sections.
 ⊖ Absolute maximum rating.
 # Conversion transconductance.

| Service | Plate Volts | Screen Volts | Neg Grid Volts | Plate Milli-am-peres | Screen Milli-am-peres | R _p Ohms | G _m μmhos | μ Factor | Load for Rated Out-put, Ohms | Power Out-put, Watts | Tube Type |
|--|-------------|--------------|----------------------|----------------------|-----------------------|---------------------|----------------------|----------------------------------|------------------------------|----------------------|-----------|
| Average Characteristics | 200 | — | R _k = 40 | 25 | — | — | 29,000 | 110 | — | — | 8506 |
| RF Amplifier Class B | 8000 | 750 | 50 | 600 | 10 | — | — | — | — | 1500 | GL8513 |
| Telephony Class C | 4000 | 400 | 100 | 570 | 20 | — | — | — | — | 1250 | |
| Telegraphy Class C | 6500 | 700 | 100 | 800 | 25 | — | — | — | — | 3200 | |
| Average Characteristics | 100 | 100 | R _k = 150 | 6.1 | 4.2 | — | — | — | — | — | 8517 Ⓞ |
| Gated Amplifier | 100 | 100 | R _k = 150 | 5.3 | 3.6 | 110,000 | 3,200 | (G ₂ tied to cathode) | | | 8522 Ⓞ |
| | 100 | 100 | R _k = 330 | — | — | — | 1,300 | (E _{cs} = -1.65 volts) | | | |
| Class A Amplifier | 100 | 100 | R _k = 150 | 5.3 | 3.6 | 110,000 | 3,200 | (G ₂ tied to cathode) | | | 8524 |
| Class A Amplifier ♦ | 100 | — | R _k = 150 | 6.5 | — | 6,500 | 5,400 | 35 | — | — | 8525 |
| Class A Amplifier ♦ | 100 | — | R _k = 220 | 8.5 | — | 4,000 | 5,000 | 20 | — | — | 8526 |
| Class A Amplifier | 150 | — | R _k = 180 | 13 | — | 4,150 | 6,500 | 27 | — | — | 8527 |
| Class A Amplifier | 110 | 110 | R _k = 270 | 30 | 2.2 | 15,000 | 4,200 | — | 3,000 | 1.0 | 8528 |
| Class A Amplifier | 100 | 100 | R _k = 120 | 7.2 | 2.0 | 260,000 | 4,500 | — | — | — | 8529 |
| Class A Amplifier | 100 | 100 | R _k = 150 | 7.5 | 2.4 | 260,000 | 5,000 | — | — | — | 8530 |
| Class A Amplifier | 150 | — | R _k = 100 | 13.5 | — | 4,800 | 11,000 | 52.5 | — | — | 8532 |
| Hi Mu Triode RF Oscillator | — | — | — | 150 | — | — | 38000 | 90 Cut-off | — | — | 8533 |
| CW RF Osc/Amp Class C | 900 | — | 30 | 140 | — | — | — | — | — | 65 | 8534 |
| Pulsed RF Osc/Amp Class C | 2000 | — | 70 | 3000 | — | — | — | — | — | 2500kw | |
| CW RF Osc/Amp Class C | 900 | — | 30 | 140 | — | — | — | — | — | 65 | 8535 |
| RF Osc/Amp Grid Pulsed Plate Pulsed | 2000 | — | 70 | 3000 | — | — | — | — | — | 2500kw | |
| CW RF Osc/Amp Class C | 900 | — | 40 | 90 | — | — | — | — | — | 40 | 8536 |
| Grid Pulsed RF Oscillator | -45 | — | 1700 (Pos) | 1900 | — | — | — | — | — | 2500kw | |
| Plate Pulsed Oscillator | peak 3500 | — | — | 9.0 | — | — | — | — | — | 2500kw | |
| CW RF Osc/Amp Oscillator | 900 | — | 40 | 90 | — | — | — | — | — | 40 | 8537 |
| Grid Pulsed Oscillator | -45 | — | 1700 (Pos) | peak 1900 | — | — | — | — | — | 2000kw | |
| Plate Pulsed Oscillator | peak 3500 | — | — | 9.0 | — | — | — | — | — | 2000kw | |
| Pulsed RF Amp/Modulator Plate Pulsed RF Oscillator | — | — | — | — | — | — | 38000 | 90 Cut-off | — | — | 8538 |
| Pulsed RF Amp/Modulator Plate Pulsed RF Oscillator | — | — | — | — | — | — | 38000 | 90 Cut-off | — | — | 8539 |
| Class AB ₁ Amplifier | 600 | 200 | 47 | 48† | 14.8† | — | — | — | 5,600‡ | 96 | 8552 |

Metal tubes are shown in bold-face type, miniature tubes in italics.

♦ G3 and G5 are screen. G4 is signal-input grid.

◆ G2 and G4 are screen. G3 is signal-input grid.

1, 2, 3, etc. indicate tube sections.

* Maximum screen dissipation appears immediately below the screen voltage.

† Heater warm-up time controlled.

| Tube Type | Classification by Construction | Base Connections | Out-line Dwg | Filament Volts | Filament Amp | Max Plate Watts | Max Plate Volts | Max Screen Volts and Watts | Capacitance in Picofarads | | |
|-----------|--------------------------------|------------------|--------------|----------------|--------------|--------------------|---------------------------------|----------------------------|---|-------------|------------|
| | | | | | | | | | Input | Out-put | Grid-plate |
| 8582 | Photoconductive Cell | 8100 | T-X | — | — | 0.05 ☐ | 300☐ | — | — | — | — |
| 8582-A | Photoconductive Cell | 8100 | T-X | — | — | 0.075 ☐ | 300☐ | — | — | — | — |
| 8595 | Twin Tetrode | 8595 | TX | 6.3 | 0.6 | 2x2☐ 2x3☐ | 200☐ 250☐ | 200 | 6.4 | 1.6 | 0.15 |
| 8627 | Triode (Nuvistor) | 12CT | 4-6 | 6.3 | 0.15 | 2.5☐ | 250☐ | — | — | — | — |
| 8628 | Triode (Nuvistor) | 12AQ | 4-4 | 6.3 | 0.1 | 0.3☐ | 250☐ | — | 3.4▲ | 1.7▲ | 0.7♣ ▲ |
| 8632 | Hi Mu Triode | 8632 | TX | 6.3 | .30 | 18 | — | — | 5.0 | 1.9 | .75 |
| 8639 | Beam Power Tetrode | 8639 | TX | 6.3 | 1.8 | 40 | 4000 | 450 | 21.0 | 6.5 | .3 |
| 8643 | Twin Tetrode | 8643 | TX | 13.5 6.7 | 1.0 2.0 | 2x38☐ | 800☐ | 300☐ | 6.7 | 2.1 | — |
| 8727 | High-Mu Triode (Pencil Tube) | 5675 | T-X | 6.3 | 0.225 | 2.5☐ | 250☐ | — | 4.4 | 0.04 | 2.1 |
| 8745 | High-Mu Triode (Planar) | 7815R | T-X | 6.0 | 1.0 | 10☐ | 3500 Peak | — | 6.3▲ | 0.035 ♣▲ | 2.05▲ |
| GL8751 | TRIODE | GL 8751 | TX | 6.3 | 1.05 | 2500 Peak 30 | — | — | — | — | — |
| 8755 | Triode (Planar) | 8755 | TX | 6.3 | 1.3 | 150 | 8000 | — | 9.3 | .06 | 1.25 |
| 8755A | Triode (Planar) | 8755-A | TX | 6.3 | 1.3 | 150 | 8000 | — | 9.5 | .06 | 1.05 |
| 8808 | Hi Mu Triode | 8808 | TX | 6.3 | .34 | 6☐ | 1000☐ | — | 9.6 | .05 | 2.7 |
| 8847 | Triode (Planar) | 8847 | TX | 6.3 | 1.3 | 150☐ | 2500☐ 3000☐ peak 3500☐ | — | 9.5 | .06 | 1.4 |
| 8847A | Triode (Planar) | 8847-A | TX | 6.0 | 0.95 | 150☐ | 2500☐ 3000☐ peak 3500☐ | — | 9.5 | .06 | 1.4 |
| 8859 | High-Mu Triode (Planar) | 8413 | T-X | 6.3 | 0.35 | 15☐ | 450☐ | — | — | — | — |
| GL8866 | Tetrode | GL 8866 | TX | 6.3 | 3.8 | 150 | 3500 | 750 | Cathode-Plate .006; Input 20; Output 8.9 | | |
| 8892 | Triode (Planar) | 8892 | TX | 6.3 | .65 | 50 | 2000☐ | — | 5.0 | .06 | 1.6 |
| 8893 | Triode (Planar) | 8893 | TX | 6.3 | 1.3 | 100 | 2000☐ | — | 8.0 | .10 | 2.35 |
| 8906 | Triode (Planar) | 8906 | TX | 6.0 | 1.0 | 10☐ | 2500☐ 3500 | — | 8.0 | .06 | 1.98 |
| 8907 | Triode (Planar) | 8907 | TX | 6.0 | 1.0 | 100☐ | 2500☐ 3500☐ | — | 8.0 | .06 | 1.98 |
| 8917 | Triode (Planar) | 8917 | TX | 6.3 | 1.2 | — | 1600 | — | — | — | — |
| 9001 | Detector Amplifier Pentode | 7BD | 5-1 | 6.3 | 0.15 | — | 250 | 100 | 3.6 | 3.0 | 0.01 ♣ |
| 9002 | Medium-Mu Triode | 7BS | 5-1 | 6.3 | 0.15 | — | 250 | — | 1.2 | 1.1 | 1.4 |

☐ Compactron.
† Zero signal.
♣ Per section.

↑ Plate-to-plate.
♣ Maximum.
‡ Supply voltage.

● Subminiature type.
▲ Without external shield.
◆ Design maximum rating.

⊗ Total for all similar sections.
⊗ Absolute maximum rating.
Conversion transconductance.

| Service | Plate Volts | Screen Volts | Neg Grid Volts | Plate Milli-am-peres | Screen Milli-am-peres | R _p , Ohms | G _m , μmhos | μ Fac-tor | Load for Rated Out-put, Ohms | Power Out-put, Watts | Tube Type |
|---|--|--------------|-------------------------|----------------------|--------------------------|-----------------------|------------------------|-----------|------------------------------|----------------------|-----------|
| Relay Control | Cell resistance (dark) = 10 megohms; cell resistance (2 foot-candles) = 100,000 ohms | | | | | | | | | 8582 | |
| Relay Control | Wavelength of maximum response = 6,100 Å; minimum dark resistance = 10 megohms; resistance with 2 foot-candles, average = 128,000 ohms | | | | | | | | | 8582-A | |
| Amplifier Class C (CCS) | 180 | 180 | 20 | 2x20 | 9.5 | — | — | — | — | 4.2 | 8595 |
| Frequency Multiplier | 180 | 180 | R _k = 82 ohm | 2x20 | 9.7 | — | — | — | — | 2.3 | |
| Class A Amplifier | 110 | — | R _k = 47 | 11.5 | — | 5,400 | 13,000 | 70 | — | — | 8627 |
| Class A Amplifier | 120 | — | R _k = 200 | 1.5 | — | 41,000 | 3,100 | 127 | — | — | 8628 |
| Amplifier | 14000 | — | — | 0.7 | — | — | — | — | — | — | 8632 |
| Pass Tube | — | — | — | — | — | — | — | 8.2 | — | — | 8639 |
| RF Amp/Osc | 750 | 300 | 90 | 266 | 9.5 | — | — | 7 | — | 137 | 8643 |
| | — | — | — | — | — | — | — | — | — | — | |
| Avg. Char. | 125 | — | R _k = 50 | 14 | — | — | 16,000 | 70 | — | — | 8727 |
| Plate-Pulsed Oscillator | 3500 | — | — | 9.0 | — | — | — | — | — | 2000 Peak | 8745 |
| Plate Pulsed Oscillator | 2000 Peak | — | — | 3000 Peak | 1200 Peak | — | — | — | — | PEAK 2500 | GL8751 |
| Hi Mu Amp/Oscillator | 5000 | — | 100 | 5000 | — | — | — | — | — | 7000kw | 8755 |
| Hi Mu Amp/Oscillator Grid Pulsed | 1750 | — | 20 | 1000 Peak | — | — | — | — | — | 650w | 8755A |
| RF Amp/Osc Freq Mult | 200 | — | 0 | 15 | R _k = 68 ohms | 6400 | 18000 | 100 | — | — | 8808 |
| Cw RF Amp/Oscillator Grid Pulsed Plate Pulsed | — | — | — | — | — | — | 38,000 | 75 | — | — | 8847 |
| Cw RF Amp/Osc Grid Pulsed Plate Pulsed | — | — | — | — | — | — | 38000 | 75 | — | — | 8874A |
| Avg. Char. | 250 | — | R _k = 75 | 25 | — | — | 17,000 | 70 | — | — | 8859 |
| RF Amplifier Class C | 2500 | 600 | 70 | 1400 | 50 | — | — | — | — | 1600 | GL8866 |
| RF Oscillator Class C | — | — | — | — | — | — | 30000 | 60 | — | — | 8892 |
| RF Oscillator Class C | — | — | — | — | — | — | 30000 | 60 | — | — | |
| Cw RF Amp/Osc | 630 | — | — | — | — | — | 38 | 80 | — | 45 | 8906 |
| RF Amp/Osc | 2200 | — | 50 | Peak 2500 | — | — | — | — | — | 2500w | |
| Cw RF Amp/Osc | 630 | — | — | Peak | — | — | 38 | 80 | — | 45 | 8907 |
| RF Amp/Osc | 2200 | — | 50 | 2500 | — | — | — | — | — | — | |
| Linear Amplifier | 1000 | — | — | 100 | — | — | 65000 | 210 | — | — | 8917 |
| Class A Amplifier | 250 | 100 | 3.0 | 2.0 | 0.7 | 1,000,000 | 1,400 | — | — | — | 9001 |
| Class A Amplifier | 250 | — | 7.0 | 6.3 | — | 11,400 | 2,200 | 25 | — | — | 9002 |

Metal tubes are shown in bold-face type, miniature tubes in italics.

♦ G3 and G5 are screen. G4 is signal-input grid. * Maximum screen dissipation appears immediately below the screen voltage.
 ♥ G2 and G4 are screen. G3 is signal-input grid.
 1, 2, 3, etc. indicate tube sections. † Heater warm-up time controlled.

| Tube Type | Classification by Construction | Base Connections | Out-line Dwg | Filament Volts | Filament Amp | Max Plate Watts | Max Plate Volts | Max Screen Volts and Watts * | Capacitance in Picofarads | | |
|----------------------------|--------------------------------|------------------|--------------|----------------|--------------|-----------------|--|------------------------------|---------------------------|--------|------------|
| | | | | | | | | | Input | Output | Grid-plate |
| 9003 | Remote-Cutoff Pentode | 7BD | 5-1 | 6.3 | 0.15 | — | 250 | 100 | 3.6 | 3.0 | 0.01 ♣ |
| 9004 | High-Frequency Diode (Acorn) | 4BJ | 4-1 | 6.3 | 0.15 | — | — | — | — | — | — |
| 9005 | High-Frequency Diode (Acorn) | 5BG | 4-1 | 3.6 | 0.165 | — | — | — | — | — | — |
| 9006 | High-Frequency Diode | 6BH | 5-1 | 6.3 | 0.15 | — | — | — | — | — | — |
| GE12661 | Triode (Planar) | GE 12661 | TX | 6.3 | .24 | 4 ⊗ | 350 ⊗ | — | 1.6 | .015 | 1.35 |
| GE13971 | Triode (Planar) | GE 13971 | TX | 6.3 | .55 | 6.5 | 1500 | — | 4.8 | 0.05 | 1.5 |
| GE14501 | Triode (Planar) Hi Mu | GE 14501 | TX | 6.3 | .24 | 2.0 ⊗ | 250 ⊗ | — | 1.75 | 0.01 | 1.25 |
| GE14811 | Triode (Planar) | GE 14811 | TX | 6.3 | .36 | 6.5 ⊗ | 1200 ⊗ | — | 4.4 | .036 | 1.65 |
| GE15371 | Triode (Planar) | GE 15371 | TX | 6.3 | .50 | 10 ⊗ | 2000 ⊗ | — | 5.0 | .035 | 1.9 |
| GE16231 | Triode (Planar) | GE 16231 | TX | 6.3 | .40 | 6.5 ⊗ | 1250 ⊗ | — | 6.0 | .018 | 1.7 |
| GE16411 | Triode (Planar) Hi Mu | GE 16411 | TX | 6.3 | .15 | 1.0 ⊗ | 250 ⊗ | — | 1.5 | .01 | 1.3 |
| GE16841 | Triode (Planar) | GE 16841 | TX | 5.7 | .27 | 1.5 ⊗ | 250 ⊗ | — | 2.1 | .018 | 1.05 |
| GE17241 | Triode (Planar) | GE 17241 | TX | 6.0 | .97 | — | 1500 ⊗ 10 ⊗ 1750 ⊗ Peak 2500 ⊗ | — | 6.3 | .035 | 1.9 |
| GE17701 | Triode (Planar) | GE 17701 | TX | 6.3 | 1.25 | 30 ⊗ | 2500 ⊗ | — | 9.0 | 0.1 | 2.15 |
| GE18651 | Triode (Planar) | GE 18651 | TX | 6.3 | .55 | 6.5 ⊗ | 1500 ⊗ | — | 4.9 | — | 1.6 |
| GL37207 | Ignitron | GL 32207 | TX | — | — | — | — | — | — | — | — |
| GL37248 | Ignitron | GL 37248 | TX | — | — | — | — | — | — | — | — |
| GL37250/ GL37250 -PC | Ignitron | GL 37250 | TX | — | — | — | — | — | — | — | — |

■ Compactron.
† Zero signal.
♣ Per section.

‡ Plate-to-plate.
♣ Maximum.
‡ Supply voltage.

⊗ Subminiature type.
▲ Without external shield.
⊗ Design maximum rating.

⊗ Total for all similar sections.
⊗ Absolute maximum rating.
Conversion transconductance.

● See X-Radiation Warning, page 4.

| Service | Plate Volts | Screen Volts | Neg Grid Volts | Plate Milli-amperes | Screen Milli-amperes | R _p Ohms | G _m μmhos | μ Factor | Load for Rated Out-put, Ohms | Power Out-put, Watts | Tube Type |
|--|---|--------------|---------------------------|---------------------|----------------------|---------------------|----------------------|----------|------------------------------|----------------------|-----------------------|
| Class A Amplifier | 250 | 100 | 3.0 | 6.7 | 2.7 | 700,000 | 1,800 | — | — | — | 9003 |
| Half-Wave Rectifier | Max d-c output current = 5 ma; max rms supply voltage = 117 volts | | | | | | | | | | 9004 |
| Half-Wave Rectifier | Max d-c output current = 1.0 ma; max rms supply voltage = 117 volts | | | | | | | | | | 9005 |
| Half-Wave Rectifier | Max d-c output current = 5 ma; max peak inverse voltage = 750 volts; rms supply voltage = 270 volts; max peak current = 15 ma | | | | | | | | | | 9006 |
| Power Osc. 450MHz | 150 | — | 0 | 25 30 | — | — | 8500 | 40 | — | 6 | GE12661 |
| Osc./Amp. 1200MHz | 200 | — | R _k = 100 ohms | 23 | — | — | 25000 | 58 | — | — | GE13971 |
| | 1500 Peak | — | — | 1.5a | — | — | — | — | — | 900w | |
| Osc./RF Amp. 450MHz | 150 | — | R _k = 82 ohms | 9.5 | — | — | 12500 | 90 | — | — | GE14501 |
| | 250 | — | — | — | — | — | — | — | — | 2.3 | |
| C Band Osc. 4300MHz | 200 | — | R _k = 100 ohms | 27 | — | — | 29000 | 60 | — | — | GE14811 |
| | 800 | — | — | — | — | — | — | — | — | 190w | |
| Osc./Amp. 1090MHz | 200 | — | R _k = 100 ohms | 17 | — | — | 22000 | 85 | — | — | GE15371 |
| | 1800 | — | — | — | — | — | — | — | — | 700w | |
| Amplifier | 200 | — | R _k = 22 ohms | 22 | — | — | 50000 | 225 | — | 20w | GE16231 |
| Osc./RF Amp. 450 MHz | 150 | — | R _k = 82 ohms | 12.5 | — | — | 12500 | 75 | — | — | GE16411 |
| | 150 | — | — | — | — | — | — | — | — | 450mW | |
| CW Osc./Amp. 4300MHz | 150 | — | R _k = 82 ohms | 14 | — | — | 17000 | 78 | — | — | GE16841 |
| | 100 | — | — | — | — | — | — | — | — | 25mW | |
| Osc./Amp. 1100MHz Grid Pulsed Plate Pulsed | 600 | — | 5 | 25 | — | — | 13500 | 95 | — | — | GE17241 |
| | 1500 | — | 115 | 1.4a | — | — | — | — | — | 675w | |
| Osc./Amp. 1200MHz | 200 | — | R _k = 68 ohms | 34 | — | — | 26000 | 58 | — | — | GE17701 |
| | 2500 Peak | — | — | — | — | — | — | — | — | 3.5 | |
| Osc./Amp. 1200MHz | 200 | — | R _k = 100 ohms | 21 | — | — | 22000 | 58 | — | — | GE18651 |
| | 1500 Peak | — | — | — | — | — | — | — | — | 800w | |
| Capacitor Discharge | Max. forward peak anode voltage 25000 volts; max. inverse peak anode voltage 25000 volts; max. peak anode curr. 500 A.; typical discharge rate pulses per minute 500. | | | | | | | | | | GL37207 |
| Capacitor Discharge | Max. forward peak anode voltage 50000 volts; max. inverse peak anode voltage 50000 volts; max. peak anode curr. 25000 A.; typical discharge rate pulses per minute 2. | | | | | | | | | | GL37248 |
| Resistance Welding | Max. supply volts RMS 250-600; max. demand KVA 1000; corresponding av. anode curr. 43.2 A.; max. av. anode curr. 75 A.; corresponding demand KVA 200. | | | | | | | | | | GL37250 GL37250-PC |

Metal tubes are shown in bold-face type, *miniature tubes in italics.*

♦G3 and G5 are screen. G4 is signal-input grid.

♠G2 and G4 are screen. G3 is signal-input grid.

1, 2, 3, etc. indicate tube sections.

✱Maximum screen dissipation appears immediately below the screen voltage.

♠ Heater warm-up time controlled.

| Tube Type | Classification by Construction | Base Connections | Out-line Dwg | Fila-ment Voits | Fila-ment Amp | Max Plate Watts | Max Plate Voits | Max Screen Voits and Watts | Capacitance in Picofarads | | | |
|----------------------------|--------------------------------|------------------|--------------|-----------------|---------------|-----------------|-----------------|----------------------------|---------------------------|---|------------|---|
| | | | | | | | | | Input | Out-put | Grid-plate | |
| GL37251/ GL37251 -PC | Ignitron | — | GL 37251 | TX | | | | | | | | |
| GL37252/ GL37252 -PC | Ignitron | — | GL 37252 | TX | | | | | | | | |
| GL37253/ GL37253 -PC | Ignitron | — | GL 37253 | TX | | | | | | | | |
| GL37254/ GL37254 -PC | Ignitron | — | GL 37254 | TX | | | | | | | | |
| GL37255 GL37255 -PC | Ignitron | — | GL 37255 | TX | | | | | | | | |
| GL51025 | Triode | — | GL 51025 | TX | 6.3 | 3.8 | 110 | 8000 | | Cathode to Plate 0.45; Input 15.5; Output 5.9 | | |
| GL51038 | Tetrode | — | GL 51038 | TX | 6.3 | 5.6 | 500 | 10000 5000 | 2000 1100 | 24 | 9 | — |
| GL51064 | Tetrode | — | GL 51064 | TX | 5.7 | 24 | 2750 | 8000 | 650 | Cathode to Plate .006 max; Input 17.0; Output 6.0 | | |
| GL51065 | Tetrode | — | GL 51065 | TX | 6.3 | 3.8 | 600 | 5000 | 1000 | Cathode-Plate .006; Input 20; Output 7.5 | | |
| GL51070 | Tetrode | — | GL 51070 | TX | | 3.8 | 600 | | | | | |
| GL51074 | Triode | — | GL 51074 | TX | | 3.8 | 110 | | | | | |

■ Compactron.

† Plate-to-plate.

‡ Zero signal.

♣ Maximum.

◆ Per section.

§ Supply voltage.

⊙ Subminiature type.

▲ Without external shield.

⊛ Design maximum rating.

⊕ Total for all similar sections.

⊞ Absolute maximum rating.

Conversion transconductance.

● See X-Radiation Warning, page 4.

| Service | Plate Volts | Screen Volts | Neg Grid Volts | Plate Milli-amperes | Screen Milli-amperes | R _p Ohms | G _m μmhos | μ Factor | Load for Rated Output, Ohms | Power Output, Watts | Tube Type |
|--|--|---|----------------|---------------------|----------------------|---------------------|----------------------|----------|-----------------------------|---------------------|----------------------------|
| Resistance Welding | Max. supply volts RMS 250-600; max. demand KVA 1000; corresponding av. anode curr. 43.2 A.; max. av. anode curr. 75 A.; corresponding demand KVA 200. | | | | | | | | | | GL37251/ GL37251 -PC |
| Resistance Welding | Max. supply volts RMS 250-600; max. demand KVA 2000; corresponding av. anode curr. 108 A.; max. av. anode curr. 150 A.; corresponding demand KVA 380. | | | | | | | | | | GL37252/ GL37252 -PC |
| Resistance Welding | Max. supply volts RMS 250-600; max. demand KVA 2000; corresponding av. anode curr. 108 A.; max. av. anode curr. 150 A.; corresponding demand KVA 380. | | | | | | | | | | GL37253/ GL37253 -PC |
| Resistance Welding | Max. supply volts RMS 250-600; max. demand KVA 3000; corresponding av. anode curr. 224 A.; max. av. anode curr. 400 A.; corresponding demand KVA 1000. | | | | | | | | | | GL37254/ GL37254 -PC |
| Resistance Welding | Max. supply volts RMS 250-600; max. demand KVA 3000; corresponding av. anode curr. 224 A.; max. av. anode curr. 400 A.; corresponding demand KVA 1000. | | | | | | | | | | GL37255 GL37255 -PC |
| Oscillator Plate Pulsed Grid Pulsed 1100MHz | 6000 1950 | <i>Ik =</i> 11.3a <i>Ik =</i> 3.3a | | 7a 2.6a | | | | | | 24000w 2000w | GL51025 |
| Amplifier Class B | 9000 | 1400 | 125 | 9.2A | 470 | | | | | 52000 | GL51038 |
| Amplifier Class C | 4800 | 1000 | 200 | 4.2A | 100 | | | | | 11000 | |
| Amplifier/ Oscillator Class C | 7500 | 600 | 100 | 650 | 16 | | | | | 4000 | GL51064 |
| 420 mcs Amplifier Class B | 7500 | 600 | 50 | 330 | 5 | | | | | 750 | |
| 420 mcs Amplifier | 4500 | 750 | 115 | 5.3A | 110 | | | | | 11000 | GL51065 |
| | | | | | | | | | | 260 | GL51070 |
| | | | | | | | | | | 40KW | GL51074 |

Metal tubes are shown in bold-face type, miniature tubes in italics.

♠ G3 and G5 are screen. G4 is signal-input grid.
 ▼ G2 and G4 are screen. G3 is signal-input grid.

1, 2, 3, etc. indicate tube sections.

* Maximum screen dissipation appears immediately below the screen voltage.

† Heater warm-up time controlled.

GENERAL ELECTRIC MULTIPLE/BRAND RECEIVING TUBE REPLACEMENT GUIDE

| Tube Type to be Replaced | General Electric Multiple/Brand | Tube Type to be Replaced | General Electric Multiple/Brand | Tube Type to be Replaced | General Electric Multiple/Brand |
|-----------------------------|---------------------------------|--------------------------|---------------------------------|---------------------------------|---------------------------------|
| 0Z4 0Z4A | 0Z4/0Z4A | 3CF6 | 3CB6/3CF6 | 6AX8 | 6U8A/6AX8/ 6KD8/5KD8 |
| 1AD2 1AD2A | 1BY2A/1AD2A | 3CX3 | 3DA3/3CX3 | 6AY3B | 6AY3B/6BS3A |
| 1B3GT | 1G3GTA/1B3GT | 3CY3 | 3DB3/3CY3 | 6BA6 | 6BA6/EF93 |
| 1BX2 | 1X2C/1BX2 | 3DA3 | 3DA3/3CX3 | 6BC5 | 6CE5/6BC5 |
| 1BY2 1BY2A | 1BY2A/1AD2A | 3DB3 | 3DB3/3CY3 | 6BC8 | 6BC8/6BZ8 |
| 1G3GT 1G3GTA | 1G3GTA/1B3GT | 3DZ4 | 3DZ4/3AF4B | 6BE3 | 6BE3/6BZ3 |
| 1K3 1K3A | 1K3A/1J3 | 3EH7 | 3EH7/XF183 | 6BK4 6BK4A 6BK4B 6BK4C | 6BK4C/6EL4A |
| 1R-K23 | 1S2A/DY87 | 3EJ7 | 3EJ7/XF184 | 6BL8 | 6BL8/ECF80 |
| 1S2A | 1S2A/DY87 | 3GS8 | 3BU8/3GS8 | 6BM8 | 6BM8/ECL82 |
| 1X2 1X2A 1X2B 1X2C | 1X2C/1BX2 | 3HA5 | 3HM5/3HA5 | 6BN6 | 6KS6/6BN6 |
| 2AF4 2AF4A 2AF4B | 2DZ4/2AF4B | 3HM5 | 3HM5/3HA5 | 6BQ5 | 6BQ5/EL84 |
| 2AH2 | 2BU2/2AS2A/ 2AH2 | 4BL8 | 4BL8/XCF80 | 6BQ6GA | 6BQ6GTB/6CU6 |
| 2AS2 2AS2A | 2BU2/2AS2A/ 2AH2 | 4BQ7A | 4BZ7/4BQ7A | 6BQ6GTB | 6BQ6GTB/6CU6 |
| 2BU2 | 2BU2/2AS2/ 2AH2 | 4BU8 | 4BU8/4GS8 | 6BQ7A | 6BZ7/6BQ7A |
| 2DZ4 | 2DZ4/2AF4B | 4BZ7 | 4BZ7/4BQ7A | 6BR3 | 6BR3/6R-K19 |
| 2FQ5 2FQ5A | 2GK5/2FQ5A | 4GS8 | 4BU8/4GS8 | 6BR8 6BR8A | 6FV8A/6BR8A |
| 2GK5 | 2GK5/2FQ5A | 4HA5 | 4HA5/PC900 | 6BS3A | 6AY3B/6BS3A |
| 3A3 3A3A 3A3B 3A3C | 3A3C/3AW3/3B2 | 4HA7 | 4HA7/4HC7 | 6BZ3 | 6BE3/6BZ3 |
| 3AF4A 3AF4B | 3DZ4/3AF4B | 4KN8 | 4KN8/4R-HH8 | 6BZ7 | 6BZ7/6BQ7A |
| 3AW3 | 3A3C/3AW3/3B2 | 4R-HH8 | 4KN8/4R-HH8 | 6BZ8 | 6BC8/6BZ8 |
| 3B2 | 3A3C/3AW3/3B2 | 5AR4 | 5AR4/GZ34 | 6CA7 | 6CA7/EL34 |
| 3BC5 | 3CE5/3BC5 | 5AS4A | 5U4GB/5AS4A | 6CB6 6CB6A | 6CB6A/6CF6 |
| 3BS2 3BS2A | 3BW2/3BS2A/ 3BT2A | 5AU4 | 5V3/5AU4 | 6CD3 | 6CG3/6CE3/ 6CD3 |
| 3BT2 3BT2A | 3BW2/3BS2A/ 3BT2A | 5BQ7A | 5BZ7/5BQ7A | 6CE3 | 6CG3/6CE3/ 6CD3 |
| 3BU8 | 3BU8/3GS8 | 5BR8 | 5FV8/5BR8 | 6CE5 | 6CE5/6BC5 |
| 3BW2 | 3BW2/3BS2A/ 3BT2A | 5BZ7 | 5BZ7/5BQ7A | 6CF6 | 6CB6A/6CF6 |
| 3CB6 | 3CB6/3CF6 | 5FV8 | 5FV8/5BR8 | 6CG3 | 6CG3/6CE3/ 6CD3 |
| 3CE5 | 3CE5/3BC5 | 5HG8 | 5HG8/LCF86 | 6CG7 | 6FQ7/6CG7 |
| | | 5KD8 | 6U8A/6AX8/ 6KD8/5KD8 | 6CJ3 6CL3 | 6CJ3/6DW4B/ 6CL3 |
| | | 5U4GA 5U4GB | 5U4GB/5AS4A | 6CQ4 | 6DE4/6CQ4 |
| | | 5U9 | 5U9/LCF201 | 6CU6 | 6BQ6GTB/6CU6 |
| | | 5V3 | 5V3/5AU4 | 6CW5 | 6CW5/EL86 |
| | | 6AF4A | 6DZ4/6AF4A | 6DA4A | 6DA4A/6DM4A |
| | | 6AK5 | 6AK5/EF95 | | |
| | | 6AL3 | 6AL3/EY88 | | |
| | | 6AQ5A | 6AQ5A/6HG5 | | |
| | | 6AQ8 | 6AQ8/ECC85 | | |

| Tube Type to be Replaced | General Electric Multiple/Brand | Tube Type to be Replaced | General Electric Multiple/Brand | Tube Type to be Replaced | General Electric Multiple/Brand |
|--------------------------|---------------------------------|--------------------------|---------------------------------|--------------------------|---------------------------------|
| 6DE4 | 6DE4/6CQ4 | 6HM5 | 6HM5/6HA5 | 12AU7A | 12AU7A/ECC82 |
| 6DG6GT | 6W6GT/6DG6GT | 6J10 | 6Z10/6J10 | 12AX7 | 12AX7/ECC83 |
| 6DJ8 | 6DJ8/ECC88 | 6JB5 | 6JB6/6HE5 | 12AX7A | 12AX7A/7025 |
| 6DL5 | 6DL5/EL95 | 6JE6 | 6JE6C/6LQ6 | 12AY3A | 12AY3A/12BS3A |
| 6DM4A | 6DA4A/6DM4A | 6JE6A | | 12BQ6GA | 12BQ6GA/ 12CU6 |
| 6DQ3A | 6DU3/6DQ3A | 6JE6B | | 12BQ6GTB | 12BQ6GTB/ 12CU6 |
| 6DQ6 | 6DQ6B/6GW6 | 6JE6C | | 12BR3 | 12BR3/12R-K19 |
| 6DT6 | | 6JW8 | 6K11 | 6K11/6Q11 | |
| 6DT6A | | 6KD8 | 6K11 | 6K11/6Q11 | |
| 6DU3 | 6DU3/6DQ3A | 6KN8 | 6U8A/6AX8/ 6KD8/5KD8 | | |
| 6DW4B | 6CJ3/6DW4B/ 6CL3 | 6KX8 | 6KN8/6R-HH8 | | |
| 6DX8 | 6DX8/ECL84 | 6KS6 | 6KS6/6BN6 | | |
| 6DZ4 | 6DZ4/6AF4A | 6LC6 | 6LJ6A/6LH6A | | |
| 6EA7 | 6EM7/6EA7 | 6LH6 | 6LJ6A/6LH6A | | |
| 6EB8 | 6GN8/6EB8 | 6LH6A | 6LJ6A/6LH6A | | |
| 6EC4A | 6EC4A/EY500 | 6LQ6 | 6LQ6/6LQ6 | | |
| 6EH7 | 6EH7/EF183 | 6LX8 | 6LX8/LCF802 | | |
| 6EJ7 | 6EJ7/EF184 | 6Q11 | 6K11/6Q11 | | |
| 6EL4 | 6BK4C/6EL4A | 6R-HH2 | 6BC8/6BZ8 | | |
| 6EL4A | | 6R-HH8 | 6KN8/6R-HH8 | | |
| 6EM7 | 6EM7/6EA7 | 6R-K19 | 6BR3/6R-K19 | | |
| 6ES8 | 6ES8/ECC189 | 6U8A | 6U8A/6AX8/ 6KD8/5KD8 | | |
| 6FG6 | 6FG6/EM84 | 6V4 | 6V4/EZ80 | | |
| 6FQ5 | 6GK5/6FQ5A | 6W6GT | 6W6GT/6DG6GT | | |
| 6FQ5A | | 6X9 | 6X9/ECF200 | | |
| 6FQ7 | 6FQ7/6CG7 | 6Z10 | 6Z10/6J10 | | |
| 6FV8A | 6FV8A/6BR8A | 7HG8 | 7HG8/PCF86 | | |
| 6GB5 | 6GB5/EL500 | 7KY6 | 7KY6/9KX6 | | |
| 6GJ7 | 6GJ7/ECF801 | 8A8 | 9A8/8A8/PCF80 | | |
| 6GK5 | 6GK5/6FQ5A | 8CG7 | 8FQ7/8CG7 | | |
| 6GM8 | 6GM8/ECC86 | 8EB8 | 8GN8/8EB8 | | |
| 6GN8 | 6GN8/6EB8 | 8FQ7 | 8FQ7/8CG7 | | |
| 6GW6 | 6DQ6B/6GW6 | 8GJ7 | 8GJ7/PCF801 | | |
| 6GW8 | 6GW8/ECL86 | 8GN8 | 8GN8/8EB8 | | |
| 6GX6 | 6GY6/6GX6 | 9A8 | 9A8/8A8/PCF80 | | |
| 6GY6 | 6GY6/6GX6 | 9KX6 | 7KY6/9KX6 | | |
| 6HA5 | 6HM5/6HA5 | 10CW5 | 10CW5/LL86 | | |
| 6HA6 | 6HB6/6HA6 | 10DX8 | 10DX8/LCL84 | | |
| 6HB6 | 6HB6/6HA6 | 10JA8 | 10LZ8/10JA8 | | |
| 6HE5 | 6JB5/6HE5 | 10LZ8 | 10LZ8/10JA8 | | |
| 6HG5 | 6AQ5A/6HG5 | 11Y9 | 11Y9/LFL200 | | |
| 6HG8 | 6HG8/ECF86 | 12AT7 | 12AT7/ECC81 | | |
| | | | | 12AU7A | 12AU7A/ECC82 |
| | | | | 12AX7 | 12AX7/ECC83 |
| | | | | 12AX7A | 12AX7A/7025 |
| | | | | 12AY3A | 12AY3A/12BS3A |
| | | | | 12BQ6GA | 12BQ6GA/ 12CU6 |
| | | | | 12BQ6GTB | 12BQ6GTB/ 12CU6 |
| | | | | 12BR3 | 12BR3/12R-K19 |
| | | | | 12BS3A | 12AY3A/12BS3A |
| | | | | 12BV7 | 12BY7A/12BV7/ 12DQ7 |
| | | | | 12BY7A | 12BY7A/12BV7/ 12DQ7 |
| | | | | 12C5 | 12CU5/12C5 |
| | | | | 12CU5 | 12CU5/12C5 |
| | | | | 12CU6 | 12BQ6GTB/ 12CU6 |
| | | | | 12DQ6B | 12DQ6B/12GW6 |
| | | | | 12DQ7 | 12BY7A/12BV7/ 12DQ7 |
| | | | | 12DZ6 | 12EK6/12DZ6/ 12EA6 |
| | | | | 12EA6 | 12EK6/12DZ6/ 12EA6 |
| | | | | 12EK6 | 12EK6/12DZ6/ 12EA6 |
| | | | | 12G-87 | 12BQ6B/12GW6 |
| | | | | 12GN7A/ 12HG7 | 12HG7/12GN7 |
| | | | | 12GW6 | 12DQ6B/12GW6 |
| | | | | 12HG7 | 12HG7/12GN7 |
| | | | | 12R-K19 | 12BR3/12R-K19 |
| | | | | 13EM7 | 15EA7/13EM7 |
| | | | | 13FM7 | 15FM7/13FM7 |
| | | | | 13GB5 | 13GB5/XL500 |
| | | | | 13J10 | 13Z10/13J10 |
| | | | | 13Z10 | 13Z10/13J10 |
| | | | | 15CW5 | 15CW5/PL84 |
| | | | | 15EA7 | 15EA7/15EM7 |
| | | | | 15FM7 | 15FM7/13FM7 |
| | | | | 16A8 | 16A8/PCL82 |
| | | | | 16AQ3 | 16AQ3/XY88 |
| | | | | 17AB10 | 17AB10/17X10 |
| | | | | 17AY3A | 17AY3A/17BS3A |
| | | | | 17BE3 | 17BE3/17BZ3 |
| | | | | 17BR3 | 17BR3/17R-K19 |

| Tube Type to be Replaced | General Electric Multiple/Brand | Tube Type to be Replaced | General Electric Multiple/Brand | Tube Type to be Replaced | General Electric Multiple/Brand |
|--------------------------|---------------------------------|--------------------------|---------------------------------|--------------------------|---------------------------------|
| 17BS3A | 17AY3A/17BS3A | 8425A | 8425A/6AU6A | PCF80 | 9A8/8A8/PCF80 |
| 17BZ3 | 17BE3/17BZ3 | 8426A | 8426A/12AU6 | PCF86 | 7HG8/PCF86 |
| 17C5 | 17CU5/17C5 | 8552 | 6883B/8032A/ 8552 | PCF801 | 8GJ7/PCF801 |
| 17CU5 | 17CU5/17C5 | DY87 | 1S2A/DY87 | PCL82 | 16A8/PCL82 |
| 17D4 | 17D4/17DM4A | ECC81 | 12AT7/ECC81 | PL84 | 15CW5/PL84 |
| 17DM4A | 17D4/17DM4A | ECC82 | 12AU7A/ECC82 | PL500 | 27GB5/PL500 |
| 17DQ6B | 17DQ6B/17GW6 | ECC83 | 12AX7/ECC83 | UL84 | 45B5/UL84 |
| 17EW8 | 17EW8/HCC85 | ECC85 | 6AQ8/ECC85 | XCF80 | 4BL8/XCF80 |
| 17GW6 | 17DQ6B/17GW6 | ECC86 | 6GM8/ECC86 | XF183 | 3EH7/XF183 |
| 17R-K19 | 17BR3/17R-K19 | ECC88 | 6DJ8/ECC88 | XF184 | 3EJ7/XF184 |
| 17X10 | 17AB10/17X10 | ECC189 | 6ES8/ECC189 | XL500 | 13GB5/XL500 |
| 18GV8 | 18GV8/PCL85 | ECF80 | 6BL8/ECF80 | XY88 | 16AQ3/XY88 |
| 19CG3 | 19DQ3/19CG3 | ECF86 | 6HG8/ECF86 | | |
| 19CL8A | 19JN8/19CL8A | ECF200 | 6X9/ECF200 | | |
| 19DQ3 | 19DQ3/19CG3 | ECF801 | 6GJ7/ECF801 | | |
| 19JN8 | 19JN8/19CL8A | ECF802 | 6JW8/ECF802 | | |
| 20AQ3 | 20AQ3/LY88 | ECL82 | 6BM8/ECL82 | | |
| 21JS6A | 21JS6A/23JS6A | ECL84 | 6DX8/ECL84 | | |
| 23JS6A | 21JS6A/23JS6A | ECL86 | 6GW8/ECL86 | | |
| 24JE6A | 24LQ6/24JE6C | EF93 | 6BA6/EF93 | | |
| 24LQ6 | 24LQ6/24JE6C | EF95 | 6AK5/EF95 | | |
| 25BQ5GA | 25BQ5GA/ 25CU6 | EF183 | 6EH7/EF183 | | |
| 25BQ6GTB | 25BQ6GTB/ 25CU6 | EF184 | 6EJ7/EF184 | | |
| 25CU6 | 25BQ6GTB/ 25CU6 | EL34 | 6CA7/EL34 | | |
| 25L6GT | 25L6GT/ 25W6GT | EL84 | 6BQ5/EL84 | | |
| 25W6GT | 25L6GT/ 25W6GT | EL86 | 6CW5/EL86 | | |
| 27GB5 | 27GB5/PL500 | EL95 | 6DL5/EL95 | | |
| 34CE3 | 34CE3/34CD3 | EL500 | 6GB5/EL500 | | |
| 36KD6 | 36KD6/40KD6 | EM84 | 6FG6/EM84 | | |
| 40KD6 | 36KD6/40KD6 | EY88 | 6AL3/EY88 | | |
| 42EC4A | 42EC4A/PY500 | EZ80 | 6V4/EZ80 | | |
| 45B5 | 45B5/UL84 | GZ34 | 5AR4/GZ34 | | |
| 6883B | 6883B/8032A/ 8552 | HCC85 | 17EW8/HCC85 | | |
| 7025 | 12AX7A/7025 | KT66 | 7581A/KT66 | | |
| 7054 | 8077/7054 | LCF86 | 5HG8/LCF86 | | |
| 7581A | 7581A/KT66 | LCF201 | 5U9/LCF201 | | |
| 8032A | 6883B/8032A/ 8552 | LCL84 | 10DX8/LCL84 | | |
| 8077 | 8077/7054 | LFL200 | 11Y9/LFL200 | | |
| | | LL86 | 10CW5/LL86 | | |
| | | LY88 | 20AQ3/LY88 | | |
| | | PC900 | 4HA5/PC900 | | |

RECEIVING TUBE—INTERCHANGEABILITY GUIDE

FOREIGN TYPES vs. AMERICAN TYPES

In most cases the domestic tube types shown below are satisfactory replacements for the corresponding foreign types however, in some circuits a few of the indicated replacements may be unsatisfactory owing to mechanical or electrical differences (which can be more critical in some circuits than others). The domestic types shown are not necessarily all available at present from domestic sources. Tubes set in bold type are presently available from General Electric.

| Foreign Type To Be Replaced | American Type For Replacement | Foreign Type To Be Replaced | American Type For Replacement | Foreign Type To Be Replaced | American Type For Replacement |
|--------------------------------|----------------------------------|--------------------------------|----------------------------------|--------------------------------|----------------------------------|
| 1C1 | 1R5 | 6CH40 | 6AJ8 | 6Q8 | 6A8 |
| 1C2 | 1AC6 | 6D1 | 6DR4 | 6R-HH2 | 6HK8, 6BZ8/6BC8 |
| 1C3 | 1AB6 | 6D2 | 6AL5 | 6R-HH8 | 6KN8, |
| 1D13 | 1A3 | 6D-HH13 | 6FX7 | | 6KN8/6R-HH8 |
| 1F1 | 1AJ4 | 6E8 | 6A8 | 6R-K19 | 6BR3/6R-K19 |
| 1F2 | 1L4 | 6F10 | 6AC7 | 6R-R8C | 5847/404A |
| 1F3 | 1T4 | 6F11 | 6AM6 | 6S5G | 6E5 |
| 1FD1 | 1AH5 | 6F12 | 6AM6 | 6T1 | 6AF4, 6DZ4/6AF4 |
| 1FD9 | 1S5 | 6F15 | 6CJ5 | 6V4 | 6CA4 |
| 1G50 | 2050A | 6F16 | 6CJ5 | 6Z4 | 6BX4, 6X4 |
| 1H2 | 1S2, 1S2A/DY87 | 6F18 | 6EC7 | 6Z31 | 6X4 |
| 1H33 | 1AQ5 | 6F19 | 6BY7 | 7D9 | 6AM5 |
| 1H35 | 1AB6 | 6F21 | 6CQ6 | 7D10 | 6CH6 |
| 1P1 | 3C4 | 6F22 | 6267 | 7D11 | 6550, 6550A |
| 1P10 | 3S4 | 6F23 | 6EL7, | 7F16 | 6CJ5 |
| 1P11 | 3V4 | | 6EH7/EF183 | 8D3 | 6AM6 |
| 1R5SF | 1AQ5 | 6F24 | 6EJ7/EF183 | 8D5 | 6BR7 |
| 1R23 | 1S2, 1S2A/DY87 | 6F25 | 6EH7/EF183 | 8D6 | 6BW7 |
| 1S5SF | 1AR5 | 6F26 | 6BY7 | 8D7 | 6BS7 |
| 1T4SF | 1AM4 | 6F29 | 6EH7/EF183 | 8D8 | 6267 |
| 1U5SF | 1AS5 | 6F30 | 6EJ7/EF184 | 8R-HP1 | 8B8 |
| 2B/250A | 807 | 6F31 | 6BA6/EF93 | 9D6 | 6CQ6 |
| 2D | 1P40 | 6F32 | 6AK5/EF95 | 9M-HH3 | 9J6 |
| 2XM600A | 866A | 6F33 | 6AS6 | 9P9 | 9BM5 |
| 3D-HH13 | 3EX7 | 6F35 | 6AJ5 | 9R-AL1 | 10E7 |
| 3M-R24 | 3DK6 | 6F36 | 6AH6 | 9R-HH2 | 9GH8A |
| 3M-V7 | 3BZ6 | 6FD12 | 6DC8 | 10C14 | 19D8, 19AJ8 |
| 3S4SF | 3W4 | 6FX4 | 6AV4 | 10F9 | 12AC5 |
| 4G280K | 2D21 | 6G-B3A | 6BQ6GTB/6CU6 | 10F18 | 13EC7 |
| 4R-HH2 | 4BC8 | 6G-B6 | 6BQ6GTB/6CU6 | 10FD12 | 19FL8 |
| 4R-HH8 | 4KN8/4R-HH8 | 6G-B9 | 6GW6, | 10L14 | 26A08 |
| 4Y25 | 807 | | 6DQ6B/6GW6 | 10LD3 | 14L7 |
| 5A/160H | 6AM6 | 6G-K17 | 6AU4GTA | 10LD12 | 28AK8 |
| 5B/250A | 807 | 6H-31 | 6BE6 | 10LD13 | 14G6 |
| 5C/100A | 813 | 6L10 | 6AG7 | 10P18 | 45B5/UL84 |
| 5M-HH3 | 5J6 | 6L12 | 6AQ8/ECC85 | 10P12 | 50BM8 |
| 5P-29 | 6CN6 | 6L13 | 12AX7A/7025 | 12B-B14 | 13GB5/XL500 |
| 5R-HP1 | 4BL8/XCF80 | 6L16 | 6CW7 | 12BC32 | 12AV6 |
| 5S1 | 807 | 6L31 | 6AQ5A/6HG5 | 12E13 | 6550, 6550A |
| 5Z10 | 5U4GB/5AS4A | 6L34 | 6AQ4 | 12F31 | 12BA6 |
| 6/30L2 | 6GA8 | 6L43 | 6CL6 | 12G-B6 | 12BQ6GT, |
| 6AT7N | 6DT8 | 6LD3 | 6CV7 | | 12BQ6GTB/12CU6 |
| 6B32 | 6AL5 | 6LD12 | 6AK8, 6T8-A | 12G-B7 | 12DQ6B/12GW6 |
| 6BC32 | 6AV6 | 6LD13 | 6BD7A | 12G-K17 | 12D4A, 12D4 |
| 6C10 | 6CU7 | 6LP12 | 6BM8/ECL82 | 12H31 | 12BE6 |
| 6C12 | 6AJ8 | 6M1 | 6U5-G | 12R-K19 | 12BR3/12R-K19 |
| 6C15 | 6CJ5 | 6M2 | 6CD7 | 12R-LL3 | 12AV7 |
| 6C16 | 6BL8/ECF80 | 6M-H1 | 6J4 | 12R-LL5 | 12FQ7 |
| 6C18 | 6GV7 | 6M-HH3 | 6J6A | 13D2 | 6SN7GTB |
| 6C31 | 6K8 | 6P9 | 6BM5, | 13D3 | 6158 |
| 6CC10 | 5692 | | 6AQ5A/6HG5 | 16A | 6AM5 |
| 6CC31 | 6J6A | 6P15 | 6BQ5/EL84 | 17N8 | 17C8 |
| 6CC42 | 6E70, 5670W | 6P17 | 6AM5 | 17R-K19 | 17BR3/17R-K19 |
| 6CC43 | 6AQ8/ECC85 | 6P25 | 6AG6 | 18AK5 | 6028, 408A |
| 6CF8 | 6267 | 6PL12 | 6BM8/ECL82 | 19AJ8 | 19D8 |

| Foreign Type To Be Replaced | American Type For Replacement | Foreign Type To Be Replaced | American Type For Replacement | Foreign Type To Be Replaced | American Type For Replacement |
|--------------------------------|----------------------------------|--------------------------------|----------------------------------|--------------------------------|----------------------------------|
| 19BD | 19X3 | A677 | 6C6 | CV143 | 813 |
| 19M-R9 | 18FW6A | A863 | 6J7 | CV144 | 829B |
| 19M-R10 | 18GD6 | A1834 | 6AS7GA | CV177 | 813 |
| 19SU | 19Y3 | A2252 | 5675 | CV216 | OD3 |
| 19U3 | 19X3 | A2521 | 6CR4 | CV281 | 6K8 |
| 19W3 | 19X3 | A2599 | 6CT4 | CV283 | 6AL5 |
| 20A3 | 2D21 | A2900 | 12AT7, | CV303 | 7G7 |
| 20D3 | 12AH8 | | 12AT7/ECC81 | CV346 | 7Y4 |
| 20D4 | 6AJ8 | A4051 | 807 | CV394 | 6CD7 |
| 25G-B6 | 25BQ6GA/25CU6 | A4051J | 807 | CV417 | 6AQ4 |
| 25R-K19 | 25BR3 | AA91E | 5726 | CV424 | 5894 |
| 30C1 | 9A8/8A8/PCF80 | ABC91 | 12A6 | CV426 | 6X2 |
| 30C15 | 9EN7 | AD | 6Z3 | CV431 | 0E3 |
| 30C18 | 7GV7 | AFX212 | 6D4 | CV449 | 0G3, 5651 |
| 30F5 | 7ED7 | AG | 83 | CV450 | 6CN6 |
| 30FL1 | 9GB8 | AG866A | 866A | CV452 | 6AT6 |
| 30L1 | 7AN7 | AG2509 | 0G3, 5651 | CV453 | 6BE6 |
| 30L15 | 7EK7 | AG5211 | 0A2 | CV454 | 6BA6/EF93 |
| 30P4 | 25GF6 | AH201 | 866A | CV455 | 12AT7/ECC81 |
| 30P12 | 12FB5 | AH216 | 872A/872 | CV466 | 6488 |
| 30P16 | 16A5 | ARS25 | 807 | CV467 | 6487 |
| 30P18 | 15CW5/PL84 | ARS25A | 807 | CV469 | 6489 |
| 30P19 | 25GF6 | ASG512 | 2D21 | CV472 | 6391 |
| 30PL1 | 13GC8 | ASG5023 | 3C23 | CV475 | 5899 |
| 30PL10 | 13GC8 | ATS25 | 807 | CV476 | 6391 |
| 30PL12 | 16A8/PCL82 | ATS225A | 807 | CV477 | 5899 |
| 30PL13 | 16GK8 | AX224 | 3B28 | CV484 | 3S4 |
| 30PL14 | 16GK8 | B36 | 12SN7GTA | CV491 | 12AU7A/ECC82 |
| 40SUA | 1D5 | B63 | 6A6 | CV492 | 12AX7A/7025 |
| 52KU | 5Z4G, 5V4GA | B65 | 6SN7GTB | CV493 | 6X4 |
| 53AWB | 927 | B139 | 7AN7 | CV500 | 6T7G |
| 54KU | 5AQ4, 5V4GA | B152 | 12AT7/ECC81 | CV503 | 5W4GT, 5V4GA |
| 61A3 | 930 | B309 | 12AT7/ECC81 | CV509 | 6V6G, 6V6GT |
| 61DV3 | 929 | B319 | 7AN7 | CV510 | 6V6 |
| 62DDT | 6CV7 | B329 | 12AU7/ECC82 | CV511 | 6V6GTA |
| 62TH | 6CU7 | B339 | 12AX7A/7025 | CV512 | 6W7G |
| 62VP | 6CJ5 | B349 | 7EK7 | CV515 | 6Y6G, 6Y6GT |
| 63TP | 6AB8 | B719 | 6AQ8/ECC85 | CV522 | 7B7 |
| 63T1 | 6BA8A | B729 | 6GA8 | CV523 | 12Y4 |
| 64ME | 6CD7 | B739 | 12AT7/ECC81 | CV525 | 12A6 |
| 64SPT | 6BX6, | B749 | 12AU7A/ECC82 | CV526 | 12A6GT |
| | 6EH7/EF183 | B759 | 12AX7A/7025 | CV529 | 12AH7GT |
| 65ME | 6BR5 | BA2 | 2050 | CV531 | 12C8 |
| 66KU | 6BT4 | BF61 | 6CK5 | CV534 | 12J5 |
| 67PT | 6CK5 | BF451 | 45A5 | CV535 | 12J5GT |
| 85A1 | 0E3 | BPM04 | 6AQ5/6HG5 | CV537 | 12SA7 |
| 85A2 | 0G3, 5651 | BVA264 | 6AG6G | CV538 | 12SA7GT, 12SA7 |
| 85A3 | 5783 | BVA265 | 6AG6G | CV540 | 12SC7 |
| 108C1 | 0B2 | C143 | 813 | CV543 | 12SK7 |
| 121VP | 12AC5 | C180 | 832A | CV544 | 12SK7GT, 12SK7 |
| 141DDT | 14L7 | C610 | 7J7 | CV546 | 12SQ7 |
| 141TH | 14K7 | C866 | 866A | CV547 | 12SQ7GT, 12SQ7 |
| 150B2 | 6354 | CC81E | 12AT7WA, 6201, | CV549 | 25A6 |
| 150C1 | 0A2 | | 12AT7WC | CV550 | 25A6GT |
| 150C2 | 0A2 | CC86E | 6GM8/ECC86 | CV551 | 25L6G, |
| 150C3 | 0D3 | CcA | 6922/E88CC | | 25L6GT/25W6GT |
| 150C4 | 0A2 | CR27 | 866A | CV552 | 25L6, |
| 163 PEN | 16A5 | CV26 | 813 | | 25L6GT/25W6GT |
| 171DDP | 17C8, 17N8 | CV32 | 866A | CV553 | 25L6GT/25W6GT |
| 213 PEN | 21A6 | CV124 | 807 | CV555 | 25Z5 |
| 311SU | 31A3 | CV131 | 6CQ6 | CV561 | 35L6, 35L6GT |
| 451PT | 45A5 | CV133 | 6C4 | CV562 | 35L6GT |
| 866AX | 866A | CV136 | 6AM5 | CV568 | 35Z5GT |
| 3874A | 813 | CV138 | 6AM6 | CV569 | 6SL7GT |
| AG1 | 17Z3 | CV140 | 6AL5 | CV571 | 50L6GT |

| Foreign Type To Be Replaced | American Type For Replacement | Foreign Type To Be Replaced | American Type For Replacement | Foreign Type To Be Replaced | American Type For Replacement |
|--------------------------------|----------------------------------|--------------------------------|----------------------------------|--------------------------------|----------------------------------|
| CV574 | 6X5GT | CV765 | 1D7G | CV887 | 7C6 |
| CV578 | 6A8G | CV766 | 1E5GP | CV888 | 7D7 |
| CV579 | 6A8 | CV767 | 1F4 | CV889 | 7D8 |
| CV580 | 6A8GT | CV768 | 1F5G | CV890 | 7E5 |
| CV581 | 6C5G, 6C5 | CV769 | 1F6 | CV891 | 7E6 |
| CV582 | 6C5 | CV770 | 1F7 | CV892 | 7E7 |
| CV583 | 6C5GT, 6C5 | CV771 | 1G5 | CV893 | 7F7 |
| CV585 | 6C6 | CV772 | 1G6 | CV894 | 7G7 |
| CV586 | 6L6GC | CV773 | 1G6GT | CV895 | 7H7 |
| CV587 | 6Q7G | CV774 | 1H4 | CV896 | 7K7 |
| CV588 | 6Q7 | CV775 | 1LA6 | CV897 | 7J7 |
| CV589 | 6Q7GT | CV776 | 1LB4 | CV898 | 7N7 |
| CV590 | 6SJ7G, 6SJ7 | CV777 | 1LC5 | CV899 | 7Q7 |
| CV591 | 6SJ7 | CV778 | 1LC6 | CV900 | 7R7 |
| CV592 | 6SJ7GT, 6SJ7 | CV779 | 1LD5 | CV901 | 7Z4 |
| CV593 | 5AQ4, 5V4GA | CV780 | 1LH4 | CV902 | 7W7 |
| CV594 | 6SH7 | CV781 | 1LN5 | CV908 | 12A5 |
| CV595 | 6SH7GT, 6SH7 | CV782 | 1R5 | CV909 | 12A7 |
| CV597 | 2X2A | CV783 | 1S4 | CV910 | 12A8GT |
| CV599 | 1851 | CV784 | 1S5 | CV911 | 12B8GT |
| CV603 | 10 | CV785 | 1T4 | CV916 | 12H6 |
| CV604 | 30 | CV786 | 1T5 | CV917 | 12J7GT |
| CV606 | 37 | CV787 | 2A7 | CV918 | 12K7GT |
| CV608 | 41 | CV797 | 2D21 | CV919 | 12SF5 |
| CV609 | 42 | CV807 | 3A4 | CV920 | 12SF5GT, 12SF5 |
| CV610 | 45 | CV808 | 3A5 | CV921 | 12SF7 |
| CV611 | 46 | CV815 | 3D6/1299 | CV922 | 12SH7 |
| CV612 | 57 | CV818 | 3Q4 | CV923 | 12SJ7GT, 12SJ7 |
| CV613 | 58 | CV819 | 3Q5 | CV924 | 12SL7, 12SL7GT |
| CV614 | 75 | CV820 | 3S4 | CV925 | 12SN7GTA |
| CV615 | 76 | CV833 | 89 | CV930 | 14F7 |
| CV616 | 77 | CV837 | 12C8 | CV931 | 15 |
| CV617 | 80 | CV844 | 6AC5G | CV936 | 24A |
| CV618 | 83 | CV845 | 6AC5GT | CV937 | 25A7 |
| CV627 | 810 | CV846 | 6AC7 | CV938 | 25AC5 |
| CV628 | 811A | CV847 | 6AF6G | CV939 | 25B6, 5824 |
| CV642 | 872A, 872 | CV848 | 6AG5 | CV940 | 25B8 |
| CV660 | 6AC7 | CV849 | 6AC7 | CV942 | 25Y5 |
| CV661 | 6AB7, 6AC7 | CV850 | 6AK5/EF95 | CV943 | 26 |
| CV686 | OC3 | CV851 | 6B4 | CV944 | 27 |
| CV694 | 12SG7 | CV852 | 6C4 | CV945 | 28D7 |
| CV698 | 12SJ7GT, 12SJ7 | CV854 | 6C7 | CV946 | 28D7GT |
| CV700 | 12SR7 | CV856 | 6G8G | CV947 | 31 |
| CV703 | 12K8 | CV858 | 6J6A | CV948 | 32L7 |
| CV705 | 1D5GP | CV859 | 6J8G | CV949 | 33 |
| CV706 | 6U7G, 6K7 | CV860 | 6K5 | CV951 | 32A |
| CV711 | 32 | CV861 | 6K5GT | CV953 | 32G |
| CV712 | 38 | CV862 | 6L5G | CV966 | 6ED8 |
| CV724 | 816 | CV864 | 6P5G | CV995 | 6AJ5 |
| CV728 | 1P5GT | CV865 | 6SD7GT | CV1060 | 807 |
| CV729 | 5V4GA | CV866 | 6SJ7Y | CV1067 | 6J5 |
| CV730 | 6A3 | CV867 | 6SR7 | CV1074 | 6J5 |
| CV731 | 6V6GTA | CV870 | 6V7G | CV1075 | 6L6GC |
| CV741 | 6CA7, EL34, 6CA7 | CV872 | 6Z7G | CV1100 | 6S7 |
| CV747 | 6AC7 | CV873 | 6ZY5 | CV1195 | 6K7 |
| CV750 | 01A | CV876 | 7A6 | CV1280 | 6L7 |
| CV752 | 0A4G | CV877 | 7A7 | CV1285 | 6N7 |
| CV753 | 1A3 | CV878 | 7A8 | CV1286 | 6L6 |
| CV754 | 1A4P | CV779 | 7B4 | CV1287 | 25L6GT/25W6GT |
| CV755 | 1T5 | CV880 | 7B5 | CV1301 | 6H6 |
| CV756 | 1A5 | CV881 | 7B5 | CV1347 | 6E8 |
| CV757 | 1A6 | CV882 | 7B6 | CV1352 | 6BR5 |
| CV758 | 1B4P | CV883 | 7B8 | CV1364 | 807 |
| CV759 | 1B5/25S | CV885 | 7C5 | CV1375 | 6BY7 |
| CV760 | 1A7GT | CV886 | 7C5LT, 7C5 | | |

| Foreign Type To Be Replaced | American Type For Replacement | Foreign Type To Be Replaced | American Type For Replacement | Foreign Type To Be Replaced | American Type For Replacement |
|--------------------------------|--|--------------------------------|----------------------------------|--------------------------------|----------------------------------|
| CV1376 | 6BX6, 6EH7/EF183 5AR4/GZ34 | CV1900 | 6D6 | CV1990 | 6SQ7 |
| CV1377 | | CV1901 | 6AM6 | CV1991 | 6SQ7GT, 6SQ7 |
| CV1449 | 872A/872 | CV1902 | 6D8 | CV1992 | 0A4G |
| CV1535 | 6V4/EZ80 | CV1908 | 6F5G, 6F5 | CV1993 | 6SS7 |
| CV1572 | 807 | CV1909 | 6F5 | CV1995 | 6ST7G |
| CV1633 | 3V4 | CV1910 | 6F5GT, 6F5 | CV1996 | 6ST7 |
| CV1741 | 6CA7, EL34/6CA7 | CV1911 | 6F6G, 6F6 | CV2004 | 6AL5 |
| CV1751 | 34 | CV1912 | 6F6 | CV2005 | 6AL5 |
| CV1752 | 35/51 | CV1915 | 6F7 | CV2007 | 12AU7A/ECC82 |
| CV1753 | 35A5 | CV1917 | 6F8G | CV2009 | 6AQ4 |
| CV1758 | 1L4 | CV1918 | 6F8 | CV2010 | 6J6A |
| CV1762 | 6AK6 | CV1924 | 5866 | CV2011 | 12AU7A/ECC82 |
| CV1763 | 6J4 | CV1926 | 6G6 | CV2012 | 0G3, 5651 |
| CV1769 | 2A6 | CV1928 | 12BA6 | CV2013 | 6CH6 |
| CV1770 | 7A4 | CV1929 | 6H6G, 6H6 | CV2014 | 5763 |
| CV1771 | 39/44 | CV1930 | 6H6 | CV2016 | 12AT7/ECC81 |
| CV1772 | 47 | CV1931 | 6H6GT, 6H6 | CV2020 | 6AK5/EF95 |
| CV1773 | 82 | CV1932 | 6J5G, 6J5 | CV2021 | 6X4 |
| CV1774 | 112A | CV1933 | 6J5 | CV2022 | 6BW6 |
| CV1775 | 36 | CV1934 | 6J5GT, 6J5 | CV2023 | 6CQ6 |
| CV1776 | 6D7 | CV1935 | 6J7G, 6J7 | CV2024 | 6BE6 |
| CV1777 | 7C7 | CV1936 | 6J7 | CV2026 | 6BA6/EF93 |
| CV1784 | 6AK7, 6AG7 | CV1937 | 6J7GT, 6J7 | CV2105 | 6973 |
| CV1800 | 1A7G, 1A7GT | CV1938 | 6K6G, 6K6GT | CV2127 | 6CH6 |
| CV1802 | 1A7GT | CV1940 | 6K6GT | CV2128 | 6AJ8 |
| CV1803 | 1C5G | CV1941 | 6K7G, 6K7 | CV2129 | 5763 |
| CV1805 | 1C5GT | CV1942 | 6K7 | CV2130 | 6155 |
| CV1806 | 1D5GT | CV1943 | 6K7GT, 6K7 | CV2131 | 6156 |
| CV1811 | 1D8GT | CV1944 | 6K8G | CV2135 | 6BR7 |
| CV1812 | 1E7 | CV1945 | 6K8 | CV2136 | 6BW6 |
| CV1815 | 6Q5G | CV1946 | 6K8GT | CV2137 | 6ED6 |
| CV1817 | 1G4 | CV1947 | 6L6G, 6L6GC | CV2180 | 19H4 |
| CV1818 | 1H5G | CV1948 | 6L6 | CV2195 | 6AM6 |
| CV1819 | 6P5GT | CV1949 | 6D4 | CV2210 | 5544 |
| CV1820 | 1H5GT | CV1950 | 6L7G | CV2215 | 5545A |
| CV1821 | 1N5 | CV1951 | 6L7 | CV2225 | 6374 |
| CV1823 | 1N5GT | CV1953 | 6N6G | CV2235 | 6374 |
| CV1824 | 1Q5G | CV1954 | 6N6 | CV2237 | 1AD4 |
| CV1826 | 1Q5GT | CV1956 | 6N7G, 6N7 | CV2238 | 5672 |
| CV1829 | 1T5GT | CV1957 | 6N7 | CV2239 | 5676 |
| CV1831 | 2A3 | CV1958 | 6N7GT, 6N7 | CV2240 | 3B4 |
| CV1832 | 0A2 | CV1959 | 50C5 | CV2241 | 5642 |
| CV1833 | 0B2 | CV1960 | 6R6G | CV2253 | 6574 |
| CV1834 | 2A5 | CV1961 | 12AU6 | CV2254 | 5678 |
| CV1837 | 2B7 | CV1962 | 6R7G | CV2275 | 6375 |
| CV1838 | 5895 | CV1963 | 6R7 | CV2300 | 3A4 |
| CV1852 | 0A2 | CV1964 | 6R7GT | CV2361 | 3C4 |
| CV1854 | 5Y3G, 5Y3GT | CV1966 | 6SA7 | CV2370 | 3S4 |
| CV1856 | 5Y3GT | CV1967 | 6SA7GT, 6SA7 | CV2382 | 6CH7 |
| CV1862 | 6AQ5A/6HG5 | CV1969 | 6SC7 | CV2390 | 3A4 |
| CV1865 | 6R4 | CV1970 | 6SC7GT, 6SC7 | CV2432 | 6205 |
| CV1867 | 6A6 | CV1971 | 1T4 | CV2434 | 6779 |
| CV1870 | 6A7 | CV1972 | 6SF5 | CV2466 | 6939 |
| CV1873 | 6AB7, 6AC7 | CV1973 | 6SF5GT, 6SF5 | CV2492 | 6DJ8/ECC88 |
| CV1878 | 6AD7 | CV1974 | 6S7G | CV2500 | 35Z4GT |
| CV1882 | 6AG7 | CV1975 | 6S7 | CV2501 | 40 |
| CV1885 | 6B5 | CV1977 | 45A5 | CV2507 | 1U4 |
| CV1886 | 6Q4 | CV1978 | 6SG7 | CV2514 | 43 |
| CV1887 | 6B6G | CV1981 | 6SK7 | CV2520 | 6279 |
| CV1888 | 6R4 | CV1982 | 6SK7GT, 6SK7 | CV2522 | 6AS6 |
| CV1891 | 6B7 | CV1984 | 6SL7, 6SL7GT | CV2523 | 6AS7G, 6AS7GA |
| CV1893 | 6B8G | CV1985 | 6SL7GT | CV2524 | 6AU6A |
| CV1894 | 6B8 | CV1986 | 6SN7, 6SN7GTB | CV2526 | 6AV6 |
| CV1896 | 6C8 | CV1988 | 6SN7GT, | CV2527 | 6BA7 |
| | | | 6SN7GTB | CV2530 | 45Z5 |

| Foreign Type To Be Replaced | American Type For Replacement | Foreign Type To Be Replaced | American Type For Replacement | Foreign Type To Be Replaced | American Type For Replacement |
|--------------------------------|----------------------------------|--------------------------------|----------------------------------|--------------------------------|----------------------------------|
| CV2531 | 46 | CV2810 | 6ED6B | CV4023 | 6AU6WA, 6136, |
| CV2532 | 49 | CV2842 | 6C4W, 6C4WA, | | 6AU6WC |
| CV2533 | 50 | | 6100 | CV4024 | 6201, 12AT7WC |
| CV2534 | 50L6GT | CV2844 | 6X4W, 6202 | CV4025 | 5726 |
| CV2535 | 53 | CV2854 | 6AN5 | CV4026 | 6R4WGA |
| CV2536 | 53A | CV2876 | 5727 | CV4028 | 0B2WA |
| CV2537 | 55 | CV2877 | 5654, 5654W | CV4029 | 5902 |
| CV2538 | 59 | CV2882 | 5726 | CV4031 | 6101, 6J6WA |
| CV2541 | 71A | CV2883 | 6005, 6005W | CV4039 | 5763 |
| CV2542 | 72 | CV2884 | 5725, 5725W | CV4044 | 6443 |
| CV2543 | 73 | CV2901 | 6267 | CV4058 | 6100, 6C4WA |
| CV2544 | 78 | CV2903 | 6073 | CV4066 | 5783WA |
| CV2545 | 79 | CV2940 | 6CM5 | CV4100 | 0A2WA |
| CV2546 | 81 | CV2967 | 8020 | CV4101 | 0B2WA |
| CV2547 | 83V | CV2975 | 6BQ5/EL84 | CV4108 | 7308 |
| CV2548 | 84 | CV2980 | 1M3 | CV5008 | 6080 |
| CV2549 | 85 | CV2983 | 3V4 | CV5021 | 6V3A |
| CV2556 | 117L7/M7GT | CV2984 | 6080 | CV5032 | 1X2A, |
| CV2557 | 117N7GT | CV3508 | 12AT7WA, 6201, | | 1X2C/1BX2 |
| CV2558 | 117Z6GT | | 12AT7WC | CV5034 | 6FG6/EM84 |
| CV2565 | 2050 | CV3512 | 5696, 5696A | CV5036 | 6AF4, |
| CV2573 | 5651 | CV3521 | 5949/1907 | | 6DZ4/GAF4A |
| CV2575 | 5670, 5670W | CV3522 | 6079 | CV5037 | 6BA6W, 5749 |
| CV2578 | 5687, 5687WA, | CV3523 | 6146B | CV5040 | 6BQ6GTB/6CU6 |
| | 5687WB | CV3526 | 6BN5 | CV5042 | 12BH7A |
| CV2638 | 393A | CV3789 | 417A, 5842/417A | CV5055 | 6DA5 |
| CV2642 | 417A, 5842/417A | CV3798 | 0A3 | CV5065 | 6U8A/6AX8/ 6KD8/5KD8 |
| CV2658 | 806 | CV3799 | 0B3 | | 6CA4 |
| CV2660 | 809 | CV3882 | 6CV7 | CV5071 | 6CA4 |
| CV2661 | 812A | CV3883 | 6CT7 | CV5072 | 6CA4 |
| CV2662 | 5639 | CV3886 | 6CJ5 | CV5074 | 6AN4 |
| CV2663 | 815 | CV3888 | 6CU7 | CV5077 | 21A6 |
| CV2666 | 829B | CV3889 | 6CK5 | CV5079 | 5643 |
| CV2669 | 849 | CV3891 | 6BT4 | CV5094 | 6CW5/EL86 |
| CV2671 | 851 | CV3905 | 5847 | CV5122 | 5823 |
| CV2680 | 868 | CV3908 | 6BH6 | CV5126 | 6AJ4 |
| CV2683 | 878A | CV3912 | 1U5 | CV5140 | 6923 |
| CV2685 | 880 | CV3928 | 5636 | CV5156 | 6DA6 |
| CV2692 | 918 | CV3929 | 5840 | CV5172 | 1AC6 |
| CV2693 | 929 | CV3930 | 5718 | CV5181 | 5R4GY, 5R4GYB |
| CV2694 | 930 | CV3933 | 5783 | CV5186 | 5681 |
| CV2695 | 931, 931A | CV3938 | 5636 | CV5188 | 5651 |
| CV2696 | 931A | CV3939 | 6BM6A | CV5189 | 5726 |
| CV2697 | 935 | CV3960 | 5783WA | CV5190 | 6005, 6005W |
| CV2698 | 5896 | CV3986 | 6021 | CV5192 | 7AN7 |
| CV2700 | 957 | CV3987 | 5644 | CV5212 | 12AT7WB, 6201, |
| CV2701 | 958A | CV3990 | 2E26 | | 12AT7WC |
| CV2704 | 7E5 | CV3995 | 6CB6A/6CF6 | CV5214 | 5920 |
| CV2706 | 7C4 | CV3998 | 6688 | CV5215 | 6BL8/ECF80 |
| CV2707 | 1231 | CV4003 | 6189, 6189W | CV5216 | 5654, 5654W |
| CV2709 | 1R4 | CV4004 | 12AX7A, 7025 | CV5220 | 6550, 6550A |
| CV2710 | 3D6 | CV4007 | 5726 | CV5231 | 7308 |
| CV2714 | 1614, 6L6 | CV4008 | 5719 | CV5242 | 6CT4 |
| CV2715 | 1630 | CV4009 | 5749, 5749W | CV5268 | 7384 |
| CV2716 | 6SC7 | CV4010 | 5654, 5654W | CV5281 | 6CW7 |
| CV2721 | 6CJ6 | CV4011 | 5725, 5725W | CV5311 | 6J4WA |
| CV2726 | 6CK6 | CV4012 | 6BE6 | CV5331 | 6ES8/ECC189 |
| CV2729 | 6084 | CV4014 | 6084 | CV5354 | 7308 |
| CV2742 | 1L4 | CV4015 | 6065 | CV5358 | 6DJ8/ECC88 |
| CV2748 | 524GT, 5V4GA | CV4016 | 6189, 6189W | CV5365 | 6BQ7A/6BZ7 |
| CV2769 | 9006 | CV4017 | 5751 | CV5397 | 8108 |
| CV2795 | 1L4 | CV4018 | 5727 | CV5404 | 6463 |
| CV2797 | 5894 | CV4019 | 6005, 6005W | CV5427 | 1X2B, |
| CV2798 | 6360 | CV4020 | 0A2WA | | 1X2C/1BX2 |
| CV2799 | 6252 | CV4022 | 6135 | CV5434 | 6FG6/EM84 |

| Foreign Type To Be Replaced | American Type For Replacement | Foreign Type To Be Replaced | American Type For Replacement | Foreign Type To Be Replaced | American Type For Replacement |
|--------------------------------|----------------------------------|--------------------------------|----------------------------------|--------------------------------|----------------------------------|
| CV5724 | 6218 | CV8229 | 6AQ5/6HG5 | DH74 | 12Q7GT |
| CV5817 | 6BW7, 6EH7/EF183 | CV8231 | 6J6A | DH76 | 12Q7GT |
| CV5831 | 6EH7/EF183 | CV8232 | 6080 | DH77 | 6AT6 |
| CV5843 | 5965A | CV8237 | 6X4 | DH81 | 7B6 |
| CV5893 | 5654, 5654W | CV8239 | 5783 | DH118 | 14L7 |
| CV5894 | 5670, 5670W | CV8246 | 5654, 5654W | DH119 | 14G6 |
| CV5895 | 5750 | CV8247 | 5670, 5670W | DH142 | 14L7 |
| CV5896 | 6136, 6AU6WC | CV8248 | 5750 | DH149 | 7C6 |
| CV5905 | 6R3 | CV8249 | 6136, 6AU6WC | DH150 | 6CV7 |
| CV5948 | 18D3 | CV8280 | 6AX5GT | DH718 | 6CV7 |
| CV5986 | 6112 | CV8287 | 5686 | DH719 | 6T8A |
| CV5989 | 6085 | CV8297 | 66W8/ECL86 | DH817 | 6CV7 |
| CV7047 | 0A5 | CV8310 | 5725, 5725W | DK32 | 1A7GT |
| CV8017 | 6CQ6 | CV8311 | 5726 | DK91 | 1R5 |
| CV8020 | 6AM6 | CV8312 | 5751 | DK92 | 1AC6 |
| CV8038 | 6CN6 | CV8324 | 5744WB | DK96 | 1AB6 |
| CV8039 | 5840 | CV8403 | 6AU6WB, 6136, 6AU6WC | DK97 | 1AB6 |
| CV8041 | 6489 | CV8430 | 6BK4B | DL29 | 3D6/1299 |
| CV8045 | 6CH6 | CV8431 | 7062 | DL31 | 1A5GT |
| CV8047 | 6BR7 | CV8433 | 9A8/8A8/PCF80 | DL33 | 3Q5GT |
| CV8048 | 6BW6 | CV8450 | 0A5 | DL35 | 1C5GT |
| CV8065 | 6922 | CV8458 | 6DL5 | DL36 | 1Q5GT |
| CV8068 | 6267 | CV8469 | 7554 | DL37 | 6L6GC |
| CV8069 | 6BQ5/EL84 | CV8470 | 7587 | DL67 | 6007 |
| CV8070 | 6059 | D1C | 957 | DL70 | 6373 |
| CV8071 | 6CQ6 | D2C | 958A | DL82 | 7B6 |
| CV8073 | 6072, 6072A | D2M9 | 6AL5 | DL91 | 1S4 |
| CV8076 | 6132 | D3F | 959 | DL92 | 3S4 |
| CV8080 | 6158 | D63 | 6H6 | DL93 | 3A4 |
| CV8086 | 0A5 | D77 | 6AL5 | DL94 | 3V4 |
| CV8154 | 12AT7/ECC81 | D152 | 6AL5 | DL95 | 3Q4 |
| CV8155 | 12AU7A/ECC82 | D717 | 6AL5 | DL96 | 3C4 |
| CV8156 | 12AX7A/7025 | DA90 | 1A3 | DL98 | 3B4 |
| CV8158 | 2D21 | DAC21 | 1S5 | DL620 | 5672 |
| CV8159 | 6AK5/EF95 | DAC32 | 1H5GT | DM70 | 1M3 |
| CV8160 | 6J6A | DAF90 | 1A3 | DM71 | 1N3 |
| CV8161 | 0A2 | DAF91 | 1S5 | DM160 | 6977 |
| CV8162 | 0B2 | DAF92 | 1U5 | DP61 | 6AK5/EF95 |
| CV8189 | 5R4GY, 5R4GYA | DAF96 | 1AH5 | DY30 | 1B3GT, 1G3GTA/1B3GT |
| CV8190 | 6AH6 | DAF97 | 1AN5 | DY51 | 1BG2 |
| CV8191 | 6CL6 | DC70 | 6375 | DY70 | 5642 |
| CV8192 | 6J4 | DC80 | 1E3 | DY80 | 1X2A, 1X2C/1BX2 |
| CV8200 | 6AL5 | DCC90 | 3A5 | DY86 | 1S2, 1S2A/DY87 |
| CV8201 | 6BE6 | DCF60 | 1V6 | DY87 | 1BQ2 |
| CV8202 | 6BA6 | DCG4/1000G | 866A | DY802 | 954 |
| CV8203 | 6X4 | DD6 | 6AL5 | E1F | 956 |
| CV8204 | 5R4GYA | DD7 | 6AM5 | E2F | 8233 |
| CV8205 | 6D4 | DD77 | 5726 | E55L | 6085 |
| CV8206 | 5763 | DDR7 | 6AM5 | E80CC | 7643 |
| CV8208 | 6AH6 | DET17 | 810 | E80CF | 6084 |
| CV8209 | 6AS6 | DF26 | 1S5 | E80L | 6227 |
| CV8210 | 6AUGA | DF33 | 1N5GT | E80T | 6218 |
| CV8211 | 6AN5 | DF60 | 5678 | E81CC | 6201, 12AT7WC |
| CV8214 | 8020 | DF62 | 1AD4 | E81L | 6686 |
| CV8215 | 5656 | DF67 | 5911, 6008 | E82CC | 6189, 6189W |
| CV8216 | 6080 | DF91 | 1T4 | E83CC | 6689 |
| CV8218 | 6146, 6146B | DF92 | 1L4 | E84L | 7320 |
| CV8221 | 12AU7A/ECC82 | DF96 | 1AJ4 | E88C | 6DL4, 8255 |
| CV8222 | 12AX7A/7025 | DF97 | 1AN5 | E88CC | 6922/E88CC |
| CV8223 | 6X4 | DF650 | 6419 | E89F | 6DG7 |
| CV8224 | 5726 | DF652 | 1AD4 | E90C | 5920 |
| CV8225 | 6AK5/EF95 | DF668 | 1AD4 | | |
| CV8226 | 6AS6 | DF904 | 1U4 | | |
| CV8227 | 5750 | DH63 | 6Q7 | | |

| Foreign Type To Be Replaced | American Type For Replacement | Foreign Type To Be Replaced | American Type For Replacement | Foreign Type To Be Replaced | American Type For Replacement |
|--------------------------------|----------------------------------|--------------------------------|--|--------------------------------|----------------------------------|
| E90CC | 5920 | EC94 | 6AF4, 6DZ4/6AF4A | ED2 | 6AL5 |
| E90F | 7693, 6661 | EC95 | 6ER5 | ED500 | 6ED4 |
| E90Z | 6X4 | EC97 | 6FY5 | EF2 | 6DA6 |
| E91AA | 5726 | EC157 | 8108 | EF5 | 6DA6 |
| E91H | 6687 | EC158 | 8436 | EF13 | 6DA6 |
| E91N | 5727 | EC900 | 6HA5/6HM5 | EF22 | 7G7 |
| E95F | 5654, 5654W | EC903 | 6BS4 | EF36 | 6J7GT, 6J7 |
| E99F | 6662 | EC1000 | 8254 | EF41 | 6CJ5 |
| E108K | 0B2 | ECC32 | 6SN7GTB | EF70 | 6487 |
| E130L | 7534 | ECC70 | 6021, 12AT7WC | EF71 | 5899 |
| E180CC | 7062 | ECC81 | 12AT7/ECC81 | EF72 | 5840 |
| E180F | 6688 | ECC82 | 12AU7A/ECC82 | EF73 | 6488 |
| E180L | 7534 | ECC83 | 12AX7A/7025 | EF74 | 6391 |
| E182CC | 7119, 7044 | ECC84 | 6CW7 | EF80 | 6BX6, 6EH7/EF183 |
| E182F | 5847/404A | ECC85 | 6AQ8/ECC85 | EF81 | 6BH5 |
| E186F | 7737 | ECC86 | 6GM8/ECC86 | EF82 | 6CH6 |
| E188CC | 7308 | ECC88 | 6DJ8/ECC88 | EF83 | 6BK8 |
| E280F | 7722 | ECC89 | 6FC7 | EF85 | 6BY7, 6EH7/EF183 |
| E288C | 8223 | ECC91 | 6J6A | EF86 | 6CF8, 6267 |
| E810F | 7788 | ECC180 | 6BQ7A/6BZ7 | EF87 | 6CF8, 6267 |
| E902 | 6X4 | ECC186 | 12AU7A/ECC82 | EF89 | 6DA6 |
| E1485 | 3A4 | ECC189 | 6ES8/ECC189 | EF89F | 6DG7 |
| E2016 | 6CQ6 | ECC230 | 6080 | EF91 | 6AM6 |
| E2157 | 12AT7/ECC81 | ECC801 | 12AT7WA, 6201, 12AT7WC | EF92 | 6CQ6 |
| E2163 | 12AU7A/ECC82 | ECC801S | 12AT7WA, 6201, 12AT7WC | EF93 | 6BA6/EF93 |
| E2164 | 12AX7A/7025 | ECC802 | 6189, 6189W | EF94 | 6AU6A |
| EA41 | 6CT7 | ECC802S | 6189, 6189W | EF95 | 6AK5/EF95 |
| EA50 | 2B35 | ECC803 | 12AX7A/7025 | EF96 | 6AG5 |
| EA52 | 6923 | ECC 803S | 12AX7A/7025 | EF97 | 6ES6 |
| EA76 | 6489 | ECC804 | 6GA8 | EF98 | 6ET6 |
| AAA91 | 6AL5 | ECC808 | 6KX8 | EF183 | 6EH7/EF183 |
| AAA901S | 5726 | ECC813 | 6463 | EF184 | 6EJ7/EF184 |
| EABC80 | 6AK8, 6T8-A | ECC863 | 12DT7, 12AX7A/7025 | EF190 | 6CB6A/6CF6 |
| EAF42 | 6CT7 | ECC900 | 6HA5, 6HM5/6HA5 | EF730 | 5636 |
| EAM86 | 6GX8 | ECC960 | 5920 | EF731 | 5899 |
| EB91 | 6AL5 | ECF80 | 6BL8/ECF80 | EF732 | 5840 |
| EBC3 | 6BD7A | ECF82 | 6U8A/6AX8/ 6KD8/5KD8/ 6HG8/ECF86 | EF734 | 6205 |
| EBC41 | 6CV7 | ECF86 | 6X9/ECF200 | EF811 | 6EH7/EF183 |
| EBC80 | 6B07 | ECF200 | 6U9 | EF812 | 6EL7, 6EH7/EF183 |
| EBC81 | 6BD7A | ECF201 | 6AJ9 | EF905 | 6688 |
| EBC90 | 6AT6 | ECF202 | 6AJ9 | EFL200 | 5654, 5654W |
| EBC91 | 6AV6 | ECF801 | 6GJ7/ECF801 | EH90 | 6Y9 |
| EBF41 | 6CJ5 | ECF802 | 6JW8/ECF802 | EK90 | 6CS6 |
| EBF80 | 6N8 | ECF805 | 6GV7 | EL33 | 6BE6 |
| EBF81 | 6AD8 | ECH42 | 6CU7 | EL34 | 6AG6 |
| EBF83 | 6DR8 | ECH80 | 6AN7 | EL34 | 6CA7, EL34/6CA7 |
| EBF85 | 6DC8 | ECH81 | 6AJ8 | EL36 | 6CM5 |
| EBF89 | 6DC8 | ECH82 | 6E8 | EL37 | 6L6GC |
| EC22 | 6R4 | ECH83 | 6DS8 | EL38 | 6CN6 |
| EC51 | 5861 | ECH84 | 6JX8 | EL41 | 6CK5 |
| EC55 | 5861 | ECH113 | 6CU7 | EL71 | 5902 |
| EC56 | 8108 | ECH200 | 6V9 | EL80 | 6M5 |
| EC57 | 8108 | ECL80 | 6AB8 | EL81 | 6CJ6 |
| EC70 | 6778, 5718 | ECL82 | 6BM8/ECL82 | EL82 | 6DY5 |
| EC71 | 5718 | ECL84 | 6DX8/ECL84 | EL83 | 6CK6 |
| EC80 | 6Q4 | ECL85 | 6GV8 | EL84 | 6BQ5/EL84 |
| EC81 | 6R4 | ECL86 | 6GW8/ECL86 | EL85 | 6BN5 |
| EC84 | 6AJ4 | ECL821 | 6CH6 | EL86 | 6CW5/EL86 |
| EC86 | 6CM4 | ECLL800 | 6KH8 | EL90 | 6AQ5A/6HG5 |
| EC88 | 6DL4, 8255 | | | EL91 | 6AM5 |
| EC90 | 6C4 | | | EL95 | 6DL5 |
| EC91 | 6AQ4 | | | | |
| EC92 | 6AB4 | | | | |
| EC93 | 6BS4 | | | | |

| Foreign Type To Be Replaced | American Type For Replacement | Foreign Type To Be Replaced | American Type For Replacement | Foreign Type To Be Replaced | American Type For Replacement |
|--------------------------------|----------------------------------|--------------------------------|----------------------------------|--------------------------------|----------------------------------|
| EL136 | 6FV5 | H2-10 | 2X2A | LCF802 | 6LX8/LCF802 |
| EL180 | 12BY7A/12BV7/ 12DQ7 | H52 | 5U4GB/5AS4A | LCH200 | 5V9 |
| EL300 | 6FN5 | H63 | 6F5GT, 6F5 | LCL82 | 11BM8 |
| EL500 | 6GB5/EL500 | HAA91 | 12AL5 | LCL84 | 10DX8/LCL84 |
| EL503 | 8278 | HBC80 | 19T8A | LCL85 | 10GV8 |
| EL504 | 6GB5A, 6GB5/EL500 | HBC90 | 12AT6 | LF183 | 4EH7 |
| EL505 | 6KG6, 6KG6A | HBC91 | 12AV6 | LF184 | 4EJ7 |
| EL508 | 6KW6 | HCC85 | 17EW8/HCC85 | LFL200 | 11Y9/LFL200 |
| EL509 | 6KG6A | HCH81 | 12AJ7 | LL86 | 10CW5/LL86 |
| EL802 | 6LD6 | HD14 | 1H5GT | LL500 | 18GB5 |
| EL821 | 6CH6 | HD30 | 3B4 | LL505 | 27KG6 |
| EL822 | 6CH6 | HD51 | OA2 | LL521 | 21KQ6 |
| EL861 | 6686 | HD52 | OB2 | LN119 | 50BM8 |
| ELF86 | 6HG8/ECF86 | HD93 | 1X2B, 1X2C/1BX2 | LN152 | 6AB8 |
| ELL80 | 6HU8 | HD94 | 6BQ6GTB/6CU6 | LN309 | 16A8/PCL82 |
| EM34 | 6CD7 | HD96 | 25BQ6GTB/ 25CU6 | LN319 | 13GC8 |
| EM35 | 6U5 | HF61 | 6CJ5 | LY81 | 11R3 |
| EM80 | 6BR5 | HF93 | 12BA6 | LY88 | 20AQ3/LY88 |
| EM81 | 6DA5/EM81 | HF94 | 12AU6 | LY500 | 28EC4 |
| EM84 | 6FG6/EM84 | HF121 | 12AC5 | LZ319 | 8A8, 9A8/8A8/PCF80 |
| EM85 | 6DG7 | HK90 | 12BE6 | LZ329 | 9A8/8A8/PCF80 |
| EM87 | 6HU6 | HL86 | 30CW5 | LZ339 | 9EN7 |
| EM840 | 6FG6/EM84 | HL90 | 19AQ5 | M8063 | 6AM6 |
| EN32 | 2050 | HL92 | 50C5 | M8079 | 5726 |
| EN91 | 2D21 | HL94 | 30A5 | M8081 | 6101/6J6WA |
| EN92 | 5696A | HM04 | 6BE6 | M8096 | 5763 |
| EN93 | 6D4 | HP6 | 6AM6 | M8100 | 5654, 5654W |
| EQ80 | 6BE7 | HY51B | 829B | M8121 | 5840 |
| ESU866 | 866A | HY61 | 807 | M8136 | 6189, 6189W |
| EY51 | 6X2 | HY90 | 35W4 | M8137 | 12AX7A/7025 |
| EY80 | 6U3 | HY145 | 1U4 | M8161 | 6065 |
| EY81 | 6R3 | HZ50 | 14Z3 | M8162 | 12AT7WA, 6201, 12ATTWC |
| EY81F | 6V3A | HZ90 | 12X4 | M8190 | 5783WA |
| EY82 | 6N3 | KD21 | OA3 | M8196 | 5725, 5725W |
| EY84 | 6374 | KD24 | OC3 | M8204 | 5727 |
| EY86 | 6S2 | KD25 | OD3 | M8212 | 5726 |
| EY87 | 6S2A | KF35 | 1E3 | M8223 | OA2WA |
| EY88 | 6AL3/EY88 | KK32 | 1C7 | M8224 | OB2WA |
| EY500 | 6EC4A/EY500 | KT32 | 25L6GT/25W6GT | M8232 | 8532/6J4WA, 6J4WA |
| EZ3 | 6V4/EZ80 | KT33 | 25A6 | M8245 | 6005, 6005W |
| EZ4 | 6CA4 | KT61 | 6AG6G | MU14 | 6BT4 |
| EZ11 | 6V4/EZ80 | KT63 | 6F6GT, 6F6 | MV6-5 | 6SA7GT, 6SA7 |
| EZ22 | 7Y4 | KT66 | 7581A/KT66 | N2ED | 6HT5 |
| EZ35 | 6X5GT | KT71 | 50L6GT | N14 | 1C5GT |
| EZ40 | 6BT4 | KT77 | 6CA7/EL34 | N15 | 3Q5GT |
| EZ80 | 6V4/EZ80 | KT88 | 6550, 6550A | N16 | 3Q5GT |
| EZ81 | 6CA4 | KTW63 | 6J7 | N17 | 3S4 |
| EZ90 | 6X4 | KT263 | 6K7GT, 6K7 | N18 | 3Q4 |
| EZ91 | 6AV4 | KT263M | 6J7GT, 6J7 | N19 | 3V4 |
| EZ900 | 6X4 | KY50 | 2L2 | N22LL | 19FK6 |
| FA6 | 5677 | KY80 | 2J2 | N25 | 3C4 |
| F1EL | 8278 | L63 | 6C5 | N30EL | 6LF6 |
| G75/2D | OA3 | L63B | 6C5 | N47 | 6AM5 |
| G77 | 6C6 | L77 | 6C4 | N63 | 6K6GT |
| G105/1D | OC3 | LC97 | 3FY5, 3ER5 | N66 | 6LGGT, 6LGGC |
| G150/3D | OD3 | LC900 | 3HA5, 3HM5/3HA5 | N77 | 6AM5 |
| G150/4K | OA2 | LCC189 | 5ES8 | N78 | 6BJ5 |
| GU12 | 866A | LCF80 | 6LN8 | N119 | 45B5/UL84 |
| GY501 | 3BH2 | LCF86 | 5HG8 | N142 | 45A5 |
| GZ30 | 524G, 5V4GA | LCF200 | 5X9 | N144 | 6AM5 |
| GZ31 | 5U4GB/5AS4A | LCF201 | 5U9/LCF201 | N147 | 6AG6G |
| GZ32 | 5V4GA | LCF801 | 5GJ7 | N148 | 7C5 |
| GZ34 | 5AR4/GZ34 | | | | |

| Foreign Type To Be Replaced | American Type For Replacement | Foreign Type To Be Replaced | American Type For Replacement | Foreign Type To Be Replaced | American Type For Replacement |
|--------------------------------|----------------------------------|--------------------------------|----------------------------------|--------------------------------|----------------------------------|
| N150 | 6CK5 | PCL800 | 16GK8 | QM559 | 5726 |
| N152 | 21A6 | PCL801 | 13GC8 | QQC04/14 | 5895 |
| N153 | 15A6 | PD500 | 9ED4 | QQE02/5 | 6939 |
| N154 | 16A5 | PF9 | 6K7 | QQE03/12 | 6360 |
| N155 | 6BN5 | PF86 | 4HR8 | QQE03/20 | 6252 |
| N308 | 25E5 | PF818 | 7ED7 | QQE06/40 | 5894 |
| N309 | 15A6 | PFL200 | 16Y9 | QQV02-6 | 6939 |
| N329 | 16A5 | PH4 | 6A8GT | QQV03-10 | 6360 |
| N359 | 21A6 | PL21 | 2D21 | QQV03-20 | 6252 |
| N369 | 16A8/PCL82 | PL36 | 25E5 | QQV07/40 | 829B |
| N378 | 15CW5/PL84 | PL81 | 21A6 | QS83/3 | 5651 |
| N379 | 15CW5/PL84 | PL82 | 16A5 | QSI50/40 | OD3 |
| N389 | 25GF6 | PL83 | 15A6 | QSI205 | OA3 |
| N709 | 6BQ5/EL84 | PL84 | 15CW5/PL84 | QSI206 | OC3 |
| N727 | 6AQ5A/6HG5 | PL86 | 14GW8 | QSI207 | OA2 |
| OBC3 | 12SQ7 | PL136 | 35FV5 | QSI208 | OB2 |
| OF1 | 6S7 | PL300 | 35FN5 | QSI209 | 5651A, 5651 |
| OF5 | 12K7GT | PL302 | 25GF6 | QSI210 | OA2WA |
| OH4 | 12A8 | PL500 | 27GB5/PL500 | QSI211 | OB2WA |
| OM6 | 6K7 | PL505 | 40KG6A | QS2404 | 5726 |
| OSW2190 | 6AC7 | PL508 | 17KW6 | QS2406 | 12AT7WA, |
| OSW2192 | 6AG7 | PL509 | 40GK6A | | 6201, 12AT7WC |
| OSW2600 | 6AC7 | PL521 | 29KQ6 | QV03-12 | 5763 |
| OSW2601 | 6AG7 | PL800 | 16KG8 | QV05/25 | 807 |
| OSW3104 | 6SA7 | PL801 | 12FB5 | QV06-20 | 6146B |
| OSW3105 | 6SQ7 | PL802 | 16LD8 | QV06-20B | 6883 |
| OSW3107 | 5CG4, 5V4GA | PL820 | 21A6 | QV06-20C | 6159 |
| OSW3109 | 6H6 | PLL267 | OA4G | QW77 | 6CQ6 |
| OSW3110 | 6E5 | PLL80 | 12HU8 | QY2-100 | 813 |
| OSW3111 | 6SK7 | PMO4 | 6BA6/EF93 | QY2/250 | 813 |
| OSW3112 | 6J5 | PMO5 | 6AK5/EF95 | QZ77 | 6AM6 |
| P17A | 807 | PMO7 | 6AM6 | R3 | 1W4 |
| PA5021 | 866A | PM84 | 9FG6 | R12 | 6X2 |
| PABC80 | 9AK8 | PM95 | 6AK6 | R12A | 6X2 |
| PC86 | 4CM4 | PY80 | 19X3 | R16 | 1T2 |
| PC88 | 4DL4 | PY81 | 17Z3 | R19 | 1X2A, |
| PC92 | 3AB4 | PY82 | 19Y3 | | 1X2C/1BX2 |
| PC93 | 4BS4 | PY83 | 17Z3 | R20 | 2J2 |
| PC95 | 4GK5 | PY88 | 30AE3 | R52 | 5Z4, 5V4GA |
| PC97 | 4FY5 | PY301 | 19CS4 | R144 | 6AM6 |
| PC900 | 4HA5/PC900 | PY500 | 42EC4A | RG3-250A/866 | 866A |
| PCC84 | 7AN7 | PY800 | 17Z3 | RK39 | 807 |
| PCC85 | 9AQ8 | PY801 | 17Z3 | RL21 | 2D21 |
| PCC88 | 7DJ8 | QA2400 | 6065 | RL1267 | OA4G |
| PCC89 | 7FC7 | QA2401 | 6135 | RS2 | 5Z4, 5V4GA |
| PCC186 | 7AU7 | QA2404 | 5726 | RSI029 | 6360 |
| PCC189 | 7ES8 | QA2406 | 12AT7WB, 6201, | S6F12 | 6AM6 |
| PCC805 | 7EK7 | | 12AT7WC | S856 | OA2 |
| PCE800 | 9GB8 | QA2407 | 6201, 12AT7WC | S860 | OB2 |
| PCF80 | 9A8/8A8/PCF80 | QA2408 | 5692 | S901C | 5651 |
| PCF82 | 9U8A, 9GH8A | QB2/250 | 813 | SM150-30 | OA2 |
| PCF86 | 7HG8/PCF86 | QB3-5/750 | 6156 | SP6 | 6AM6 |
| PCF200 | 8X9 | QB5/1750 | 6079 | SR2 | OG3 |
| PCF201 | 8U9 | QB65 | 6SN7GTA | SR3 | OB3 |
| PCF800 | 9EN7 | QB309 | 12AT7 | SR55 | OB2 |
| PCF801 | 8GJ7/PCF801 | QE03/10 | 5763 | SR56 | OA2 |
| PCF802 | 9JW8 | QE05-40 | 6146B | STR85/10 | OG3 |
| PCF805 | 7GV7 | QE05-40H | 6159 | STR108/30 | OB2 |
| PCF806 | 8GJ7/PCF801 | QE06/50 | 807 | STR150/30 | OA2 |
| PCH200 | 9V9 | QF408 | 1AD4 | STV85/10 | OG3 |
| PCL82 | 16A8/PCL82 | QL77 | 6C4 | STV108/30 | OB2 |
| PCL84 | 15DQ8 | QM328 | 5686 | STV150/30 | OA2 |
| PCL85 | 18GV8/PCL85 | QM556 | 6X4W, 6202 | SU61 | 6X2 |
| PCL86 | 14GW8 | QM557 | 5654, 5654W | T2M05 | 6J6A |
| PCL88 | 16GK8 | QM558 | 5725, 5725W | T77 | 6C6 |

| Foreign Type To Be Replaced | American Type For Replacement | Foreign Type To Be Replaced | American Type For Replacement | Foreign Type To Be Replaced | American Type For Replacement |
|--------------------------------|----------------------------------|--------------------------------|----------------------------------|--------------------------------|----------------------------------|
| T866A/866 | 866A | UF89 | 12AD6 | X77 | 6BE6 |
| TB2.5/300 | 5866 | UL41 | 45A5 | X79 | 6AE8 |
| TH813 | 813 | UL84 | 45B5/UL84 | X81 | 7S7 |
| TH5021B | 866A | UM80 | 19BR5 | X107 | 18FX6A, 18FX6 |
| TM12 | 6J7 | UM84 | 12FG6 | X119 | 19D8 |
| TS229 | 5687 | UN954 | 954 | X142 | 14K7 |
| TT10 | 813 | UN955 | 955 | X147 | 6E8 |
| TTZ63 | 6J7 | UQ80 | 12BE7 | X148 | 7S7 |
| TX2/3 | 5544 | UU5 | 6BT4 | X155 | 6BZ8, 6BC8/6BZ8 |
| U25 | 2L2 | UU9 | 6BT4 | X319 | 6351 |
| U26 | 2J2 | UU12 | 6CA4 | X719 | 6A18 |
| U31 | 25Z4GT | UX866 | 866A | X727 | 6BE6 |
| U37 | 1T4 | UY41 | 31A3 | XAA91 | 3AL5 |
| U41 | 1B3GT, 1G3GT/1B3GT | UY42 | 31A3 | XB91 | 3AL5 |
| U43 | 6X2 | UY82 | 55N3 | XC88 | 2DL4 |
| U49 | 6S2A | UY85 | 38A3 | XC95 | 2ER5 |
| U50 | 5Y3GT | UY89 | 31AV3 | XC97 | 2FY5, 2GK5/2FQ5 |
| U51 | 5W4GT, 5V4GA | UY807 | 807 | XC900 | 2HA5 |
| U52 | 5U4GB/5AS4A | V2M70 | 6X4 | XCC82 | 7AU7 |
| U70 | 6X5GT | V61 | 6BT4 | XCC89 | 4FC7 |
| U74 | 35Z4GT | V177 | 6CQ6 | XCC189 | 4ES8 |
| U76 | 35Z4GT | V311 | 31A3 | XCF80 | 4BL8/XCF80 |
| U77 | 5AR4/GZ34 | V312 | 31A3 | XCF82 | 5U8A |
| U78 | 6X4 | V741 | 6C4 | XCF801 | 4GJ7 |
| U82 | 7Y4 | V884 | 6CQ6 | XCH81 | 3AJ8 |
| U118 | 31A3 | V886 | 6AM5 | XCL82 | 8B8 |
| U119 | 38A3 | VH550H | 866A | XCL84 | 8DX8 |
| U142 | 31A3 | VP6 | 6CQ6 | XCL85 | 9GV8 |
| U145 | 31A3 | VP12D | 12C8 | XCL86 | 8GW8 |
| U147 | 6X5G, 6X5GT | VR150 | OD3 | XF80 | 3BX6 |
| U149 | 7Y4 | VT83 | 83 | XF85 | 3BY7 |
| U150 | 6BT4 | W17 | 1T4 | XF86 | 2HR8 |
| U151 | 6X2 | W25 | 1AJ4 | XF94 | 3AU6 |
| U152 | 19X3 | W63 | 6K7 | XF183 | 3EH7/XF183 |
| U153 | 17Z3 | W77 | 6CQ6 | XF184 | 3EJ7/XF184 |
| U154 | 19Y3 | W81 | 7A7 | XFR3 | 5676 |
| U191 | 19CS4 | W110 | 13EC7 | XL36 | 13CM5 |
| U192 | 19Y3 | W118 | 12AC5 | XL84 | 8BQ5 |
| U193 | 17Z3 | W119 | 13EC7 | XL86 | 8CW5 |
| U251 | 17Z3 | W142 | 12AC5 | XL136 | 17FV5 |
| U309 | 19X3 | W145 | 12AC5 | XL500 | 13GB5/XL500 |
| U319 | 19Y3 | W148 | 7A7 | XXB | 3C6 |
| U329 | 25BR3 | W149 | 7B7 | XXD | 14F7 |
| U339 | 19CS4 | W150 | 6CJ5 | XXFM | 7X7 |
| U349 | 17Z3 | W719 | 6BY7, 6EH7/EF183 | XXL | 7A4 |
| U381 | 38A3 | W727 | 6BA6/EF93 | XY88 | 16AQ3/XY88 |
| U707 | 6X4 | W739 | 6EC7 | Y25 | 1N3 |
| U709 | 6CA4 | WD119 | 19FL8 | Y64 | 6U5 |
| UABC80 | 28AK8 | WD142 | 12S7 | Y119 | 19BR5 |
| UAF42 | 12S7 | WD150 | 6CT7 | YC88 | 3DL4 |
| UBC41 | 14L7 | WD709 | 6N8 | YC95 | 3ER5 |
| UBC80 | 14G6 | WT294 | OD3 | YC97 | 3FY5, 3ER5 |
| UBC81 | 14G6 | WT301 | 83 | YCC89 | 5FC7 |
| UBF80 | 17C8 | X14 | 1A7GT | YCC189 | 5ES8 |
| UBF89 | 19FL8, 19DC8 | X17 | 1R5 | YCF86 | 5HG8/LCF86 |
| UC92 | 9AB4 | X18 | 1AC6 | YCL82 | 10BM8 |
| UCC85 | 26AQ8 | X20 | 1AC6 | YCL84 | 10DX8/XCL84 |
| UCH42 | 14K7 | X25 | 1AB6 | YCL86 | 10GW8 |
| UCH80 | 14Y7 | X61M | 6K8 | YF183 | 4EH7 |
| UCH81 | 19D8, 19AJ8 | X63 | 6A8 | YF184 | 4EJ7 |
| UCL82 | 50BM8 | X64 | 6L7 | YL84 | 10BQ5 |
| UF41 | 12AC5 | X65 | 6E8 | YL86 | 10CW5/LL86 |
| UF80 | 19BX6 | X71M | 12K8 | YL1370 | 6146B/8298A |
| UF85 | 19BY7 | X76M | 12K8GT | YL1371 | 8032A |

| Foreign Type To Be Replaced | American Type For Replacement | Foreign Type To Be Replaced | American Type For Replacement | Foreign Type To Be Replaced | American Type For Replacement |
|--------------------------------|----------------------------------|--------------------------------|----------------------------------|--------------------------------|----------------------------------|
| YL1372 | 6159B | Z319 | 6351 | Z900T | 5823 |
| Z14 | 1N5G | Z329 | 7ED7 | ZD17 | 1S5 |
| Z63 | 6J7 | Z550M | 8453 | ZD25 | 1AH5 |
| Z77 | 6AM6 | Z719 | 6BX6, | ZD152 | 6N8 |
| Z150 | 6CU7 | | 6EH7/EF183 | ZM1050 | 8453 |
| Z152 | 6BX6, | Z729 | 6CF8, 6267 | ZZ1000 | 8228 |
| Z300T | 6EH7/EF183 | Z749 | 6EL7, | | |
| | OA4G | | 6EH7/EF183 | | |

INDUSTRIAL, MILITARY, AND SPECIAL-PURPOSE TUBES AND THEIR PROTOTYPES

Industrial, military, and various special-purpose types are all listed under the heading "Special Type," along with an indication of the general type of service for which the special type was originally intended. Based on an examination of the data, these special types appear to be similar to the types listed opposite them under the heading "Prototype or Similar Receiving Tube Type." Notes are referenced to describe some of the apparent differences between the associated types. Following the basic listing in order of the "Special Type" number, a cross-reference listing in order of the "Prototype or Similar Receiving Tube Type" number is given.

The inclusion of a type number under either heading does not necessarily mean that it is currently available, or that it is the latest modification of the basic type. All of the modifications of types, as represented by the addition of various suffix letters, are not listed. General information on the interpretation of suffix letters is presented near the front of this book under the heading "Arrangement of Data."

The associated types in these lists are not generally interchangeable in all respects, even where no specific differences are mentioned in the notes. However, the lists may be used as an aid in locating emergency replacements for unavailable tube types. Although reasonable care has been taken in compiling the lists and notes, no tube substitution should be made without a prior independent investigation to make sure that the tube under consideration is basically compatible with the specific circuit.

In Order By Special Types

| Special Type | MIL Designation if Other Than EIA | Service | Prototype or Similar Receiving Tube Type |
|--------------|-----------------------------------|---|--|
| 1612* | — | Broadcast—Audio Voltage Amplifier | 6L7 |
| 1620* | — | Broadcast—Audio Voltage Amplifier | 6J7 |
| 1621 | — | Ind.—Audio Power Output | 6F6 |
| 1622 | — | Ind.—Audio Power Output | 6L6 |
| 1634† | — | Ind.—Voltage Amplifier | 12SC7 |
| 1644 | — | Ind.—Audio Power Output | 12L8GT |
| 5591‡ | — | Ind.—Wide-band Amplifier | 6AK5 |
| 5654 | 5654W | Ind. or Mil.—Wide-band Amplifier (5★) | 6AK5 |
| 5670§ | 5670W | Ind. or Mil.—General Purpose (5★) | 2C51 |
| 5679¶ | — | Ind.—Low-current Rectifier | 7A6 |
| 5691†§Δ | — | Ind. or Mil.—Voltage Amplifier | 6SL7GT |
| 5692#Δ | — | Ind.—General Purpose | 6SN7GT |
| 5693# | — | Ind. or Mil.—Voltage Amplifier | 6SJ7 |
| 5725 | 5725W | Ind. or Mil.—Gated Amplifier (5★) | 6AS6 |
| 5726† | — | Ind. or Mil.—Detector, Low-current Rectifier (5★) | 6AL5 |
| 5727 | — | Ind. or Mil.—Relay Control (5★) | 2D21 |
| 5749 | 5749W | Ind. or Mil.—RF or IF Amplifier (5★) | 6BA6 |
| 5750 | — | Ind. or Mil.—Converter (5★) | 6BE6 |
| 5751†#§ | — | Ind. or Mil.—Voltage Amplifier (5★) | 12AX7 |
| 5814A†§ | — | Ind. or Mil.—General Purpose (5★) | 12AU7 |
| 5824 | — | Ind.—Audio Power Output | 25B6G |
| 5842 | — | Ind. or Mil.—Wide-band Amplifier | 417A |
| 5844‡ | — | Ind. or Mil.—Computer (5★) | 6J6 |
| 5847 | — | Ind. or Mil.—RF Amplifier | 40A4 |
| 5852§ | — | Ind. or Mil.—Rectifier | 6X5 |
| 5871 | — | Mobile—Audio Power Output | 6V6GT |
| 5881## | — | Audio—Power Output | 6L6G |
| 5915 | — | Ind. or Mil.—Computer—Gated Amplifier | 6BE6 |
| 5930 | — | Ind.—Audio Power Output | 2A3 |
| 5931 | — | Ind. or Mil.—Rectifier | 5U4G |
| 5932 | — | Ind.—Audio Power Output | 6L6G |
| 5965† | — | Ind. or Mil.—Computer | 12AV7 |
| 5965A† | — | Computer (5★) | 12AV7 |
| 5992§# | — | Ind.—Audio Power Output | 6V6GT |
| 5998 | — | Ind. or Mil.—Series Regulator | 421A |

*Low-microphonic
 †Balanced Sections
 ‡Lower Heater Current
 §Higher Heater Current
 ¶Center-tapped Heater
 #Lower Ratings

##Higher Ratings
 Δ Shorter Envelope
 †† Longer Envelope
 Δ Cathode Type
 ††† Different Basing
 ★ General Electric Five-Star Tube

| Special Type | MIL Designation if Other Than EIA | Service | Prototype or Similar Receiving Tube Type |
|--------------|-----------------------------------|--|--|
| 5998A | — | Ind.—Series Regulator | 421A |
| 6005 | 6005W | Ind. or Mil.—Audio Power Output (5★) | 6AQ5 |
| 6028 | — | Ind. or Mil.—RF Amplifier | 408A |
| 6045† | — | Ind.—General Purpose | 6J6 |
| 6046 | — | Ind.—Relay Energizer | 25L6GT |
| 6057 | — | Ind.—Voltage Amplifier | 12AX7 |
| 6058 | — | Ind.—Detector, Low-current Rectifier | 6AL5 |
| 6060 | — | Ind.—Oscillator-mixer | 12AT7 |
| 6061 | — | Ind.—Audio Power Output | 6BW6 |
| 6063 | — | Ind.—Rectifier | 6X4 |
| 6066 | — | Ind.—Detector, Voltage Amplifier | 6AT6 |
| 6067 | — | Ind.—General Purpose | 12AU7 |
| 6072*§ | 6072A | Ind. or Mil.—Audio Voltage Amplifier (5★) | 12AY7 |
| 6073 | — | Ind.—Voltage Regulator | 0A2 |
| 6074 | — | Ind.—Voltage Regulator | 0B2 |
| 6080 | — | Ind.—Series Regulator | 6AS7G |
| 6087△△ | 5Y3WGTB | Ind. or Mil.—Rectifier (5★) | 5Y3GT |
| 6095 | — | Ind.—Audio Power Output | 6AQ5 |
| 6096 | — | Ind.—Wide-band Amplifier | 6AK5 |
| 6097 | — | Ind.—Detector, Low-current Rectifier | 6AL5 |
| 6100 | 6C4WA | Ind. or Mil.—General Purpose (5★) | 6C4 |
| 6101†# | — | Ind.—General Purpose | 6J6 |
| 6106△△ | — | Ind.—Rectifier | 5Y3GT |
| 6113* | — | Ind.—Audio Voltage Amplifier | 6SL7GT |
| 6134 | 6AC7WA | Ind. or Mil.—RF Amplifier (5★) | 6AC7 |
| 6135§ | — | Ind. or Mil.—General Purpose (5★) | 6C4 |
| 6136 | 6AU6WC | Ind. or Mil.—RF or IF Amplifier (5★) | 6AU6 |
| 6137 | 6SK7WA | Ind. or Mil.—RF or IF Amplifier (5★) | 6SK7 |
| 6180# | — | Ind.—General Purpose | 6SN7GT |
| 6186 | 6186W | Ind. or Mil.—RF or IF Amplifier | 6AG5 |
| 6187 | — | Ind.—Gated Amplifier | 6AS6 |
| 6188 | — | Ind. or Mil.—DC Amplifier | 6SU7WGT |
| 6189 | 6189W | Ind. or Mil.—General Purpose (5★) | 12AU7 |
| 6197 | — | Ind. or Mil.—Computer—Frequency-divider | 6CL6 |
| 6201 | 12AT7WC | Ind. or Mil.—Oscillator-mixer (5★) | 12AT7 |
| 6202# | 6X4WA | Ind. or Mil.—Rectifier (5★) | 6X4 |
| 6203†§ | — | Ind. or Mil.—Rectifier (5★) | 6X4 |
| 6265§ | — | Ind.—Wide-band Amplifier (5★) | 6BH6 |
| 6384 | — | Ind. or Mil.—Pulse Amplifier | 6AR6 |
| 6385¶¶§ | — | Ind.—General Purpose | 2C51 |
| 6386§ | — | Ind. or Mil.—Cascode Amplifier (5★) | 2C51 |
| 6388 | — | Ind.—Cold-cathode Relay Tube | 443A |
| 6414 | 6414W | Ind. or Mil.—Computer—General Purpose (5★) | 12AV7 |
| 6485 | — | Ind.—Wide-band Amplifier | 6AH6 |
| 6520† | — | Ind.—Series Regulator | 6AS7G |
| 6626 | — | Ind.—Voltage Regulator | 0A2 |
| 6627 | — | Ind.—Voltage Regulator | 0B2 |
| 6660 | — | Mobile—RF or IF Amplifier | 6BA6 |
| 6661 | — | Mobile—Wide-band Amplifier | 6BH6 |
| 6662 | — | Mobile—Wide-band Amplifier | 6BJ6 |
| 6663 | — | Mobile—Detector, Low-current Rectifier | 6AL5 |
| 6664 | — | Mobile—General Purpose | 6AB4 |
| 6669 | — | Mobile—Audio Power Output | 6AQ5 |
| 6676 | — | Mobile—RF or IF Amplifier | 6CB6 |
| 6677 | — | Mobile—Audio Power Output | 6CL6 |
| 6678 | — | Mobile—Oscillator-mixer | 6U8 |
| 6679 | — | Mobile—Oscillator-mixer | 12AT7 |
| 6680 | — | Mobile—General Purpose | 12AU7 |
| 6681 | — | Mobile—Voltage Amplifier | 12AX7 |
| 6829 | — | Ind. or Mil.—Computer (5★) | 12AV7 |
| 6913 | — | Computer | 12BH7 |
| 6928†# | — | Ind.—Audio Power Output | 6AQ5 |
| 6968 | — | Ind.—Wide-band Amplifier | 6AK5 |
| 7025 | — | Audio—Voltage Amplifier | 12AX7 |
| 7036 | — | Computer—Gated Amplifier (5★) | 6BE6 |

*Low-microphonic
†Balanced Sections
‡Lower Heater Current
§Higher Heater Current
¶Center-tapped Heater
#Lower Ratings

##Higher Ratings
△ Shorter Envelope
¶ Longer Envelope
△ Cathode Type
† Different Basing
5★ General Electric Five-Star Tube

| Special Type | MIL Designation if Other Than EIA | Service | Prototype or Similar Receiving Tube Type |
|--------------|-----------------------------------|------------------------------------|--|
| 7189## | — | Audio—Power Output | 6BQ5 |
| 7212 | — | Mobile—RF Power Output | 6146 |
| 7244 | — | Ind.—General Purpose | 6J6 |
| 7245AΔ | — | Ind.—RF Amplifier | 6J4 |
| 7318§ | — | Ind.—Pulse Amplifier | 12AU7 |
| 7320 | — | Mobile—Audio Power Output | 6BQ5 |
| 7408 | — | Audio—Power Output | 6V6GT |
| 7543* | — | Audio—Voltage Amplifier | 6AU6 |
| 7581 | — | Audio Power Output | 6L6GC |
| 7581A## | — | Audio—Power Output | 6L6GC |
| 7717 | — | Mobile—RF Amplifier | 6CY5 |
| 7724 | — | Mobile—Detector, Voltage Amplifier | 14GT8 |
| 7728 | — | Industrial—Instrument Service | 12AT7 |
| 7729 | — | Industrial—Instrument Service | 12AX7 |
| 7730 | — | Industrial—Instrument Service | 12AU7 |
| 7731 | — | Industrial—Instrument Service | 6U8 |
| 7732 | — | Industrial—Instrument Service | 6CB6 |
| 7733 | — | Industrial—Instrument Service | 12BY7 |
| 7734 | — | Ind.—Voltage Regulator | 6GE8 |
| 7738## | — | Ind.—Class C Amplifier | 6AN4 |
| 7803 | — | Ind.—Class C Amplifier | 6FW8 |
| 8113 | — | Ind.—RF Amplifier | 6CY5 |
| 8425A | — | Industrial—Instrument Service | 6AU6 |
| 8426A | — | Industrial—Instrument Service | 12AU6 |
| 8532 | 8532W | Ind. or Mil.—RF Amplifier | 6J4 |

*Low-microphonic

†Balanced Sections

‡Lower Heater Current

§Higher Heater Current

¶Center-tapped Heater

#Lower Ratings

##Higher Ratings

Δ Shorter Envelope

¶ Longer Envelope

Δ Δ Cathode Type

†† Different Basing

5 ★ General Electric Five-Star Tube

In Order by Prototype or Similar Receiving Tube Type

| Prototype or Similar Receiving Tube Type | Special Type (Refer to Preceding List for Service and Notes) | Prototype or Similar Receiving Tube Type | Special Type (Refer to Preceding List for Service and Notes) |
|--|--|--|--|
| 0A2 | 6073, 6626 | 6J7 | 1620 |
| 0B2 | 6074, 6627 | 6L6 | 1622 |
| 2A3 | 5930 | 6L6G | 5881, 5932 |
| 2C51 | 5670, 6385, 6386, 396A | 6L6GC | 7581, 7581A |
| 2D21 | 5727 | 6L7 | 1612 |
| 5U4G | 5931 | 6SJ7 | 5693 |
| 5Y3GT | 6087, 6106, 5Y3WGTB | 6SK7 | 6137 |
| 6AB4 | 6664 | 6SL7GT | 5691, 6113 |
| 6AC7 | 6134 | 6SN7GT | 5692, 6180 |
| 6AG5 | 6186 | 6SU7WGT | 6188 |
| 6AH6 | 6485 | 6U8 | 6678, 7731 |
| 6AK5 | 5591, 5654, 6096, 6968, 403B | 6V6GT | 5871, 5992, 7408 |
| 6AL5 | 5726, 6058, 6097, 6663 | 6X4 | 6063, 6202, 6203 |
| 6AN4 | 7738 | 6X5 | 5852 |
| 6AQ5 | 6005, 6095, 6669, 6928 | 7A6 | 5679 |
| 6AR6 | 6384 | 12AT7 | 6060, 6201, 6679, 7728 |
| 6AS6 | 5725, 6187 | 12AU6 | 8426A |
| 6AS7G | 6080, 6520 | 12AU7 | 5814A, 6067, 6189, 6680, 7318, 7730 |
| 6AT6 | 6066 | 12AV7 | 5965, 5965A, 6829, 6414, 6414W |
| 6AU6 | 6136, 7543, 8425A | 12AX7 | 5751, 6057, 6681, 7025, 7729 |
| 6BA6 | 5749, 6660 | 12AY7 | 6072 |
| 6BE6 | 5750, 5915, 7036 | 12BH7 | 6913 |
| 6BH6 | 6265, 6661 | 12BY7 | 7733 |
| 6RJ6 | 6662 | 12L8GT | 1644 |
| 6BQ5 | 7189, 7320 | 12SC7 | 1634 |
| 6BW6 | 6061 | 14GT8 | 7724 |
| 6C4 | 6100, 6135, 6C4WA | 25B6G | 5824 |
| 6CB6 | 6676, 7732 | 25L6GT | 6046 |
| 6CL6 | 6197, 6677 | 403B | 5591 |
| 6CY5 | 7717, 8113 | 404A | 5847 |
| 6F6 | 1621 | 408A | 6028 |
| 6FW8 | 7803 | 417A | 5842 |
| 6GE8 | 7734 | 421A | 5998, 5998A |
| 6J4 | 7245A, 8532, 8532W | 443A | 6388 |
| 6J6 | 5844, 6045, 6101, 7244 | 6146 | 7212 |

Radio & TV Pilot Lamps

| Lamp Number | Voltage | Amperes | Type of Base | Max. Overall Length Inches | Max. Overall Length Millimeters |
|-------------|---------|---------|-------------------|----------------------------|---------------------------------|
| 12 | 6.3 | 0.15 | Miniature 2 Pin | 0.938 | 23.825 |
| 39 | 6.3 | 0.36 | Miniature Bayonet | 1.188 | 30.175 |
| 40 | 6.3 | 0.15 | Miniature Screw | 1.188 | 30.175 |
| 41 | 2.5 | 0.50 | Miniature Screw | 1.188 | 30.175 |
| 42 | 3.2 | 0.35 | Miniature Screw | 1.188 | 30.175 |
| 44 | 6.3 | 0.25 | Miniature Bayonet | 1.188 | 30.175 |
| 45 | 3.2 | 0.35 | Miniature Bayonet | 1.188 | 30.175 |
| 46 | 6.3 | 0.25 | Miniature Screw | 1.188 | 30.175 |
| 47 | 6.3 | 0.15 | Miniature Bayonet | 1.188 | 30.175 |
| 48 | 2.0 | 0.06 | Miniature Screw | 1.188 | 30.175 |
| 49 | 2.0 | 0.06 | Miniature Bayonet | 1.188 | 30.175 |
| 130 | 6.3 | 0.15 | Miniature Bayonet | 0.938 | 23.825 |
| 137 | 6.3 | 0.25 | Miniature Bayonet | 0.938 | 23.825 |
| 159 | 6.3 | 0.15 | Wedge | 1.063 | 27.000 |
| 239 | 6.3 | 0.36 | Miniature Bayonet | 1.188 | 30.175 |
| 240 | 6.3 | 0.36 | Miniature Bayonet | 1.188 | 30.175 |
| 242 | 6.3 | 0.15 | Miniature Bayonet | 1.188 | 30.175 |
| 259 | 6.3 | 0.25 | Wedge | 1.063 | 27.000 |
| 1490 | 3.2 | 0.16 | Miniature Bayonet | 1.188 | 30.175 |
| 1847 | 6.3 | 0.15 | Miniature Bayonet | 1.188 | 30.175 |
| 1847AF | 6.3 | 0.15 | Miniature Bayonet | 1.188 | 30.175 |
| 1855 | 6.3 | 0.80 | Miniature Bayonet | 1.375 | 34.925 |
| 1866 | 6.3 | 0.25 | Miniature Bayonet | 1.188 | 30.175 |
| 1891 | 14.0 | 0.24 | Miniature Bayonet | 1.188 | 30.175 |
| 1893 | 14.0 | 0.33 | Miniature Bayonet | 1.188 | 30.175 |
| 2067D | 4.0 | 0.06 | Wire Terminal | 1.188 | 30.175 |

| TUBE TYPE | X-RADIATION RATING | DEFL. ANGLE DEGREES | GLASS or METAL | FACE PLATE | | | | Overall Length (Inches) | NECK LENGTH (Inches) | EXTERNAL COATING IN PF | BASING | FOCUS | HEATER | |
|-----------|--------------------|---------------------|----------------|------------|----------------------|-----------|--------------------------|-------------------------|----------------------|------------------------|--------|----------|--------|------|
| | | | | SHAPE | IMPLOSION PROTECTION | TREATMENT | LIGHT TRANSMITTANCE IN % | | | | | | V. | A. |
| | | | | | | | | | | | | | | |
| 10VABP22 | □ | 72 | G | □ | B | U | 72.0 | 15.240 | 7.930 | 600/800 | 14BM | 1BPES | 6.3 | 0.90 |
| 11SP22 | □ | 72 | G | □ | B | U | 72.0 | 14.915 | 7.605 | 600/800 | 14BJ | 1UPES | 13.8 | 0.58 |
| 11WP22 | □ | 72 | G | □ | B | U | 52.0 | 14.915 | 7.605 | 600/800 | 14BJ | 1UPES | 13.8 | 0.58 |
| 12DCP22 | △ | 90 | G | □ | V | U | 65.0 | 13.976 | 6.968 | 500/900 | 14BH | 2UPES | 6.3 | 0.90 |
| 12VAHP22 | △ | 90 | G | □ | X | UR | 81.5 | 13.870 | 6.693 | 500/1000 | 14BH | 2UPES | 6.3 | 0.90 |
| 13GP22 | △ | 90 | G | □ | E | U | 48.0 | 13.594 | 6.417 | 500/1000 | 14BH | 2UPES | 6.3 | 0.90 |
| 13JP22 | △ | 90 | G | □ | X | U | 52.0 | 13.861 | 6.693 | 500/1000 | 14BH | 2UPES | 6.3 | 1.35 |
| 13LP22 | △ | 90 | G | □ | V | U | 69.0 | 13.594 | 6.417 | 500/1000 | 14BH | 2UPES | 6.3 | 0.90 |
| 13MP22 | △ | 90 | G | □ | E | U | 69.0 | 13.594 | 6.417 | 500/1000 | 14BH | 2UPES | 6.3 | 0.90 |
| 14BCP22 | △ | 65 | G | □ | — | — | — | 19.281 | 9.562 | 500/1500 | 14AU | DBPES | 6.3 | 1.80 |
| 14VABP22 | △ | 90 | G | □ | E | U | 52.0 | 15.000 | 6.693 | 500/1000 | 14BH | 2UPES | 6.3 | 0.90 |
| 14VADP22 | △ | 90 | G | □ | X | U | 52.0 | 15.199 | 6.893 | 550/1050 | 14BH | 2UPES | 6.3 | 0.90 |
| 14VAEP22 | △ | 90 | G | □ | Y | U | 52.0 | 15.199 | 6.893 | 550/1050 | 14BH | 2UPES | 6.3 | 0.90 |
| 14VAFP22 | △ | 90 | G | □ | E | U | 52.0 | 15.000 | 6.693 | 700/1200 | 14BH | 2UPES | 6.3 | 0.90 |
| 14VAGP22 | △ | 90 | G | □ | W | U | 60.0 | 15.000 | 6.693 | 550/1050 | 14BH | 2UPES | 6.3 | 0.90 |
| 14VAHP22 | △ | 90 | G | □ | X | U | 60.5 | 15.199 | 6.893 | 550/1050 | 14BH | 2UPES | 6.3 | 0.90 |
| 14VALP22 | △ | 90 | G | □ | X | U | 60.5 | 15.199 | 6.893 | 550/1050 | 14BH | 2UPES | 6.3 | 0.90 |
| 15ACP22 | △ | 90 | G | □ | E | U | 52.0 | 15.000 | 6.693 | 500/1000 | 14BH | 2UPES | 6.3 | 0.90 |
| 15AEP22 | △ | 90 | G | □ | Y | U | 52.0 | 15.000 | 6.693 | 550/1050 | 14BH | 2UPES | 6.3 | 0.90 |
| 15AFP22 | △ | 90 | G | □ | E | U | 60.5 | 14.724 | 6.417 | 700/1300 | 14BH | 2UPES | 6.3 | 0.90 |
| 15GP22 | △ | 45 | G | □ | — | — | — | 26.125 | 10.375 | 1500/3000 | 20A | H.V.E.S. | 6.3 | 1.80 |
| 15HP22 | △ | 45 | G | □ | — | — | — | 26.125 | 10.375 | 1500/3000 | 20A | H.V.E.S. | 6.3 | 1.80 |
| 15KP22 | △ | 90 | G | □ | — | U | 74.0 | 15.000 | 6.693 | 550/1050 | 14BH | 2UPES | 6.3 | 0.90 |
| 15LP22 | △ | 90 | G | □ | P | UR | 44.0 | 15.191 | 6.693 | 550/1050 | 14BH | 2UPES | 6.3 | 0.90 |
| 15MP22 | △ | 90 | G | □ | P | UR | 56.0 | 15.838 | 7.332 | 750/1200 | 14BK | DBPES | 6.3 | 1.35 |
| 15NP22 | △ | 90 | G | □ | X | U | 52.0 | 15.000 | 6.693 | 550/1050 | 14BH | 2UPES | 6.3 | 0.90 |
| 15RP22 | △ | 90 | G | □ | — | U | 48.0 | 14.724 | 6.417 | 550/1050 | 14BH | 2UPES | 6.3 | 0.90 |
| 15SP22 | △ | 90 | G | □ | E | U | 48.0 | 14.724 | 6.417 | 550/1050 | 14BH | 2UPES | 6.3 | 0.90 |
| 15WP22 | △ | 90 | G | □ | P | U | 44.0 | 14.924 | 6.417 | 550/1050 | 14BH | 2UPES | 6.3 | 0.90 |
| 15XP22 | △ | 90 | G | □ | X | U | 52.0 | 15.000 | 6.693 | 500/1050 | 14BH | 2UPES | 6.3 | 1.30 |
| 15YP22 | △ | 90 | G | □ | V | U | 52.0 | 15.648 | 7.332 | 750/1200 | 14BK | DBPES | 6.3 | 1.35 |
| 16CDP22 | △ | 90 | G | □ | — | — | 72.0 | 15.125 | 6.420 | 500/1000 | 14BE | DBPES | 6.3 | 0.90 |
| 16CSP22 | △ | 90 | G | □ | V | U | 54.0 | 15.120 | 6.420 | 700/1300 | 14BE | DBPES | 6.3 | 0.90 |
| 16CPY22 | △ | 90 | G | □ | V | U | 65.0 | 15.709 | 7.008 | 700/1300 | 14BH | 2UPES | 6.3 | 0.90 |
| 16DAP22 | △ | 90 | G | □ | V | U | 65.0 | 15.120 | 6.420 | 700/1300 | 14BE | DBPES | 6.3 | 0.90 |
| 16VABP22 | △ | 90 | G | □ | V | U | 48.0 | 16.798 | 6.893 | 1000/1500 | 14BH | 2UPES | 6.3 | 0.90 |
| 16VACP22 | △ | 90 | G | □ | X | U | 57.0 | 16.598 | 6.693 | 1000/1500 | 14BH | 2UPES | 6.3 | 0.90 |
| 16VAFP22 | △ | 90 | G | □ | E | U | 48.0 | 16.598 | 6.693 | 1200/1700 | 14BH | 2UPES | 6.3 | 0.90 |
| 16VAHP22 | △ | 90 | G | □ | V | U | 57.0 | 16.598 | 6.693 | 1000/1500 | 14BH | 2UPES | 6.3 | 0.90 |
| 16VAKP22 | △ | 90 | G | □ | Y | U | 57.0 | 16.798 | 6.893 | 1000/1500 | 14BH | 2UPES | 6.3 | 0.90 |
| 16VASP22 | △ | 90 | G | □ | E | U | 57.0 | 16.598 | 6.693 | 1000/1500 | 14BE | DBPES | 6.3 | 0.90 |
| 16VATP22 | △ | 90 | G | □ | E | UM | 86.0 | 16.598 | 6.693 | 1000/1500 | 14BE | DBPES | 6.3 | 0.90 |
| 16VAWP22 | △ | 90 | G | □ | V | U | 57.0 | 17.247 | 7.332 | 1000/1500 | 14BK | 1BPES | 6.3 | 1.35 |
| 16VBDP22 | △ | 90 | G | □ | V | U | 57.0 | 17.259 | 7.344 | 1000/1500 | 14BK | 1BPES | 6.3 | 0.90 |
| 17ETP22 | △ | 90 | G | □ | P | U | 44.0 | 16.727 | 6.837 | 500/1000 | 14BE | DBPES | 6.3 | 1.30 |
| 17EVP22 | △ | 90 | G | □ | E | U | 48.0 | 16.598 | 6.693 | 1000/1500 | 14BH | 2UPES | 6.3 | 0.90 |
| 17EXP22 | △ | 90 | G | □ | V | U | 48.0 | 17.247 | 7.332 | 1000/1500 | 14BK | 1BPES | 6.3 | 1.35 |
| 17EZP22 | △ | 90 | G | □ | V | U | 48.0 | 16.598 | 6.693 | 1000/1500 | 14BH | 2UPES | 6.3 | 0.90 |
| 17FGP22 | △ | 90 | G | □ | P | U | 55.0 | 16.790 | 6.693 | 1000/1500 | 14BH | 2UPES | 6.3 | 0.90 |
| 17FHP22 | △ | 90 | G | □ | E | U | 67.0 | 16.322 | 6.417 | 1200/1700 | 14BH | 2UPES | 6.3 | 0.90 |
| 17FJP22 | △ | 90 | G | □ | V | U | 48.0 | 17.247 | 7.332 | 1000/1500 | 14BK | 1BPES | 6.3 | 1.35 |
| 17FKP22 | △ | 90 | G | □ | V | U | 48.0 | 16.598 | 6.693 | 1000/1500 | 14BH | 2UPES | 6.3 | 0.90 |
| 17VABP22 | △ | 90 | G | □ | W | U | 54.5 | 16.650 | 6.420 | 1400/1900 | 14BH | 2UPES | 6.3 | 0.90 |
| 17VACP22 | △ | 90 | G | □ | V | U | 56.5 | 17.122 | 6.893 | 1200/1600 | 14BH | 2UPES | 6.3 | 0.90 |
| 17VADP22 | △ | 90 | G | □ | V | UM | 72.0 | 17.122 | 6.893 | 1200/1600 | 14BH | 2UPES | 6.3 | 0.90 |
| 18VABP22 | △ | 90 | G | □ | V | U | 53.5 | 17.876 | 6.703 | 1500/2000 | 14BE | DBPES | 6.3 | 1.35 |
| 18VACP22 | △ | 90 | G | □ | P | UR | 41.0 | 18.048 | 6.693 | 1400/1900 | 14BE | DBPES | 6.3 | 0.90 |
| 18VADP22 | △ | 90 | G | □ | V | U | 43.5 | 17.856 | 6.693 | 1500/2100 | 14BE | DBPES | 6.3 | 0.90 |
| 18VAFP22 | △ | 90 | G | □ | W | U | 43.5 | 17.856 | 6.693 | 1500/2100 | 14BH | 2UPES | 6.3 | 0.90 |
| 18VAHP22 | △ | 90 | G | □ | P | UR | 53.0 | 18.248 | 6.893 | 1400/1900 | 14BE | DBPES | 6.3 | 0.90 |

| ANODE KV DESIGN MAX. ◆ | TYPICAL OPERATING CONDITIONS | | | | TUBE TYPE |
|---------------------------|------------------------------|----------------------------------|----------------------------|----------------------------|--------------|
| | ANODE KV. | FOCUS ELEC- TRODE VOLTS | SPOT CUTOFF | | |
| | | | GRID- NUMBER 2 VOLTS | GRID- NUMBER 1 VOLTS | |
| 22.0 | 20 | 3200/4300 | 355/595 | -70 | 10VABP22 |
| 18.0 | 15 | -250/500 | 250/540 | -55 | 11SP22 |
| 18.0 | 15 | -250/500 | 250/540 | -55 | 11WP22 |
| 20.0 | 16 | -75/400 | 260/540 | -80 | 12DCP22 |
| 22.5 | 20 | -75/400 | 150/420 | -100 | 12VAHP22 |
| 20.0 | 18 | -75/400 | 150/390 | -100 | 13GP22 |
| 22.5 | 20 | -75/400 | 150/390 | -100 | 13JP22 |
| 22.5 | 18 | -75/400 | 150/390 | -100 | 13LP22 |
| 22.5 | 20 | -75/400 | 150/390 | -100 | 13MP22 |
| 22.0 | 16 | 2400/3400 | 200 | -50/-105 | 14BCP22 |
| 22.5 | 20 | -75/400 | 150/380 | -100 | 14VABP22 |
| 22.5 | 20 | -75/400 | 210/508 | -125 | 14VADP22 |
| 22.5 | 20 | -75/400 | 210/505 | -125 | 14VAEP22 |
| 22.5 | 20 | -75/400 | 70/220 | -60 | 14VAFP22 |
| 22.5 | 20 | -75/400 | 150/390 | -100 | 14VAGP22 |
| 22.5 | 20 | -75/400 | 210/505 | -125 | 14VAHP22 |
| 22.5 | 20 | -75/400 | 210/505 | -125 | 14VALP22 |
| 22.5 | 20 | -75/400 | 150/380 | -100 | 15ACP22 |
| 22.5 | 20 | -75/400 | 150/390 | -100 | 15AEP22 |
| 22.5 | 20 | -75/400 | 150/390 | -100 | 15AFP22 |
| 22.0 | 20 | 2400/3800 | — | — | 15GP22 |
| 22.0 | 20 | 3100 | — | — | 15HP22 |
| 22.5 | 20 | -75/400 | 150/390 | -100 | 15KP22 |
| 22.5 | 20 | -75/400 | 150/390 | -100 | 15LP22 |
| 24.0 | 20 | 3300/4300 | 215/360 | -60 | 15MP22 |
| 22.5 | 20 | -75/400 | 150/390 | -100 | 15NP22 |
| 22.5 | 20 | -75/400 | 150/390 | -100 | 15RP22 |
| 22.5 | 20 | -75/400 | 150/390 | -100 | 15SP22 |
| 22.5 | 20 | -75/400 | 150/390 | -100 | 15WP22 |
| 22.5 | 20 | -75/400 | 150/390 | -100 | 15XP22 |
| 24.0 | 20 | 3300/4300 | 220/370 | -60 | 15YP22 |
| 20.0 | 18 | 3000/3600 | 200/650 | -100 | 16CDP22 |
| 23.0 | 18 | 3020/3600 | 110/300 | -70 | 16CSP22 |
| 23.0 | 20 | -75/400 | 125/370 | -70 | 16CYP22 |
| 23.0 | 20 | 3360/4000 | 110/300 | -70 | 16DAP22 |
| 22.5 | 20 | -75/400 | 210/505 | -125 | 16VABP22 |
| 22.5 | 20 | -75/400 | 160/400 | -100 | 16VACP22 |
| 22.5 | 20 | -75/400 | 150/385 | -100 | 16VAFP22 |
| 22.5 | 20 | -75/400 | 150/390 | -100 | 16VAHP22 |
| 22.5 | 20 | -75/400 | 210/505 | -125 | 16VAKP22 |
| 22.5 | 20 | 3360/4000 | 140/410 | -100 | 16VASP22 |
| 22.5 | 20 | 3360/4000 | 140/410 | -100 | 16VATP22 |
| 24.0 | 20 | 3300/4300 | 355/600 | -70 | 16VAWP22 |
| 24.0 | 20 | 3300/4300 | 355/690 | -70 | 16VBDP22 |
| 22.5 | 20 | 3200/4000 | 135/335 | -75 | 17ETP22 |
| 22.5 | 20 | -75/400 | 150/380 | -100 | 17EVP22 |
| 24.0 | 20 | 3300/4300 | 330/550 | -60 | 17EXP22 |
| 22.5 | 20 | -75/400 | 150/390 | -100 | 17EZP22 |
| 22.5 | 20 | -75/400 | 165/430 | -100 | 17FGP22 |
| 22.5 | 20 | -75/400 | 150/390 | -100 | 17FHP22 |
| 24.0 | 20 | 3300/4300 | 330/550 | -60 | 17FJP22 |
| 22.5 | 20 | -75/400 | 150/390 | -100 | 17FKP22 |
| 22.5 | 20 | -75/400 | 150/370 | -100 | 17VABP22 |
| 22.5 | 20 | -75/400 | 210/505 | -125 | 17VACP22 |
| 22.5 | 20 | -75/400 | 210/505 | -125 | 17VADP22 |
| 27.5 | 25 | 4200/5000 | 175/460 | -100 | 18VABP22 |
| 27.5 | 25 | 4200/5000 | 285/685 | -150 | 18VACP22 |
| 27.5 | 25 | 4200/5000 | 285/685 | -150 | 18VADP22 |
| 22.5 | 20 | -75/400 | 150/390 | -100 | 18VAFP22 |
| 27.5 | 25 | 4200/5000 | 200/535 | -125 | 18VAHP22 |

NOTES

◆ Design-Maximum Values Unless Otherwise Indicated

▣ Absolute-Maximum Values

☒ For X-Radiation Measurements, Characteristics, Limitations, and Warning see JEDEC Publication 64A, the latest EIA Published Product Information for this type, the specified applicable JEDEC X-Radiation Isodose and Limit Curves, and X-Radiation Warning, page

△ The EIA Published Product Information as of March 1, 1972, does not contain an X-Radiation rating or reference to JEDEC X-Radiation Isodose and Limit Curves for this tube type. This does not necessarily mean the type is not capable of meeting an acceptable X-Radiation limit. Refer to the latest Published Product Information for X-Radiation Ratings and glass absorption characteristics.

☆ This type summary is based on EIA registered data, registered envelope data, and manufacturer's published data. Data presented herein have been carefully prepared from such publicly available data to assure technical correctness; however, no responsibility is assumed by the General Electric Company for possible inaccuracies.

EXPLANATION OF SYMBOLS

○—Round Tube

□—Rectangular Tube

B—Fiberglass wrap implosion protection

E—Filled rim type implosion protection

G—Glass Tube

MET—Metal Tube

M—Matrix Screen

P—Sagged glass implosion plate attached to face

R—Anti-reflection faceplate

U—Rare earth red phosphor

V—Rim bands and tension band

W—Rim bands and tension band with mounting lugs

X—Tension band

Y—Tension band and mounting lugs

DUPES—Uni-potential electrostatic focus, delta

DBPES—Bi-potential electrostatic focus, delta

IUPES—Uni-potential electrostatic focus, inline

IBPES—Bi-potential electrostatic focus, inline

L.V.E.S.—Low voltage electrostatic focus

H.V.E.S.—High voltage electrostatic focus

Color Picture Tube—Condensed Data

| TUBE TYPE | X-RADIATION RATING | DEFL. ANGLE DEGREES | GLASS or METAL | FACE PLATE | | | Overall Length (Inches) | NECK LENGTH (Inches) | EXTERNAL COATING IN μ f | BASING | FOCUS | HEATER | | |
|-----------|--------------------|---------------------|----------------|------------|----------------------|-----------|-------------------------|----------------------|-----------------------------|--------|----------|--------------------------|------|----|
| | | | | SHAPE | IMPLOSION PROTECTION | TREATMENT | | | | | | LIGHT TRANSMITTANCE IN % | V. | A. |
| | | | | | | | | | | | | | | |
| 18VAJP22 | 90 | G | □ | V | U | 53.5 | 18.056 | 6.893 | 1500/2100 | 14BE | DBPES | 6.3 | 0.90 | |
| 18VAKP22 | 90 | G | □ | W | U | 53.5 | 18.056 | 6.893 | 1500/2100 | 14BE | DBPES | 6.3 | 0.90 | |
| 18VALP22 | 90 | G | □ | P | UR | 42.5 | 18.248 | 6.893 | 1500/2100 | 14BH | DUPES | 6.3 | 0.90 | |
| 18VAMP22 | 90 | G | □ | V | U | 43.5 | 18.056 | 6.893 | 1500/2100 | 14BH | DUPES | 6.3 | 0.90 | |
| 18VANP22 | 110 | G | □ | V | U | 53.0 | 13.872 | 5.538 | 1350/1750 | 13C | DBPES | 6.3 | 0.90 | |
| 18VAQP22 | 90 | G | □ | V | U | 52.0 | 17.856 | 6.693 | 1500/2100 | 14BE | DBPES | 6.3 | 1.35 | |
| 18VASP22 | 90 | G | □ | V | U | 53.5 | 17.856 | 6.693 | 1500/2000 | 14BE | DBPES | 6.3 | 0.90 | |
| 18VATP22 | 90 | G | □ | V | U | 43.5 | 17.856 | 6.693 | 1500/2000 | 14BE | DBPES | 6.3 | 0.90 | |
| 18VAZP22 | 90 | G | □ | V | U | 53.5 | 18.056 | 6.893 | 1500/2100 | 14BH | DUPES | 6.3 | 0.90 | |
| 18VBAP22 | 90 | G | □ | V | U | 52.0 | 18.050 | 6.900 | 1400/1900 | 14BE | DBPES | 6.3 | 1.30 | |
| 18VBDP22 | 90 | G | □ | V | U | 53.5 | 18.056 | 6.893 | 1500/2100 | 14BH | DUPES | 6.3 | 0.90 | |
| 18VBEP22 | 90 | G | □ | W | U | 53.0 | 18.056 | 6.893 | 1500/2100 | 14BH | DUPES | 6.3 | 0.90 | |
| 18VBGP22 | 90 | G | □ | P | UR | 52.0 | 18.248 | 6.893 | 1500/2100 | 14BH | DUPES | 6.3 | 0.90 | |
| 18VBHP22 | 90 | G | □ | V | U | 53.5 | 17.876 | 6.703 | 1500/2000 | 14BE | DBPES | 6.3 | 1.35 | |
| 18VBJP22 | 90 | G | □ | W | U | 53.0 | 18.056 | 6.893 | 1500/2100 | 14BH | DUPES | 6.3 | 0.90 | |
| 18VBKP22 | 90 | G | □ | V | UM | 85.5 | 18.056 | 6.893 | 1500/2100 | 14BE | DBPES | 6.3 | 0.90 | |
| 18VBMP22 | 90 | G | □ | V | U | 53.5 | 18.056 | 6.893 | 1500/2100 | 14BE | DBPES | 6.3 | 0.90 | |
| 19EXP22 | 90 | G | □ | — | U | 69.0 | 17.856 | 6.693 | 1500/2100 | 14BE | DBPES | 6.3 | 0.90 | |
| 19EYP22 | 90 | G | □ | P | UR | 41.0 | 18.048 | 6.693 | 1500/2100 | 14BE | DBPES | 6.3 | 0.90 | |
| 19FMP22 | 90 | G | □ | P | UR | 50.0 | 18.048 | 6.693 | 1500/2100 | 14BE | DBPES | 6.3 | 0.90 | |
| 19FXP22 | 92 | G | □ | P | UR | 41.0 | 18.062 | 6.687 | 1500/2000 | 14BE | DBPES | 6.3 | 1.35 | |
| 19GLP22 | 90 | G | □ | P | UR | 41.0 | 17.937 | 6.437 | 1500/2000 | 14BE | DBPES | 6.3 | 0.90 | |
| 19GSP22 | 90 | G | □ | P | UR | 41.0 | 18.066 | 6.703 | 1500/2000 | 14BE | DBPES | 6.3 | 1.35 | |
| 19GVP22 | 90 | G | □ | — | U | 69.0 | 17.856 | 6.693 | 1400/1900 | 14BE | DBPES | 6.3 | 0.90 | |
| 19GWP22 | 90 | G | □ | P | UR | 41.0 | 18.048 | 6.693 | 1400/1900 | 14BE | DBPES | 6.3 | 0.90 | |
| 19GXP22 | 90 | G | □ | — | U | 72.0 | 17.520 | 6.417 | 1300/1800 | 14BE | DBPES | 6.3 | 0.90 | |
| 19GYP22 | 90 | G | □ | — | U | 72.0 | 17.520 | 6.417 | 1000/2000 | 14BE | DBPES | 6.3 | 0.90 | |
| 19HBP22 | 90 | G | □ | P | U | 41.0 | 18.048 | 6.693 | 1400/1900 | 14BE | DBPES | 6.3 | 0.90 | |
| 19HCP22 | 90 | G | □ | V | U | 43.5 | 17.856 | 6.693 | 1500/2100 | 14BE | DBPES | 6.3 | 0.90 | |
| 19HFP22 | 90 | G | □ | P | UR | 55.0 | 18.255 | 6.900 | 1400/1900 | 14BE | DBPES | 6.3 | 1.30 | |
| 19HKP22 | 90 | G | □ | V | U | 43.5 | 17.856 | 6.693 | 1500/2000 | 14BE | DBPES | 6.3 | 0.90 | |
| 19HMP22 | 90 | G | □ | W | U | 43.5 | 17.856 | 6.693 | 1500/2100 | 14BE | DBPES | 6.3 | 0.90 | |
| 19HNP22 | 90 | G | □ | V | U | 43.5 | 17.856 | 6.693 | 1500/2100 | 14BH | DUPES | 6.3 | 0.90 | |
| 19HQP22 | 90 | G | □ | — | U | 64.0 | 17.579 | 6.417 | 1400/1900 | 14BE | DBPES | 6.3 | 0.90 | |
| 19HRP22 | 90 | G | □ | P | UR | 45.0 | 17.772 | 6.417 | 1400/1900 | 14BE | DBPES | 6.3 | 0.90 | |
| 19HTP22 | 90 | G | □ | W | U | 43.5 | 17.856 | 6.693 | 1500/2100 | 14BH | DUPES | 6.3 | 0.90 | |
| 19HXP22 | 90 | G | □ | V | U | 43.5 | 17.876 | 6.703 | 1500/2000 | 14BE | DBPES | 6.3 | 1.35 | |
| 19HYP22 | 90 | G | □ | V | U | 43.5 | 17.856 | 6.693 | 1500/2100 | 14BH | DUPES | 6.3 | 0.90 | |
| 19JLP22 | 90 | G | □ | W | U | 42.0 | 18.050 | 6.900 | 1400/1900 | 14BE | DBPES | 6.3 | 1.30 | |
| 19JNP22 | 90 | G | □ | V | U | 43.5 | 17.876 | 6.703 | 1500/2000 | 14BE | DBPES | 6.3 | 1.35 | |
| 19JWP22 | 90 | G | □ | P | UR | 42.5 | 18.048 | 6.693 | 1500/2100 | 14BH | DUPES | 6.3 | 0.90 | |
| 19JYP22 | 90 | G | □ | P | UR | 51.5 | 18.048 | 6.693 | 1400/1900 | 14BE | DBPES | 6.3 | 0.90 | |
| 19JZP22 | 90 | G | □ | V | U | 53.0 | 17.856 | 6.693 | 1500/2100 | 14BE | DBPES | 6.3 | 0.90 | |
| 19KLP22 | 90 | G | □ | W | U | 53.0 | 17.856 | 6.693 | 1500/2100 | 14BE | DBPES | 6.3 | 0.90 | |
| 19TP22 | 60 | G | ○ | — | — | — | 24.375 | 8.843 | 1500/3000 | 20A | H.V.E.S. | 6.3 | 1.80 | |
| 19VABP22 | 70 | G | □ | P | UR | 39.0 | 25.219 | 9.625 | 2000/2500 | 14AU | DBPES | 6.3 | 1.80 | |
| 19VAFP22 | 90 | G | □ | E | UM | 80.5 | 18.047 | 6.693 | 1750/2250 | 14BE | DBPES | 6.3 | 0.90 | |
| 19VAGP22 | 90 | G | □ | E | U | 52.0 | 18.047 | 6.693 | 1750/2250 | 14BE | DBPES | 6.3 | 0.90 | |
| 19VAMP22 | 90 | G | □ | P | UR | 52.0 | 18.439 | 6.893 | 1400/1900 | 14BE | DBPES | 6.3 | 0.90 | |
| 19VANP22 | 90 | G | □ | V | U | 53.0 | 18.247 | 6.893 | 1800/2300 | 14BH | DUPES | 6.3 | 0.90 | |
| 19VAQP22 | 90 | G | □ | W | U | 53.5 | 18.247 | 6.893 | 1800/2300 | 14BE | DBPES | 6.3 | 0.90 | |
| 19VATP22 | 90 | G | □ | V | U | 53.5 | 18.247 | 6.893 | 1800/2300 | 14BE | DBPES | 6.3 | 0.90 | |
| 19VAUP22 | 90 | G | □ | V | U | 43.5 | 18.047 | 6.693 | 1500/2000 | 14BE | DBPES | 6.3 | 0.90 | |
| 19VBDP22 | 90 | G | □ | P | UR | 52.0 | 18.239 | 6.693 | 1500/2000 | 14BE | DBPES | 6.3 | 0.90 | |
| 19VBLP22 | 110 | G | □ | V | U | 53.5 | 14.091 | 5.568 | 1350/1750 | 13C | DBPES | 6.3 | 0.90 | |
| 19VBQP22 | 90 | G | □ | V | UM | 70.0 | 18.247 | 6.893 | 1800/2300 | 14BH | DUPES | 6.3 | 0.90 | |
| 19VBRP22 | 90 | G | □ | V | UM | 70.0 | 18.247 | 6.893 | 1800/2300 | 14BE | DBPES | 6.3 | 0.90 | |
| 19VBS P22 | 90 | G | □ | W | U | 53.5 | 18.247 | 6.893 | 1800/2300 | 14BE | DBPES | 6.3 | 0.90 | |
| 19VBWP22 | 90 | G | □ | V | U | 70.0 | 18.065 | 6.703 | 1800/2300 | 14BE | DBPES | 6.3 | 1.35 | |
| 19VCBP22 | 90 | G | □ | W | UM | 70.0 | 18.247 | 6.893 | 1800/2300 | 14BE | DBPES | 6.3 | 0.90 | |

| ANODE KV DESIGN MAX. ◆ | TYPICAL OPERATING CONDITIONS | | | | TUBE TYPE |
|---------------------------|------------------------------|----------------------------------|----------------------------|----------------------------|--------------|
| | ANODE KV. | FOCUS ELEC- TRODE VOLTS | SPOT CUTOFF | | |
| | | | GRID- NUMBER 2 VOLTS | GRID- NUMBER 1 VOLTS | |
| 27.5 | 25 | 4200/5000 | 215/550 | -125 | 18VAJP22 |
| 27.5 | 25 | 4200/5000 | 215/550 | -125 | 18VAKP22 |
| 22.5 | 20 | -75/400 | 210/505 | -125 | 18VALP22 |
| 22.5 | 20 | -75/400 | 210/505 | -125 | 18VAMP22 |
| 22.5 | 20 | 3360/4000 | 210/540 | -125 | 18VANP22 |
| 27.5 | 25 | 4200/5000 | 285/685 | -150 | 18VAQP22 |
| 27.5 | 25 | 4200/5000 | 250/650 | -150 | 18VASP22 |
| 27.5 | 25 | 4200/5000 | 250/650 | -150 | 18VATP22 |
| 22.5 | 20 | -75/400 | 210/505 | -125 | 18VAZP22 |
| 27.5 | 25 | 4200/5000 | 340/970 | -150 | 18VBAP22 |
| 22.5 | 20 | -75/400 | 210/505 | -125 | 18VBDP22 |
| 22.5 | 20 | -75/400 | 150/390 | -100 | 18VBEP22 |
| 22.5 | 20 | -75/400 | 210/505 | -125 | 18VBGP22 |
| 27.5 | 25 | 4200/5000 | 220/545 | -125 | 18VBHP22 |
| 22.5 | 20 | -75/400 | 150/390 | -100 | 18VBJP22 |
| 27.5 | 25 | 4200/5000 | 215/550 | -125 | 18VBKP22 |
| 27.5 | 25 | 4200/5000 | 205/535 | -125 | 18VBMP22 |
| 27.5 | 25 | 4200/5000 | 285/685 | -150 | 19EXP22 |
| 27.5 | 25 | 4200/5000 | 285/685 | -150 | 19EYP22 |
| 27.5 | 25 | 4200/5000 | 285/685 | -150 | 19FMP22 |
| 27.5 | 25 | 4200/5000 | 285/685 | -150 | 19FXP22 |
| 23.0 | 22 | 3700/4400 | 100/400 | -75 | 19GLP22 |
| 27.5 | 25 | 4200/5000 | 285/685 | -150 | 19GSP22 |
| 27.5 | 25 | 4200/5000 | 285/685 | -150 | 19GVP22 |
| 27.5 | 25 | 4200/5000 | 285/685 | -150 | 19GWP22 |
| 24.0 | 22 | 3700/4400 | 190/460 | -100 | 19GXP22 |
| 25.0 | 22 | 3530/4200 | 130/300 | -70 | 19GYP22 |
| 27.5 | 25 | 4200/5000 | 285/685 | -150 | 19HBP22 |
| 27.5 | 25 | 4200/5000 | 285/685 | -150 | 19HCP22 |
| 27.5 | 25 | 4200/5000 | 340/970 | -150 | 19HFP22 |
| 27.5 | 25 | 4200/5000 | 285/685 | -150 | 19HKP22 |
| 27.5 | 25 | 4200/5000 | 285/685 | -150 | 19HMP22 |
| 22.5 | 20 | -75/400 | 150/390 | -100 | 19HNP22 |
| 27.5 | 25 | 4200/5000 | 285/685 | -150 | 19HQP22 |
| 27.5 | 25 | 4200/5000 | 285/685 | -150 | 19HRP22 |
| 22.5 | 20 | -75/400 | 150/390 | -100 | 19HTP22 |
| 27.5 | 25 | 4200/5000 | 175/460 | -100 | 19HXP22 |
| 22.5 | 20 | -75/400 | 150/390 | -100 | 19HYP22 |
| 27.5 | 25 | 4200/5000 | 340/970 | -150 | 19JLP22 |
| 27.5 | 25 | 4200/5000 | 175/460 | -100 | 19JNP22 |
| 22.5 | 20 | -75/400 | 150/390 | -100 | 19JWP22 |
| 27.5 | 25 | 4200/5000 | 285/685 | -150 | 19JYP22 |
| 27.5 | 25 | 4200/5000 | 285/685 | -150 | 19JZP22 |
| 27.5 | 25 | 4200/5000 | 285/685 | -150 | 19KLP22 |
| 24.2 | 20 | 1950/3250 | — | — | 19TP22 |
| 27.5 | 25 | 4200/5000 | 310/690 | -150 | 19VABP22 |
| 27.5 | 25 | 4200/5000 | 250/640 | -150 | 19VAFP22 |
| 27.5 | 25 | 4200/5000 | 250/640 | -150 | 19VAGP22 |
| 27.5 | 25 | 4200/5000 | 215/550 | -125 | 19VAMP22 |
| 22.5 | 20 | -75/400 | 210/505 | -125 | 19VANP22 |
| 27.5 | 25 | 4200/5000 | 215/550 | -125 | 19VAQP22 |
| 27.5 | 25 | 4200/5000 | 215/550 | -125 | 19VATP22 |
| 27.5 | 25 | 4200/5000 | 200/540 | -125 | 19VAUP22 |
| 27.5 | 25 | 4200/5000 | 200/540 | -125 | 19VBDP22 |
| 27.5 | 25 | 4200/5000 | 205/535 | -125 | 19VBLP22 |
| 22.5 | 20 | -75/400 | 210/505 | -125 | 19VBQP22 |
| 27.5 | 25 | 4200/5000 | 215/550 | -125 | 19VBRP22 |
| 27.5 | 25 | 4200/5000 | 205/535 | -125 | 19Vbsp22 |
| 27.5 | 25 | 4200/5000 | 220/545 | -125 | 19VBWP22 |
| 27.5 | 25 | 4200/5000 | 215/550 | -125 | 19VCBP22 |

NOTES

◆ Design-Maximum Values Unless Otherwise Indicated

Ⓜ Absolute-Maximum Values

☐ For X-Radiation Measurements, Characteristics, Limitations, and Warning see JEDEC Publication 64A, the latest EIA Published Product Information for this type, the specified applicable JEDEC X-Radiation Isodose and Limit Curves, and X-Radiation Warning, page

△ The EIA Published Product Information as of March 1, 1972, does not contain an X-Radiation rating or reference to JEDEC X-Radiation Isodose and Limit Curves for this tube type. This does not necessarily mean the type is not capable of meeting an acceptable X-Radiation limit. Refer to the latest Published Product Information for X-Radiation Ratings and glass absorption characteristics.

☆ This type summary is based on EIA registered data, registered envelope data, and manufacturer's published data. Data presented herein have been carefully prepared from such publicly available data to assure technical correctness; however, no responsibility is assumed by the General Electric Company for possible inaccuracies.

EXPLANATION OF SYMBOLS

○—Round Tube

□—Rectangular Tube

B—Fiberglass wrap implosion protection

E—Filled rim type implosion protection

G—Glass Tube

MET—Metal Tube

M—Matrix Screen

P—Sagged glass implosion plate attached to face

R—Anti-reflection faceplate

U—Rare earth red phosphor

V—Rim bands and tension band

W—Rim bands and tension band with mounting lugs

X—Tension band

Y—Tension band and mounting lugs

DUPES—Uni-potential electrostatic focus, delta

DBPES—Bi-potential electrostatic focus, delta

IUPES—Uni-potential electrostatic focus, inline

IBPES—Bi-potential electrostatic focus, inline

L.V.E.S.—Low voltage electrostatic focus

H.V.E.S.—High voltage electrostatic focus

Color Picture Tube—Condensed Data

| TUBE TYPE | X-RADIATION RATING | DEFL. ANGLE DEGREES | GLASS or METAL | FACE PLATE | | | | Overall Length (Inches) | NECK LENGTH (Inches) | EXTERNAL COATING IN pt | BASING | FOCUS | HEATER | |
|-----------|--------------------|---------------------|----------------|------------|----------------------|-----------|--------------------------|-------------------------|----------------------|------------------------|--------|----------|--------|------|
| | | | | SHAPE | IMPLOSION PROTECTION | TREATMENT | LIGHT TRANSMITTANCE IN % | | | | | | V. | A. |
| | | | | | | | | | | | | | | |
| 19VCSP22 | □ | 90 | G | □ | W | UM | 69.0 | 18.247 | 6.893 | 1800/2300 | 14BE | DBPES | 6.3 | 0.90 |
| 19VP22 | △ | 62 | G | □ | — | — | — | 26.437 | 10.531 | 1500/3000 | 14W | H.V.E.S. | 6.3 | 1.80 |
| 20VABP22 | □ | 90 | G | □ | V | U | 42.0 | 19.012 | 6.693 | 2000/2500 | 14BE | DBPES | 6.3 | 0.90 |
| 20VADP22 | □ | 90 | G | □ | P | UR | 49.5 | 19.404 | 6.893 | 2000/2500 | 14BE | DBPES | 6.3 | 0.90 |
| 20VAEP22 | □ | 90 | G | □ | V | U | 51.0 | 19.212 | 6.893 | 2000/2500 | 14BE | DBPES | 6.3 | 0.90 |
| 20VAFP22 | □ | 90 | G | □ | W | U | 51.0 | 19.212 | 6.893 | 2000/2500 | 14BE | DBPES | 6.3 | 0.90 |
| 20VAGP22 | □ | 90 | G | □ | P | UR | 41.0 | 19.404 | 6.893 | 2000/2500 | 14BE | DBPES | 6.3 | 0.90 |
| 20VAHP22 | □ | 90 | G | □ | V | U | 52.0 | 19.212 | 6.893 | 2000/2500 | 14BH | DUPES | 6.3 | 0.90 |
| 20VAJP22 | □ | 90 | G | □ | V | U | 52.0 | 19.032 | 6.703 | 1800/2300 | 14BE | DBPES | 6.3 | 1.35 |
| 20VAMP22 | △ | 90 | G | □ | P | UR | 52.0 | 19.204 | 6.693 | 2000/2500 | 14BE | DBPES | 6.3 | 1.35 |
| 20VANP22 | □ | 90 | G | □ | P | UR | 52.0 | 19.204 | 6.693 | 2000/2500 | 14BE | DBPES | 6.3 | 1.35 |
| 20VASP22 | □ | 90 | G | □ | V | U | 51.0 | 19.032 | 6.703 | 2000/2500 | 14BE | DBPES | 6.3 | 1.35 |
| 21AXP22 | △ | 70 | MET | ○ | — | — | — | 25.312 | 9.625 | — | 14W | — | 6.3 | 1.80 |
| 21AXP22A | △ | 70 | MET | ○ | — | — | — | 24.937 | 9.625 | — | 14AH | — | 6.3 | 1.80 |
| 21CYP22 | □ | 70 | G | ○ | — | — | — | 25.031 | 9.625 | 2000/2500 | 14AL | DBPES | 6.3 | 1.60 |
| 21CYP22A | □ | 70 | G | ○ | — | — | — | 25.031 | 9.625 | 2000/2500 | 14AL | — | 6.3 | 1.80 |
| 21FBP22 | □ | 70 | G | ○ | — | — | — | 25.031 | 9.625 | 2000/2500 | 14AU | DBPES | 6.3 | 1.80 |
| 21FBP22A | □ | 70 | G | ○ | — | U | 72.0 | 25.031 | 9.625 | 2000/2500 | 14AU | DBPES | 6.3 | 1.80 |
| 21FJP22 | □ | 70 | G | ○ | P | R | 39.0 | 25.219 | 9.625 | 2000/2500 | 14AU | DBPES | 6.3 | 1.80 |
| 21FJP22A | □ | 70 | G | ○ | P | UR | 39.0 | 25.219 | 9.625 | 2000/2500 | 14AU | DBPES | 6.3 | 1.80 |
| 21FKP22 | □ | 70 | G | ○ | P | — | 39.0 | 25.219 | 9.625 | 2000/2500 | 14AU | DBPES | 6.3 | 1.80 |
| 21GFP22 | □ | 90 | G | □ | P | UR | 41.0 | 19.457 | 6.994 | 1500/2000 | 14BE | DBPES | 6.3 | 1.35 |
| 21GRP22 | □ | 90 | G | □ | U | U | 41.0 | 19.300 | 6.875 | 1500/2000 | 14BE | DBPES | 6.3 | 1.35 |
| 21GUP22 | □ | 70 | G | □ | — | U | 72.0 | 25.031 | 9.625 | 2000/2500 | 14AU | DBPES | 6.3 | 1.90 |
| 21GVP22 | □ | 70 | G | ○ | P | UR | 39.0 | 25.219 | 9.625 | 2000/5000 | 14AU | DBPES | 6.3 | 1.90 |
| 21GWP22 | □ | 90 | G | □ | P | UR | 41.0 | 19.457 | 6.994 | 1500/2000 | 14BE | DBPES | 6.3 | 1.35 |
| 21GYP22 | □ | 70 | G | ○ | P | U | 69.0 | 25.219 | 9.625 | 2000/2500 | 14AU | DBPES | 6.3 | 1.90 |
| 21HBP22 | □ | 90 | G | □ | P | UR | 52.0 | 19.457 | 6.994 | 1700/2200 | 14BE | DBPES | 6.3 | 1.35 |
| 21VABP22 | □ | 92 | G | □ | P | UR | 40.5 | 19.228 | 6.893 | 1750/2250 | 14BE | DBPES | 6.3 | 0.90 |
| 21VACP22 | □ | 92 | G | □ | V | U | 50.5 | 19.036 | 6.893 | 1750/2250 | 14BE | DBPES | 6.3 | 0.90 |
| 21VADP22 | □ | 92 | G | □ | W | U | 50.5 | 19.036 | 6.893 | 1750/2250 | 14BE | DBPES | 6.3 | 0.90 |
| 21VAJP22 | □ | 92 | G | □ | V | U | 53.0 | 18.820 | 6.693 | 1400/1800 | 14BE | DBPES | 6.3 | 0.90 |
| 21VALP22 | □ | 92 | G | □ | P | URM | 66.0 | 19.228 | 6.893 | 1750/2250 | 14BE | DBPES | 6.3 | 0.90 |
| 21VALP22 | □ | 92 | G | □ | W | UR | 50.5 | 19.036 | 6.893 | 1750/2250 | 14BE | DBPES | 6.3 | 0.90 |
| 21VAQP22 | □ | 92 | G | □ | V | UM | 68.0 | 19.036 | 6.893 | 1750/2250 | 14BE | DBPES | 6.3 | 0.90 |
| 21VARP22 | □ | 92 | G | □ | W | UM | 68.0 | 19.036 | 6.893 | 1750/2250 | 14BE | DBPES | 6.3 | 0.90 |
| 21VAUP22 | □ | 92 | G | □ | V | UM | 84.5 | 19.036 | 6.893 | 1750/2250 | 14BE | DBPES | 6.3 | 0.90 |
| 22AHP22 | □ | 90 | G | □ | V | U | 42.0 | 19.012 | 6.693 | 1700/2200 | 14BE | DBPES | 6.3 | 1.35 |
| 22ALP22 | □ | 90 | G | □ | V | U | 42.0 | 19.032 | 6.703 | 1800/2300 | 14BE | DBPES | 6.3 | 1.35 |
| 22ANP22 | □ | 90 | G | □ | V | U | 52.0 | 19.012 | 6.693 | 2000/2500 | 14BH | DUPES | 6.3 | 0.90 |
| 22ARP22 | □ | 90 | G | □ | P | UR | 50.5 | 19.204 | 6.693 | 2000/2500 | 14BE | DBPES | 6.3 | 0.90 |
| 22ASP22 | □ | 90 | G | □ | V | U | 52.0 | 19.012 | 6.693 | 2000/2500 | 14BE | DBPES | 6.3 | 0.90 |
| 22ATP22 | □ | 90 | G | □ | W | U | 52.0 | 19.012 | 6.693 | 2000/2500 | 14BE | DBPES | 6.3 | 0.90 |
| 22EP22 | □ | 70 | G | □ | — | — | 73.0 | 25.375 | 11.688 | 1500/2800 | 14W | — | 6.3 | 1.80 |
| 22JP22 | □ | 90 | G | □ | P | UR | 41.0 | 19.204 | 6.693 | 2000/2500 | 14BE | DBPES | 6.3 | 0.90 |
| 22KP22 | □ | 90 | G | □ | — | U | 69.0 | 19.012 | 6.693 | 2000/2500 | 14BE | DBPES | 6.3 | 0.90 |
| 22LP22 | □ | 90 | G | □ | P | U | 50.0 | 19.204 | 6.693 | 2000/2500 | 14BE | DBPES | 6.3 | 0.90 |
| 22QP22 | □ | 90 | G | □ | P | UR | 42.0 | 19.427 | 6.920 | 1700/2200 | 14BE | DBPES | 6.3 | 1.35 |
| 22RP22 | □ | 90 | G | □ | — | U | 69.0 | 19.239 | 6.920 | 1700/2200 | 14BE | DBPES | 6.3 | 1.35 |
| 22SP22 | □ | 90 | G | □ | P | UR | 41.0 | 19.204 | 6.693 | 2000/2500 | 14BE | DBPES | 6.3 | 1.35 |
| 22UP22 | □ | 90 | G | □ | V | U | 42.0 | 19.012 | 6.693 | 2000/2500 | 14BE | DBPES | 6.3 | 0.90 |
| 22WP22 | □ | 90 | G | □ | W | U | 42.0 | 19.012 | 6.693 | 2000/2500 | 14BE | DBPES | 6.3 | 0.90 |
| 22YP22 | □ | 90 | G | □ | P | UR | 52.0 | 19.469 | 6.950 | 1700/2200 | 14BE | DBPES | 6.3 | 1.35 |
| 23EGP22 | □ | 92 | G | □ | P | R | 41.0 | 19.969 | 7.219 | 2000/2500 | 14BE | DBPES | 6.3 | 1.35 |
| 23EGP22A | □ | 92 | G | □ | P | UR | 41.0 | 19.969 | 7.219 | 1800/2500 | 14BE | DBPES | 6.3 | 1.35 |
| 23VABP22 | □ | 90 | G | □ | P | UR | 50.0 | 20.912 | 6.703 | 2000/2500 | 14BE | DBPES | 6.3 | 1.35 |
| 23VACP22 | □ | 90 | G | □ | V | U | 52.0 | 20.722 | 6.703 | 2000/2500 | 14BE | DBPES | 6.3 | 1.35 |
| 23VADP22 | □ | 90 | G | □ | V | U | 42.0 | 20.702 | 6.693 | 2000/2500 | 14BE | DBPES | 6.3 | 0.90 |
| 23VALP22 | □ | 90 | G | □ | P | URM | 67.0 | 21.094 | 6.893 | 2000/2500 | 14BE | DBPES | 6.3 | 0.90 |
| 23VAMP22 | □ | 90 | G | □ | V | UM | 69.0 | 20.902 | 6.893 | 2000/2500 | 14BE | DBPES | 6.3 | 0.90 |

| ANODE KV DESIGN MAX. ◆ | TYPICAL OPERATING CONDITIONS | | | | TUBE TYPE |
|---------------------------|------------------------------|----------------------------------|----------------------------|----------------------------|--------------|
| | ANODE KV. | FOCUS ELEC- TRODE VOLTS | SPOT CUTOFF | | |
| | | | GRID- NUMBER 2 VOLTS | GRID- NUMBER 1 VOLTS | |
| 27.5 | 25 | 4200/5000 | 205/535 | -125 | 19VCSP22 |
| 29.7 | 25 | 6500/8000 | 150/330 | -75 | 19VP22 |
| 27.5 | 25 | 4200/5000 | 285/685 | -150 | 20VABP22 |
| 27.5 | 25 | 4200/5000 | 215/550 | -125 | 20VADP22 |
| 27.5 | 25 | 4200/5000 | 215/550 | -125 | 20VAEP22 |
| 27.5 | 25 | 4200/5000 | 215/550 | -125 | 20VAFP22 |
| 27.5 | 25 | 4200/5000 | 215/550 | -125 | 20VAGP22 |
| 22.5 | 20 | -75/400 | 210/505 | -125 | 20VAHP22 |
| 27.5 | 25 | 4200/5000 | 320/750 | -150 | 20VAJP22 |
| 27.5 | 25 | 4200/5000 | 300/660 | -150 | 20VAMP22 |
| 27.5 | 25 | 4200/5000 | 300/660 | -150 | 20VANP22 |
| 27.5 | 25 | 4200/5000 | 220/545 | -125 | 20VASP22 |
| 27.5 | 25 | 3800/5300 | 140/310 | -39/-73 | 21AXP22 |
| 27.5 | 25 | 3800/5300 | 130/370 | -45/-100 | 21AXP22A |
| 27.5 | 25 | 4200/5000 | 105/345 | -70 | 21CYP22 |
| 27.5 | 25 | 4200/5000 | — | — | 21CYP22A |
| 27.5 | 25 | 4200/5000 | 105/345 | -70 | 21FBP22 |
| 27.5 | 25 | 4200/5000 | 310/690 | -150 | 21FBP22A |
| 27.5 | 25 | 4200/5000 | 105/345 | -70 | 21FJP22 |
| 27.5 | 25 | 4200/5000 | 310/690 | -150 | 21FJP22A |
| 27.5 | 25 | 4200/5000 | 105/345 | -70 | 21FKP22 |
| 27.5 | 25 | 4200/5000 | 225/425 | -100 | 21GFP22 |
| 27.5 | 25 | 4125/5000 | 340/970 | -150 | 21GRP22 |
| 27.5 | 25 | 4200/5000 | 310/690 | -150 | 21GUP22 |
| 27.5 | 25 | 4200/5000 | 310/690 | -150 | 21GVP22 |
| 27.5 | 25 | 4125/5000 | 225/425 | -100 | 21GWP22 |
| 27.5 | 25 | 4200/5000 | 310/690 | -150 | 21GYP22 |
| 27.5 | 25 | 4200/5000 | 225/425 | -100 | 21HBP22 |
| 27.5 | 25 | 4200/5000 | 215/550 | -125 | 21VABP22 |
| 27.5 | 25 | 4200/5000 | 215/550 | -125 | 21VACP22 |
| 27.5 | 25 | 4200/5000 | 215/550 | -125 | 21VADP22 |
| 27.5 | 25 | 4200/5000 | 150/410 | -100 | 21VAJP22 |
| 27.5 | 25 | 4200/5000 | 215/550 | -125 | 21VAKP22 |
| 27.5 | 25 | 4200/5000 | 205/535 | -125 | 21VALP22 |
| 27.5 | 25 | 4200/5000 | 215/550 | -125 | 21VAQP22 |
| 27.5 | 25 | 4200/5000 | 215/550 | -125 | 21VARP22 |
| 27.5 | 25 | 4200/5000 | 215/550 | -125 | 21VAUP22 |
| 27.5 | 25 | 4200/5000 | 285/685 | -150 | 22AHP22 |
| 27.5 | 25 | 4200/5000 | 320/750 | -150 | 22ALP22 |
| 22.5 | 20 | -75/400 | 150/390 | -100 | 22ANP22 |
| 27.5 | 25 | 4200/5000 | 285/685 | -150 | 22ARP22 |
| 27.5 | 25 | 4200/5000 | 285/685 | -150 | 22ASP22 |
| 27.5 | 25 | 4200/5000 | 285/685 | -150 | 22ATP22 |
| 27.5 | 25 | 4000/5100 | 50/225 | -55/-105 | 22EP22 |
| 27.5 | 25 | 4200/5000 | 285/685 | -150 | 22JP22 |
| 27.5 | 25 | 4200/5000 | 285/685 | -150 | 22KP22 |
| 27.5 | 25 | 4200/5000 | 285/685 | -150 | 22LP22 |
| 27.5 | 25 | 4200/5000 | 280/690 | -150 | 22QP22 |
| 27.5 | 25 | 4200/5000 | 280/690 | -150 | 22RP22 |
| 27.5 | 25 | 4200/5000 | 300/660 | -150 | 22SP22 |
| 27.5 | 25 | 4200/5000 | 285/685 | -150 | 22UP22 |
| 27.5 | 25 | 4200/5000 | 285/685 | -150 | 22WP22 |
| 27.5 | 25 | 4200/5000 | 330/665 | -150 | 22YP22 |
| 27.5 | 25 | 4175/5400 | 265/565 | -90 | 23GEP22 |
| 27.5 | 25 | 4175/5400 | 265/565 | -90 | 23GEP22A |
| 27.5 | 25 | 4200/5000 | 220/545 | -125 | 23VABP22 |
| 27.5 | 25 | 4200/5000 | 175/460 | -100 | 23VACP22 |
| 27.5 | 25 | 4200/5000 | 285/685 | -150 | 23VADP22 |
| 27.5 | 25 | 4200/5000 | 205/535 | -125 | 23VALP22 |
| 27.5 | 25 | 4200/5000 | 205/535 | -125 | 23VAMP22 |

NOTES

◆ Design-Maximum Values Unless Otherwise Indicated

▣ Absolute-Maximum Values

☒ For X-Radiation Measurements, Characteristics, Limitations, and Warning see JEDEC Publication 64A, the latest EIA Published Product Information for this type, the specified applicable JEDEC X-Radiation Isodose and Limit Curves, and X-Radiation Warning, page

△ The EIA Published Product Information as of March 1, 1972, does not contain an X-Radiation rating or reference to JEDEC X-Radiation Isodose and Limit Curves for this tube type. This does not necessarily mean the type is not capable of meeting an acceptable X-Radiation limit. Refer to the latest Published Product Information for X-Radiation Ratings and glass absorption characteristics.

☆ This type summary is based on EIA registered data, registered envelope data, and manufacturer's published data. Data presented herein have been carefully prepared from such publicly available data to assure technical correctness; however, no responsibility is assumed by the General Electric Company for possible inaccuracies.

EXPLANATION OF SYMBOLS

○—Round Tube

□—Rectangular Tube

B—Fiberglass wrap implosion protection

E—Filled rim type implosion protection

G—Glass Tube

MET—Metal Tube

M—Matrix Screen

P—Sagged glass implosion plate attached to face

R—Anti-reflection faceplate

U—Rare earth red phosphor

V—Rim bands and tension band

W—Rim bands and tension band with mounting lugs

X—Tension band

Y—Tension band and mounting lugs

DUPES—Uni-potential electrostatic focus, delta

DBPES—Bi-potential electrostatic focus, delta

IUPES—Uni-potential electrostatic focus, inline

IBPES—Bi-potential electrostatic focus, inline

L.V.E.S.—Low voltage electrostatic focus

H.V.E.S.—High voltage electrostatic focus

Color Picture Tube—Condensed Data

| TUBE TYPE | X-RADIATION RATING | DEFL. ANGLE DEGREES | GLASS or METAL | FACE PLATE | | | Overall Length (Inches) | NECK LENGTH (Inches) | EXTERNAL COATING IN μ t | BASING | FOCUS | HEATER | | |
|-----------|--------------------|---------------------|----------------|------------|----------------------|-----------|-------------------------|----------------------|-----------------------------|-----------|-------|--------------------------|-----|------|
| | | | | SHAPE | IMPLOSION PROTECTION | TREATMENT | | | | | | LIGHT TRANSMITTANCE IN % | V. | A. |
| | | | | | | | | | | | | | | |
| 23VANP22 | ☒ | 90 | G | ☐ | P | UR | 50.5 | 21.094 | 6.893 | 2000/2500 | 14BE | DBPES | 6.3 | 0.90 |
| 23VAQP22 | ☒ | 90 | G | ☐ | U | UR | 52.0 | 20.902 | 6.893 | 2000/2500 | 14BE | DBPES | 6.3 | 0.90 |
| 23VARP22 | ☒ | 90 | G | ☐ | P | UR | 41.0 | 21.094 | 6.893 | 2000/2500 | 14BE | DBPES | 6.3 | 0.90 |
| 23VASP22 | ☒ | 90 | G | ☐ | P | URM | 67.5 | 20.894 | 6.693 | 2000/2500 | 14BE | DBPES | 6.3 | 1.35 |
| 23VATP22 | ☒ | 90 | G | ☐ | P | URM | 78.2 | 20.924 | 6.693 | 2000/2500 | 14BE | DBPES | 6.3 | 0.90 |
| 23VAXP22 | ☒ | 90 | G | ☐ | P | URM | 78.2 | 20.924 | 6.693 | 2000/2500 | 14BE | DBPES | 6.3 | 1.35 |
| 23VAYP22 | ☒ | 90 | G | ☐ | V | UM | 80.0 | 20.732 | 6.693 | 2350/2850 | 14BE | DBPES | 6.3 | 1.35 |
| 23VAZP22 | ☒ | 90 | G | ☐ | V | UM | 80.0 | 20.732 | 6.693 | 2000/2500 | 14BE | DBPES | 6.3 | 0.90 |
| 23VBAP22 | ☒ | 90 | G | ☐ | V | UM | 80.0 | 20.732 | 6.693 | 2350/2850 | 14BE | DBPES | 6.3 | 0.90 |
| 23VBCP22 | ☒ | 90 | G | ☐ | V | U | 42.0 | 20.702 | 6.693 | 2000/2500 | 14BE | DBPES | 6.3 | 1.35 |
| 23VBDP22 | ☒ | 90 | G | ☐ | V | U | 42.0 | 20.702 | 6.693 | 2000/2500 | 14BE | DBPES | 6.3 | 0.90 |
| 23VBJP22 | ☒ | 90 | G | ☐ | V | U | 53.0 | 20.702 | 6.693 | 1400/1800 | 14BE | DBPES | 6.3 | 0.90 |
| 23VBKP22 | ☒ | 90 | G | ☐ | W | UR | 52.0 | 20.702 | 6.893 | 2000/2500 | 14BE | DBPES | 6.3 | 0.90 |
| 23VBNP22 | ☒ | 90 | G | ☐ | V | U | 69.0 | 20.722 | 6.703 | 2000/2500 | 14BE | DBPES | 6.3 | 1.35 |
| 23VBRP22 | ☒ | 90 | G | ☐ | V | U | 69.0 | 20.902 | 6.703 | 2000/2500 | 14BE | DBPES | 6.3 | 0.90 |
| 23VBS P22 | ☒ | 90 | G | ☐ | P | UR | 67.0 | 20.912 | 6.703 | 2000/2500 | 14BE | DBPES | 6.3 | 1.35 |
| 23VBTP22 | ☒ | 90 | G | ☐ | V | U | 52.0 | 20.722 | 6.703 | 2000/2500 | 14BE | DBPES | 6.3 | 1.35 |
| 25ABP22 | ☒ | 90 | G | ☐ | P | U | 41.0 | 20.924 | 6.693 | 2000/2500 | 14BE | DBPES | 6.3 | 0.90 |
| 25AEP22 | ☒ | 90 | G | ☐ | — | U | 69.0 | 20.960 | 6.950 | 2000/2500 | 14BE | DBPES | 6.3 | 1.35 |
| 25AFP22 | ☒ | 90 | G | ☐ | P | UR | 52.0 | 21.160 | 6.950 | 2000/2500 | 14BE | DBPES | 6.3 | 1.35 |
| 25AJP22 | ☒ | 90 | G | ☐ | V | U | 42.0 | 20.702 | 6.693 | 2000/2500 | 14BE | DBPES | 6.3 | 0.90 |
| 25AKP22 | ☒ | 90 | G | ☐ | E | U | 42.0 | 20.960 | 6.950 | 2000/2500 | 14BE | DBPES | 6.3 | 1.35 |
| 25ALP22 | ☒ | 90 | G | ☐ | E | U | 52.0 | 20.732 | 6.693 | 2000/2500 | 14BE | DBPES | 6.3 | 0.90 |
| 25ALP22A | ☒ | 90 | G | ☐ | W | UR | 52.0 | 20.732 | 6.693 | 2000/2500 | 14BE | DBPES | 6.3 | 0.90 |
| 25AMP22 | ☒ | 90 | G | ☐ | W | U | 42.0 | 20.732 | 6.693 | 2000/2500 | 14BE | DBPES | 6.3 | 0.90 |
| 25ANP22 | ☒ | 90 | G | ☐ | P | U | 41.0 | 20.924 | 6.693 | 2000/2500 | 14BE | DBPES | 6.3 | 1.35 |
| 25AP22 | ☒ | 90 | G | ☐ | P | R | 41.0 | 20.924 | 6.693 | 2000/2500 | 14BE | DBPES | 6.3 | 0.90 |
| 25AP22A | ☒ | 90 | G | ☐ | P | UR | 41.0 | 20.924 | 6.693 | 2000/2500 | 14BE | DBPES | 6.3 | 0.90 |
| 25AQP22 | ☒ | 90 | G | ☐ | P | UR | 41.0 | 20.912 | 6.703 | 2000/2500 | 14BE | DBPES | 6.3 | 1.35 |
| 25AWP22 | ☒ | 90 | G | ☐ | V | U | 42.0 | 20.722 | 6.703 | 2000/2500 | 14BE | DBPES | 6.3 | 1.35 |
| 25AYP22 | ☒ | 90 | G | ☐ | W | U | 42.0 | 20.797 | 6.788 | 2000/2500 | 14BE | DBPES | 6.3 | 1.35 |
| 25AZP22 | ☒ | 90 | G | ☐ | V | U | 42.0 | 20.702 | 6.693 | 2000/2500 | 14BE | DBPES | 6.3 | 1.35 |
| 25BAP22 | ☒ | 90 | G | ☐ | P | URM | 78.2 | 20.924 | 6.693 | 2000/2500 | 14BE | DBPES | 6.3 | 1.35 |
| 25BCP22 | ☒ | 90 | G | ☐ | P | URM | 67.5 | 20.894 | 6.693 | 2000/2500 | 14BE | DBPES | 6.3 | 0.90 |
| 25BDP22 | ☒ | 90 | G | ☐ | V | UM | 69.0 | 20.702 | 6.693 | 2000/2500 | 14BE | DBPES | 6.3 | 0.90 |
| 25BFP22 | ☒ | 90 | G | ☐ | V | U | 42.0 | 20.722 | 6.703 | 2000/2500 | 14BE | DBPES | 6.3 | 1.35 |
| 25BGP22 | ☒ | 90 | G | ☐ | P | UR | 52.5 | 20.924 | 6.693 | 2000/2500 | 14BE | DBPES | 6.3 | 0.90 |
| 25BHP22 | ☒ | 90 | G | ☐ | V | U | 52.0 | 20.702 | 6.693 | 2000/2500 | 14BE | DBPES | 6.3 | 0.90 |
| 25BKP22 | ☒ | 90 | G | ☐ | V | U | 78.2 | 20.702 | 6.693 | 2000/2500 | 14BE | DBPES | 6.3 | 1.35 |
| 25BMP22 | ☒ | 90 | G | ☐ | P | UR | 52.0 | 21.160 | 6.950 | 2000/2500 | 14BE | DBPES | 6.3 | 1.35 |
| 25BP22 | ☒ | 90 | G | ☐ | — | — | 69.0 | 20.732 | 6.693 | 2000/2500 | 14BE | DBPES | 6.3 | 0.90 |
| 25BP22A | ☒ | 90 | G | ☐ | — | U | 69.0 | 20.732 | 6.693 | 2000/2500 | 14BE | DBPES | 6.3 | 0.90 |
| 25CAP22 | ☒ | 90 | G | ☐ | W | U | 52.0 | 20.827 | 6.788 | 2000/2500 | 14BE | DBPES | 6.3 | 1.35 |
| 25CBP22 | ☒ | 90 | G | ☐ | P | UR | 52.0 | 21.125 | 6.875 | 2000/2800 | 14BE | DBPES | 6.3 | 1.30 |
| 25FP22 | ☒ | 90 | G | ☐ | — | — | 69.0 | 20.939 | 6.920 | 2000/2500 | 14BE | DBPES | 6.3 | 1.30 |
| 25FP22A | ☒ | 90 | G | ☐ | — | U | 69.0 | 20.736 | 6.693 | 2000/2500 | 14BE | DBPES | 6.3 | 1.35 |
| 25GP22 | ☒ | 90 | G | ☐ | P | R | 42.0 | 21.127 | 6.920 | 2000/2500 | 14BE | DBPES | 6.3 | 1.35 |
| 25GP22A | ☒ | 90 | G | ☐ | P | UR | 42.0 | 20.924 | 6.693 | 2000/2500 | 14BE | DBPES | 6.3 | 1.35 |
| 25RP22 | ☒ | 90 | G | ☐ | — | U | 69.0 | 20.535 | 6.496 | 2000/2500 | 14BE | DBPES | 6.3 | 0.90 |
| 25SP22 | ☒ | 90 | G | ☐ | P | R | 41.0 | 21.125 | 6.875 | 2000/2800 | 14BE | DBPES | 6.3 | 1.30 |
| 25UP22 | ☒ | 90 | G | ☐ | E | U | 55.0 | 20.512 | 6.500 | 2000/2500 | 14BE | DBPES | 6.3 | 0.90 |
| 25VABP22 | ☒ | 90 | G | ☐ | P | URM | 66.0 | 21.822 | 6.893 | 2000/2500 | 14BE | DBPES | 6.3 | 0.90 |
| 25VACP22 | ☒ | 90 | G | ☐ | V | UM | 67.5 | 21.630 | 6.893 | 2000/2500 | 14BE | DBPES | 6.3 | 0.90 |
| 25VADP22 | ☒ | 90 | G | ☐ | P | URM | 48.0 | 21.822 | 6.893 | 2000/2500 | 14BE | DBPES | 6.3 | 0.90 |
| 25VAEP22 | ☒ | 90 | G | ☐ | P | UR | 48.0 | 21.822 | 6.893 | 2000/2500 | 14BE | DBPES | 6.3 | 0.90 |
| 25VAFP22 | ☒ | 90 | G | ☐ | V | U | 49.5 | 21.630 | 6.893 | 2000/2500 | 14BE | DBPES | 6.3 | 0.90 |
| 25VAGP22 | ☒ | 90 | G | ☐ | W | U | 49.5 | 21.630 | 6.893 | 2000/2500 | 14BE | DBPES | 6.3 | 0.90 |
| 25VAJP22 | ☒ | 90 | G | ☐ | P | UR | 48.0 | 21.603 | 6.693 | 2000/2500 | 14BE | DBPES | 6.3 | 0.90 |
| 25VAKP22 | ☒ | 90 | G | ☐ | P | UR | 48.0 | 21.632 | 6.703 | 2000/2500 | 14BE | DBPES | 6.3 | 1.35 |
| 25VAMP22 | ☒ | 90 | G | ☐ | P | URM | 78.0 | 21.628 | 6.693 | 2000/2500 | 14BE | DBPES | 6.3 | 0.90 |

| ANODE KV DESIGN MAX. ◆ | TYPICAL OPERATING CONDITIONS | | | | TUBE TYPE |
|---------------------------|------------------------------|----------------------------------|----------------------------|----------------------------|--------------|
| | ANODE KV. | FOCUS ELEC- TRODE VOLTS | SPOT CUTOFF | | |
| | | | GRID- NUMBER 2 VOLTS | GRID- NUMBER 1 VOLTS | |
| 27.5 | 25 | 4200/5000 | 200/535 | -125 | 23VANP22 |
| 27.5 | 25 | 4200/5000 | 200/535 | -125 | 23VAQP22 |
| 27.5 | 25 | 4200/5000 | 205/535 | -125 | 23VARP22 |
| 27.5 | 25 | 4200/5000 | 255/655 | -150 | 23VASP22 |
| 27.5 | 25 | 4200/5000 | 250/650 | -150 | 23VATP22 |
| 27.5 | 25 | 4200/5000 | 250/650 | -150 | 23VAXP22 |
| 27.5 | 25 | 4200/5000 | 250/650 | -150 | 23VAYP22 |
| 27.5 | 25 | 4200/5000 | 250/650 | -150 | 23VAZP22 |
| 27.5 | 25 | 4200/5000 | 250/650 | -150 | 23VBAP22 |
| 27.5 | 25 | 4200/5000 | 200/535 | -125 | 23VBCP22 |
| 27.5 | 25 | 4200/5000 | 200/535 | -125 | 23VBDP22 |
| 27.5 | 25 | 4200/5000 | 285/685 | -150 | 23VBJP22 |
| 27.5 | 25 | 4200/5000 | 205/535 | -125 | 23VBKP22 |
| 27.5 | 25 | 4200/5000 | 220/545 | -125 | 23VBNP22 |
| 27.5 | 25 | 4200/5000 | 285/685 | -150 | 23VBRP22 |
| 27.5 | 25 | 4200/5000 | 220/545 | -125 | 23VBS P22 |
| 27.5 | 25 | 4200/5000 | 220/545 | -125 | 23VBT P22 |
| 27.5 | 25 | 4200/5000 | 285/685 | -150 | 25ABP22 |
| 27.5 | 25 | 4200/5000 | 355/685 | -150 | 25AEP22 |
| 27.5 | 25 | 4200/5000 | 355/685 | -150 | 25AFP22 |
| 27.5 | 25 | 4200/5000 | 285/685 | -150 | 25AJP22 |
| 27.5 | 25 | 4200/5000 | 355/685 | -150 | 25AKP22 |
| 27.5 | 25 | 4200/5000 | 285/685 | -150 | 25ALP22 |
| 27.5 | 25 | 4200/5000 | 285/685 | -150 | 25ALP22A |
| 27.5 | 25 | 4200/5000 | 285/685 | -150 | 25AMP22 |
| 27.5 | 25 | 4200/5000 | 300/660 | -150 | 25ANP22 |
| 27.5 | 25 | 4200/5000 | 285/685 | -150 | 25AP22 |
| 27.5 | 25 | 4200/5000 | 285/685 | -150 | 25AP22A |
| 27.5 | 25 | 4200/5000 | 320/750 | -150 | 25AQP22 |
| 27.5 | 25 | 4200/5000 | 175/460 | -100 | 25AWP22 |
| 27.5 | 25 | 4200/5000 | 335/975 | -150 | 25AYP22 |
| 27.5 | 25 | 4200/5000 | 285/685 | -150 | 25AZP22 |
| 27.5 | 25 | 4200/5000 | 290/650 | -150 | 25BAP22 |
| 27.5 | 25 | 4200/5000 | 255/655 | -150 | 25BCP22 |
| 27.5 | 25 | 4200/5000 | 255/655 | -150 | 25BDP22 |
| 27.5 | 25 | 4200/5000 | 175/460 | -100 | 25BFP22 |
| 27.5 | 25 | 4200/5000 | 285/685 | -150 | 25BGP22 |
| 27.5 | 25 | 4200/5000 | 285/685 | -150 | 25BHP22 |
| 27.5 | 25 | 4200/5000 | 120/370 | -100 | 25BKP22 |
| 27.5 | 25 | 4200/5000 | 330/660 | -150 | 25BMP22 |
| 27.5 | 25 | 4200/5000 | 285/685 | -150 | 25BP22 |
| 27.5 | 25 | 4200/5000 | 285/685 | -150 | 25BP22A |
| 27.5 | 25 | 4200/5000 | 335/975 | -150 | 25CAP22 |
| 27.5 | 25 | 4250/5000 | 340/990 | -150 | 25CBP22 |
| 27.5 | 25 | 3600/4400 | 360/1000 | -150 | 25FP22 |
| 27.5 | 25 | 4200/5000 | 285/685 | -150 | 25FP22A |
| 27.5 | 25 | 3600/4400 | 360/1000 | -150 | 25GP22 |
| 27.5 | 25 | 4200/5000 | 285/685 | -150 | 25GP22A |
| 27.5 | 25 | 4200/5000 | 285/685 | -150 | 25RP22 |
| 27.5 | 25 | 4250/5000 | 340/990 | -150 | 25SP22 |
| 27.5 | 25 | 4200/5000 | 210/495 | -105 | 25UP22 |
| 27.5 | 25 | 4200/5000 | 205/535 | -125 | 25VABP22 |
| 27.5 | 25 | 4200/5000 | 205/535 | -125 | 25VACP22 |
| 27.5 | 25 | 4200/5000 | 205/535 | -125 | 25VADP22 |
| 27.5 | 25 | 4200/5000 | 205/535 | -125 | 25VAEP22 |
| 27.5 | 25 | 4200/5000 | 205/535 | -125 | 25VAFP22 |
| 27.5 | 25 | 4200/5000 | 205/535 | -125 | 25VAGP22 |
| 27.5 | 25 | 4200/5000 | 160/410 | -100 | 25VAJP22 |
| 27.5 | 25 | 4200/5000 | 220/545 | -125 | 25VAKP22 |
| 27.5 | 25 | 4200/5000 | 250/650 | -150 | 25VAMP22 |

NOTES

◆ Design-Maximum Values Unless Otherwise Indicated

▣ Absolute-Maximum Values

▢ For X-Radiation Measurements, Characteristics, Limitations, and Warning see JEDEC Publication 64A, the latest EIA Published Product Information for this type, the specified applicable JEDEC X-Radiation Isodose and Limit Curves, and X-Radiation Warning, page

△ The EIA Published Product Information as of March 1, 1972, does not contain an X-Radiation rating or reference to JEDEC X-Radiation Isodose and Limit Curves for this tube type. This does not necessarily mean the type is not capable of meeting an acceptable X-Radiation limit. Refer to the latest Published Product Information for X-Radiation Ratings and glass absorption characteristics.

☆ This type summary is based on EIA registered data, registered envelope data, and manufacturer's published data. Data presented herein have been carefully prepared from such publicly available data to assure technical correctness; however, no responsibility is assumed by the General Electric Company for possible inaccuracies.

EXPLANATION OF SYMBOLS

○—Round Tube

□—Rectangular Tube

B—Fiberglass wrap implosion protection

E—Filled rim type implosion protection

G—Glass Tube

MET—Metal Tube

M—Matrix Screen

P—Sagged glass implosion plate attached to face

R—Anti-reflection faceplate

U—Rare earth red phosphor

V—Rim bands and tension band

W—Rim bands and tension band with mounting lugs

X—Tension band

Y—Tension band and mounting lugs

DUPES—Uni-potential electrostatic focus, delta

DBPES—Bi-potential electrostatic focus, delta

IUPES—Uni-potential electrostatic focus, inline

IBPES—Bi-potential electrostatic focus, inline

L.V.E.S.—Low voltage electrostatic focus

H.V.E.S.—High voltage electrostatic focus

Color Picture Tube—Condensed Data

| TUBE TYPE | X-RADIATION RATING | DEFL. ANGLE DEGREES | GLASS or METAL | FACE PLATE | | | Overall Length (Inches) | NECK LENGTH (Inches) | EXTERNAL COATING IN pf | BASING | FOCUS | HEATER | | |
|-----------|--------------------|---------------------|----------------|------------|-----------------------|-----------|-------------------------|----------------------|------------------------|-----------|-------|--------------------------|-----|------|
| | | | | SHAPE | IMPLISSION PROTECTION | TREATMENT | | | | | | LIGHT TRANSMITTANCE IN % | V. | A. |
| | | | | | | | | | | | | | | |
| 25VAQP22 | ☒ | 90 | G | □ | V | UM | 80.0 | 21.430 | 6.693 | 2300/2800 | 14BE | DBPES | 6.3 | 0.90 |
| 25VAWP22 | — | 90 | G | □ | V | UM | 67.5 | 21.430 | 6.693 | 1400/1800 | 14BE | DBPES | 6.3 | 0.90 |
| 25VAXP22 | — | 90 | G | □ | W | UM | 67.5 | 21.630 | 6.893 | 2000/2500 | 14BE | DBPES | 6.3 | 0.90 |
| 25VAZP22 | ☒ | 90 | G | □ | V | U | 49.5 | 21.457 | 6.703 | 2000/2500 | 14BE | DBPES | 6.3 | 1.35 |
| 25VBAP22 | ☒ | 90 | G | □ | V | UR | 66.0 | 21.622 | 6.693 | 2000/2500 | 14BE | DBPES | 6.3 | 1.35 |
| 25VBGP22 | ☒ | 90 | G | □ | P | U | 67.5 | 21.457 | 6.703 | 2000/2500 | 14BE | DBPES | 6.3 | 1.35 |
| 25VBJP22 | ☒ | 90 | G | □ | W | U | 49.5 | 21.630 | 6.893 | 2000/2500 | 14BE | DBPES | 6.3 | 0.90 |
| 25VBKP22 | ☒ | 90 | G | □ | W | U | 67.5 | 21.457 | 6.703 | 2000/2500 | 14BE | DBPES | 6.3 | 1.35 |
| 25VBLP22 | ☒ | 90 | G | □ | P | UR | 65.5 | 21.632 | 6.703 | 2000/2500 | 14BE | DBPES | 6.3 | 1.35 |
| 25VBMP22 | ☒ | 90 | G | □ | P | URM | 82.5 | 21.822 | 6.893 | 2000/2500 | 14BE | DBPES | 6.3 | 1.35 |
| 25WP22 | ☒ | 90 | G | □ | P | UR | 41.0 | 20.924 | 6.693 | 2000/2500 | 14BE | DBPES | 6.3 | 1.35 |
| 25XP22 | ☒ | 90 | G | □ | P | UR | 41.0 | 20.924 | 6.693 | 2000/2500 | 14BE | DBPES | 6.3 | 0.90 |
| 25YP22 | ☒ | 90 | G | □ | — | U | 69.0 | 20.732 | 6.693 | 2000/2500 | 14BE | DBPES | 6.3 | 0.90 |
| 25ZP22 | ☒ | 90 | G | □ | P | UR | 41.0 | 21.160 | 6.950 | 2000/2500 | 14BE | DBPES | 6.3 | 1.35 |
| 370AB22 | — | 90 | G | □ | — | — | — | 14.725 | — | — | 14BH | — | 6.3 | 0.90 |
| 370CB22 | — | 90 | G | □ | W | — | — | 14.725 | — | — | 14BH | — | 6.3 | 0.90 |
| 490AB22 | — | 90 | G | □ | — | — | — | 17.520 | — | — | 14BE | — | 6.3 | 0.90 |
| 490ACB22 | — | 90 | G | □ | — | — | — | 17.520 | — | — | 14BE | — | 6.3 | 0.90 |
| 490ADB22 | — | 90 | G | □ | — | — | — | 17.992 | — | — | 14BE | — | 6.3 | 0.80 |
| 490AEB22 | — | 90 | G | □ | P | — | — | 17.992 | — | — | 14BE | — | 6.3 | 0.80 |
| 490AFB22 | — | 90 | G | □ | P | — | — | 17.792 | — | — | 14BE | — | 6.3 | 0.80 |
| 490AGB22 | — | 90 | G | □ | P | — | — | 17.756 | — | — | 14BE | — | 6.3 | 0.90 |
| 490AHB22 | — | 90 | G | □ | — | — | — | 17.950 | — | — | 14BE | — | 6.3 | 0.90 |
| 490AHB22A | — | 90 | G | □ | — | — | — | 17.954 | — | — | 14BE | — | 6.3 | 0.90 |
| 490AJB22 | — | 90 | G | □ | P | — | — | 18.147 | — | — | 14BE | — | 6.3 | 0.90 |
| 490AJB22A | — | 90 | G | □ | P | — | — | 18.147 | — | — | 14BE | — | 6.3 | 0.90 |
| 490AKB22 | — | 90 | G | □ | — | — | — | 17.579 | — | — | 14BE | — | 6.3 | 0.80 |
| 490ALB22 | — | 90 | G | □ | — | — | — | 17.520 | — | — | 14BE | — | 6.3 | 0.90 |
| 490AMB22 | — | 90 | G | □ | — | — | — | 17.952 | — | — | 14BE | — | 6.3 | 0.90 |
| 490ANB22 | — | 90 | G | □ | — | — | — | 17.579 | — | — | 14BE | — | 6.3 | 0.90 |
| 490ARB22 | — | 90 | G | □ | P | — | — | 17.756 | — | — | 14BE | — | 6.3 | 0.90 |
| 490ASB22 | △ | 90 | G | □ | P | — | 54.0 | 17.772 | 6.418 | 1300/1900 | 14BE | — | 6.3 | 0.90 |
| 490BAB22 | — | 90 | G | □ | — | — | — | 18.228 | — | — | 14BE | — | 6.3 | 0.80 |
| 490BCB22 | — | 90 | G | □ | P | — | — | 18.421 | — | — | 14BE | — | 6.3 | 0.80 |
| 490BDB22 | — | 90 | G | □ | W | — | — | 18.140 | — | — | 14BE | — | 6.3 | 0.90 |
| 490BGB22 | △ | 90 | G | □ | — | U | 64.0 | 17.601 | 6.439 | 1500/2100 | 14BH | — | 6.3 | 0.90 |
| 490BHB22 | △ | 90 | G | □ | E | U | 45.0 | 17.793 | 6.439 | 1500/2100 | 14BE | — | 6.3 | 0.90 |
| 490BNB22 | — | 90 | G | □ | P | — | — | 18.151 | — | — | 14BH | — | 6.3 | 0.90 |
| 490BRB22 | △ | 90 | G | □ | V | U | 45.5 | 17.793 | 6.439 | 1500/2100 | 14BE | — | 6.3 | 0.90 |
| 490UBB22 | △ | 90 | G | □ | W | UR | 64.0 | 17.601 | 6.439 | 1500/2100 | 14BE | — | 6.3 | 0.90 |
| 490VBB22 | — | 90 | G | □ | P | — | — | 18.540 | — | — | 14BH | — | 6.3 | 0.90 |
| 490XBB22 | △ | 90 | G | □ | P | UR | 45.0 | 17.793 | 6.439 | 1400/1900 | 14BE | — | 6.3 | 0.90 |
| 490CB22 | — | 90 | G | □ | W | — | — | 17.520 | — | — | 14BE | — | 6.3 | 0.90 |
| 490DB22 | — | 90 | G | □ | W | — | — | 18.110 | — | — | 14BE | — | 6.3 | 0.90 |
| 490EB22 | — | 90 | G | □ | — | — | — | 17.520 | — | — | 14BE | — | 6.3 | 0.90 |
| 490EB22A | — | 90 | G | □ | — | — | — | 17.520 | — | — | 14BE | — | 6.3 | 0.90 |
| 490FB22 | — | 90 | G | □ | — | — | — | 18.110 | — | — | 14BE | — | 6.3 | 0.90 |
| 490GB22 | — | 90 | G | □ | — | — | — | 17.520 | — | — | 14BE | — | 6.3 | 0.90 |
| 490HB22 | — | 90 | G | □ | — | — | — | 17.913 | — | — | 14BE | — | 6.3 | 0.90 |
| 490JB22 | — | 90 | G | □ | — | — | — | 18.504 | — | — | 14BE | — | 6.3 | 0.90 |
| 490JB22A | — | 90 | G | □ | — | — | — | — | — | — | 14BE | — | 6.3 | 0.90 |
| 490KB22 | — | 90 | G | □ | — | — | — | 18.110 | — | — | 14BE | — | 6.3 | 0.80 |
| 490KB22A | — | 90 | G | □ | — | — | — | 18.110 | — | — | 14BE | — | 6.3 | 0.80 |
| 490LB22 | — | 90 | G | □ | — | — | — | 17.913 | — | — | 14BE | — | 6.3 | 0.80 |
| 490MB22 | — | 90 | G | □ | W | — | — | 18.150 | — | — | 14BE | — | 6.3 | 0.90 |
| 490NB22 | — | 90 | G | □ | P | — | — | 18.346 | — | — | 14BE | — | 6.3 | 0.90 |
| 490RB22 | — | 90 | G | □ | P | — | — | 17.756 | — | — | 14BE | — | 6.3 | 0.90 |
| 490SB22 | — | 90 | G | □ | P | — | — | 17.795 | — | — | 14BE | — | 6.3 | 0.90 |
| 490TB22 | — | 90 | G | □ | P | — | — | 17.520 | — | — | 14BE | — | 6.3 | 0.80 |
| 490UB22 | — | 90 | G | □ | — | — | — | 17.520 | — | — | 14BE | — | 6.3 | 0.90 |

| ANODE KV DESIGN MAX. | TYPICAL OPERATING CONDITIONS | | | | TUBE TYPE |
|-------------------------|------------------------------|----------------------------------|----------------------------|----------------------------|--------------|
| | ANODE KV. | FOCUS ELEC- TRODE VOLTS | SPOT CUTOFF | | |
| | | | GRID- NUMBER 2 VOLTS | GRID- NUMBER 1 VOLTS | |
| 27.5 | 25 | 4200/5000 | 250/650 | -150 | 25VAQP22 |
| 27.5 | 25 | 4200/5000 | 250/650 | -150 | 25VAWP22 |
| 27.5 | 25 | 4200/5000 | 205/535 | -125 | 25VAXP22 |
| 27.5 | 25 | 4200/5000 | 220/545 | -125 | 25VAZP22 |
| 27.5 | 25 | 4200/5000 | 200/525 | -125 | 25VBAP22 |
| 27.5 | 25 | 4200/5000 | 220/545 | -125 | 25VBGP22 |
| 27.5 | 25 | 4200/5000 | 205/535 | -125 | 25VBJP22 |
| 27.5 | 25 | 4200/5000 | 220/545 | -125 | 25VBKP22 |
| 27.5 | 25 | 4200/5000 | 220/545 | -125 | 25VBLP22 |
| 27.5 | 25 | 4200/5000 | 205/535 | -125 | 25VBMP22 |
| 27.5 | 25 | 4200/5000 | 300/660 | -150 | 25WV22 |
| 27.5 | 25 | 4200/5000 | 285/685 | -150 | 25XP22 |
| 27.5 | 25 | 4200/5000 | 285/685 | -150 | 25YP22 |
| 27.5 | 25 | 4200/5000 | 355/685 | -150 | 25ZP22 |
| 22.5 | 20 | -75/400 | 200 | -57/-125 | 370AB22 |
| 22.5 | 20 | -75/400 | 200 | -57/-125 | 370CB22 |
| 23.0 | 20 | 3360/4000 | 200 | -50/-105 | 490AB22 |
| 23.0 | 20 | 3360/4000 | 200 | -50/-105 | 490ACB22 |
| 23.0 | 20 | 3360/4000 | 200 | -50/-105 | 490ADB22 |
| 23.0 | 20 | 3360/4000 | 200 | -50/-105 | 490AEB22 |
| 23.0 | 20 | 3360/4000 | 200 | -50/-105 | 490AFB22 |
| 23.0 | 20 | 3360/4000 | 200 | -50/-105 | 490AGB22 |
| 27.5 | 25 | 4200/5000 | 285/684 | -150 | 490AHB22 |
| 27.5 | 25 | 4200/5000 | 300/695 | -150 | 490AHB22A |
| 26.0 | 24 | 4030/4800 | 150/420 | -150 | 490AJB22 |
| 27.5 | 25 | 4200/5000 | 300/695 | -150 | 490AJB22A |
| 26.0 | 24 | 4030/4800 | 200 | -50/-105 | 490AKB22 |
| 23.0 | 20 | 3360/4000 | 200 | -50/-105 | 490ALB22 |
| 26.0 | 24 | 4030/4800 | 200 | -50/-105 | 490AMB22 |
| 25.5 | 22 | 3700/4400 | 200 | -50/-105 | 490ANB22 |
| 23.0 | 20 | 3360/4000 | 200 | -50/-105 | 490ARB22 |
| 26.0 | 24 | 4030/4800 | 200 | -50/-105 | 490ASB22 |
| 26.0 | 24 | 4030/4800 | 285/685 | -150 | 490AB22 |
| 26.0 | 24 | 4030/4800 | 285/685 | -150 | 490BCB22 |
| 26.0 | 24 | 4030/4800 | 150/420 | -100 | 490DB22 |
| 22.5 | 20 | 4200/5000 | 200/375 | -100 | 490GB22 |
| 27.5 | 25 | 4200/5000 | 190/380 | -100 | 490HB22 |
| 22.5 | 20 | -75/400 | 150/390 | -100 | 490NB22 |
| 27.5 | 25 | 4200/5000 | 340/630 | -150 | 490RB22 |
| 27.5 | 25 | 4200/5000 | 190/380 | -100 | 490UB22 |
| 23.0 | 20 | -75/400 | 150/410 | -100 | 490VB22 |
| 22.5 | 20 | -75/400 | 200/350 | -100 | 490XB22 |
| 23.0 | 20 | 3360/4000 | 200 | -50/-105 | 490CB22 |
| 23.0 | 20 | 3360/4000 | 200 | -50/-105 | 490DB22 |
| 23.0 | 20 | 3360/4000 | 200 | -50/-105 | 490EB22 |
| 23.0 | 20 | 3360/4000 | 200 | -50/-105 | 490EB22A |
| 23.0 | 20 | 3360/4000 | 200 | -50/-105 | 490FB22 |
| 23.0 | 20 | 3360/4000 | 200/520 | -200 | 490GB22 |
| 24.0 | 22 | 3700/4400 | 325/800 | -150 | 490HB22 |
| 23.0 | 20 | 3360/4000 | 290/670 | -150 | 490JB22 |
| 23.0 | 20 | 3360/4000 | 200 | -50/-105 | 490JB22A |
| 23.0 | 20 | 3360/4000 | 200 | -50/-105 | 490KB22 |
| 23.0 | 20 | 3360/4000 | 200 | -50/-105 | 490KB22A |
| 23.0 | 20 | 3360/4000 | 200 | -50/-105 | 490LB22 |
| 23.0 | 20 | 3360/4000 | 200 | -50/-105 | 490MB22 |
| 23.0 | 20 | 3360/4000 | 200 | -50/-105 | 490NB22 |
| 23.0 | 20 | 3360/4000 | 200 | -50/-105 | 490RB22 |
| 23.0 | 20 | 3360/4000 | 200 | -50/-105 | 490SB22 |
| 23.0 | 20 | 3360/4000 | 200 | -50/-105 | 490TB22 |
| 23.0 | 20 | 3360/4000 | 200 | -50/-105 | 490UB22 |

NOTES

◆ Design-Maximum Values Unless Otherwise Indicated

▣ Absolute-Maximum Values

▢ For X-Radiation Measurements, Characteristics, Limitations, and Warning see JEDEC Publication 64A, the latest EIA Published Product Information for this type, the specified applicable JEDEC X-Radiation Isodose and Limit Curves, and X-Radiation Warning, page

△ The EIA Published Product Information as of March 1, 1972, does not contain an X-Radiation rating or reference to JEDEC X-Radiation Isodose and Limit Curves for this tube type. This does not necessarily mean the type is not capable of meeting an acceptable X-Radiation limit. Refer to the latest Published Product Information for X-Radiation Ratings and glass absorption characteristics.

☆ This type summary is based on EIA registered data, registered envelope data, and manufacturer's published data. Data presented herein have been carefully prepared from such publicly available data to assure technical correctness; however, no responsibility is assumed by the General Electric Company for possible inaccuracies.

EXPLANATION OF SYMBOLS

○—Round Tube

□—Rectangular Tube

B—Fiberglass wrap implosion protection

E—Filled rim type implosion protection

G—Glass Tube

MET—Metal Tube

M—Matrix Screen

P—Sagged glass implosion plate attached to face

R—Anti-reflection faceplate

U—Rare earth red phosphor

V—Rim bands and tension band

W—Rim bands and tension band with mounting lugs

X—Tension band

Y—Tension band and mounting lugs

DUPES—Uni-potential electrostatic focus, delta

DBPES—Bi-potential electrostatic focus, delta

IUPES—Uni-potential electrostatic focus, inline

IBPES—Bi-potential electrostatic focus, inline

L.V.E.S.—Low voltage electrostatic focus

H.V.E.S.—High voltage electrostatic focus

Color Picture Tube—Condensed Data

| TUBE TYPE | X-RADIATION RATING | DEFL. ANGLE DEGREES | GLASS or METAL | FACE PLATE | | | Overall Length (inches) | NECK LENGTH (inches) | EXTERNAL COATING IN | BASING | FOCUS | HEATER | |
|-----------|--------------------|---------------------|----------------|------------|----------------------|-----------|-------------------------|----------------------|---------------------|--------|-------|--------------------------|------|
| | | | | SHAPE | IMPLOSION PROTECTION | TREATMENT | | | | | | LIGHT TRANSMITTANCE IN % | V. |
| 490VB22 | — | 90 | G | □ | P | — | 17.756 | — | — | 14BE | — | 6.3 | 0.90 |
| 490WB22 | — | 90 | G | □ | — | — | 17.520 | — | — | 14BE | — | 6.3 | 0.90 |
| 490XB22 | — | 90 | G | □ | P | — | 17.756 | — | — | 14BE | — | 6.3 | 0.90 |
| 490YB22 | — | 90 | G | □ | P | — | 17.756 | — | — | 14BE | — | 6.3 | 0.90 |
| 490ZB22 | — | 90 | G | □ | P | — | 17.756 | — | — | 14BE | — | 6.3 | 0.90 |

| ANODE KV DESIGN MAX. ◆ | TYPICAL OPERATING CONDITIONS | | | | TUBE TYPE |
|---------------------------|------------------------------|----------------------------------|----------------------------|----------------------------|--------------|
| | ANODE KV. | FOCUS ELEC- TRODE VOLTS | SPOT CUTOFF | | |
| | | | GRID- NUMBER 2 VOLTS | GRID- NUMBER 1 VOLTS | |
| 23.0 | 20 | 3360/4000 | 200 | -50/-105 | 490VB22 |
| 23.0 | 20 | 3360/4000 | 200 | -50/-105 | 490WB22 |
| 23.0 | 20 | 3360/4000 | 200 | -50/-105 | 490XB22 |
| 25.5 | 23 | 3860/4600 | 200 | -50/-105 | 490YB22 |
| 23.0 | 20 | 3360/4000 | 200 | -50/-105 | 490ZB22 |

NOTES

◆ Design-Maximum Values Unless Otherwise Indicated

⊞ Absolute-Maximum Values

☒ For X-Radiation Measurements, Characteristics, Limitations, and Warning see JEDEC Publication 64A, the latest EIA Published Product Information for this type, the specified applicable JEDEC X-Radiation Isodose and Limit Curves, and X-Radiation Warning, page

△ The EIA Published Product Information as of March 1, 1972, does not contain an X-Radiation rating or reference to JEDEC X-Radiation Isodose and Limit Curves for this tube type. This does not necessarily mean the type is not capable of meeting an acceptable X-Radiation limit. Refer to the latest Published Product Information for X-Radiation Ratings and glass absorption characteristics.

☆ This type summary is based on EIA registered data, registered envelope data, and manufacturer's published data. Data presented herein have been carefully prepared from such publicly available data to assure technical correctness; however, no responsibility is assumed by the General Electric Company for possible inaccuracies.

EXPLANATION OF SYMBOLS

○—Round Tube

□—Rectangular Tube

B—Fiberglass wrap implosion protection

E—Filled rim type implosion protection

G—Glass Tube

MET—Metal Tube

M—Matrix Screen

P—Sagged glass implosion plate attached to face

R—Anti-reflection faceplate

U—Rare earth red phosphor

V—Rim bands and tension band

W—Rim bands and tension band with mounting lugs

X—Tension band

Y—Tension band and mounting lugs

DUPES—Uni-potential electrostatic focus, delta

DBPES—Bi-potential electrostatic focus, delta

IUPES—Uni-potential electrostatic focus, inline

IBPES—Bi-potential electrostatic focus, inline

L.V.E.S.—Low voltage electrostatic focus

H.V.E.S.—High voltage electrostatic focus

Monochrome Picture Tubes—Condensed Data

| TUBE TYPE | X-RADIATION RATING | DEFL. ANGLE DEGREES | GLASS or METAL | FACEPLATE | | | EXTERNAL COATING IN pf | FOCUS | ION TRAP MAG. | Overall Length (Inches) | NECK LENGTH (Inches) | BASING | HEATER | |
|-----------|--------------------|---------------------|----------------|-----------|----------------------|-----------|------------------------|----------|---------------|-------------------------|----------------------|--------|--------|-------|
| | | | | SHAPE | IMPLOSION PROTECTION | TREATMENT | | | | | | | V. | A. |
| 2EP4 | △ | 30 | G | ○ | — | A | 300/500 | L.V.E.S. | N | 8.250 | 5.625 | 8JK | 6.3 | 0.145 |
| 5AXP4 | △ | 53 | G | ○ | — | C | None | Auto.Es. | N | 10.625 | 7.375 | 12S | 6.3 | 0.60 |
| 7DP4 | △ | 50 | G | ○ | — | C | 400/1500 | H.V.E.S. | D | 14.062 | 8.125 | 12C | 6.3 | 0.60 |
| 7RP4 | △ | 50 | G | ○ | — | CA | None | Mag. | S | 14.062 | 8.125 | 12D | 6.3 | 0.60 |
| 8AP4 | △ | 54 | MET | ○ | — | C | None | Mag. | S | 14.250 | 7.000 | 12H | 6.3 | 0.60 |
| 8AP4A | △ | 54 | MET | ○ | — | F | None | Mag. | S | 14.250 | 7.000 | 12H | 6.3 | 0.60 |
| 8DP4 | △ | 90 | G | □ | — | F | 250/350 | L.V.E.S. | S | 10.438 | 6.500 | 12AB | 6.3 | 0.60 |
| 8JP4 | △ | 110 | G | □ | — | FA | None | Auto.Es. | N | 8.938 | 5.438 | 8JL | 6.3 | 0.60 |
| 8LP4 | △ | 110 | G | □ | — | FA | 200/400 | L.V.E.S. | N | 8.688 | 5.188 | 7FA | 6.3 | 0.30 |
| 8MP4 | △ | 90 | G | □ | — | F | 250/350 | L.V.E.S. | N | 9.938 | 6.000 | 12L | 6.3 | 0.60 |
| 8XP4 | △ | 90 | G | □ | — | FA | None | Auto.Es. | N | 11.348 | 7.500 | 12S | 6.3 | 0.60 |
| 8YP4 | △ | 110 | G | □ | — | F | None | Auto.Es. | N | 8.688 | 5.188 | 7FG | 6.3 | 0.60 |
| 9ACP4 | △ | 90 | G | □ | X | FA | 300/750 | L.V.E.S. | N | 8.265 | 3.698 | 7GR | 12.0 | 0.065 |
| 9AGP4 | △ | 90 | G | □ | X | FA | 300/750 | L.V.E.S. | N | 8.346 | 3.700 | 7GR | 12.0 | 0.065 |
| 9QP4 | △ | 70 | G | □ | — | C | None | L.V.E.S. | S | 12.750 | 6.500 | 12AD | 4.7 | 0.30 |
| 9QP4A | △ | 70 | G | □ | — | F | None | L.V.E.S. | S | 12.750 | 6.500 | 12AD | 4.7 | 0.30 |
| 9SP4 | △ | 90 | G | □ | — | A | 300/500 | L.V.E.S. | N | 10.500 | 5.719 | 8HR | 6.3 | 0.60 |
| 9TP4 | △ | 110 | G | □ | E | A | 350/600 | L.V.E.S. | N | 8.375 | 4.250 | 8HR | 6.3 | 0.45 |
| 9UP4 | △ | 90 | G | □ | — | FA | 300/750 | L.V.E.S. | N | 8.267 | 3.540 | 7GR | 12.6 | 0.075 |
| 9VP4 | △ | 90 | G | □ | — | FA | 300/750 | L.V.E.S. | N | 7.906 | 3.344 | 7GR | 12.6 | 0.075 |
| 9WP4 | △ | 90 | G | □ | X | FA | 300/750 | L.V.E.S. | N | 8.270 | 2.920 | 7GR | 12.0 | 0.075 |
| 9YP4 | △ | 90 | G | □ | X | FA | 300/750 | L.V.E.S. | N | 8.440 | 3.250 | 7GR | 12.6 | 0.075 |
| 10ABP4 | △ | 90 | G | □ | — | C | 400/850 | L.V.E.S. | S | 11.875 | 6.500 | 12L | 6.3 | 0.60 |
| 10ABP4A | △ | 90 | G | □ | — | CA | 400/850 | L.V.E.S. | S | 11.875 | 6.500 | 12L | 6.3 | 0.60 |
| 10ABP4B | △ | 90 | G | □ | — | F | 400/850 | L.V.E.S. | S | 11.875 | 6.500 | 12L | 6.3 | 0.60 |
| 10ABP4C | △ | 90 | G | □ | — | FA | 400/850 | L.V.E.S. | S | 11.875 | 6.500 | 12L | 8.4 | 0.45 |
| 10ADP4 | △ | 90 | G | □ | — | F | 400/850 | L.V.E.S. | S | 11.875 | 6.500 | 12L | 8.4 | 0.45 |
| 10AEP4 | △ | 90 | G | □ | — | F | 400/850 | L.V.E.S. | S | 11.875 | 6.500 | 12L | 6.3 | 0.45 |
| 10ARP4 | △ | 90 | G | □ | X | FA | 300/750 | L.V.E.S. | N | 9.425 | 3.875 | 7GR | 6.3 | 0.30 |
| 10ASP4 | △ | 90 | G | □ | X | FA | 300/750 | L.V.E.S. | N | 8.700 | 4.020 | 7GR | 6.3 | 0.45 |
| 10BP4 | △ | 50 | G | ○ | — | C | 500/2500 | Mag. | D | 17.625 | 8.188 | 12N | 6.3 | 0.60 |
| 10BP4A | △ | 50 | G | ○ | — | F | 500/2500 | Mag. | D | 17.625 | 8.188 | 12N | 6.3 | 0.60 |
| 10BP4C | △ | 50 | G | ○ | — | CA | 500/2500 | Mag. | S | 17.625 | 8.188 | 12N | 6.3 | 0.60 |
| 10BP4D | △ | 50 | G | ○ | — | FA | 500/2500 | Mag. | S | 17.625 | 8.188 | 12N | 6.3 | 0.60 |
| 10DP4 | △ | 50 | G | ○ | — | CA | None | H.V.E.S. | N | 17.625 | 8.188 | 12M | 6.3 | 0.60 |
| 10FP4 | △ | 50 | G | ○ | — | CA | 500/2500 | Mag. | N | 17.625 | 8.188 | 12N | 6.3 | 0.60 |
| 10FP4A | △ | 50 | G | ○ | — | FA | 500/2500 | Mag. | N | 17.625 | 8.188 | 12N | 6.3 | 0.60 |
| SG-10FP4A | △ | 50 | G | ○ | — | FA | 500/2500 | Mag. | N | 17.625 | 8.188 | 12N | 6.3 | 0.60 |
| 10MP4 | △ | 50 | G | ○ | — | C | 500/2500 | Mag. | D | 17.000 | 7.557 | 12G | 6.3 | 0.60 |
| 10MP4A | △ | 50 | G | ○ | — | F | 500/2500 | Mag. | D | 17.000 | 7.557 | 12G | 6.3 | 0.60 |
| 10RP4 | △ | 50 | G | ○ | — | CA | 750/1500 | L.V.E.S. | N | 16.500 | 7.062 | 12L | 6.3 | 0.60 |
| 11AP4 | △ | 110 | G | □ | L | FA | 500/750 | L.V.E.S. | N | 8.938 | 4.250 | 8HR | 6.3 | 0.45 |
| 11BP4 | △ | 110 | G | □ | — | FA | 400/700 | L.V.E.S. | N | 8.938 | 4.250 | 8HR | 6.3 | 0.45 |
| 11CP4 | △ | 110 | G | □ | — | FA | 500/750 | L.V.E.S. | N | 8.938 | 4.250 | 8HR | 6.3 | 0.45 |
| 11DP4 | △ | 110 | G | □ | — | FA | 500/750 | L.V.E.S. | N | 8.938 | 4.250 | 8HR | 6.3 | 0.45 |
| 11EP4 | △ | 114 | G | □ | — | FA | 300/500 | L.V.E.S. | N | 8.460 | 4.130 | 8HR | 6.3 | 0.60 |
| 11FP4 | △ | 114 | G | □ | — | FA | 300/500 | L.V.E.S. | N | 8.460 | 4.130 | 8HR | 6.3 | 0.45 |
| 11GP4 | △ | 110 | G | □ | E | FA | 400/600 | L.V.E.S. | N | 8.938 | 4.250 | 8HR | 6.3 | 0.45 |
| 11HP4 | △ | 110 | G | □ | X | FA | 500/750 | L.V.E.S. | N | 8.938 | 4.250 | 8HR | 6.3 | 0.45 |
| 11HP4A | △ | 110 | G | □ | X | FA | 500/750 | L.V.E.S. | N | 8.785 | 4.125 | 8HR | 6.3 | 0.45 |
| 11JP4 | △ | 110 | G | □ | E | FA | 400/600 | L.V.E.S. | N | 8.938 | 4.250 | 8HR | 6.3 | 0.30 |
| 11KP4 | △ | 110 | G | □ | X | FA | 500/750 | L.V.E.S. | N | 8.910 | 4.250 | 8HR | 6.3 | 0.45 |
| 11LP4 | △ | 110 | G | □ | — | FA | 400/600 | L.V.E.S. | N | 9.250 | 4.590 | 8HR | 6.3 | 0.30 |
| 11MP4 | △ | 110 | G | □ | E | FA | 400/600 | L.V.E.S. | N | 8.938 | 4.250 | 8HR | 6.3 | 0.30 |
| 11QP4 | △ | 90 | G | □ | — | FA | 400/800 | L.V.E.S. | N | 9.610 | 3.710 | 7GR | 12.6 | 0.075 |
| 11RP4 | △ | 104 | G | □ | X | FA | 400/750 | L.V.E.S. | N | 9.000 | 3.875 | 7GR | 6.3 | 0.45 |
| 11TP4 | △ | 110 | G | □ | X | FA | 400/600 | L.V.E.S. | N | 8.937 | 4.277 | 8HR | 6.3 | 0.30 |
| 11UP4 | △ | 104 | G | □ | X | FA | 400/750 | L.V.E.S. | N | 9.000 | 3.875 | 7GR | 6.3 | 0.45 |
| 12AYP4 | △ | 110 | G | □ | — | FA | 400/900 | L.V.E.S. | N | 9.312 | 4.125 | 8HR | 6.3 | 0.45 |
| 12AZP4 | △ | 110 | G | □ | — | FA | 400/900 | L.V.E.S. | N | 9.312 | 4.125 | 8HR | 6.3 | 0.60 |

| ANODE KV. DESIGN-MAX. VALUES | TYPICAL OPERATING CONDITIONS | | | | | TUBE TYPE |
|------------------------------------|------------------------------|-----------|-----------------|----------------------------------|---------------------------|--------------|
| | DRIVE | ANODE KV. | GRID 2 VOLTS | FOCUS ELEC- TRODE VOLTS | RASTER CUTOFF VOLTS | |
| 11.0 | Grid | 9 | 300 | -50/350 | -15/-25 | 2EP4 |
| 19.8 | Grid | 14 | 300 | — | -28/-72 | 5AXP4 |
| 8.8 | Grid | 6 | 250 | 1215/1465 | -22/-58 | 7DP4 |
| 13.2 | Grid | 9 | 250 | — | -22/-58 | 7RP4 |
| 9.9 | Grid | 9 | — | — | -22/-58 | 8AP4 |
| 9.9 | Grid | 9 | — | — | -22/-58 | 8AP4A |
| 8.8 | Grid | 6 | 150 | 15/315 | -13/-35 | 8DP4 |
| 22.0 | Grid | 16 | 300 | — | -35/-72 | 8JP4 |
| 20.0 | Grid | 16 | 300 | 0/400 | -35/-72 | 8LP4 |
| 18.0 | Grid | 15 | 300 | 0/450 | -28/-72 | 8MP4 |
| 22.0 | Grid | 16 | 300 | — | -28/-72 | 8XP4 |
| 22.0 | Grid | 16 | 300 | — | -28/-72 | 8YP4 |
| 12.0 | Cath. | 10 | 100 | 0/300 | 30/60 | 9ACP4 |
| 12.0 | Cath. | 10 | 100 | 0/300 | 26/56 | 9AGP4 |
| 7.5 | Cath. | 5.5 | 200 | 0/400 | 28/52 | 9QP4 |
| 7.5 | Cath. | 5.5 | 200 | 0/400 | 28/52 | 9QP4A |
| 18.0 | Cath. | 14 | 300 | 0/400 | 33/77 | 9SP4 |
| 15.0 | Cath. | 12 | 50 | 0/300 | 37/53 | 9TP4 |
| 12.0 | Cath. | 9 | 100 | 0/300 | 35/55 | 9UP4 |
| 12.0 | Grid | 9 | 100 | 0/300 | -38/-84 | 9VP4 |
| 12.0 | Cath. | 9 | 100 | 0/300 | 32/50 | 9WP4 |
| 12.0 | Grid | 9 | 100 | 0/300 | -38/-84 | 9YP4 |
| 13.2 | Grid | 7.5 | 300 | 0/500 | -38/-62 | 10ABP4 |
| 13.2 | Grid | 7.5 | 300 | 0/500 | -38/-62 | 10ABP4A |
| 13.2 | Grid | 7.5 | 300 | 0/500 | -38/-62 | 10ABP4B |
| 13.2 | Grid | 7.5 | 300 | 0/500 | -38/-62 | 10ABP4C |
| 13.2 | Grid | 7.5 | 300 | 0/500 | -33/-72 | 10ADP4 |
| 13.2 | Grid | 7.5 | 300 | 0/500 | -38/-62 | 10AEP4 |
| 13.0 | Cath. | 9 | 140 | -250/+150 | 31/49 | 10ARP4 |
| 12.0 | Cath. | 9 | 100 | 0/300 | 33/52 | 10ASP4 |
| 11.0 | Grid | 9 | 250 | — | -22/-58 | 10BP4 |
| 13.2 | Grid | 9 | 250 | — | -22/-58 | 10BP4A |
| 11.0 | Grid | 9 | 250 | — | -22/-58 | 10BP4C |
| 11.0 | Grid | 9 | 250 | — | -22/-58 | 10BP4D |
| 11.0 | Grid | 9 | 250 | 2550/3250 | -36/-84 | 10DP4 |
| 11.0 | Grid | 9 | 250 | — | -22/-58 | 10FP4 |
| 13.2 | Grid | 11 | 250 | — | -22/-58 | 10FP4A |
| 13.2 | Grid | 11 | 250 | — | -22/-58 | SG-10FP4A |
| 11.0 | Grid | 9 | — | — | -22/-58 | 10MP4 |
| 11.0 | Grid | 9 | — | — | -22/-58 | 10MP4A |
| 17.6 | Grid | 14 | 300 | -55/300 | -28/-72 | 10RP4 |
| 15.0 | Cath. | 11 | 150 | 0/400 | 31/49 | 11AP4 |
| 15.0 | Cath. | 11 | 150 | 0/400 | 31/49 | 11BP4 |
| 15.0 | Grid | 12 | 400 | 0/400 | -39/-94 | 11CP4 |
| 15.0 | Cath. | 11 | 50 | -100/300 | 31/49 | 11DP4 |
| 14.0 | Grid | 10 | 400 | 0/400 | -36/-94 | 11EP4 |
| 14.0 | Grid | 10 | 400 | 0/400 | -36/-94 | 11FP4 |
| 15.0 | Cath. | 11 | 135 | -200/200 | 27/43 | 11GP4 |
| 15.0 | Cath. | 11 | 150 | — | 31/49 | 11HP4 |
| 15.0 | Cath. | 11 | 150 | — | 31/49 | 11HP4A |
| 15.0 | Cath. | 11 | 50 | -200/200 | 24/75 | 11JP4 |
| 15.0 | Cath. | 11 | 150 | -100/300 | 31/49 | 11KP4 |
| 15.0 | Grid | 10 | 400 | 0/400 | -36/-94 | 11LP4 |
| 15.0 | Cath. | 11 | 135 | -200/200 | 27/43 | 11MP4 |
| 14.0 | Cath. | 10 | 100 | 0/300 | 32/50 | 11QP4 |
| 15.0 | Cath. | 11 | 140 | — | 31/49 | 11RP4 |
| 15.0 | Cath. | 10 | 400 | 0/400 | 36/78 | 11TP4 |
| 15.0 | Cath. | 11 | 140 | — | 31/49 | 11UP4 |
| 14.0 | Grid | 10 | 400 | 0/400 | -36/-94 | 12AYP4 |
| 14.0 | Grid | 10 | 400 | 0/400 | -36/-94 | 12AZP4 |

EXPLANATION OF SYMBOLS

- M—Metal cone tube
G—Glass tube
LWG—Light weight glass tube
G°—Glass tube, dimensions different from normal
MET—Metal tube
O—Round tube
□—Rectangular tube, spherical face
⊙—Rectangular tube, cylindrical face
B—Fiberglass wrap implosion protection
E—Filled rim type implosion protection
T—Molded glass implosion panel attached to face
P—Sagged glass implosion plate attached to face
L—Plastic implosion barrier attached to face
K—Banded tube with coated funnel for implosion protection
H—Tube sealed into steel sheath for implosion protection
C—Clear glass faceplate
F—Gray filter glass faceplate
R—Anti-reflection faceplate
A—Aluminized screen
V—Rim bands and tension band
W—Rim bands and tension band with mounting lugs
X—Formed with tension band
Y—Formed rim with tension band and mounting lugs
Mag.—Magnetic focus
L.V.E.S.—Low voltage electrostatic focus
H.V.E.S.—High Voltage electrostatic focus
Auto.E.s.—Self-focusing electrostatic
Int.Mag.—Internal magnetic focus
TPF—Tri-potential focus
N—No ion trap
S—Single field ion trap
D—Double field ion trap
I—Internal ion trap
*—18 second heater warm-up time (all others are 11 second)
Grid—Grid drive service (all voltages with respect to cathode)
Cath.—Cathode drive service (all voltages with respect to Grid No. 1)

NOTES

◆ Design-Maximum Values Unless Otherwise Indicated

⊠ Absolute-Maximum Values

□ For X-Radiation Measurements, Characteristics, Limitations, and Warning see JEDEC Publication 64A, the latest EIA Published Product Information for this type, the specified applicable JEDEC X-Radiation Isodose and Limit Curves, and X-Radiation Warning, page

△ The EIA Published Product Information as of March 1, 1972, does not contain an X-Radiation rating or reference to JEDEC X-Radiation Isodose and Limit Curves for this tube type. This does not necessarily mean the type is not capable of meeting an acceptable X-Radiation limit. Refer to the latest Published Product Information for X-Radiation Ratings and glass absorption characteristics.

☆ This type summary is based on EIA registered data, registered envelope data, and manufacturer's published data. Data presented herein have been carefully prepared from such publicly available data to assure technical correctness; however, no responsibility is assumed by the General Electric Company for possible inaccuracies.

Monochrome Picture Tubes—Condensed Data

| TUBE TYPE | X-RADIATION RATING | DEFL. ANGLE DEGREES | GLASS or METAL | FACEPLATE | | | EXTERNAL COATING IN pf | FOCUS | ION TRAP MAG. | Overall Length (Inches) | NECK LENGTH (Inches) | BASING | HEATER | |
|-----------|--------------------|---------------------|----------------|-----------|----------------------|-----------|------------------------|-----------|---------------|-------------------------|----------------------|--------|--------|-------|
| | | | | SHAPE | IMPLOSION PROTECTION | TREATMENT | | | | | | | V. | A. |
| | | | | | | | | | | | | | | |
| 12BP4 | △ | 110 | G | □ | — | FA | 400/900 | L.V.E.S. | N | 9.312 | 4.125 | 8HR | 6.3 | 0.30 |
| 12BEP4 | △ | 110 | G | □ | E | FA | 500/900 | L.V.E.S. | N | 9.312 | 4.375 | 7FA | 6.3 | 0.45 |
| 12BFP4 | △ | 110 | G | □ | — | FA | 400/1200 | L.V.E.S. | N | 9.330 | 3.270 | 7GR | 4.2 | 0.45 |
| 12BGP4 | △ | 110 | G | □ | E | FA | 550/850 | L.V.E.S. | N | 9.312 | 4.375 | 8HR | 6.3 | 0.45 |
| 12BJP4 | △ | 110 | G | □ | — | FA | 400/900 | L.V.E.S. | N | 9.300 | 4.130 | 8HR | 4.2 | 0.45 |
| 12BKP4 | △ | 110 | G | □ | X | FA | 500/1000 | L.V.E.S. | N | 9.348 | 4.375 | 8HR | 6.3 | 0.45 |
| 12BLP4 | △ | 110 | G | □ | X | FA | 800/1000 | L.V.E.S. | N | 9.348 | 4.375 | 8HR | 6.3 | 0.45 |
| 12BMP4 | △ | 104 | G | □ | X | FA | 500/750 | L.V.E.S. | N | 9.531 | 3.875 | 7GR | 6.3 | 0.45 |
| 12BNP4 | △ | 110 | G | □ | X | FA | 500/750 | L.V.E.S. | N | 9.348 | 4.375 | 8HR | 6.3 | 0.45 |
| 12BNP4A | △ | 110 | G | □ | X | FA | 500/750 | L.V.E.S. | N | 9.348 | 4.375 | 8HR | 6.3 | 0.45 |
| 12BQP4 | △ | 110 | G | □ | X | FA | 600/900 | L.V.E.S. | N | 9.348 | 4.375 | 8HR | 6.3 | 0.45 |
| 12BSP4 | △ | 110 | G | □ | — | FA | 400/900 | L.V.E.S. | N | 9.300 | 4.130 | 8HR | 6.3 | 0.30 |
| 12BTP4 | △ | 110 | G | □ | E | FA | 550/850 | L.V.E.S. | N | 9.344 | 4.375 | 8HR | 12.6 | 0.150 |
| 12BUP4 | △ | 110 | G | □ | V | FA | 450/900 | L.V.E.S. | N | 9.290 | 4.120 | 8HR | 6.3 | 0.45 |
| 12BUP4A | △ | 110 | G | □ | X | FA | 450/900 | L.V.E.S. | N | 9.290 | 4.130 | 8HR | 6.3 | 0.45 |
| 12BUP4B | △ | 110 | G | □ | X | FA | 450/900 | L.V.E.S. | N | 9.290 | 4.130 | 8HR | 6.3 | 0.45 |
| 12BUP4C | △ | 110 | G | □ | X | FA | 450/900 | L.V.E.S. | N | 9.290 | 4.130 | 8HR | 6.3 | 0.45 |
| 12BVP4 | △ | 110 | G | □ | X | FA | 450/900 | L.V.E.S. | N | 9.350 | 3.900 | 7GR | 12.6 | 0.075 |
| 12BZP4 | △ | 104 | G | □ | X | FA | 500/750 | L.V.E.S. | N | 9.531 | 3.875 | 7GR | 12.0 | 0.157 |
| 12CBP4 | △ | 110 | G | □ | X | FA | 500/900 | L.V.E.S. | N | 9.312 | 4.375 | 7FA | 6.3 | 0.45 |
| 12CDP4 | △ | 104 | G | □ | X | FA | 500/750 | L.V.E.S. | N | 9.500 | 3.875 | 7GR | 6.3 | 0.45 |
| 12CEP4 | △ | 110 | G | □ | E | FA | 600/900 | L.V.E.S. | N | 9.021 | 3.867 | 7GR | 12.6 | 0.15 |
| 12CFP4 | △ | 110 | G | □ | X | FA | 450/900 | L.V.E.S. | N | 9.330 | 3.900 | 7GR | 4.2 | 0.45 |
| 12CHP4 | △ | 110 | G | □ | X | FA | 450/900 | L.V.E.S. | N | 9.330 | 3.900 | 7GR | 6.3 | 0.45 |
| 12CNP4 | △ | 110 | G | □ | X | FA | 600/1200 | L.V.E.S. | N | 9.530 | 4.090 | 7GR | 4.2 | 0.45 |
| 12CNP4A | △ | 110 | G | □ | X | FA | 600/1200 | L.V.E.S. | N | 9.530 | 4.090 | 7GR | 4.2 | 0.45 |
| 12CQP4 | △ | 110 | G | □ | E | FA | 400/900 | L.V.E.S. | N | 9.312 | 4.125 | 8HR | 6.3 | 0.45 |
| 12CSP4 | △ | 90 | G | □ | E | FA | 600/900 | L.V.E.S. | N | 10.814 | 3.750 | 7GR | 12.6 | 0.15 |
| 12CTP4 | △ | 110 | G | □ | X | FA | 700/1000 | L.V.E.S. | N | 9.021 | 3.887 | 7GR | 6.3 | 0.45 |
| 12CVP4 | △ | 100 | G | □ | X | FA | 500/750 | L.V.E.S. | N | 10.035 | 3.875 | 7GR | 12.0 | 0.157 |
| 12CWP4 | □ | 100 | G | □ | X | FA | 500/750 | L.V.E.S. | N | 10.031 | 3.875 | 7GR | 6.3 | 0.45 |
| 12CZP4 | △ | 110 | G | □ | X | FA | 400/1200 | L.V.E.S. | N | 9.330 | 3.900 | 7GR | 12.6 | 0.075 |
| 12DEP4 | △ | 110 | G | □ | X | FA | 600/900 | L.V.E.S. | N | 9.190 | 4.190 | 7GR | 6.3 | 0.45 |
| 12DFP4 | △ | 110 | G | □ | X | FA | 800/1100 | L.V.E.S. | N | 8.810 | 3.810 | 7GR | 6.3 | 0.45 |
| 12GDP4 | △ | 110 | G | □ | X | FA | 600/1000 | L.V.E.S. | N | 9.187 | 4.187 | 7GR | 6.3 | 0.45 |
| 12DHP4 | △ | 110 | G | □ | X | FA | 600/1200 | L.V.E.S. | N | 9.528 | 4.370 | 8HR | 6.3 | 0.45 |
| 12DKP4 | △ | 110 | G | □ | X | FA | 600/1000 | L.V.E.S. | N | 9.187 | 4.187 | 7GR | 6.3 | 0.45 |
| 12DMP4 | △ | 110 | G | □ | X | FA | None | L.V.E.S. | N | 9.350 | 4.380 | 8HR | 6.3 | 0.60 |
| 12DP4 | △ | 110 | G | □ | X | FA | 800/1000 | L.V.E.S. | N | 9.280 | 4.310 | 8HR | 6.3 | 0.45 |
| 12KP4 | △ | 54 | G | ○ | — | CA | 500/2500 | Mag. | N | 17.625 | 7.125 | 12N | 6.3 | 0.60 |
| 12KP4A | △ | 54 | G | ○ | — | FA | 500/2500 | Mag. | N | 17.625 | 7.125 | 12N | 6.3 | 0.60 |
| SG-12KP4A | △ | 54 | G | ○ | — | FA | 500/2500 | Mag. | N | 17.625 | 7.125 | 12N | 6.3 | 0.60 |
| 12LP4 | △ | 54 | G | ○ | — | C | 750/3000 | Mag. | D | 18.750 | 8.250 | 12N | 6.3 | 0.60 |
| 12LP4A | △ | 54 | G | ○ | — | F | 750/3000 | Mag. | D | 18.750 | 8.250 | 12N | 6.3 | 0.60 |
| 12LP4C | △ | 54 | G | ○ | — | FA | 750/3000 | Mag. | D | 18.750 | 8.250 | 12N | 6.3 | 0.60 |
| 12TP4 | △ | 54 | G | ○ | — | C | None | Mag. | D | 18.750 | 8.250 | 12D | 6.3 | 0.60 |
| 12UP4 | △ | 54 | M | ○ | — | C | None | Mag. | S | 18.750 | 8.000 | 12D | 6.3 | 0.60 |
| 12UP4A | △ | 54 | M | ○ | — | F | None | Mag. | S | 18.750 | 8.000 | 12D | 6.3 | 0.60 |
| 12UP4B | △ | 54 | M | ○ | — | FR | None | Mag. | S | 18.750 | 8.000 | 12D | 6.3 | 0.60 |
| 12VABP4 | △ | 110 | G | □ | X | FA | 800/1000 | L.V.E.S. | N | 9.350 | 4.380 | 8HR | 6.3 | 0.45 |
| 12VP4 | △ | 54 | G | ○ | — | C | 750/3000 | Mag. | D | 18.000 | 7.500 | 12G | 6.3 | 0.60 |
| 12VP4A | △ | 54 | G | ○ | — | F | 750/3000 | Mag. | D | 18.000 | 7.500 | 12G | 6.3 | 0.60 |
| 12YP4 | △ | 54 | G | ○ | — | C | 750/3000 | Auto. Es. | S | 18.750 | 8.250 | 12P | 6.3 | 0.60 |
| 12ZP4 | △ | 54 | G | ○ | — | CA | 500/2500 | Mag. | S | 17.625 | 7.125 | 12N | 6.3 | 0.60 |
| 12ZP4A | △ | 54 | G | ○ | — | FA | 500/2500 | Mag. | S | 17.625 | 7.125 | 12N | 6.3 | 0.60 |
| 13AP4 | △ | 110 | G | □ | E | FA | 550/800 | L.V.E.S. | N | 9.266 | 4.250 | 8HR | 6.3 | 0.45 |
| 13DP4 | △ | 110 | G | □ | E | FA | 500/1000 | L.V.E.S. | N | 9.688 | 4.375 | 8HR | 6.3 | 0.45 |
| 14ACP4 | △ | 90 | G | □ | — | FA | 800/1200 | L.V.E.S. | S | 14.188 | 6.500 | 12L | 6.3 | 0.60 |
| 14EP4 | △ | 90 | G | □ | — | FA | 800/1200 | L.V.E.S. | N | 13.188 | 5.500 | 12L | 6.3 | 0.60 |
| 14AJP4 | △ | 110 | G | □ | — | FA | 500/850 | L.V.E.S. | S | 11.438 | 5.500 | 8HR | 6.3 | 0.60 |

| ANODE KV. DESIGN-MAX. VALUES | TYPICAL OPERATING CONDITIONS | | | | | TUBE TYPE |
|------------------------------------|------------------------------|-----------|-----------------|----------------------------------|---------------------------|--------------|
| | DRIVE | ANODE KV. | GRID 2 VOLTS | FOCUS ELEC- TRODE VOLTS | RASTER CUTOFF VOLTS | |
| 14.0 | Grid | 10 | 400 | 0/400 | -36/-94 | 12BAP4 |
| 16.0 | Cath. | 12 | 30 | 0/500 | 25/40 | 12BEP4 |
| 14.0 | Cath. | 10 | 300 | 0/400 | 40/77 | 12BFP4 |
| 15.0 | Cath. | 12 | 50 | 0/400 | 35/55 | 12BGP4 |
| 13.0 | Cath. | 10 | 450 | 0/400 | 38/73 | 12BJP4 |
| 15.0 | Cath. | 12 | 50 | 0/400 | 35/55 | 12BKP4 |
| 16.0 | Cath. | 12 | 30 | 0/400 | 30/45 | 12BLP4 |
| 15.0 | Cath. | 12 | 140 | — | 31/49 | 12BMP4 |
| 16.0 | Cath. | 12 | 250 | 0/400 | 35/65 | 12BNP4 |
| 16.0 | Cath. | 12 | 250 | 0/400 | 35/65 | 12BNP4A |
| 16.0 | Cath. | 12 | 50 | 0/400 | 30/50 | 12BQP4 |
| 14.0 | Grid | 10 | 500 | 0/400 | -50/-93 | 12BSP4 |
| 15.0 | Cath. | 12 | 50 | — | 35/55 | 12BTP4 |
| 14.0 | Cath. | 12 | 50 | 0/400 | 37/49 | 12BUP4 |
| 14.0 | Cath. | 12 | 50 | 0/400 | 32/52 | 12BUP4A |
| 14.0 | Cath. | 12 | 50 | 0/400 | 35/55 | 12BUP4B |
| 14.0 | Cath. | 12 | 50 | 0/400 | 35/55 | 12BUP4C |
| 14.0 | Cath. | 12 | 50 | 0/400 | 37/49 | 12BVP4 |
| 15.0 | Cath. | 11 | 100 | — | 31/49 | 12BZP4 |
| 16.0 | Cath. | 12 | 50 | 0/500 | 30/50 | 12CBP4 |
| 15.0 | Cath. | 11 | 140 | — | 31/49 | 12CDP4 |
| 15.0 | Cath. | 12 | 100 | -200/200 | 30/50 | 12CEP4 |
| 14.0 | Cath. | 10 | 200 | 0/300 | 27/57 | 12CFP4 |
| 14.0 | Grid | 10 | 300 | 0/400 | -30/-72 | 12CHP4 |
| 14.0 | Cath. | 10 | 200 | 0/400 | 25/55 | 12CNP4 |
| 14.0 | Cath. | 10 | 200 | 0/400 | 25/55 | 12CNP4A |
| 15.4 | Cath. | 12 | 40 | 0/400 | 30/50 | 12CQP4 |
| 15.0 | Cath. | 12 | 100 | -200/200 | 30/50 | 12CSP4 |
| 15.0 | Cath. | 12 | 100 | -200/200 | 30/50 | 12CTP4 |
| 15.0 | Cath. | 11 | 100 | — | 31/49 | 12CVP4 |
| 15.0 | Cath. | 11 | 140 | — | 31/49 | 12CWP4 |
| 14.0 | Cath. | 12 | 100 | 0/400 | 33/52 | 12CZP4 |
| 15.0 | Cath. | 12 | 100 | -200/+200 | 30/50 | 12DEP4 |
| 15.0 | Cath. | 12 | 200 | -200/+200 | 30/55 | 12DFP4 |
| 16.0 | Cath. | 12 | 50 | 0/400 | 30/50 | 12DGP4 |
| 16.0 | Cath. | 12 | 50 | 0/400 | 30/50 | 12DHP4 |
| 16.0 | Cath. | 12 | 140 | 0/400 | 30/50 | 12DKP4 |
| 22.0 | Grid | 12 | 300 | -200/+200 | -35/-72 | 12DMP4 |
| 15.0 | Cath. | 12 | 50 | -200/+200 | 35/55 | 12DQP4 |
| 13.2 | Grid | 11 | 250 | — | -22/-58 | 12KP4 |
| 13.2 | Grid | 12 | 300 | — | -28/-72 | 12KP4A |
| 13.2 | Grid | 12 | 300 | — | -28/-72 | SG-12KP4A |
| 13.2 | Grid | 11 | 250 | — | -22/-58 | 12LP4 |
| 13.2 | Grid | 11 | 250 | — | -22/-58 | 12LP4A |
| 13.2 | Grid | 11 | 250 | — | -22/-58 | 12LP4C |
| 13.2 | Grid | 11 | 250 | — | -22/-58 | 12TP4 |
| 13.2 | Grid | 12 | 300 | — | -28/-72 | 12UP4 |
| 13.2 | Grid | 12 | 300 | — | -28/-72 | 12UP4A |
| 13.2 | Grid | 12 | 300 | — | -28/-72 | 12UP4B |
| 15.0 | Cath. | 12 | 50 | -200/+200 | 35/55 | 12VABP4 |
| 13.2 | Grid | 11 | — | — | -28/-72 | 12VP4 |
| 13.2 | Grid | 11 | — | — | -28/-72 | 12VP4A |
| 13.2 | Grid | 11 | 250 | — | -28/-72 | 12YP4 |
| 13.2 | Grid | 11 | 250 | — | -22/-58 | 12ZP4 |
| 13.2 | Grid | 11 | 250 | — | -22/-58 | 12ZP4A |
| 15.0 | Cath. | 12 | 50 | 0/400 | 35/55 | 13AP4 |
| 16.0 | Cath. | 12 | 50 | 0/250 | 30/50 | 13DP4 |
| 15.4 | Cath. | 10 | 125 | -50/350 | 40/80 | 14ACP4 |
| 15.4 | Cath. | 10 | 110 | -50/350 | 32/50 | 14AEP4 |
| 12.1 | Grid | 9 | 250 | -100/400 | -24/-64 | 14AJP4 |

EXPLANATION OF SYMBOLS

- M—Metal cone tube
G—Glass tube
LWG—Light weight glass tube
G°—Glass tube, dimensions different from normal
MET—Metal tube
O—Round tube
□—Rectangular tube, spherical face
⊙—Rectangular tube, cylindrical face
B—Fiberglass wrap implosion protection
E—Filled rim type implosion protection
T—Molded glass implosion panel attached to face
P—Sagged glass implosion plate attached to face
L—Plastic implosion barrier attached to face
K—Banded tube with coated funnel for implosion protection
H—Tube sealed into steel sheath for implosion protection
C—Clear glass faceplate
F—Gray filter glass faceplate
R—Anti-reflection faceplate
A—Aluminized screen
V—Rim bands and tension band
W—Rim bands and tension band with mounting lugs
X—Formed with tension band
Y—Formed rim with tension band and mounting lugs
Mag.—Magnetic focus
L.V.E.S.—Low voltage electrostatic focus
H.V.E.S.—High Voltage electrostatic focus
Auto.Es.—Self-focusing electrostatic
Int.Mag.—Internal magnetic focus

- TPF—Tri-potential focus
N—No ion trap
S—Single field ion trap
D—Double field ion trap
I—Internal ion trap
*—18 second heater warm-up time (all others are 11 second)
Grid—Grid drive service (all voltages with respect to cathode)
Cath.—Cathode drive service (all voltages with respect to Grid No. 1)

NOTES

- ◆ Design-Maximum Values Unless Otherwise Indicated
⊠ Absolute-Maximum Values
☐ For X-Radiation Measurements, Characteristics, Limitations, and Warning see JEDEC Publication 64A, the latest EIA Published Product Information for this type, the specified applicable JEDEC X-Radiation Isodose and Limit Curves, and X-Radiation Warning, page
△ The EIA Published Product Information as of March 1, 1972, does not contain an X-Radiation Rating or reference to JEDEC X-Radiation Isodose and Limit Curves for this tube type. This does not necessarily mean the type is not capable of meeting an acceptable X-Radiation limit. Refer to the latest Published Product Information for X-Radiation Ratings and glass absorption characteristics.
☆ This type summary is based on EIA registered data, registered envelope data, and manufacturer's published data. Data presented herein have been carefully prepared from such publicly available data to assure technical correctness, however, no responsibility is assumed by the General Electric Company for possible inaccuracies.

Monochrome Picture Tubes—Condensed Data

| TUBE TYPE | X-RADIATION RATING | DEFL. ANGLE DEGREES | GLASS or METAL | FACEPLATE | | | EXTERNAL COATING IN μ | FOCUS | ION TRAP MAG. | Overall Length (Inches) | NECK LENGTH (Inches) | BASING | HEATER | |
|-----------|--------------------|---------------------|----------------|-----------|----------------------|-----------|---------------------------|----------|---------------|-------------------------|----------------------|--------|--------|-------|
| | | | | SHAPE | IMPULSION PROTECTION | TREATMENT | | | | | | | V. | A. |
| | | | | | | | | | | | | | | |
| SG-14AJP4 | Δ | 110 | G | \square | — | FA | 800/850 | L.V.E.S. | N | 11.438 | 5.500 | 8HR | 6.3 | 0.60 |
| 14ARP4 | \square | 90 | G | \square | — | FA | 800/1200 | L.V.E.S. | N | 13.188 | 5.500 | 12L | 6.3 | 0.60 |
| 14ASP4 | Δ | 110 | G | \square | — | FA | 500/850 | L.V.E.S. | N | 11.375 | 5.438 | 8HR | 6.3 | 0.60 |
| 14ATP4 | Δ | 90 | G | \square | — | FA | 500/1000 | L.V.E.S. | N | 13.188 | 5.500 | 12L | 8.4 | 0.45 |
| 14AUP4 | Δ | 90 | G | \square | — | FA | 1000/1500 | L.V.E.S. | N | 13.188 | 5.500 | 12L | 6.3 | 0.45 |
| 14AVP4 | Δ | 110 | G | \square | — | FA | 450/700 | L.V.E.S. | N | 11.375 | 5.438 | 8HR | 6.3 | 0.60 |
| 14AWP4 | Δ | 90 | G | \square | — | FA | 800/1200 | L.V.E.S. | N | 13.188 | 5.500 | 12L | 6.3 | 0.45 |
| 14BDP4 | Δ | 70 | G | \square | P | FA | 600/1000 | L.V.E.S. | N | 17.375 | 7.500 | 12L | 6.3 | 0.60 |
| 14BP4 | Δ | 70 | G | \square | — | F | 500/2000 | Mag. | S | 16.812 | 7.531 | 12N | 6.3 | 0.60 |
| 14BP4A | Δ | 70 | G | \square | — | FR | 500/2000 | Mag. | S | 16.812 | 7.531 | 12N | 6.3 | 0.60 |
| 14CP4 | Δ | 70 | G | \square | — | F | 750/2000 | Mag. | S | 16.750 | 7.469 | 12N | 6.3 | 0.60 |
| 14CP4A | Δ | 70 | G | \square | — | F | 750/2000 | Mag. | S | 16.750 | 7.469 | 12N | 6.3 | 0.60 |
| SG-14CP4A | Δ | 70 | G | \square | — | FA | 750/2000 | Mag. | N | 16.750 | 7.500 | 12N | 6.3 | 0.60 |
| 14CP4B | Δ | 70 | G | \square | — | FA | 750/2000 | Mag. | N | 16.500 | 7.188 | 12N | 6.3 | 0.60 |
| 14DP4 | Δ | 70 | G | \square | — | F | None | Mag. | D | 16.750 | 7.469 | 12D | 6.3 | 0.60 |
| 14EP4 | Δ | 70 | G | \square | — | F | 500/2000 | Mag. | S | 16.500 | 7.187 | 12N | 6.3 | 0.60 |
| 14GP4 | Δ | 70 | G | \square | — | F | 750/2000 | H.V.E.S. | S | 16.812 | 7.500 | 12L | 6.3 | 0.60 |
| 14HP4 | Δ | 70 | G | \square | — | F | 750/2000 | L.V.E.S. | S | 16.781 | 7.500 | 12L | 6.3 | 0.60 |
| 14NP4 | Δ | 90 | G | \square | — | F | 800/1200 | L.V.E.S. | S | 14.188 | 6.500 | 12L | 6.3 | 0.60 |
| 14NP4A | Δ | 90 | G | \square | — | FA | 800/1200 | L.V.E.S. | S | 14.188 | 6.500 | 12L | 6.3 | 0.60 |
| 14QP4 | Δ | 70 | G | \square | — | F | 600/1000 | L.V.E.S. | S | 16.156 | 6.875 | 12L | 6.3 | 0.60 |
| 14QP4A | Δ | 70 | G | \square | — | F | 600/1000 | L.V.E.S. | S | 16.156 | 6.875 | 12L | 6.3 | 0.60 |
| SG-14QP4A | Δ | 70 | G | \square | — | FA | 600/1000 | L.V.E.S. | N | 16.156 | 6.875 | 12L | 6.3 | 0.60 |
| 14QP4B | Δ | 70 | G | \square | — | FA | 600/1000 | L.V.E.S. | N | 16.156 | 6.875 | 12L | 6.3 | 0.60 |
| 14RP4 | Δ | 90 | G | \square | — | F | 800/1000 | L.V.E.S. | S | 14.562 | 6.875 | 12L | 6.3 | 0.60 |
| 14RP4A | Δ | 90 | G | \square | — | FA | 800/1000 | L.V.E.S. | S | 14.562 | 6.875 | 12L | 6.3 | 0.60 |
| 14SP4 | Δ | 90 | G | \square | — | FA | 900/1200 | L.V.E.S. | S | 14.188 | 6.500 | 12L | 6.3 | 0.60 |
| 14UP4 | Δ | 70 | G | \square | — | FA | None | Mag. | S | 16.781 | 7.500 | 12D | 6.3 | 0.60 |
| 14WP4 | Δ | 90 | G | \square | — | FA | 800/1200 | L.V.E.S. | N | 13.188 | 5.500 | 12L | 6.3 | 0.60 |
| SG-14WP4 | Δ | 90 | G | \square | — | FA | 800/1200 | L.V.E.S. | N | 13.188 | 5.500 | 12L | 6.3 | 0.60 |
| 14XP4 | Δ | 90 | G | \square | — | F | 1100/1500 | L.V.E.S. | S | 14.188 | 6.500 | 12L | 6.3 | 0.45 |
| 14XP4A | Δ | 90 | G | \square | — | FA | 1100/1500 | L.V.E.S. | S | 14.188 | 6.500 | 12L | 6.3 | 0.45 |
| 14ZP4 | Δ | 90 | G | \square | — | FA | 800/1200 | L.V.E.S. | N | 13.188 | 5.500 | 12L | 6.3 | 0.60 |
| 15ADP4 | Δ | 110 | G | \square | X | FA | 700/1100 | L.V.E.S. | N | 10.750 | 4.370 | 8HR | 6.3 | 0.45 |
| 15JP4 | Δ | 110 | G | \square | E | FA | 600/1000 | L.V.E.S. | N | 11.000 | 4.375 | 8HR | 6.3 | 0.45 |
| 15BP4 | Δ | 70 | G | \square | — | F | 750/1500 | Auto.Es. | S | 18.750 | 7.500 | 12P | 6.3 | 0.60 |
| 16ACP4 | Δ | 60 | G | \square | — | C | 750/2000 | Auto.Es. | S | 20.875 | 8.000 | 12P | 6.3 | 0.60 |
| 16AEP4 | Δ | 70 | G | \square | — | F | 750/1500 | L.V.E.S. | S | 18.750 | 7.500 | 12L | 6.3 | 0.60 |
| 16ANP4 | Δ | 114 | G | \square | P | FA | 800/1200 | L.V.E.S. | N | 10.438 | 4.125 | 8HR | 6.3 | 0.60 |
| 16AP4 | Δ | 53 | M | \square | — | C | None | Mag. | D | 22.250 | 7.562 | 12D | 6.3 | 0.60 |
| 16AP4A | Δ | 53 | M | \square | — | F | None | Mag. | D | 22.250 | 7.562 | 12D | 6.3 | 0.60 |
| 16AQP4 | Δ | 114 | G | \square | P | FAR | 800/1200 | L.V.E.S. | N | 10.438 | 4.125 | 8HR | 6.3 | 0.60 |
| 16ASP4 | Δ | 114 | G | \square | — | FA | 1000/1500 | L.V.E.S. | N | 10.406 | 4.125 | 8HR | 6.3 | 0.45 |
| 16ATP4 | Δ | 114 | G | \square | L | FA | 1000/1500 | L.V.E.S. | N | 10.125 | 4.000 | 8HR | 6.3 | 0.45 |
| 16AUP4 | Δ | 114 | G | \square | — | FA | 800/1500 | L.V.E.S. | N | 10.062 | 4.000 | 8HR | 6.3 | 0.60 |
| 16AVP4 | Δ | 114 | G | \square | P | FA | 900/1400 | L.V.E.S. | N | 10.688 | 4.375 | 7FA | 6.3 | 0.45 |
| 16AWP4 | Δ | 114 | G | \square | L | FA | 1000/1500 | L.V.E.S. | N | 10.125 | 4.000 | 8HR | 6.3 | 0.30* |
| 16AXP4 | Δ | 114 | G | \square | P | FA | 1000/1500 | L.V.E.S. | N | 10.125 | 3.813 | 8HR | 6.3 | 0.45 |
| 16AYP4 | Δ | 114 | G | \square | — | FA | 800/1300 | L.V.E.S. | N | 10.250 | 4.125 | 8HR | 6.3 | 0.45 |
| 16AZP4 | Δ | 114 | G | \square | L | FA | 1000/1500 | L.V.E.S. | N | 10.375 | 4.250 | 8HR | 6.3 | 0.45 |
| 16BAP4 | Δ | 114 | G | \square | P | FA | 1000/1500 | L.V.E.S. | N | 10.688 | 4.375 | 8HR | 6.3 | 0.60 |
| 16BDP4 | Δ | 114 | G | \square | — | FA | 800/1300 | L.V.E.S. | N | 10.250 | 4.125 | 8HR | 6.3 | 0.60 |
| 16BEP4 | Δ | 114 | G | \square | P | FA | 800/1200 | L.V.E.S. | N | 10.688 | 4.375 | 8HR | 6.3 | 0.30 |
| 16BFP4 | Δ | 114 | G | \square | — | FA | 800/1500 | L.V.E.S. | N | 10.062 | 4.000 | 8HR | 6.3 | 0.45 |
| 16BGP4 | Δ | 114 | G | \square | V | FA | 800/1300 | L.V.E.S. | N | 10.569 | 4.375 | 8HR | 6.3 | 0.45 |
| 16BMP4 | Δ | 114 | G | \square | — | FA | 800/1500 | L.V.E.S. | N | 10.062 | 4.000 | 8HR | 6.3 | 0.45 |
| 16BNP4 | Δ | 114 | G | \square | V | FA | 1000/1500 | L.V.E.S. | N | 10.500 | 4.375 | 8HR | 6.3 | 0.60 |
| 16BRP4 | Δ | 114 | G | \square | — | FA | 1000/1500 | L.V.E.S. | N | 10.281 | 4.125 | 8HR | 6.3 | 0.60 |
| 16BSP4 | Δ | 114 | G | \square | V | FA | 1000/1500 | L.V.E.S. | N | 10.531 | 4.375 | 8HR | 6.3 | 0.45 |
| 16BUP4 | Δ | 114 | G | \square | L | FA | 1000/1500 | L.V.E.S. | N | 10.375 | 4.250 | 8HR | 6.3 | 0.45 |

| ANODE KV. DESIGN-MAX. VALUES | TYPICAL OPERATING CONDITIONS | | | | | TUBE TYPE |
|------------------------------------|------------------------------|-----------|-----------------|----------------------------------|---------------------------|--------------|
| | DRIVE | ANODE KV. | GRID 2 VOLTS | FOCUS ELEC- TRODE VOLTS | RASTER CUTOFF VOLTS | |
| 15.4 | Grid | 9 | 300 | -100/400 | -28/-72 | SG-14AJP4 |
| 15.4 | Cath. | 10 | 50 | -50/350 | 35/50 | 14ARP4 |
| 15.4 | Grid | 12 | 300 | -50/350 | -28/-72 | 14ASP4 |
| 15.4 | Grid | 10 | 300 | 0/400 | -25/-69 | 14ATP4 |
| 16.5 | Cath. | 12 | 50 | 0/350 | 30/50 | 14AUP4 |
| 15.4 | Grid | 12 | 300 | -50/350 | -28/-72 | 14AVP4 |
| 15.4 | Cath. | 12 | 50 | -50/350 | 32/47 | 14AWP4 |
| 24.2 | Grid | 18 | 300 | 0/400 | -33/-77 | 14BDP4 |
| 13.2 | Grid | 12 | 300 | — | -28/-72 | 14BP4 |
| 13.2 | Grid | 12 | 300 | — | -28/-72 | 14BP4A |
| 15.4 | Grid | 12 | 300 | — | -28/-72 | 14CP4 |
| 15.4 | Grid | 12 | 300 | — | -28/-72 | 14CP4A |
| 15.4 | Grid | 12 | 300 | — | -28/-72 | SG-14CP4A |
| 15.4 | Grid | 11 | 300 | — | -28/-72 | 14CP4B |
| 15.4 | Grid | 11 | 250 | — | -22/-58 | 14DP4 |
| 15.4 | Grid | 12 | 300 | — | -28/-72 | 14EP4 |
| 15.4 | Grid | 12 | 300 | 2170/2950 | -28/-72 | 14GP4 |
| 15.4 | Grid | 12 | 300 | -48/264 | -28/-72 | 14HP4 |
| 15.4 | Grid | 12 | 300 | -50/350 | -28/-72 | 14NP4 |
| 15.4 | Grid | 12 | 300 | -50/350 | -28/-72 | 14NP4A |
| 12.1 | Grid | 9 | 250 | -50/250 | -24/-64 | 14QP4 |
| 12.1 | Grid | 9 | 250 | -50/250 | -24/-64 | 14QP4A |
| 15.4 | Grid | 9 | 300 | -50/300 | -28/-72 | SG-14QP4A |
| 12.1 | Grid | 9 | 250 | -50/250 | -24/-64 | 14QP4B |
| 15.4 | Grid | 10 | 300 | -50/350 | -26/-70 | 14RP4 |
| 15.4 | Grid | 10 | 300 | -50/350 | -26/-70 | 14RP4A |
| 15.4 | Grid | 12 | 300 | -48/264 | -28/-72 | 14SP4 |
| 15.4 | Grid | 12 | 300 | — | -28/-72 | 14UP4 |
| 15.4 | Grid | 12 | 300 | -50/350 | -28/-72 | 14WP4 |
| 15.4 | Grid | 12 | 300 | -50/350 | -28/-72 | SG-14WP4 |
| 16.5 | Grid | 12 | 300 | -50/350 | -28/-72 | 14XP4 |
| 16.5 | Grid | 12 | 300 | -50/350 | -28/-72 | 14XP4A |
| 15.4 | Grid | 12 | 300 | 0/450 | -28/-72 | 14ZP4 |
| 20.0 | Cath. | 16 | 50 | -200/+200 | 33/52 | 15ADP4 |
| 15.0 | Cath. | 12 | 50 | 0/400 | 35/55 | 15JP4 |
| 17.6 | Grid | 14 | 300 | — | -28/-72 | 16ABP4 |
| 15.4 | Grid | 12 | 250 | — | -28/-63 | 16ACP4 |
| 17.6 | Grid | 14 | 300 | -64/350 | -28/-72 | 16AEP4 |
| 18.0 | Grid | 14 | 300 | 0/400 | -33/-70 | 16ANP4 |
| 15.4 | Grid | 12 | 300 | — | -28/-72 | 16AP4 |
| 15.4 | Grid | 12 | 300 | — | -28/-72 | 16AP4A |
| 18.0 | Grid | 14 | 300 | 0/400 | -33/-70 | 16AQP4 |
| 20.0 | Grid | 15 | 300 | -100/300 | -43/-70 | 16ASP4 |
| 18.0 | Cath. | 15 | 50 | 0/500 | 31/49 | 16ATP4 |
| 15.4 | Grid | 12 | 400 | 0/400 | -36/-94 | 16AUP4 |
| 17.6 | Cath. | 15 | 35 | 0/500 | 25/50 | 16AVP4 |
| 18.0 | Cath. | 15 | 150 | 0/500 | 31/49 | 16AWP4 |
| 18.0 | Grid | 15 | 300 | 0/500 | -40/-72 | 16AXP4 |
| 20.0 | Cath. | 16 | 300 | -100/300 | 28/60 | 16AYP4 |
| 18.0 | Cath. | 15 | 150 | 0/400 | 31/49 | 16AZP4 |
| 18.0 | Cath. | 15 | 50 | 0/400 | 35/55 | 16BAP4 |
| 20.0 | Cath. | 16 | 300 | -100/300 | 28/60 | 16BDP4 |
| 18.0 | Cath. | 14 | 50 | 0/400 | 30/48 | 16BEP4 |
| 15.4 | Grid | 12 | 400 | 0/400 | -36/-94 | 16BFP4 |
| 20.0 | Cath. | 16 | 300 | -100/+300 | 28/60 | 16BGP4 |
| 15.4 | Grid | 12 | 400 | 0/400 | -36/-94 | 16BMP4 |
| 18.0 | Cath. | 15 | 50 | 0/400 | 35/35 | 16BNP4 |
| 18.0 | Grid | 15 | 400 | 0/400 | -46/-94 | 16BRP4 |
| 21.0 | Cath. | 15 | 50 | 0/400 | 35/35 | 16BSP4 |
| 16.0 | Cath. | 13 | 100 | -250/150 | 31/49 | 16BUP4 |

EXPLANATION OF SYMBOLS

- M—Metal cone tube
 G—Glass tube
 LWG—Light weight glass tube
 G²—Glass tube, dimensions different from normal
 MET—Metal tube
 O—Round tube
 □—Rectangular tube, spherical face
 ⊙—Rectangular tube, cylindrical face
 B—Fiberglass wrap implosion protection
 E—Filled rim type implosion protection
 T—Molded glass implosion panel attached to face
 P—Sagged glass implosion plate attached to face
 L—Plastic implosion barrier attached to face
 K—Banded tube with coated funnel for implosion protection
 H—Tube sealed into steel sheath for implosion protection
 C—Clear glass faceplate
 F—Gray filter glass faceplate
 R—Anti-reflection faceplate
 A—Aluminized screen
 V—Rim bands and tension band
 W—Rim bands and tension band with mounting lugs
 X—Formed with tension band
 Y—Formed rim with tension band and mounting lugs
- Mag.—Magnetic focus
 L.V.E.S.—Low voltage electrostatic focus
 H.V.E.S.—High voltage electrostatic focus
 Auto.Es.—Self-focusing electrostatic
 Int.Mag.—Internal magnetic focus
 TPF—Tri-potential focus
 N—No ion trap
 S—Single field ion trap
 D—Double field ion trap
 I—Internal ion trap
 *—18 second heater warm-up time (all others are 11 second)
- Grid—Grid drive service (all voltages with respect to cathode)
 Cath.—Cathode drive service (all voltages with respect to Grid No. 1)
- NOTES**
- ◆ Design-Maximum Values Unless Otherwise Indicated
 ⊠ Absolute-Maximum Values
 ☒ For X-Radiation Measurements, Characteristics, Limitations, and Warning see JEDEC Publication 64A, the latest EIA Published Product Information for the type, the specified applicable JEDEC X-Radiation Isodose and Limit Curves, and X-Radiation Warning, page
 △ The EIA Published Product Information as of March 1, 1972, does not contain an X-Radiation rating or reference to JEDEC X-Radiation Isodose and Limit Curves for this tube type. This does not necessarily mean the type is not capable of meeting an acceptable X-Radiation limit. Refer to the latest Published Product Information for X-Radiation Ratings and glass absorption characteristics.
- ☆ This type summary is based on EIA registered data, registered envelope data, and manufacturer's published data. Data presented herein have been carefully prepared from such publicly available data to assure technical correctness, however, no responsibility is assumed by the General Electric Company for possible inaccuracies.

Monochrome Picture Tubes—Condensed Data

| TUBE TYPE | X-RADIATION RATING | DEF. ANGLE DEGREES | GLASS or METAL | FACEPLATE | | EXTERNAL COATING in pf | FOCUS | ION TRAP MAG. | Overall Length (inches) | NECK LENGTH (inches) | BASING | HEATER | | |
|-----------|--------------------|--------------------|----------------|-----------|----------------------|------------------------|-----------|---------------|-------------------------|----------------------|--------|-----------|------|-------|
| | | | | SHAPE | IMPLOSION PROTECTION | | | | | | | TREATMENT | V. | A. |
| 16BVP4 | □ | 114 | G | □ | V | FA | 1050/1450 | L.V.E.S. | N | 10.413 | 4.219 | 8HR | 6.3 | 0.45 |
| 16BWP4 | □ | 114 | G | □ | V | FA | 800/1300 | L.V.E.S. | N | 10.563 | 4.375 | 8HR | 6.3 | 0.45 |
| 16BXP4 | △ | 114 | G | □ | E | FA | 900/1400 | L.V.E.S. | N | 10.562 | 4.375 | 7FA | 6.3 | 0.45 |
| 16BYP4 | □ | 114 | G | □ | V | FA | 1000/1500 | L.V.E.S. | N | 10.438 | 4.250 | 8HR | 6.3 | 0.45 |
| 16CAP4 | △ | 114 | G | □ | V | FA | 1000/1500 | L.V.E.S. | N | 10.531 | 4.375 | 8HR | 6.3 | 0.45 |
| 16CEP4 | △ | 114 | G | □ | V | FA | 1000/1500 | L.V.E.S. | N | 10.531 | 4.375 | 8HR | 6.3 | 0.45 |
| 16CFP4 | △ | 104 | G | □ | V | FA | 1000/1500 | L.V.E.S. | N | 11.075 | 3.875 | 7GR | 6.3 | 0.45 |
| 16CHP4 | △ | 114 | G | □ | V | FA | 1000/1500 | L.V.E.S. | N | 10.569 | 4.375 | 8HR | 6.3 | 0.45 |
| 16CHP4A | □ | 114 | G | □ | X | FA | 1000/1500 | L.V.E.S. | N | 10.569 | 4.375 | 8HR | 6.3 | 0.45 |
| 16CJP4 | △ | 114 | G | □ | V | FA | 1000/1500 | L.V.E.S. | N | 10.594 | 4.406 | 8HR | 6.3 | 0.45 |
| 16CKP4 | □ | 114 | G | □ | V | FA | 1000/1500 | L.V.E.S. | N | 10.281 | 4.125 | 8HR | 6.3 | 0.30 |
| 16CMP4 | □ | 114 | G | □ | V | FA | 1000/1500 | L.V.E.S. | N | 10.531 | 4.375 | 8HR | 6.3 | 0.45 |
| 16CNP4 | △ | 104 | G | □ | V | FA | 1000/1500 | L.V.E.S. | N | 11.075 | 3.875 | 7GR | 12.0 | 0.157 |
| 16CP4 | △ | 52 | G | □ | — | C | None | Mag. | D | 21.500 | 6.625 | 12D | 6.3 | 0.60 |
| 16CQP4 | △ | 104 | G | □ | V | FA | 1000/1500 | L.V.E.S. | N | 11.075 | 3.875 | 7GR | 6.3 | 0.45 |
| 16CTP4 | △ | 114 | G | □ | V | FA | 800/1500 | L.V.E.S. | N | 10.080 | 4.020 | 8HR | 6.3 | 0.45 |
| 16CUP4 | △ | 114 | G | □ | V | FA | 800/1500 | L.V.E.S. | N | 10.080 | 4.020 | 8HR | 6.3 | 0.45 |
| 16CWP4 | □ | 100 | G | □ | V | FA | 1000/1500 | L.V.E.S. | N | 11.675 | 3.875 | 7GR | 6.3 | 0.45 |
| 16CXP4 | △ | 100 | G | □ | V | FA | 1000/1500 | L.V.E.S. | N | 11.675 | 3.875 | 7GR | 12.0 | 0.157 |
| 16DCP4 | △ | 100 | G | □ | V | FA | 1000/1500 | L.V.E.S. | N | 11.675 | 3.875 | 7GR | 6.3 | 0.45 |
| 16DCP4A | △ | 100 | G | □ | X | FA | 1000/1500 | L.V.E.S. | N | 11.610 | 3.810 | 7GR | 6.3 | 0.45 |
| 16DP4 | △ | 60 | G | □ | — | C | None | Mag. | D | 20.750 | 7.891 | 12D | 6.3 | 0.60 |
| 16DP4A | △ | 60 | G | □ | — | C | None | Mag. | D | 20.750 | 7.875 | 12D | 6.3 | 0.60 |
| 16EP4 | △ | 60 | M | □ | — | C | None | Mag. | S | 19.625 | 6.875 | 12D | 6.3 | 0.60 |
| 16EP4A | △ | 60 | M | □ | — | F | None | Mag. | S | 19.625 | 6.875 | 12D | 6.3 | 0.60 |
| 16EP4B | △ | 60 | M | □ | — | FR | None | Mag. | S | 19.625 | 6.875 | 12D | 6.3 | 0.60 |
| 16GP4 | △ | 70 | M | □ | — | F | None | Mag. | S | 17.688 | 7.313 | 12D | 6.3 | 0.60 |
| 16GP4A | △ | 70 | M | □ | — | C | None | Mag. | S | 17.688 | 7.313 | 12D | 6.3 | 0.60 |
| 16GP4B | △ | 70 | M | □ | — | FR | None | Mag. | S | 17.688 | 7.313 | 12D | 6.3 | 0.60 |
| 16GP4C | △ | 70 | M | □ | — | CR | None | Mag. | S | 17.688 | 7.313 | 12D | 6.3 | 0.60 |
| 16HP4 | △ | 60 | G | □ | — | C | 750/2000 | Mag. | D | 21.250 | 8.375 | 12N | 6.3 | 0.60 |
| 16HP4A | △ | 60 | G | □ | — | F | 750/2000 | Mag. | D | 21.250 | 8.375 | 12N | 6.3 | 0.60 |
| 16JP4 | △ | 60 | G | □ | — | C | 750/2000 | Mag. | D | 20.750 | 7.500 | 12N | 6.3 | 0.60 |
| 16JP4A | △ | 60 | G | □ | — | F | 750/2000 | Mag. | D | 20.750 | 7.500 | 12N | 6.3 | 0.60 |
| 16KP4 | △ | 70 | G | □ | — | F | 750/1500 | Mag. | S | 18.750 | 7.500 | 12N | 6.3 | 0.60 |
| 16KP4A | △ | 70 | G | □ | — | FA | 750/1500 | Mag. | S | 18.750 | 7.500 | 12N | 6.3 | 0.60 |
| SG-16KP4A | △ | 70 | G | □ | — | FA | 750/1500 | Mag. | N | 18.750 | 7.500 | 12N | 6.3 | 0.60 |
| 16LP4 | △ | 52 | G | □ | — | C | 750/2000 | Mag. | D | 22.250 | 7.375 | 12N | 6.3 | 0.60 |
| 16LP4A | △ | 52 | G | □ | — | F | 750/2000 | Mag. | D | 22.250 | 7.375 | 12N | 6.3 | 0.60 |
| 16MP4 | △ | 60 | G | □ | — | C | 750/2000 | Mag. | D | 21.750 | 8.500 | 12N | 6.3 | 0.60 |
| 16MP4A | △ | 60 | G | □ | — | F | 750/2000 | Mag. | D | 21.750 | 8.500 | 12N | 6.3 | 0.60 |
| 16QP4 | △ | 70 | G | □ | — | F | None | Mag. | D | 19.146 | 8.079 | 12D | 6.3 | 0.60 |
| 16RP4 | △ | 70 | G | □ | — | F | 750/1500 | Mag. | S | 18.750 | 7.500 | 12N | 6.3 | 0.60 |
| 16RP4A | △ | 70 | G | □ | — | F | 750/1500 | Mag. | S | 18.750 | 7.500 | 12N | 6.3 | 0.60 |
| 16RP4B | □ | 70 | G | □ | — | F | 750/1500 | Mag. | N | 18.750 | 7.500 | 12N | 6.3 | 0.60 |
| 16SP4 | △ | 70 | G | □ | — | C | 750/2000 | Mag. | D | 17.312 | 7.000 | 12N | 6.3 | 0.60 |
| 16SP4A | △ | 70 | G | □ | — | F | 750/2000 | Mag. | D | 17.312 | 7.000 | 12N | 6.3 | 0.60 |
| 16TP4 | △ | 70 | G | □ | — | F | 750/2000 | Mag. | S | 18.125 | 6.875 | 12N | 6.3 | 0.60 |
| 16UP4 | △ | 70 | G | □ | — | F | None | Mag. | S | 18.125 | 6.875 | 12D | 6.3 | 0.60 |
| 16VAGP4 | □ | 114 | G | □ | V | FA | 1300/1700 | L.V.E.S. | N | 11.445 | 4.375 | 8HR | 6.3 | 0.45 |
| 16VBAP4 | □ | 114 | G | □ | V | FA | 1300/1700 | L.V.E.S. | N | 11.312 | 4.500 | 8HR | 6.3 | 0.45 |
| 16VBCP4 | □ | 114 | G | □ | V | FA | 1000/1400 | L.V.E.S. | N | 11.200 | 4.380 | 8HR | 6.3 | 0.45 |
| 16VP4 | △ | 70 | G | □ | — | F | None | Mag. | S | 17.188 | 6.876 | 12D | 6.3 | 0.60 |
| 16WP4 | △ | 70 | G | □ | — | F | None | Mag. | D | 17.750 | 7.438 | 12D | 6.3 | 0.60 |
| 16WP4A | △ | 70 | G | □ | — | F | 750/1500 | Mag. | D | 17.750 | 7.438 | 12N | 6.3 | 0.60 |
| 16WP4B | △ | 70 | G | □ | — | FA | 750/1500 | Mag. | D | 17.750 | 7.438 | 12N | 6.3 | 0.60 |
| 16XP4 | △ | 70 | G | □ | — | F | None | Mag. | D | 18.750 | 7.500 | 12D | 6.3 | 0.60 |
| 16YP4 | △ | 70 | G | □ | — | F | 750/2000 | Mag. | S | 17.312 | 7.000 | 12N | 6.3 | 0.60 |
| 16ZP4 | △ | 52 | G | □ | — | F | 750/1500 | Mag. | D | 22.250 | 7.375 | 12N | 6.3 | 0.60 |
| 17AP4 | △ | 70 | G | □ | — | F | 750/2000 | Mag. | S | 18.625 | 6.875 | 12N | 6.3 | 0.60 |

| ANODE KV. DESIGN- MAX. VALUES | TYPICAL OPERATING CONDITIONS | | | | TUBE TYPE | |
|--|------------------------------|-----------|-----------------|----------------------------------|--------------|---------------------------|
| | DRIVE | ANODE KV. | GRID 2 VOLTS | FOCUS ELEC- TRODE VOLTS | | RASTER CUTOFF VOLTS |
| 20.0 | Cath. | 15 | 300 | -200/300 | 38/59 | 16BVP4 |
| 20.0 | Grid | 16 | 300 | -200/300 | -35/-72 | 16BWP4 |
| 17.6 | Cath. | 15 | 35 | 0/500 | 25/50 | 16BXP4 |
| 16.0 | Cath. | 13 | 100 | — | 31/49 | 16BYP4 |
| 18.0 | Grid | 15 | 400 | 0/400 | -46/-94 | 16CAP4 |
| 18.0 | Grid | 15 | 400 | 0/400 | -46/-94 | 16CEP4 |
| 15.0 | Cath. | 11 | 140 | — | 31/49 | 16CFP4 |
| 20.0 | Cath. | 16 | 30 | 0/400 | 30/45 | 16CHP4 |
| 20.0 | Cath. | 16 | 30 | 0/400 | 30/45 | 16CHP4A |
| 23.0 | Grid | 15 | 400 | 0/400 | -39/-94 | 16CJP4 |
| 18.0 | Grid | 15 | 400 | 0/400 | -46/-94 | 16CKP4 |
| 18.0 | Grid | 15 | 400 | 0/400 | -46/-94 | 16CMP4 |
| 15.0 | Cath. | 11 | 100 | — | 31/49 | 16CNP4 |
| 16.5 | Grid | 12 | 250 | — | -22/-58 | 16CP4 |
| 15.0 | Cath. | 11 | 140 | — | 31/49 | 16CQP4 |
| 15.4 | Grid | 12 | 400 | 0/400 | -36/-94 | 16CTP4 |
| 15.4 | Grid | 12 | 400 | 0/400 | -36/-94 | 16CUP4 |
| 15.0 | Cath. | 11 | 140 | — | 31/49 | 16CWP4 |
| 15.0 | Cath. | 11 | 100 | — | 31/49 | 16CXP4 |
| 15.0 | Cath. | 11 | 140 | — | 31/49 | 16DCP4 |
| 15.0 | Cath. | 11 | 140 | — | 31/49 | 16DCP4A |
| 16.5 | Grid | 12 | 250 | — | -22/-58 | 16DP4 |
| 16.5 | Grid | 12 | 250 | — | -22/-58 | 16DP4A |
| 15.4 | Grid | 12 | 300 | — | -28/-72 | 16EP4 |
| 15.4 | Grid | 12 | 300 | — | -28/-72 | 16EP4A |
| 15.4 | Grid | 12 | 300 | — | -28/-72 | 16EP4B |
| 15.4 | Grid | 12 | 300 | — | -28/-72 | 16GP4 |
| 15.4 | Grid | 12 | 300 | — | -28/-72 | 16GP4A |
| 15.4 | Grid | 12 | 300 | — | -28/-72 | 16GP4B |
| 15.4 | Grid | 12 | 300 | — | -28/-72 | 16GAC |
| 15.4 | Grid | 12 | 300 | — | -28/-72 | 16HP4 |
| 15.4 | Grid | 12 | 300 | — | -28/-72 | 16HP4A |
| 15.4 | Grid | 11 | 250 | — | -22/-58 | 16JP4 |
| 15.4 | Grid | 11 | 250 | — | -22/-58 | 16JP4A |
| 17.6 | Grid | 12 | 300 | — | -28/-72 | 16KP4 |
| 17.6 | Grid | 12 | 300 | — | -28/-72 | 16KP4A |
| 17.6 | Grid | 12 | 300 | — | -28/-72 | SG-16KP4A |
| 15.4 | Grid | 12 | 300 | — | -28/-72 | 16LP4 |
| 15.4 | Grid | 12 | 300 | — | -28/-72 | 16LP4A |
| 15.4 | Grid | 12 | 300 | — | -28/-72 | 16MP4 |
| 15.4 | Grid | 12 | 300 | — | -28/-72 | 16MP4A |
| 17.6 | Grid | 12 | 250 | — | -22/-58 | 16QP4 |
| 17.6 | Grid | 12 | 300 | — | -28/-72 | 16RP4 |
| 17.6 | Grid | 12 | 300 | — | -28/-72 | 16RP4A |
| 17.6 | Grid | 12 | 300 | — | -28/-72 | 16RP4B |
| 15.4 | Grid | 12 | 300 | — | -28/-72 | 16SP4 |
| 15.4 | Grid | 12 | 300 | — | -28/-72 | 16SP4A |
| 15.4 | Grid | 12 | 300 | — | -28/-72 | 16TP4 |
| 16.5 | Grid | 12 | 250 | — | -22/-58 | 16UP4 |
| 20.0 | Cath. | 16 | 30 | -100/+300 | 22/45 | 16VAGP4 |
| 22.0 | Cath. | 16 | 50 | 0/400 | 33/45 | 16VBAP4 |
| 23.0 | Grid | 16 | 300 | -200/200 | -35/-72 | 16VBCP4 |
| 16.5 | Grid | 12 | 250 | — | -22/-58 | 16VP4 |
| 16.5 | Grid | 12 | 250 | — | -22/-58 | 16WP4 |
| 17.6 | Grid | 12 | 250 | — | -22/-58 | 16WP4A |
| 17.6 | Grid | 12 | 250 | — | -22/-58 | 16WP4B |
| 16.5 | Grid | 12 | 250 | — | -22/-58 | 16XP4 |
| 15.4 | Grid | 12 | 300 | — | -28/-72 | 16YP4 |
| 17.6 | Grid | 12 | 300 | — | -28/-72 | 16ZP4 |
| 17.6 | Grid | 12 | 300 | — | -28/-72 | 17AP4 |

EXPLANATION OF SYMBOLS

- M—Metal cone tube
 G—Glass tube
 LWG—Light weight glass tube
 G°—Glass tube, dimensions different from normal
 MET—Metal tube
 O—Round tube
 □—Rectangular tube, spherical face
 ⊙—Rectangular tube, cylindrical face
 B—Fiberglass wrap implosion protection
 E—Filled rim type implosion protection
 T—Molded glass implosion panel attached to face
 P—Sagged glass implosion plate attached to face
 L—Plastic implosion barrier attached to face
 K—Banded tube with coated funnel for implosion protection
 H—Tube sealed into steel sheath for implosion protection
 C—Clear glass faceplate
 F—Gray filter glass faceplate
 R—Anti-reflection faceplate
 A—Aluminized screen
 V—Rim bands and tension band
 W—Rim bands and tension band with mounting lugs
 X—Formed with tension band
 Y—Formed rim with tension band and mounting lugs
 Mag.—Magnetic focus
 L.V.E.S.—Low voltage electrostatic focus
 H.V.E.S.—High Voltage electrostatic focus
 Auto.Es.—Self-focusing electrostatic
 Int.Mag.—Internal magnetic focus
 TPF—Tri-potential focus
 N—No ion trap
 S—Single field ion trap
 D—Double field ion trap
 I—Internal ion trap
 *—18 second heater warm-up time (all others are 11 second)
 Grid—Grid drive service (all voltages with respect to cathode)
 Cath.—Cathode drive service (all voltages with respect to Grid No. 1)

NOTES

◆ Design-Maximum Values Unless Otherwise Indicated

■ Absolute-Maximum Values

▣ For X-Radiation Measurements, Characteristics, Limitations, and Warning see JEDEC Publication 6A, the latest EIA Published Product Information for this type, the specified applicable JEDEC X-Radiation Isodose and Limit Curves, and X-Radiation Warning, page

△ The EIA Published Product Information as of March 1, 1972, does not contain an X-Radiation rating or reference to JEDEC X-Radiation Isodose and Limit Curves for this tube type. This does not necessarily mean the type is not capable of meeting an acceptable X-Radiation limit. Refer to the latest Published Product Information for X-Radiation Ratings and glass absorption characteristics.

☆ This type summary is based on EIA registered data, registered envelope data, and manufacturer's published data. Data presented herein have been carefully prepared from such publicly available data to assure technical correctness, however, no responsibility is assumed by the General Electric Company for possible inaccuracies.

Monochrome Picture Tubes—Condensed Data

| TUBE TYPE | X-RADIATION RATING | DEFL. ANGLE DEGREES | GLASS or METAL | FACEPLATE | | | EXTERNAL COATING IN μ f | FOCUS | ION TRAP MAG. | Overall Length (Inches) | NECK LENGTH (Inches) | BASING | HEATER | |
|-----------|--------------------|---------------------|----------------|-----------|----------------------|-----------|-----------------------------|-------------|---------------|-------------------------|----------------------|--------|--------|-------|
| | | | | SHAPE | IMPLOSION PROTECTION | TREATMENT | | | | | | | V. | A. |
| | | | | | | | | | | | | | | |
| 17DXP4 | Δ | 110 | G | \square | — | FA | 1000/1500 | L.V.E.S.TPF | N | 10.688 | 3.562 | 8JR | 6.3 | 0.45 |
| 17DZP4 | Δ | 110 | G | \square | — | FA | 1000/1500 | L.V.E.S. | N | 10.688 | 3.562 | 8HR | 6.3 | 0.45 |
| 17EAP4 | Δ | 70 | G | \square | — | FA | 1000/1500 | Auto.Es. | S | 19.188 | 7.500 | 12AT | 6.3 | 0.60 |
| 17EBP4 | Δ | 110 | G | \square | — | FA | 1100/1700 | L.V.E.S. | N | 11.250 | 4.125 | 8HR | 6.3 | 0.45 |
| 17EFP4 | \square | 110 | G | \square | — | FA | 1000/1500 | L.V.E.S. | N | 11.250 | 4.125 | 8HR | 6.3 | 0.45 |
| 17EHP4 | Δ | 110 | G | \square | — | FA | 1000/1500 | L.V.E.S. | N | 11.500 | 4.375 | 8HR | 6.3 | 0.60 |
| 17EKP4 | Δ | 70 | G | \square | P | FA | 600/1000 | L.V.E.S. | N | 19.438 | 7.500 | 12L | 6.3 | 0.60 |
| 17ELP4 | Δ | 114 | G | \square | E | FA | 1150/1650 | L.V.E.S. | N | 11.188 | 4.375 | 8HR | 6.3 | 0.45 |
| 17EMP4 | \square | 114 | G | \square | V | FA | 1300/1700 | L.V.E.S. | N | 11.312 | 4.500 | 8HR | 6.3 | 0.45 |
| 17EQP4 | Δ | 114 | G | \square | E | FA | 900/1500 | L.V.E.S. | N | 11.250 | 4.375 | 8HR | 6.3 | 0.45 |
| 17ESP4 | \square | 114 | G | \square | V | FA | 1000/1400 | L.V.E.S. | N | 11.200 | 4.380 | 8HR | 6.3 | 0.45 |
| 17FCP4 | Δ | 114 | G | \square | E | FA | 900/1500 | L.V.E.S. | N | 11.250 | 4.375 | 8HR | 6.3 | 0.45 |
| 17FDP4 | \square | 114 | G | \square | V | FA | 1300/1700 | L.V.E.S. | N | 11.180 | 4.370 | 8HR | 6.3 | 0.45 |
| 17FP4 | Δ | 70 | G | \square | — | F | 500/1500 | H.V.E.S. | S | 19.250 | 7.500 | 12L | 6.3 | 0.60 |
| 17FP4A | Δ | 70 | G | \square | — | F | 750/1500 | H.V.E.S. | S | 19.250 | 7.500 | 12L | 6.3 | 0.60 |
| 17GP4 | Δ | 70 | M | \square | — | FR | None | H.V.E.S. | S | 19.312 | 7.500 | 12M | 6.3 | 0.60 |
| 17HP4 | Δ | 70 | G | \square | — | F | 750/1500 | L.V.E.S. | S | 19.188 | 7.500 | 12L | 6.3 | 0.60 |
| 17HP4A | Δ | 70 | G | \square | — | FR | 750/1500 | L.V.E.S. | S | 19.188 | 7.500 | 12L | 6.3 | 0.60 |
| 17HP4B | Δ | 70 | G | \square | — | FA | 750/1500 | L.V.E.S. | S | 19.188 | 7.500 | 12L | 6.3 | 0.60 |
| SG-17HP4B | Δ | 70 | G | \square | — | FA | 750/1500 | L.V.E.S. | N | 19.188 | 7.500 | 12L | 6.3 | 0.60 |
| 17HP4C | Δ | 70 | G | \square | — | FA | 750/1500 | L.V.E.S. | N | 19.188 | 7.500 | 12L | 6.3 | 0.60 |
| 17JP4 | Δ | 70 | G | \square | — | F | 500/1500 | Mag. | S | 19.250 | 7.500 | 12N | 6.3 | 0.60 |
| 17KP4 | Δ | 70 | G | \square | — | F | 1000/1500 | Auto.Es. | S | 19.250 | 7.500 | 12P | 6.3 | 0.60 |
| 17KP4A | Δ | 70 | G | \square | — | FA | 1000/1500 | Auto.Es. | S | 19.250 | 7.500 | 12P | 6.3 | 0.60 |
| 17LP4 | Δ | 70 | G | \odot | — | F | 750/1500 | L.V.E.S. | S | 19.188 | 7.500 | 12L | 6.3 | 0.60 |
| 17LP4A | Δ | 70 | G | \odot | — | FA | 750/1500 | L.V.E.S. | S | 19.188 | 7.500 | 12L | 6.3 | 0.60 |
| SG-17LP4A | Δ | 70 | G | \odot | — | FA | 750/1500 | L.V.E.S. | N | 19.188 | 7.500 | 12L | 6.3 | 0.60 |
| 17LP4B | \square | 70 | G | \odot | — | FA | 750/1500 | L.V.E.S. | N | 19.188 | 7.500 | 12L | 6.3 | 0.60 |
| 17QP4 | Δ | 70 | G | \odot | — | F | 750/1500 | Mag. | S | 19.188 | 7.500 | 12N | 6.3 | 0.60 |
| 17QP4A | Δ | 70 | G | \odot | — | FA | 750/1500 | Mag. | S | 19.188 | 7.500 | 12N | 6.3 | 0.60 |
| SG-17QP4A | Δ | 70 | G | \odot | — | FA | 750/1500 | Mag. | N | 19.188 | 7.500 | 12N | 6.3 | 0.60 |
| 17QP4B | \square | 70 | G | \odot | — | FA | 750/1500 | Mag. | N | 19.188 | 7.500 | 12N | 6.3 | 0.60 |
| 17RP4 | Δ | 70 | G | \square | — | F | 750/1500 | L.V.E.S. | S | 19.250 | 7.500 | 12L | 6.3 | 0.60 |
| 17RP4C | Δ | 70 | G | \square | — | FA | 750/1500 | L.V.E.S. | S | 19.250 | 7.500 | 12L | 6.3 | 0.60 |
| 17SP4 | Δ | 70 | G | \odot | — | F | 500/750 | Auto.Es. | S | 19.188 | 7.500 | 12P | 6.3 | 0.60 |
| 17TP4 | Δ | 70 | MET | \square | — | FR | None | L.V.E.S. | S | 18.125 | 6.875 | 12M | 6.3 | 0.60 |
| 17UP4 | Δ | 70 | G | \odot | — | F | 750/1500 | Mag. | S | 19.188 | 7.500 | 12N | 6.3 | 0.60 |
| 17VP4 | Δ | 70 | G | \odot | — | F | 750/1500 | L.V.E.S. | S | 19.188 | 7.500 | 12L | 6.3 | 0.60 |
| 17VP4B | Δ | 70 | G | \odot | — | FA | 750/1500 | L.V.E.S. | S | 19.188 | 7.500 | 12L | 6.3 | 0.60 |
| 17YP4 | Δ | 70 | G | \odot | — | F | 500/1500 | Mag. | S | 19.188 | 7.500 | 12N | 6.3 | 0.60 |
| 18VAUP4 | \square | 114 | G | \square | X | FA | 1250/1750 | L.V.E.S. | N | 11.875 | 4.375 | 8HR | 6.3 | 0.45 |
| 19ABP4 | \square | 114 | G | \square | — | FA | 850/1400 | L.V.E.S. | N | 10.938 | 3.688 | 8JK | 2.68 | 0.45 |
| 19ACP4 | Δ | 114 | G | \square | — | FA | 1000/1500 | L.V.E.S. | N | 12.375 | 5.125 | 8HR | 6.3 | 0.60 |
| 19AEP4 | Δ | 114 | G | \square | — | FA | 1000/1500 | L.V.E.S. | N | 11.625 | 4.375 | 8HR | 12.6 | 0.15 |
| 19AFP4 | \square | 114 | G | \square | T | FA | 1000/1500 | L.V.E.S. | N | 11.625 | 4.125 | 8HR | 6.3 | 0.60 |
| 19AHP4 | Δ | 114 | G | \square | — | FA | 1000/1500 | L.V.E.S. | N | 11.375 | 4.125 | 8HR | 6.3 | 0.45 |
| 19AJP4 | Δ | 114 | G | \square | — | FA | 1400/1900 | L.V.E.S. | N | 11.375 | 4.125 | 7FA | 6.3 | 0.45 |
| 19ALP4 | Δ | 114 | G | \square | — | FA | 1000/1500 | L.V.E.S. | N | 11.375 | 4.125 | 8HR | 6.3 | 0.30* |
| 19ANP4 | \square | 114 | G | \square | — | FA | 1000/1500 | L.V.E.S.TPF | N | 10.812 | 3.562 | 8JR | 6.3 | 0.45 |
| 19AP4 | Δ | 66 | M | \square | — | C | None | Mag. | S | 21.500 | 7.125 | 12D | 6.3 | 0.60 |
| 19AP4A | Δ | 66 | M | \square | — | F | None | Mag. | S | 21.500 | 7.125 | 12D | 6.3 | 0.60 |
| 19AP4B | Δ | 66 | M | \square | — | FR | None | Mag. | S | 21.500 | 7.125 | 12D | 6.3 | 0.60 |
| 19AP4C | Δ | 66 | M | \square | — | FA | None | Mag. | S | 21.500 | 7.125 | 12D | 6.3 | 0.60 |
| 19AP4D | Δ | 66 | M | \square | — | CR | None | Mag. | S | 21.500 | 7.125 | 12D | 6.3 | 0.60 |
| 19AQP4 | Δ | 114 | G | \square | — | FA | 1000/1500 | L.V.E.S. | N | 11.375 | 4.125 | 8HR | 6.3 | 0.30 |
| 19ARP4 | Δ | 114 | G | \square | — | FA | 1000/1500 | L.V.E.S. | N | 12.625 | 5.125 | 8HR | 6.3 | 0.60 |
| 19ASP4 | \square | 114 | G | \square | T | FA | 1000/1500 | L.V.E.S. | N | 12.625 | 5.125 | 8HR | 6.3 | 0.30 |
| 19ATP4 | Δ | 114 | G | \square | T | FA | 1000/1500 | L.V.E.S.TPF | N | 11.062 | 3.562 | 8JR | 6.3 | 0.60 |
| 19AUP4 | \square | 113 | G | \square | T | FAR | 1000/1500 | L.V.E.S. | N | 11.625 | 4.125 | 8HR | 6.3 | 0.60 |
| 19AVP4 | \square | 114 | G | \square | — | FA | 1000/1500 | L.V.E.S. | N | 11.375 | 4.125 | 8HR | 6.3 | 0.60 |

| ANODE KV. DESIGN-MAX. VALUES | TYPICAL OPERATING CONDITIONS | | | | | TUBE TYPE |
|------------------------------------|------------------------------|-----------|-----------------|----------------------------------|---------------------------|--------------|
| | DRIVE | ANODE KV. | GRID 2 VOLTS | FOCUS ELEC- TRODE VOLTS | RASTER CUTOFF VOLTS | |
| 17.6 | Grid | 14 | 500 | 0/400 | -43/-78 | 17DXP4 |
| 17.6 | Grid | 14 | 300 | 0/400 | -28/-72 | 17DZP4 |
| 17.6 | Grid | 12 | 300 | — | -28/-72 | 17EAP4 |
| 20.0 | Grid | 14 | 500 | 0/400 | -43/-72 | 17EBP4 |
| 19.8 | Grid | 14 | 400 | 0/400 | -45/-90 | 17EFP4 |
| 20.0 | Cath. | 16 | 50 | 0/400 | 35/55 | 17EHP4 |
| 24.2 | Grid | 18 | 300 | 0/400 | -33/-77 | 17EKP4 |
| 15.0 | Cath. | 12 | 50 | 0/400 | 35/55 | 17ELP4 |
| 22.0 | Cath. | 16 | 50 | 0/400 | 33/45 | 17EMP4 |
| 19.8 | Cath. | 16 | 400 | 0/500 | 35/72 | 17EQP4 |
| 23.0 | Grid | 16 | 300 | -200/+200 | -35/-72 | 17ESP4 |
| 19.8 | Cath. | 16 | 400 | 0/500 | 35/72 | 17FCP4 |
| 22.0 | Cath. | 14 | 50 | 0/400 | 33/52 | 17FDP4 |
| 19.8 | Grid | 12 | 300 | 2300/3100 | -28/-72 | 17FP4 |
| 19.8 | Grid | 12 | 300 | 2170/2970 | -28/-72 | 17FP4A |
| 17.6 | Grid | 12 | 300 | 2290/3100 | -28/-72 | 17GP4 |
| 17.6 | Grid | 14 | 300 | -56/310 | -28/-72 | 17HP4 |
| 17.6 | Grid | 14 | 300 | -56/310 | -28/-72 | 17HP4A |
| 17.6 | Grid | 14 | 300 | -56/310 | -28/-72 | 17HP4B |
| 17.6 | Grid | 14 | 300 | -56/310 | -28/-72 | SG-17HP4B |
| 17.6 | Grid | 14 | 300 | -56/310 | -28/-72 | 17HP4C |
| 19.8 | Grid | 12 | 300 | — | -28/-72 | 17JP4 |
| 17.6 | Grid | 12 | 300 | — | -28/-72 | 17KP4 |
| 17.6 | Grid | 12 | 300 | — | -28/-72 | 17KP4A |
| 17.6 | Grid | 12 | 300 | -48/260 | -28/-72 | 17LP4 |
| 17.6 | Grid | 14 | 300 | -56/310 | -28/-72 | 17LP4A |
| 17.6 | Grid | 14 | 300 | -56/310 | -28/-72 | SG-17LP4A |
| 17.6 | Grid | 14 | 300 | -56/310 | -28/-72 | 17LP4B |
| 17.6 | Grid | 12 | 300 | — | -28/-72 | 17QP4 |
| 19.8 | Grid | 14 | 300 | — | -28/-72 | 17QP4A |
| 19.8 | Grid | 14 | 300 | — | -28/-72 | SG-17QP4A |
| 19.8 | Grid | 14 | 300 | — | -28/-72 | 17QP4B |
| 17.6 | Grid | 14 | 300 | -56/310 | -28/-72 | 17RP4 |
| 17.6 | Grid | 14 | 300 | -56/310 | -28/-72 | 17RP4C |
| 15.4 | Grid | 12 | 250 | — | -28/-72 | 17SP4 |
| 17.6 | Grid | 14 | 300 | 0/350 | -28/-72 | 17TP4 |
| 15.4 | Grid | 12 | 250 | — | -28/-72 | 17UP4 |
| 17.6 | Grid | 14 | 300 | -48/260 | -28/-72 | 17VP4 |
| 17.6 | Grid | 14 | 300 | -48/260 | -28/-72 | 17VP4B |
| 19.8 | Grid | 16 | 300 | — | -28/-72 | 17YP4 |
| 23.5 | Cath. | 16 | 30 | 0/400 | 22/45 | 18VAUP4 |
| 20.0 | Grid | 16 | 300 | 100/500 | -35/-72 | 19ABP4 |
| 20.0 | Cath. | 14 | 50 | 0/400 | 35/50 | 19ACP4 |
| 17.6 | Cath. | 14 | 100 | -100/100 | 32/47 | 19AEP4 |
| 20.0 | Grid | 16 | 300 | 0/400 | -35/-72 | 19AFP4 |
| 17.6 | Cath. | 14 | 500 | 0/400 | 40/63 | 19AHP4 |
| 19.8 | Cath. | 14.5 | 50 | 0/500 | 31/49 | 19AJP4 |
| 22.0 | Cath. | 14 | 500 | 0/400 | 45/95 | 19ALP4 |
| 20.0 | Grid | 16 | 500 | 0/400 | -43/-78 | 19ANP4 |
| 17.6 | Grid | 12 | 300 | — | -28/-72 | 19AP4 |
| 17.6 | Grid | 12 | 300 | — | -28/-72 | 19AP4A |
| 17.6 | Grid | 12 | 300 | — | -28/-72 | 19AP4B |
| 17.6 | Grid | 12 | 300 | — | -28/-72 | 19AP4C |
| 17.6 | Grid | 12 | 300 | — | -28/-72 | 19AP4D |
| 20.0 | Grid | 16 | 300 | 0/400 | -38/-72 | 19AQP4 |
| 20.0 | Grid | 16 | 300 | 0/400 | -35/-72 | 19ARP4 |
| 20.0 | Grid | 16 | 300 | 0/400 | -35/-72 | 19ASP4 |
| 20.0 | Grid | 16 | 500 | 0/400 | -43/-78 | 19ATP4 |
| 20.0 | Grid | 16 | 300 | 0/400 | -35/-72 | 19AUP4 |
| 23.0 | Grid | 20 | 400 | 0/400 | -36/-94 | 19AVP4 |

EXPLANATION OF SYMBOLS

- M—Metal cone tube
 G—Glass tube
 LWG—Light weight glass tube
 G°—Glass tube, dimensions different from normal
 MET—Metal tube
 O—Round tube
 □—Rectangular tube, spherical face
 ⊙—Rectangular tube, cylindrical face
 B—Fiberglass wrap implosion protection
 E—Filled rim type implosion protection
 T—Molded glass implosion panel attached to face
 P—Sagged glass implosion plate attached to face
 L—Plastic implosion barrier attached to face
 K—Banded tube with coated funnel for implosion protection
 H—Tube sealed into steel sheath for implosion protection
 C—Clear glass faceplate
 F—Gray filter glass faceplate
 R—Anti-reflection faceplate
 A—Aluminized screen
 V—Rim bands and tension band
 W—Rim bands and tension band with mounting lugs
 X—Formed with tension band
 Y—Formed rim with tension band and mounting lugs
 Mag.—Magnetic focus
 L.V.E.S.—Low voltage electrostatic focus
 H.V.E.S.—High Voltage electrostatic focus
 Auto.Es.—Self-focusing electrostatic
 Int.Mag.—Internal magnetic focus
 TPF—Tri-potential focus
 N—No ion trap
 S—Single field ion trap
 D—Double field ion trap
 I—Internal ion trap
 *—18 second heater warm-up time (all others are 11 second)

- Grid—Grid drive service (all voltages with respect to cathode)
 Cath.—Cathode drive service (all voltages with respect to Grid No. 1)

NOTES

◆ Design-Maximum Values Unless Otherwise Indicated

■ Absolute-Maximum Values

☐ For X-Radiation Measurements, Characteristics, Limitations, and Warning see JEDEC Publication 64A, the latest EIA Published Product Information for this type, the specified applicable JEDEC X-Radiation Isodose and Limit Curves, and X-Radiation Warning, page

△ The EIA Published Product Information as of March 1, 1972, does not contain an X-Radiation rating or reference to JEDEC X-Radiation Isodose and Limit Curves for this tube type. This does not necessarily mean the type is not capable of meeting an acceptable X-Radiation limit. Refer to the latest Published Product Information for X-Radiation Ratings and glass absorption characteristics.

☆ This type summary is based on EIA registered data, registered envelope data, and manufacturer's published data. Data presented herein have been carefully prepared from such publicly available data to assure technical correctness, however, no responsibility is assumed by the General Electric Company for possible inaccuracies.

Monochrome Picture Tubes — Condensed Data

328

| TUBE TYPE | X-RADIATION RATING | DEFL. ANGLE DEGREES | GLASS or METAL | FACEPLATE | | EXTERNAL COATING IN μ f | FOCUS | ION TRAP MAG. | Overall Length (Inches) | NECK LENGTH (Inches) | BASING | HEATER | | |
|-----------|--------------------|---------------------|----------------|-----------|----------------------|-----------------------------|-----------|---------------|-------------------------|----------------------|--------|-----------|-----|-------|
| | | | | SHAPE | IMPLOSION PROTECTION | | | | | | | TREATMENT | V. | A. |
| | | | | | | | | | | | | | | |
| 19AXP4 | △ | 114 | G | □ | — | FA | 1000/1500 | L.V.E.S. | N | 11.375 | 4.125 | 8HR | 6.3 | 0.45 |
| 19AYP4 | △ | 114 | G | □ | — | FA | 1000/1500 | L.V.E.S. | N | 11.375 | 4.125 | 8HR | 6.3 | 0.45 |
| 19BAP4 | △ | 114 | G | □ | T | FA | 1000/1500 | L.V.E.S. | N | 11.625 | 4.125 | 8HR | 6.3 | 0.30 |
| 19BCP4 | △ | 114 | G | □ | — | FAR | 1000/1500 | L.V.E.S. | N | 11.625 | 4.125 | 8HR | 6.3 | 0.30 |
| 19BDP4 | △ | 92 | G | □ | — | FA | 1500/2000 | L.V.E.S. | N | 15.250 | 5.500 | 12L | 6.3 | 0.60 |
| 19BEP4 | △ | 110 | G | □ | — | FA | 1000/1500 | L.V.E.S. | N | 11.812 | 4.250 | 8HR | 6.3 | 0.30 |
| 19BFP4 | △ | 92 | G | □ | — | FA | 1500/2000 | L.V.E.S. | N | 15.250 | 5.500 | 12L | 6.3 | 0.60 |
| 19BHP4 | △ | 114 | G | □ | — | FA | 1000/1500 | L.V.E.S. | N | 11.750 | 4.500 | 8HR | 6.3 | 0.60 |
| 19BLP4 | △ | 114 | G | □ | — | FA | 1300/1700 | L.V.E.S. | N | 11.312 | 4.125 | 8HR | 6.3 | 0.60 |
| 19BMP4 | △ | 114 | G | □ | T | FA | 1300/1700 | L.V.E.S. | N | 11.562 | 4.062 | 8HR | 6.3 | 0.60 |
| 19BNP4 | △ | 114 | G | □ | T | FA | 1000/1500 | L.V.E.S. | N | 12.625 | 5.125 | 8HR | 6.3 | 0.60 |
| 19BQP4 | △ | 114 | G | □ | T | FAR | 1000/1500 | L.V.E.S. | N | 12.562 | 5.125 | 8HR | 6.3 | 0.60 |
| 19BRP4 | △ | 114 | G | □ | P | FA | 1000/1500 | L.V.E.S. | N | 11.812 | 4.374 | 8HR | 6.3 | 0.60 |
| 19BSP4 | △ | 110 | G | □ | — | FA | 1000/1500 | L.V.E.S. | N | 11.812 | 4.250 | 8HR | 6.3 | 0.60 |
| 19BTP4 | △ | 114 | G | □ | — | FA | 1000/1500 | L.V.E.S.TPF | N | 10.812 | 3.562 | 8JR | 6.3 | 0.60 |
| 19BUP4 | △ | 114 | G | □ | — | FA | 1300/1700 | L.V.E.S. | N | 11.625 | 4.375 | 8HR | 2.2 | 0.102 |
| 19BVP4 | △ | 114 | G | □ | — | FA | 1000/1500 | L.V.E.S. | N | 11.750 | 4.500 | 8HR | 6.3 | 0.60 |
| 19BWP4 | △ | 114 | G | □ | — | FA | 1000/1500 | L.V.E.S. | N | 11.750 | 4.500 | 8HR | 6.3 | 0.45 |
| 19CAP4 | △ | 110 | G | □ | — | FA | 1000/1500 | L.V.E.S.TPF | N | 11.125 | 3.562 | 8JR | 6.3 | 0.60 |
| 19CDP4 | △ | 114 | G | □ | — | FA | 1400/1900 | L.V.E.S. | N | 11.625 | 4.375 | 7FA | 6.3 | 0.60 |
| 19CEP4 | △ | 114 | G | □ | T | FAR | 1000/1500 | L.V.E.S. | N | 11.625 | 4.125 | 8HR | 6.3 | 0.30* |
| 19CFP4 | △ | 114 | G | □ | — | FA | 1000/1500 | L.V.E.S. | N | 11.500 | 4.250 | 8HR | 6.3 | 0.60 |
| 19CGP4 | △ | 92 | G | □ | T | FAR | 1400/1700 | L.V.E.S. | N | 15.500 | 5.500 | 12L | 6.3 | 0.60 |
| 19CHP4 | △ | 114 | G | □ | — | FA | 1000/1500 | L.V.E.S. | N | 11.750 | 4.500 | 8HR | 6.3 | 0.60 |
| 19CJP4 | △ | 114 | G | □ | — | FA | 1300/1700 | L.V.E.S. | N | 11.312 | 4.125 | 8HR | 6.3 | 0.60 |
| 19CKP4 | △ | 114 | G | □ | — | FA | 1000/1500 | L.V.E.S. | N | 11.750 | 4.500 | 8HR | 6.3 | 0.60 |
| 19CLP4 | △ | 92 | G | □ | — | FA | 1500/2000 | L.V.E.S. | N | 15.250 | 5.500 | 12L | 6.3 | 0.60 |
| 19CMP4 | △ | 114 | G | □ | — | FA | 1000/1500 | L.V.E.S. | N | 11.625 | 4.375 | 8HR | 6.3 | 0.45 |
| 19CMP4A | △ | 114 | G | □ | — | FA | 1000/1500 | L.V.E.S. | N | 11.625 | 4.375 | 8HR | 6.3 | 0.45 |
| 19CQP4 | △ | 114 | G | □ | — | FA | 1400/1900 | L.V.E.S. | N | 11.625 | 4.375 | 7FA | 6.3 | 0.60 |
| 19CRP4 | △ | 92 | G | □ | — | FA | 1500/2000 | L.V.E.S. | N | 15.250 | 5.500 | 12L | 6.3 | 0.60 |
| 19CUP4 | △ | 114 | G | □ | — | FA | 1300/1700 | L.V.E.S. | N | 11.625 | 4.375 | 8HR | 6.3 | 0.45 |
| 19CVP4 | △ | 114 | G | □ | T | FA | 1700/2100 | L.V.E.S. | N | 11.625 | 4.125 | 8HR | 6.3 | 0.45 |
| 19CKP4 | △ | 114 | G | □ | — | FA | 1400/1900 | L.V.E.S. | N | 11.625 | 4.375 | 7FA | 6.3 | 0.60 |
| 19CYP4 | △ | 114 | G | □ | — | FA | 1000/1500 | L.V.E.S. | N | 10.875 | 3.625 | 8HR | 6.3 | 0.60 |
| 19CZP4 | △ | 114 | G | □ | P | FA | 1000/1500 | L.V.E.S. | N | 11.562 | 4.125 | 8HR | 6.3 | 0.45 |
| 19DAP4 | △ | 114 | G | □ | P | FAR | 1000/1500 | L.V.E.S. | N | 11.562 | 4.125 | 8HR | 6.3 | 0.45 |
| 19DBP4 | △ | 114 | G | □ | P | FA | 1400/1900 | L.V.E.S. | N | 11.812 | 4.375 | 7FA | 6.3 | 0.45 |
| 19DCP4 | △ | 114 | G | □ | V | FA | 1000/1500 | L.V.E.S. | N | 11.625 | 4.375 | 8HR | 6.3 | 0.60 |
| 19DEP4 | △ | 114 | G | □ | — | FA | 1000/1500 | L.V.E.S. | N | 11.875 | 4.625 | 8HR | 6.3 | 0.60 |
| 19DFP4 | △ | 114 | G | □ | — | FA | 1300/1700 | L.V.E.S. | N | 11.688 | 4.438 | 8HR | 6.3 | 0.60 |
| 19DHP4 | △ | 114 | G | □ | V | FA | 1000/1500 | L.V.E.S. | N | 11.625 | 4.375 | 8HR | 6.3 | 0.60 |
| 19DJP4 | △ | 110 | G | □ | — | FA | 1000/1500 | L.V.E.S. | N | 11.875 | 4.328 | 8HR | 6.3 | 0.60 |
| 19DKP4 | △ | 114 | G | □ | P | FA | 1000/1500 | L.V.E.S. | N | 11.562 | 4.125 | 8HR | 6.3 | 0.60 |
| 19DLP4 | △ | 114 | G | □ | — | FA | 1000/1500 | L.V.E.S. | N | 11.625 | 4.375 | 8HR | 6.3 | 0.60 |
| 19DNP4 | △ | 114 | G | □ | P | FA | 1000/1500 | L.V.E.S. | N | 11.562 | 4.125 | 8HR | 6.3 | 0.60 |
| 19DP4 | △ | 66 | G | ○ | — | C | 750/2500 | Mag. | S | 21.500 | 7.125 | 12N | 6.3 | 0.60 |
| 19DP4A | △ | 66 | G | ○ | — | F | 750/2500 | Mag. | S | 21.500 | 7.125 | 12N | 6.3 | 0.60 |
| 19DQP4 | △ | 114 | G | □ | V | FA | 1000/1500 | L.V.E.S. | N | 11.375 | 4.125 | 8HR | 6.3 | 0.45 |
| 19DRP4 | △ | 114 | G | □ | V | FA | 1250/1750 | L.V.E.S. | N | 11.625 | 4.375 | 8HR | 6.3 | 0.60 |
| 19DSP4 | △ | 114 | G | □ | V | FA | 1000/1500 | L.V.E.S. | N | 11.625 | 4.375 | 8HR | 6.3 | 0.60 |
| 19DUP4 | △ | 114 | G | □ | V | FA | 1150/1550 | L.V.E.S. | N | 11.750 | 4.500 | 8HR | 6.3 | 0.45 |
| 19DVP4 | △ | 114 | G | □ | — | FA | 1000/1500 | L.V.E.S. | N | 11.750 | 4.500 | 8HR | 6.3 | 0.45 |
| 19DWP4 | △ | 114 | G | □ | V | FA | 1000/1500 | L.V.E.S. | N | 11.375 | 4.125 | 8HR | 6.3 | 0.45 |
| 19DYP4 | △ | 114 | G | □ | T | FAR | 1700/2100 | L.V.E.S. | N | 11.625 | 4.125 | 8HR | 6.3 | 0.45 |
| 19DZP4 | △ | 114 | G | □ | — | FA | 1000/1500 | L.V.E.S. | N | 11.750 | 4.500 | 8HR | 6.3 | 0.45 |
| 19EAP4 | △ | 114 | G | □ | V | FA | 1000/1500 | L.V.E.S. | N | 11.625 | 4.375 | 8HR | 6.3 | 0.45 |
| 19EBP4 | △ | 114 | G | □ | E | FA | 1000/1500 | L.V.E.S. | N | 11.625 | 4.375 | 8HR | 6.3 | 0.60 |
| 19ECP4 | △ | 114 | G | □ | V | FA | 1000/1500 | L.V.E.S. | N | 11.750 | 4.500 | 8HR | 6.3 | 0.45 |
| 19EDP4 | △ | 114 | G | □ | V | FA | 1000/1500 | L.V.E.S. | N | 11.625 | 4.375 | 8HR | 6.3 | 0.60 |

| ANODE KV. DESIGN-MAX. VALUES | TYPICAL OPERATING CONDITIONS | | | | | TUBE TYPE |
|------------------------------------|------------------------------|-----------|-----------------|----------------------------------|---------------------------|--------------|
| | DRIVE | ANODE KV. | GRID 2 VOLTS | FOCUS ELEC- TRODE VOLTS | RASTER CUTOFF VOLTS | |
| 20.0 | Grid | 16 | 400 | 0/400 | -36/-94 | 19AXP4 |
| 23.0 | Grid | 20 | 400 | 0/400 | -36/-94 | 19AYP4 |
| 20.0 | Grid | 16 | 300 | 0/400 | -35/-72 | 19BAP4 |
| 20.0 | Grid | 16 | 300 | 0/400 | -35/-72 | 19BCP4 |
| 20.0 | Cath. | 14.5 | 50 | 0/500 | 31/49 | 19BDP4 |
| 20.0 | Cath. | 16 | 400 | 0/400 | 42/78 | 19BEP4 |
| 20.0 | Grid | 16 | 400 | 0/400 | -36/-94 | 19BFP4 |
| 22.0 | Grid | 18.5 | 450 | 0/500 | -28/-61 | 19BHP4 |
| 20.0 | Grid | 16 | 400 | 0/400 | -36/-94 | 19BLP4 |
| 20.0 | Grid | 16 | 400 | 0/400 | -36/-94 | 19BMP4 |
| 20.0 | Cath. | 16 | 50 | 0/400 | 32/50 | 19BNP4 |
| 20.0 | Cath. | 16 | 50 | 0/400 | 32/50 | 19BQP4 |
| 23.0 | Grid | 16 | 300 | 0/400 | -35/-72 | 19BRP4 |
| 20.0 | Cath. | 16 | 400 | 0/400 | 42/78 | 19BSP4 |
| 23.0 | Grid | 16 | 500 | 0/400 | -43/-78 | 19BTP4 |
| 18.75 | Cath. | 14 | 100 | 0/400 | 45/60 | 19BUP4 |
| 23.5 | Cath. | 20 | 500 | 0/500 | 45/95 | 19BVP4 |
| 23.5 | Cath. | 20 | 500 | 0/500 | 45/95 | 19BWP4 |
| 20.0 | Grid | 16 | 500 | 0/400 | -43/-78 | 19CAP4 |
| 19.8 | Cath. | 16 | 50 | 0/500 | 35/50 | 19CDP4 |
| 20.0 | Grid | 16 | 300 | 0/400 | -35/-72 | 19CEP4 |
| 17.5 | Cath. | 13 | 50 | 0/400 | 31/49 | 19CFP4 |
| 20.0 | Grid | 16 | 300 | 0/400 | -35/-72 | 19CGP4 |
| 20.0 | Cath. | 16 | 50 | -50/250 | 32/50 | 19CHP4 |
| 20.0 | Grid | 16 | 400 | 0/400 | -65/-105 | 19CJP4 |
| 22.0 | Cath. | 18 | 50 | 0/500 | 36/54 | 19CKP4 |
| 19.8 | Cath. | 14.5 | 35 | 0/500 | 25/40 | 19CLP4 |
| 20.0 | Cath. | 16 | 30 | 0/400 | 30/45 | 19CMP4 |
| 23.5 | Cath. | 16 | 30 | 0/400 | 30/45 | 19CMP4A |
| 19.8 | Cath. | 16 | 35 | 0/500 | 25/50 | 19CQP4 |
| 22.0 | Cath. | 16 | 35 | 0/500 | 25/50 | 19CRP4 |
| 22.0 | Cath. | 16 | 65 | -100/300 | 41/56 | 19CUP4 |
| 23.0 | Cath. | 16 | 50 | 0/400 | 32/50 | 19CVP4 |
| 19.8 | Cath. | 16 | 45 | 0/500 | 35/50 | 19CXP4 |
| 23.0 | Grid | 20 | 400 | 0/400 | -36/-94 | 19CYP4 |
| 23.0 | Grid | 20 | 400 | 0/400 | -46/-94 | 19CZP4 |
| 23.0 | Grid | 20 | 400 | 0/400 | -46/-94 | 19DAP4 |
| 19.8 | Cath. | 16 | 40 | 0/500 | 35/50 | 19DBP4 |
| 20.0 | Grid | 16 | 400 | 0/400 | -39/-94 | 19DCP4 |
| 22.0 | Cath. | 18 | 300 | 0/500 | 36/54 | 19DEP4 |
| 22.0 | Cath. | 16 | 65 | -100/300 | 41/56 | 19DFP4 |
| 20.0 | Cath. | 16 | 50 | 0/400 | 35/65 | 19DHP4 |
| 20.0 | Cath. | 16 | 400 | 0/400 | 42/78 | 19DJP4 |
| 23.0 | Grid | 20 | 400 | 0/400 | -46/-94 | 19DKP4 |
| 20.0 | Cath. | 16 | 50 | 0/400 | 35/55 | 19DLP4 |
| 18.0 | Grid | 16 | 300 | 0/400 | -35/-72 | 19DNP4 |
| 18.7 | Grid | 13 | 250 | — | -21/-58 | 19DP4 |
| 18.7 | Grid | 13 | 250 | — | -21/-58 | 19DP4A |
| 23.0 | Cath. | 16 | 300 | 0/400 | 28/62 | 19DQP4 |
| 23.0 | Cath. | 16 | 300 | 0/400 | 28/62 | 19DRP4 |
| 20.0 | Cath. | 16 | 50 | -100/300 | 32/50 | 19DSP4 |
| 22.0 | Cath. | 16 | 50 | -200/200 | 33/45 | 19DUP4 |
| 20.0 | Cath. | 16 | 150 | -250/150 | 36/54 | 19DVP4 |
| 23.0 | Grid | 20 | 400 | -200/200 | -50/-98 | 19DWP4 |
| 23.0 | Cath. | 16 | 50 | 0/400 | 32/50 | 19DYP4 |
| 18.0 | Cath. | 13 | 150 | -250/150 | 36/54 | 19DZP4 |
| 20.0 | Cath. | 16 | 50 | -100/300 | 32/50 | 19EAP4 |
| 23.0 | Grid | 16 | 400 | 0/400 | -39/-94 | 19EBP4 |
| 20.0 | Cath. | 16 | 150 | -250/150 | 36/54 | 19ECP4 |
| 23.0 | Cath. | 20 | 400 | 0/400 | 42/78 | 19EDP4 |

EXPLANATION OF SYMBOLS

- M—Metal cone tube
 G—Glass tube
 LWG—Light weight glass tube
 G°—Glass tube, dimensions different from normal
 MET—Metal tube
 ○—Round tube
 □—Rectangular tube, spherical face
 ⊙—Rectangular tube, cylindrical face
 B—Fiberglass wrap implosion protection
 E—Filtered rim type implosion protection
 T—Molded glass implosion panel attached to face
 P—Sagged glass implosion plate attached to face
 L—Plastic implosion barrier attached to face
 K—Banded tube with coated funnel for implosion protection
 H—Tube sealed into steel sheath for implosion protection
 C—Clear glass faceplate
 F—Gray filter glass faceplate
 R—Anti-reflection faceplate
 A—Aluminized screen
 V—Rim bands and tension band
 W—Rim bands and tension band with mounting lugs
 X—Formed with tension band
 Y—Formed rim with tension band and mounting lugs
- Mag.—Magnetic focus
 L.V.E.S.—Low voltage electrostatic focus
 H.V.E.S.—High Voltage electrostatic focus
 Auto.Es.—Self-focusing electrostatic
 Int.Mag.—Internal magnetic focus
 TPF—Tri-potential focus
 N—No ion trap
 S—Single field ion trap
 D—Double field ion trap
 I—Internal ion trap
 *—18 second heater warm-up time (all others are 11 second)
- Grid—Grid drive service (all voltages with respect to cathode)
 Cath.—Cathode drive service (all voltages with respect to Grid No. 1)
- NOTES**
- ◆ Design-Maximum Values Unless Otherwise Indicated
- ▣ Absolute-Maximum Values
- ▢ For X-Radiation Measurements, Characteristics, Limitations, and Warning see JEDEC Publication 64A, the latest EIA Published Product Information for this type, the specified applicable JEDEC X-Radiation Isodose and Limit Curves, and X-Radiation Warning, page
- △ The EIA Published Product Information as of March 1, 1972, does not contain an X-Radiation rating or reference to JEDEC X-Radiation Isodose and Limit Curves for this tube type. This does not necessarily mean the type is not capable of meeting an acceptable X-Radiation limit. Refer to the latest Published Product Information for X-Radiation Ratings and glass absorption characteristics.
- ☆ This type summary is based on EIA registered data, registered envelope data, and manufacturer's published data. Data presented herein have been carefully prepared from such publicly available data to assure technical correctness, however, no responsibility is assumed by the General Electric Company for possible inaccuracies.

Monochrome Picture Tubes—Condensed Data

330

| TUBE TYPE | X-RADIATION RATING | DEFL. ANGLE DEGREES | GLASS or METAL | FACEPLATE | | EXTERNAL COATING IN pf | FOCUS | ION TRAP MAG. | Overall Length (Inches) | NECK LENGTH (Inches) | BASING | HEATER | | |
|-----------|--------------------|---------------------|----------------|-----------|----------------------|------------------------|-----------|---------------|-------------------------|----------------------|--------|-----------|------|-------|
| | | | | SHAPE | IMPLOSION PROTECTION | | | | | | | TREATMENT | V. | A. |
| 19EFP4 | △ | 114 | G | □ | V | FA | 1000/1500 | L.V.E.S. | N | 11.625 | 4.375 | 8HR | 6.3 | 0.60 |
| 19EGP4 | △ | 114 | G | □ | V | FA | 1000/1500 | L.V.E.S. | N | 11.625 | 4.375 | 8HR | 6.3 | 0.45 |
| 19EHP4 | △ | 114 | G | □ | V | FA | 1000/1500 | L.V.E.S. | N | 11.625 | 4.375 | 8HR | 6.3 | 0.60 |
| 19EHP4A | △ | 114 | G | □ | V | FA | 1250/1750 | L.V.E.S. | N | 11.625 | 4.375 | 8HR | 6.3 | 0.60 |
| 19EJP4 | △ | 114 | G | □ | V | FA | 1000/1500 | L.V.E.S. | N | 11.625 | 4.375 | 8HR | 6.3 | 0.45 |
| 19EKP4 | △ | 114 | G | □ | E | FA | 1000/1500 | L.V.E.S. | N | 11.625 | 4.375 | 7FA | 6.3 | 0.45 |
| 19ELP4 | △ | 114 | G | □ | — | FA | 1000/1500 | L.V.E.S. | N | 11.375 | 4.125 | 8HR | 6.3 | 0.60 |
| 19ENP4 | △ | 114 | G | □ | V | FA | 1000/1500 | L.V.E.S. | N | 11.625 | 4.375 | 8HR | 6.3 | 0.45 |
| 19ENP4A | △ | 114 | G | □ | V | FA | 1000/1500 | L.V.E.S. | N | 11.625 | 4.375 | 8HR | 6.3 | 0.45 |
| 19EP4 | △ | 70 | G | □ | — | F | None | Mag. | S | 21.125 | 7.500 | 12D | 6.3 | 0.60 |
| 19ESP4 | △ | 114 | G | □ | V | FA | 1000/1500 | L.V.E.S. | N | 11.625 | 4.375 | 8HR | 6.3 | 0.60 |
| 19ETP4 | △ | 114 | G | □ | W | FA | 1000/1500 | L.V.E.S. | N | 11.625 | 4.375 | 8HR | 6.3 | 0.45 |
| 19EUP4 | △ | 114 | G | □ | V | FA | 1000/1500 | L.V.E.S. | N | 11.625 | 4.375 | 8HR | 6.3 | 0.60 |
| 19EZP4 | △ | 114 | G | □ | E | FA | 1000/1500 | L.V.E.S. | N | 11.625 | 4.375 | 7FA | 6.3 | 0.45 |
| 19FBP4 | △ | 114 | G | □ | E | FA | 1000/1500 | L.V.E.S. | N | 11.625 | 4.375 | 8HR | 6.3 | 0.45 |
| 19FCP4 | △ | 114 | G | □ | V | FA | 1000/1500 | L.V.E.S. | N | 11.625 | 4.375 | 8HR | 6.3 | 0.45 |
| 19FDP4 | △ | 114 | G | □ | V | FA | 1000/1500 | L.V.E.S. | N | 11.375 | 4.125 | 8HR | 6.3 | 0.45 |
| 19FEP4 | △ | 114 | G | □ | V | FA | 1250/1750 | L.V.E.S. | N | 11.625 | 4.375 | 8HR | 6.3 | 0.45 |
| 19FEP4A | △ | 114 | G | □ | V | FA | 1250/1750 | L.V.E.S. | N | 11.625 | 4.375 | 8HR | 6.3 | 0.45 |
| 19FEP4B | △ | 114 | G | □ | V | FA | 1250/1750 | L.V.E.S. | N | 11.625 | 4.375 | 8HR | 6.3 | 0.45 |
| 19FGP4 | △ | 114 | G | □ | W | FA | 1000/1500 | L.V.E.S. | N | 10.813 | 3.563 | 8JR | 6.3 | 0.60 |
| 19FHP4 | △ | 114 | G | □ | W | FA | 1000/1500 | L.V.E.S. | N | 11.625 | 4.375 | 8HR | 6.3 | 0.60 |
| 19FJP4 | △ | 114 | G | □ | W | FA | 1250/1750 | L.V.E.S. | N | 11.625 | 4.375 | 8HR | 6.3 | 0.60 |
| 19FJP4A | △ | 114 | G | □ | W | FA | 1250/1750 | L.V.E.S. | N | 11.625 | 4.375 | 8HR | 6.3 | 0.45 |
| 19FKP4 | △ | 110 | G | □ | E | FA | 1000/1500 | L.V.E.S. | N | 11.812 | 4.250 | 8HR | 6.3 | 0.30 |
| 19FLP4 | △ | 114 | G | □ | V | FA | 1000/1500 | L.V.E.S. | N | 11.375 | 4.125 | 8HR | 6.3 | 0.45 |
| 19FNP4 | △ | 114 | G | □ | W | FA | 1250/1750 | L.V.E.S. | N | 11.625 | 4.375 | 8HR | 6.3 | 0.60 |
| 19FP4 | △ | 66 | G | ○ | — | F | None | Mag. | S | 22.000 | 7.625 | 12D | 6.3 | 0.60 |
| 19FRP4 | △ | 114 | G | □ | V | FA | 1000/1500 | L.V.E.S. | N | 11.375 | 4.125 | 8HR | 6.3 | 0.30 |
| 19FTP4 | △ | 114 | G | □ | V | FA | 1000/1500 | L.V.E.S. | N | 11.500 | 4.250 | 8HR | 6.3 | 0.45 |
| 19FWP4 | △ | 114 | G | □ | — | FA | 1000/1500 | L.V.E.S. | N | 11.380 | 4.130 | 8HR | 4.2 | 0.45 |
| 19GAP4 | △ | 114 | G | □ | E | FA | 1000/1500 | L.V.E.S. | N | 11.625 | 4.375 | 8HR | 6.3 | 0.45 |
| 19GBP4 | △ | 114 | G | □ | T | FA | 1000/1500 | L.V.E.S. | N | 11.625 | 4.125 | 8HR | 6.3 | 0.45 |
| 19GEP4 | △ | 114 | G | □ | W | FA | 1250/1750 | L.V.E.S. | N | 11.625 | 4.375 | 8HR | 6.3 | 0.45 |
| 19GFP4 | △ | 114 | G | □ | E | FA | 1000/1500 | L.V.E.S. | N | 11.656 | 4.406 | 8HR | 6.3 | 0.45 |
| 19GHP4 | △ | 114 | G | □ | V | FA | 1150/1550 | L.V.E.S. | N | 11.750 | 4.500 | 8HR | 6.3 | 0.45 |
| 19GJP4 | △ | 114 | G | □ | V | FA | 1000/1500 | L.V.E.S. | N | 11.630 | 4.380 | 8HR | 6.3 | 0.45 |
| 19GJP4A | △ | 114 | G | □ | V | FA | 1000/1500 | L.V.E.S. | N | 11.375 | 4.125 | 8HR | 6.3 | 0.45 |
| 19GKP4 | △ | 114 | G | □ | W | FAR | 1250/1750 | L.V.E.S. | N | 11.625 | 4.375 | 8HR | 6.3 | 0.30 |
| 19GMP4 | △ | 114 | G | □ | T | FA | 700/900 | L.V.E.S. | N | 11.625 | 4.125 | 8HR | 6.3 | 0.45 |
| 19GP4 | △ | 66 | G | ○ | — | F | None | Mag. | S | 21.250 | 6.875 | 12D | 6.3 | 0.60 |
| 19HAP4 | △ | 114 | G | □ | E | FA | 1000/1500 | L.V.E.S. | N | 11.625 | 4.375 | 8HR | 6.3 | 0.315 |
| 19HGP4 | △ | 114 | G | □ | V | FA | 1000/1700 | L.V.E.S. | N | 11.380 | 4.130 | 8HR | 6.3 | 0.45 |
| 19JP4 | △ | 70 | G | □ | — | F | None | Mag. | S | 20.812 | 7.188 | 12D | 6.3 | 0.60 |
| 19QP4 | △ | 70 | G | □ | — | F | 500/750 | L.V.E.S. | S | 21.125 | 7.500 | 12L | 6.3 | 0.60 |
| 19VAHP4 | △ | 114 | G | □ | X | FA | 1400/2000 | L.V.E.S. | N | 12.519 | 4.375 | 8HR | 6.3 | 0.45 |
| 19VAJP4 | △ | 114 | G | □ | X | FA | 1400/2000 | L.V.E.S. | N | 12.519 | 4.375 | 8HR | 9.45 | 0.30 |
| 19VENP4 | △ | 114 | G | □ | V | FAR | 1400/2000 | L.V.E.S. | N | 12.390 | 4.500 | 8HR | 6.3 | 0.45 |
| 19XP4 | △ | 114 | G | □ | — | FA | 1000/1500 | L.V.E.S. | N | 11.375 | 4.125 | 8HR | 6.3 | 0.60 |
| 19YP4 | △ | 114 | G | □ | — | FA | 1000/1500 | L.V.E.S. | N | 10.812 | 3.562 | 8JR | 6.3 | 0.60 |
| 19ZP4 | △ | 114 | G | □ | — | FA | 1000/1500 | L.V.E.S. | N | 11.500 | 4.250 | 8HR | 6.3 | 0.60 |
| 20ABP4 | △ | 114 | G | □ | V | FA | 700/900 | L.V.E.S. | N | 12.270 | 4.380 | 8HR | 6.3 | 0.45 |
| 20ADP4 | △ | 114 | G | □ | W | FA | 1500/2000 | L.V.E.S. | N | 12.270 | 4.380 | 8HR | 6.3 | 0.45 |
| 20AEP4 | △ | 114 | G | □ | V | FA | 1500/2200 | L.V.E.S. | N | 12.269 | 4.375 | 8HR | 6.3 | 0.45 |
| 20AHP4 | △ | 114 | G | □ | V | FA | 1400/2000 | L.V.E.S. | N | 12.390 | 4.500 | 8HR | 6.3 | 0.45 |
| 20CP4 | △ | 70 | G | □ | — | F | None | Mag. | S | 21.438 | 7.188 | 12D | 6.3 | 0.60 |
| 20CP4A | △ | 70 | G | □ | — | F | 500/1500 | Mag. | S | 21.438 | 7.188 | 12N | 6.3 | 0.60 |
| 20CP4B | △ | 70 | G | □ | — | FA | None | Mag. | S | 21.438 | 7.188 | 12D | 6.3 | 0.60 |
| 20CP4C | △ | 70 | G | □ | — | FR | None | Mag. | S | 21.438 | 7.188 | 12D | 6.3 | 0.60 |

| ANODE KV. DESIGN-MAX. VALUES | TYPICAL OPERATING CONDITIONS | | | | | TUBE TYPE |
|------------------------------------|------------------------------|-----------|-----------------|----------------------------------|---------------------------|--------------|
| | DRIVE | ANODE KV. | GRID 2 VOLTS | FOCUS ELEC- TRODE VOLTS | RASTER CUTOFF VOLTS | |
| 20.0 | Cath. | 16 | 50 | 0/400 | 35/55 | 19EFP4 |
| 21.0 | Cath. | 16 | 50 | 0/400 | 35/55 | 19EGP4 |
| 18.0 | Cath. | 16 | 400 | 0/400 | 40/76 | 19EHP4 |
| 18.0 | Cath. | 16 | 400 | 0/400 | 40/76 | 19EHP4A |
| 20.0 | Cath. | 16 | 30 | 0/400 | 30/45 | 19EJP4 |
| 19.8 | Cath. | 16 | 45 | 0/500 | 35/50 | 19EKP4 |
| 18.0 | Cath. | 14 | 400 | 0/400 | 36/94 | 19ELP4 |
| 21.0 | Cath. | 16 | 50 | 0/400 | 32/50 | 19ENP4 |
| 21.0 | Cath. | 16 | 50 | 0/400 | 32/50 | 19ENP4A |
| 20.9 | Grid | 13 | 250 | — | -21/-58 | 19EP4 |
| 20.0 | Cath. | 16 | 50 | 0/400 | 32/50 | 19ESP4 |
| 21.0 | Cath. | 16 | 50 | 0/400 | 32/50 | 19ETP4 |
| 23.0 | Grid | 16 | 400 | 0/400 | -39/-94 | 19EUP4 |
| 19.8 | Cath. | 16 | 45 | 0/500 | 35/50 | 19EZP4 |
| 15.0 | Cath. | 12 | 50 | 0/400 | 35/55 | 19FBP4 |
| 23.0 | Grid | 20 | 400 | -200/200 | -50/-98 | 19FCP4 |
| 23.0 | Grid | 20 | 400 | 0/400 | -36/-78 | 19FDP4 |
| 20.0 | Cath. | 16 | 30 | 0/400 | 30/45 | 19FEP4 |
| 23.5 | Cath. | 16 | 30 | 0/400 | 30/45 | 19FEP4A |
| 23.5 | Cath. | 16 | 30 | 0/400 | 22/45 | 19FEP4B |
| 20.0 | Grid | 16 | 500 | 0/400 | -43/-78 | 19FGP4 |
| 21.0 | Cath. | 16 | 400 | 0/400 | -39/-94 | 19FHP4 |
| 18.0 | Cath. | 16 | 400 | 0/400 | 40/76 | 19FJP4 |
| 18.0 | Cath. | 16 | 400 | 0/400 | 40/76 | 19FJP4A |
| 20.0 | Grid | 16 | 300 | 0/400 | -35/-72 | 19FKP4 |
| 23.0 | Cath. | 16 | 300 | 0/400 | 28/62 | 19FLP4 |
| 23.0 | Cath. | 16 | 300 | 0/400 | 28/62 | 19FNP4 |
| 20.9 | Grid | 13 | 250 | — | -22/-58 | 19FP4 |
| 23.0 | Cath. | 16 | 300 | 0/400 | 28/62 | 19FRP4 |
| 21.0 | Cath. | 16 | 400 | 0/400 | 39/94 | 19FTP4 |
| 20.0 | Grid | 16 | 500 | 0/400 | -50/-93 | 19FWP4 |
| 19.8 | Cath. | 16 | 400 | 0/500 | 35/72 | 19GAP4 |
| 23.0 | Cath. | 20 | 400 | 0/500 | 45/70 | 19GBP4 |
| 23.0 | Cath. | 18 | 400 | 0/400 | 36/78 | 19GEP4 |
| 23.0 | Grid | 16 | 400 | 0/400 | 39/-94 | 19GFP4 |
| 22.0 | Cath. | 16 | 50 | -200/200 | 33/45 | 19GHP4 |
| 23.0 | Grid | 20 | 400 | -200/200 | -50/-98 | 19GJP4 |
| 23.0 | Grid | 20 | 400 | -200/200 | -50/-98 | 19GJP4A |
| 23.0 | Cath. | 16 | 300 | 0/400 | 28/62 | 19GKP4 |
| 23.0 | Cath. | 16 | 50 | 0/400 | 32/50 | 19GMP4 |
| 20.9 | Grid | 13 | 250 | — | -22/-58 | 19GP4 |
| 21.0 | Cath. | 16 | 50 | 0/400 | 35/55 | 19HAP4 |
| 20.0 | Grid | 16 | 150 | 0/400 | -38/-62 | 19HGP4 |
| 19.8 | Grid | 12 | 300 | — | -28/-72 | 19JP4 |
| 19.8 | Grid | 12 | 300 | -50/350 | -28/-72 | 19QP4 |
| 23.0 | Cath. | 16 | 30 | -100/+300 | 22/45 | 19VAHP4 |
| 23.0 | Cath. | 16 | 30 | -100/+300 | 22/45 | 19VAJP4 |
| 20.0 | Cath. | 16 | 150 | -250/+150 | -36/-54 | 19VBNP4 |
| 20.0 | Grid | 16 | 400 | 0/400 | -36/-94 | 19XP4 |
| 20.0 | Grid | 16 | 500 | 0/400 | -43/-78 | 19YP4 |
| 20.0 | Grid | 16.5 | 450 | 0/500 | -28/-72 | 19ZP4 |
| 23.0 | Cath. | 16 | 50 | -200/+200 | 32/52 | 20ABP4 |
| 23.0 | Cath. | 16 | 35 | -200/200 | 30/42 | 20ADP4 |
| 23.5 | Cath. | 16 | 30 | 0/400 | 30/45 | 20AEP4 |
| 20.0 | Cath. | 16 | 150 | -250/150 | 36/54 | 20AHP4 |
| 19.8 | Grid | 16 | 300 | — | -28/-72 | 20CP4 |
| 19.8 | Grid | 16 | 300 | — | -28/-72 | 20CP4A |
| 19.8 | Grid | 16 | 300 | — | -28/-72 | 20CP4B |
| 19.8 | Grid | 16 | 300 | — | -28/-72 | 20CP4C |

EXPLANATION OF SYMBOLS

- M—Metal cone tube
 G—Glass tube
 LWG—Light weight glass tube
 G²—Glass tube, dimensions different from normal
 MET—Metal tube
 O—Round tube
 □—Rectangular tube, spherical face
 ⊙—Rectangular tube, cylindrical face
 B—Fiberglass wrap implosion protection
 E—Filled rim type implosion protection
 T—Molded glass implosion panel attached to face
 P—Sagged glass implosion plate attached to face
 L—Plastic implosion barrier attached to face
 K—Banded tube with coated funnel for implosion protection
 H—Tube sealed into steel sheath for implosion protection
 C—Clear glass faceplate
 F—Gray filter glass faceplate
 R—Anti-reflection faceplate
 A—Aluminized screen
 V—Rim bands and tension band
 W—Rim bands and tension band with mounting lugs
 X—Formed with tension band
 Y—Formed rim with tension band and mounting lugs
 Mag.—Magnetic focus
 L.V.E.S.—Low voltage electrostatic focus
 H.V.E.S.—High Voltage electrostatic focus
 Auto.Es.—Self-focusing electrostatic
 Int.Mag.—Internal magnetic focus
 TPF—Tri-potential focus
 N—No ion trap
 S—Single field ion trap
 D—Double field ion trap
 I—Internal ion trap
 *—18 second heater warm-up time (all others are 11 second)
 Grid—Grid drive service (all voltages with respect to cathode)
 Cath.—Cathode drive service (all voltages with respect to Grid No. 1)

NOTES

- ◆ Design-Maximum Values Unless Otherwise Indicated
 ⊠ Absolute-Maximum Values
 ⊞ For X-Radiation Measurements, Characteristics, Limitations, and Warning see JEDEC Publication 64A, the latest EIA Published Product Information for this type, the specified applicable JEDEC X-Radiation Isodose and Limit Curves, and X-Radiation Warning, page
 △ The EIA Published Product Information as of March 1, 1972, does not contain an X-Radiation rating or reference to JEDEC X-Radiation Isodose and Limit Curves for this tube type. This does not necessarily mean the type is not capable of meeting an acceptable X-Radiation limit. Refer to the latest Published Product Information for X-Radiation Ratings and glass absorption characteristics.
 ☆ This type summary is based on EIA registered data, registered envelope data, and manufacturer's published data. Data presented herein have been carefully prepared from such publicly available data to assure technical correctness, however, no responsibility is assumed by the General Electric Company for possible inaccuracies.

Monochrome Picture Tubes—Condensed Data

332

| TUBE TYPE | X-RADIATION RATING | DEFL. ANGLE DEGREES | GLASS or METAL | FACEPLATE | | | EXTERNAL COATING IN pf | FOCUS | ION TRAP MAG. | Overall Length (inches) | NECK LENGTH (inches) | BASING | HEATER | |
|------------|--------------------|---------------------|----------------|-----------|----------------------|-----------|------------------------|----------|---------------|-------------------------|----------------------|--------|--------|------|
| | | | | SHAPE | IMPLOSION PROTECTION | TREATMENT | | | | | | | V. | A. |
| 20CP4D | △ | 70 | G | □ | — | FA | 500/1500 | Mag. | S | 21.438 | 7.188 | 12N | 6.3 | 0.60 |
| SG-20CP4D | △△ | 70 | G | □ | — | FA | 500/1500 | Mag. | N | 21.438 | 7.188 | 12N | 6.3 | 0.60 |
| 20DP4 | △ | 70 | G | □ | — | F | None | Mag. | S | 21.750 | 7.500 | 12D | 6.3 | 0.60 |
| 20DP4A | △ | 70 | G | □ | — | F | 500/1500 | Mag. | S | 21.750 | 7.500 | 12N | 6.3 | 0.60 |
| 20DP4B | △ | 70 | G | □ | — | FA | None | Mag. | S | 21.750 | 7.500 | 12D | 6.3 | 0.60 |
| 20DP4C | △ | 70 | G | □ | — | FA | 500/1500 | Mag. | S | 21.750 | 7.500 | 12N | 6.3 | 0.60 |
| 20DP4D | △ | 70 | G | □ | — | FA | 500/1500 | Mag. | N | 21.750 | 7.500 | 12N | 6.3 | 0.60 |
| 20FP4 | △ | 70 | G | □ | — | F | None | H.V.E.S. | S | 21.750 | 7.500 | 12M | 6.3 | 0.60 |
| 20GP4 | △ | 70 | G | □ | — | F | 500/750 | H.V.E.S. | S | 21.750 | 7.500 | 12L | 6.3 | 0.60 |
| 20HP4 | △ | 70 | G | □ | — | F | None | L.V.E.S. | S | 21.750 | 7.500 | 12M | 6.3 | 0.60 |
| 20HP4A | △ | 70 | G | □ | — | F | 500/1500 | L.V.E.S. | S | 21.750 | 7.500 | 12L | 6.3 | 0.60 |
| 20HP4B | △ | 70 | G | □ | — | FR | None | L.V.E.S. | S | 21.750 | 7.500 | 12M | 6.3 | 0.60 |
| 20HP4C | △ | 70 | G | □ | — | FA | None | L.V.E.S. | S | 21.750 | 7.500 | 12M | 6.3 | 0.60 |
| 20HP4D | △ | 70 | G | □ | — | FA | 500/1500 | L.V.E.S. | S | 21.750 | 7.500 | 12L | 6.3 | 0.60 |
| SG-20HP4D | △ | 70 | G | □ | — | FA | 500/1500 | L.V.E.S. | N | 21.750 | 7.500 | 12L | 6.3 | 0.60 |
| 20HP4E | △ | 70 | G | □ | — | FA | 500/1500 | L.V.E.S. | N | 21.750 | 7.500 | 12L | 6.3 | 0.60 |
| 20JP4 | △ | 70 | G | □ | — | F | 500/750 | Auto.Es. | S | 21.750 | 7.500 | 12P | 6.3 | 0.60 |
| 20LP4 | △ | 70 | G | □ | — | F | 750/1500 | L.V.E.S. | S | 21.750 | 7.500 | 12L | 6.3 | 0.60 |
| 20MP4 | △ | 70 | G | □ | — | F | 500/1500 | L.V.E.S. | S | 21.750 | 7.500 | 12L | 6.3 | 0.60 |
| 20RP4 | △ | 114 | G | □ | V | F | 1600/2000 | L.V.E.S. | N | 12.394 | 4.500 | 8HR | 6.3 | 0.45 |
| 20SP4 | △ | 114 | G | □ | X | FA | 1400/2000 | L.V.E.S. | N | 12.269 | 4.375 | 8HR | 6.3 | 0.45 |
| 20TP4 | △ | 114 | G | □ | X | FA | 1400/2000 | L.V.E.S. | N | 12.269 | 4.375 | 8HR | 6.3 | 0.45 |
| 20UP4 | △ | 114 | G | □ | E | FA | 1200/1700 | L.V.E.S. | N | 12.312 | 4.375 | 8HR | 6.3 | 0.45 |
| 20WP4 | △ | 114 | G | □ | W | FA | 1600/2200 | L.V.E.S. | N | 12.269 | 4.375 | 8HR | 6.3 | 0.45 |
| 20XP4 | △ | 114 | G | □ | V | FA | 1500/2000 | L.V.E.S. | N | 12.270 | 4.380 | 8HR | 6.3 | 0.45 |
| 20YP4 | △ | 114 | G | □ | V | FA | 1500/2000 | L.V.E.S. | N | 12.270 | 4.380 | 8HR | 6.3 | 0.45 |
| 20ZP4 | △ | 114 | G | □ | V | FA | 1500/2000 | L.V.E.S. | N | 12.270 | 4.380 | 8HR | 6.3 | 0.45 |
| 21ACP4 | △ | 90 | G | □ | — | F | 2000/2500 | Mag. | S | 20.000 | 7.500 | 12N | 6.3 | 0.60 |
| 21ACP4A | △ | 90 | G | □ | — | FA | 2000/3500 | Mag. | S | 20.000 | 7.500 | 12N | 6.3 | 0.60 |
| SG-21ACP4A | △ | 90 | G | □ | — | FA | 2000/2500 | Mag. | N | 20.000 | 7.500 | 12N | 6.3 | 0.60 |
| 21AFP4 | △ | 70 | G | □ | — | F | None | L.V.E.S. | S | 23.000 | 7.500 | 12M | 6.3 | 0.60 |
| 21ALP4 | △ | 90 | G | □ | — | F | 500/750 | L.V.E.S. | S | 20.000 | 7.500 | 12L | 6.3 | 0.60 |
| 21ALP4A | △ | 90 | G | □ | — | FA | 500/750 | L.V.E.S. | S | 20.000 | 7.500 | 12L | 6.3 | 0.60 |
| 21ALP4B | △ | 90 | G | □ | — | FA | 500/750 | L.V.E.S. | S | 20.000 | 7.500 | 12L | 6.3 | 0.60 |
| 21AMP4 | △ | 90 | G | □ | — | F | 2000/2500 | Mag. | S | 20.000 | 7.500 | 12L | 6.3 | 0.60 |
| 21AMP4A | △ | 90 | G | □ | — | FA | 2000/2500 | Mag. | S | 20.000 | 7.500 | 12L | 6.3 | 0.60 |
| 21AMP4B | △ | 90 | G | □ | — | FA | 2000/2500 | Mag. | N | 20.000 | 7.500 | 12N | 6.3 | 0.60 |
| 21ANP4 | △ | 90 | G | □ | — | F | None | L.V.E.S. | S | 20.000 | 7.500 | 12M | 6.3 | 0.60 |
| 21ANP4A | △ | 90 | G | □ | — | FA | None | L.V.E.S. | S | 20.000 | 7.500 | 12M | 6.3 | 0.60 |
| 21AP4 | △ | 90 | MET | □ | — | FR | None | Mag. | S | 22.312 | 7.500 | 12D | 6.3 | 0.60 |
| 21AQP4 | △ | 70 | G | □ | — | F | None | Mag. | S | 20.000 | 7.500 | 12D | 6.3 | 0.60 |
| 21AQP4A | △ | 90 | G | □ | — | FA | None | Mag. | S | 20.000 | 7.500 | 12D | 6.3 | 0.60 |
| 21ARP4 | △ | 70 | G | □ | — | F | 500/750 | Int.Mag. | I | 23.031 | 7.500 | 12N | 6.3 | 0.60 |
| 21ARP4A | △ | 70 | G | □ | — | FA | 500/755 | Int.Mag. | I | 23.031 | 7.500 | 12N | 6.3 | 0.60 |
| 21ASP4 | △ | 70 | G | □ | — | F | None | L.V.E.S. | S | 22.438 | 7.500 | 12M | 6.3 | 0.60 |
| 21ATP4 | △ | 90 | G | □ | — | FA | 1200/1500 | L.V.E.S. | S | 20.000 | 7.500 | 12L | 6.3 | 0.60 |
| 21ATP4A | △ | 90 | G | □ | — | FA | 1200/1500 | L.V.E.S. | S | 20.000 | 7.500 | 12L | 6.3 | 0.60 |
| 21ATP4B | △ | 90 | G | □ | — | F | 1200/1500 | L.V.E.S. | S | 20.000 | 7.500 | 12L | 6.3 | 0.60 |
| 21AUP4 | △ | 72 | G | □ | — | F | 2000/2500 | L.V.E.S. | S | 23.031 | 7.500 | 12L | 6.3 | 0.60 |
| 21AUP4A | △ | 72 | G | □ | — | FA | 2000/2500 | L.V.E.S. | S | 23.031 | 7.500 | 12L | 6.3 | 0.60 |
| 21AUP4B | △ | 72 | G | □ | — | FA | 2000/2500 | L.V.E.S. | S | 23.031 | 7.500 | 12L | 6.3 | 0.60 |
| SG-21AUP4B | △ | 72 | G | □ | — | FA | 2000/2500 | L.V.E.S. | N | 22.031 | 7.500 | 12L | 6.3 | 0.60 |
| 21AUP4C | △ | 72 | G | □ | — | FA | 2000/2500 | L.V.E.S. | N | 23.031 | 7.500 | 12L | 6.3 | 0.60 |
| 21AVP4 | △ | 72 | G | □ | — | F | 2000/2500 | L.V.E.S. | S | 23.031 | 7.500 | 12L | 6.3 | 0.60 |
| 21AVP4A | △ | 72 | G | □ | — | FA | 2000/2500 | L.V.E.S. | S | 23.031 | 7.500 | 12L | 6.3 | 0.60 |
| 21AVP4B | △ | 72 | G | □ | — | FA | 2000/2500 | L.V.E.S. | S | 23.031 | 7.500 | 12L | 6.3 | 0.60 |
| 21AVP4C | △ | 72 | G | □ | — | FA | 2000/2500 | L.V.E.S. | N | 23.031 | 7.500 | 12L | 6.3 | 0.60 |
| 21AWP4 | △ | 72 | G | □ | — | FA | 2000/2500 | Mag. | S | 23.031 | 7.500 | 12N | 6.3 | 0.60 |
| 21AWP4A | △ | 72 | G | □ | — | FA | 2000/2500 | Mag. | N | 23.031 | 7.500 | 12N | 6.3 | 0.60 |
| SG-21AWP4A | △ | 72 | G | □ | — | FA | 2000/2500 | Mag. | N | 23.031 | 7.500 | 12N | 6.3 | 0.60 |

| ANODE KV. DESIGN-MAX. VALUES | TYPICAL OPERATING CONDITIONS | | | | | TUBE TYPE |
|------------------------------------|------------------------------|-----------|-----------------|----------------------------------|---------------------------|--------------|
| | DRIVE | ANODE KV. | GRID 2 VOLTS | FOCUS ELEC- TRODE VOLTS | RASTER CUTOFF VOLTS | |
| 19.8 | Grid | 16 | 300 | — | -28/-72 | 20CP4D |
| 19.8 | Grid | 16 | 300 | — | -28/-72 | SG-20CP4D |
| 19.8 | Grid | 16 | 300 | — | -28/-72 | 20DP4 |
| 19.8 | Grid | 16 | 300 | — | -28/-72 | 20DP4A |
| 19.8 | Grid | 16 | 300 | — | -28/-72 | 20DP4B |
| 19.8 | Grid | 16 | 300 | — | -28/-72 | 20DP4C |
| 19.8 | Grid | 16 | 300 | — | -28/-72 | 20DP4D |
| 19.8 | Grid | 12 | 300 | 2300/3200 | -28/-72 | 20FP4 |
| 19.8 | Grid | 14 | 300 | 2750/3740 | -28/-72 | 20GP4 |
| 17.6 | Grid | 14 | 300 | -56/310 | -28/-72 | 20HP4 |
| 17.6 | Grid | 14 | 300 | -56/310 | -28/-72 | 20HP4A |
| 17.6 | Grid | 14 | 300 | -56/310 | -28/-72 | 20HP4B |
| 17.6 | Grid | 14 | 300 | -56/310 | -28/-72 | 20HP4C |
| 17.6 | Grid | 14 | 300 | -56/310 | -28/-72 | 20HP4D |
| 17.6 | Grid | 14 | 300 | -56/310 | -28/-72 | SG-20HP4D |
| 17.6 | Grid | 14 | 300 | -56/310 | -28/-72 | 20HP4E |
| 19.8 | Grid | 12 | 300 | — | -28/-72 | 20JP4 |
| 17.6 | Grid | 14 | 300 | -56/310 | -28/-72 | 20LP4 |
| 17.6 | Grid | 14 | 300 | -55/300 | -28/-72 | 20MP4 |
| 22.0 | Cath. | 16 | 50 | 0/400 | 33/50 | 20RP4 |
| 23.0 | Cath. | 16 | 30 | -100/300 | 22/40 | 20SP4 |
| 23.0 | Cath. | 16 | 300 | 0/400 | 28/62 | 20TP4 |
| 23.0 | Cath. | 16 | 400 | 0/500 | 35/72 | 20UP4 |
| 23.0 | Cath. | 18 | 400 | 0/400 | 36/78 | 20WP4 |
| 23.0 | Cath. | 20 | 400 | -200/200 | 48/82 | 20XP4 |
| 23.0 | Cath. | 16 | 50 | -200/200 | 32/52 | 20YP4 |
| 23.0 | Cath. | 16 | 50 | -200/200 | 32/52 | 20ZP4 |
| 22.0 | Grid | 16 | 300 | — | -28/-72 | 21ACP4 |
| 22.0 | Grid | 16 | 300 | — | -28/-72 | 21ACP4A |
| 22.0 | Grid | 16 | 300 | — | -28/-72 | SG-21ACP4A |
| 19.8 | Grid | 16 | 300 | -64/350 | -28/-72 | 21AFP4 |
| 19.8 | Grid | 14 | 300 | -55/300 | -28/-72 | 21ALP4 |
| 19.8 | Grid | 14 | 300 | -55/300 | -28/-72 | 21ALP4A |
| 22.0 | Grid | 14 | 300 | -55/300 | -28/-72 | 21ALP4B |
| 19.8 | Grid | 16 | 300 | — | -28/-72 | 21AMP4 |
| 19.8 | Grid | 16 | 300 | — | -28/-72 | 21AMP4A |
| 19.8 | Grid | 17 | 300 | — | -28/-72 | 21AMP4B |
| 19.8 | Grid | 14 | 300 | -55/300 | -28/-72 | 21ANP4 |
| 19.8 | Grid | 14 | 300 | -55/300 | -28/-72 | 21ANP4A |
| 19.8 | Grid | 14 | 300 | — | -28/-72 | 21AP4 |
| 19.8 | Grid | 16 | 300 | — | -28/-72 | 21AQP4 |
| 19.8 | Grid | 16 | 300 | — | -28/-72 | 21AQP4A |
| 22.0 | Grid | 16 | 300 | — | -28/-72 | 21ARP4 |
| 22.0 | Grid | 16 | 300 | — | -28/-72 | 21ARP4A |
| 19.8 | Grid | 16 | 300 | -64/352 | -28/-72 | 21ASP4 |
| 19.8 | Grid | 16 | 300 | -64/350 | -28/-72 | 21ATP4 |
| 22.0 | Grid | 16 | 300 | -64/350 | -28/-72 | 21ATP4A |
| 19.8 | Grid | 16 | 300 | -64/350 | -28/-72 | 21ATP4B |
| 19.8 | Grid | 14 | 300 | -55/300 | -28/-72 | 21AUP4 |
| 19.8 | Grid | 14 | 300 | -55/300 | -28/-72 | 21AUP4A |
| 22.0 | Grid | 14 | 300 | -55/300 | -28/-72 | 21AUP4B |
| 22.0 | Grid | 14 | 300 | -55/300 | -28/-72 | SG-21AUP4B |
| 22.0 | Grid | 14 | 300 | -55/300 | -28/-72 | 21AUP4C |
| 19.8 | Grid | 14 | 300 | -55/300 | -28/-72 | 21AVP4 |
| 19.8 | Grid | 14 | 300 | -55/300 | -28/-72 | 21AVP4A |
| 22.0 | Grid | 14 | 300 | -55/300 | -28/-72 | 21AVP4B |
| 22.0 | Grid | 14 | 300 | -55/300 | -28/-72 | 21AVP4C |
| 19.8 | Grid | 16 | 300 | — | -28/-72 | 21AWP4 |
| 19.8 | Grid | 16 | 300 | — | -28/-72 | 21AWP4A |
| 19.8 | Grid | 16 | 300 | — | -28/-72 | SG-21AWP4A |

EXPLANATION OF SYMBOLS

- M—Metal cone tube
 G—Glass tube
 LWG—Light weight glass tube
 G°—Glass tube, dimensions different from normal
 MET—Metal tube
 O—Round tube
 □—Rectangular tube, spherical face
 ⊗—Rectangular tube, cylindrical face
 B—Fiberglass wrap implosion protection
 E—Filled rim type implosion protection
 T—Molded glass implosion panel attached to face
 P—Sagged glass implosion plate attached to face
 L—Plastic implosion barrier attached to face
 K—Banded tube with coated funnel for implosion protection
 H—Tube sealed into steel sheath for implosion protection
 C—Clear glass faceplate
 F—Gray filter glass faceplate
 R—Anti-reflection faceplate
 A—Aluminized screen
 V—Rim bands and tension band
 W—Rim bands and tension band with mounting lugs
 X—Formed with tension band
 Y—Formed rim with tension band and mounting lugs
 Mag.—Magnetic focus
 L.V.E.S.—Low voltage electrostatic focus
 H.V.E.S.—High Voltage electrostatic focus
 Auto.Es.—Self-focusing electrostatic
 Int.Mag.—Internal magnetic focus
 TPF—Tri-potential focus
 N—No ion trap
 S—Single field ion trap
 D—Double field ion trap
 I—Internal ion trap
 *—18 second heater warm-up time (all others are 11 second)
 Grid—Grid drive service (all voltages with respect to cathode)
 Cath.—Cathode drive service (all voltages with respect to Grid No. 1)
- NOTES**
- ◆ Design-Maximum Values Unless Otherwise Indicated
- ▣ Absolute-Maximum Values
- ▢ For X-Radiation Measurements, Characteristics, Limitations, and Warning see JEDEC Publication 64A, the latest EIA Published Product Information for this type, the specified applicable JEDEC X-Radiation Isodose and Limit Curves, and X-Radiation Warning, page
- △ The EIA Published Product Information as of March 1, 1972, does not contain an X-Radiation rating or reference to JEDEC X-Radiation Isodose and Limit Curves for this tube type. This does not necessarily mean the type is not capable of meeting an acceptable X-Radiation limit. Refer to the latest Published Product Information for X-Radiation Ratings and glass absorption characteristics.
- ☆ This type summary is based on EIA registered data, registered envelope data, and manufacturer's published data. Data presented herein have been carefully prepared from such publicly available data to assure technical correctness, however, no responsibility is assumed by the General Electric Company for possible inaccuracies.

Monochrome Picture Tubes — Condensed Data

334

| TUBE TYPE | X-RADIATION RATING | DEFL. ANGLE DEGREES | GLASS or METAL | FACEPLATE | | EXTERNAL COATING IN pf | FOCUS | ION TRAP MAG. | Overall Length (Inches) | NECK LENGTH (Inches) | BASING | HEATER | | |
|------------|--------------------|---------------------|----------------|-----------|----------------------|------------------------|-----------|---------------|-------------------------|----------------------|--------|-----------|------|-------|
| | | | | SHAPE | IMPLOSION PROTECTION | | | | | | | TREATMENT | V. | A. |
| 21AYP4 | △ | 70 | G | □ | — | F | 750/2500 | L.V.E.S. | S | 22.438 | 7.500 | 12L | 6.3 | 0.60 |
| 21BAP4 | △ | 90 | G | □ | — | FA | 2000/2500 | L.V.E.S. | N | 20.000 | 7.500 | 12L | 6.3 | 0.60 |
| 21BCP4 | △ | 90 | G | □ | — | FA | 500/750 | L.V.E.S. | N | 23.031 | 7.500 | 12L | 6.3 | 0.60 |
| 21BDP4 | △ | 72 | G | □ | — | FA | 500/750 | L.V.E.S. | N | 23.031 | 7.500 | 12L | 6.3 | 0.60 |
| 21BNP4 | △ | 90 | G | □ | — | FA | 2000/2500 | L.V.E.S. | N | 20.000 | 7.500 | 12L | 6.3 | 0.60 |
| 21BSP4 | △ | 90 | G | □ | — | FA | 2000/2500 | Mag. | S | 20.000 | 7.500 | 12N | 6.3 | 0.60 |
| 21BTP4 | △ | 90 | G | □ | — | FA | 2000/2500 | L.V.E.S. | S | 20.000 | 7.500 | 12L | 6.3 | 0.60 |
| 21CBP4 | △ | 90 | G | □ | — | FA | 2000/2500 | L.V.E.S. | N | 18.000 | 5.500 | 12L | 6.3 | 0.60 |
| 21CBP4A | △ | 90 | G | □ | — | FA | 2000/2500 | L.V.E.S. | N | 18.000 | 5.500 | 12L | 6.3 | 0.60 |
| 21CBP4B | △ | 90 | G | □ | — | FA | 2000/2500 | L.V.E.S. | N | 18.000 | 5.500 | 12L | 6.3 | 0.60 |
| 21CDP4 | △ | 90 | G | □ | — | F | 2000/2500 | L.V.E.S. | S | 20.000 | 7.500 | 12L | 6.3 | 0.45 |
| 21CDP4A | △ | 90 | G | □ | — | FA | 2000/2500 | L.V.E.S. | S | 20.000 | 7.500 | 12L | 6.3 | 0.45 |
| 21CEP4 | △ | 110 | G | □ | — | FA | 2000/2500 | L.V.E.S. | N | 14.438 | 5.438 | 8HR | 6.3 | 0.60 |
| 21CEP4A | △ | 110 | G | □ | — | FA | 2000/2500 | L.V.E.S. | N | 14.438 | 5.438 | 8HR | 6.3 | 0.60 |
| 21CGP4 | △ | 90 | G | □ | — | FA | 2000/2500 | L.V.E.S. | S | 20.000 | 7.500 | 12L | 6.3 | 0.60 |
| 21CHP4 | △ | 90 | G | □ | — | FA | 2000/2000 | L.V.E.S. | N | 18.000 | 5.500 | 12L | 6.3 | 0.60 |
| 21CKP4 | △ | 90 | G | □ | — | FA | 2000/2500 | L.V.E.S. | N | 18.000 | 5.500 | 12L | 6.3 | 0.45 |
| 21CLP4 | △ | 90 | G | □ | — | FA | 1250/1750 | L.V.E.S. | S | 19.000 | 6.500 | 12AJ | 6.3 | 0.30 |
| 21CMP4 | △ | 90 | G | □ | — | FA | 2000/2500 | L.V.E.S. | S | 19.000 | 6.500 | 12L | 6.3 | 0.60 |
| 21CQP4 | △ | 110 | LWG | □ | — | FA | 2000/2500 | L.V.E.S. | N | 14.438 | 5.188 | 7FA | 6.3 | 0.60 |
| 21CSP4 | △ | 110 | LWG | □ | — | FA | 2000/2500 | L.V.E.S. | N | 14.438 | 5.188 | 7FA | 6.3 | 0.45 |
| 21CUP4 | △ | 90 | G | □ | — | FA | 2000/2500 | Mag. | S | 20.000 | 7.500 | 12N | 6.3 | 0.60 |
| 21CVP4 | △ | 90 | G | □ | — | FA | 2000/2500 | L.V.E.S. | N | 20.000 | 7.500 | 12L | 6.3 | 0.60 |
| 21CWP4 | △ | 90 | G | □ | — | FA | 2000/2500 | L.V.E.S. | S | 20.000 | 7.500 | 12L | 6.3 | 0.60 |
| 21CXP4 | △ | 90 | G | □ | — | FA | 2000/2500 | L.V.E.S. | N | 18.000 | 5.500 | 12L | 6.3 | 0.60 |
| 21CZP4 | △ | 110 | LWG | □ | — | FA | 2000/2500 | L.V.E.S. | S | 14.688 | 5.438 | 8HR | 6.3 | 0.60 |
| 21DP4 | △ | 70 | M | □ | — | FR | None | H.V.E.S. | S | 22.625 | 7.500 | 12M | 6.3 | 0.60 |
| 21DAP4 | △ | 110 | LWG | □ | — | FA | 2000/2500 | L.V.E.S. | N | 14.688 | 5.438 | 8HR | 6.3 | 0.60 |
| 21DEP4 | △ | 110 | LWG | □ | — | FA | 2000/2500 | L.V.E.S. | N | 14.688 | 5.438 | 8HR | 6.3 | 0.60 |
| 21DEP4A | △ | 110 | LWG | □ | — | FA | 2000/2500 | L.V.E.S. | N | 14.688 | 5.438 | 8HR | 6.3 | 0.60 |
| SG-21DEP4A | △ | 110 | LWG | □ | — | FA | 2000/2500 | L.V.E.S. | N | 14.688 | 5.438 | 8HR | 6.3 | 0.60 |
| 21DFP4 | △ | 110 | G | □ | — | FA | 1500/2200 | L.V.E.S. | N | 14.438 | 5.438 | 8HR | 6.3 | 0.60 |
| 21DHP4 | △ | 110 | LWG | □ | — | FA | 1700/2500 | L.V.E.S. | N | 14.688 | 5.438 | 8HR | 6.3 | 0.45 |
| 21DJP4 | △ | 90 | G | □ | — | FA | 2000/2500 | L.V.E.S. | N | 18.000 | 5.500 | 12L | 6.3 | 0.30 |
| 21DKP4 | △ | 110 | LWG | □ | — | FA | 1700/2500 | L.V.E.S. | N | 14.688 | 5.438 | 8HR | 6.3 | 0.30 |
| 21DKP4A | △ | 110 | LWG | □ | — | FA | 1700/2500 | L.V.E.S. | N | 14.688 | 5.438 | 8HR | 6.3 | 0.30* |
| 21DLP4 | △ | 90 | G | □ | — | FA | 2000/2500 | L.V.E.S. | N | 17.000 | 4.500 | 12L | 6.3 | 0.60 |
| 21DMP4 | △ | 110 | LWG | □ | — | FA | 2000/2500 | L.V.E.S. | N | 13.750 | 4.500 | 8HR | 6.3 | 0.60 |
| 21DNP4 | △ | 90 | G | □ | — | FA | 1200/1500 | L.V.E.S. | S | 19.000 | 6.500 | 12L | 6.3 | 0.60 |
| 21DQP4 | △ | 90 | G | □ | — | FA | 2000/2500 | L.V.E.S. | N | 17.500 | 5.000 | 12L | 6.3 | 0.60 |
| 21DRP4 | △ | 90 | LWG | □ | — | FA | 2000/2500 | L.V.E.S. | N | 18.250 | 5.500 | 12L | 6.3 | 0.60 |
| 21DSP4 | △ | 90 | G | □ | — | FA | 2000/2500 | L.V.E.S. | N | 18.000 | 5.500 | 12L | 6.3 | 0.60 |
| 21DVP4 | △ | 90 | G | □ | — | FA | 500/750 | L.V.E.S. | S | 20.000 | 7.500 | 12L | 6.3 | 0.30 |
| 21DWP4 | △ | 110 | G | □ | — | FA | 2000/2500 | L.V.E.S. | N | 14.438 | 5.438 | 8HR | 6.3 | 0.30 |
| 21EAP4 | △ | 110 | LWG | □ | — | FA | 1500/2000 | L.V.E.S. | N | 12.938 | 3.688 | 8JK | 2.35 | 0.60 |
| 21ELP4 | △ | 90 | G | □ | — | FA | 2000/2500 | L.V.E.S. | N | 19.000 | 6.500 | 12L | 6.3 | 0.30 |
| 21EMP4 | △ | 110 | G | □ | — | FA | 2000/2500 | L.V.E.S. | N | 13.375 | 4.375 | 8HR | 6.3 | 0.60 |
| 21ENP4 | △ | 90 | G | □ | — | FA | 2000/2500 | L.V.E.S. | S | 19.000 | 6.500 | 12L | 6.3 | 0.30 |
| 21EP4 | △ | 70 | G | ⊙ | — | F | None | Mag. | S | 23.000 | 7.500 | 12D | 6.3 | 0.60 |
| 21EP4A | △ | 70 | G | □ | — | F | 500/750 | Mag. | S | 23.000 | 7.500 | 12N | 6.3 | 0.60 |
| 21EP4B | △ | 70 | G | □ | — | FA | 500/750 | Mag. | S | 23.000 | 7.500 | 12N | 6.3 | 0.60 |
| SG-21EP4B | △ | 70 | G | ⊙ | — | FA | 500/750 | Mag. | N | 23.000 | 7.500 | 12N | 6.3 | 0.60 |
| 21EP4C | △ | 70 | G | ⊙ | — | FA | 500/750 | Mag. | N | 23.000 | 7.500 | 12N | 6.3 | 0.60 |
| 21EQP4 | △ | 110 | G | □ | — | FA | 2000/2500 | L.V.E.S.TPF | N | 12.562 | 3.562 | 8JR | 6.3 | 0.60 |
| 21ERP4 | △ | 110 | G | □ | P | FAR | 1500/2000 | L.V.E.S.TPF | N | 12.812 | 3.562 | 8JR | 6.3 | 0.60 |
| 21ESP4 | △ | 110 | LWG | □ | — | FA | 2000/2500 | L.V.E.S. | N | 13.312 | 4.062 | 8JS | 6.3 | 0.60 |
| 21EVP4 | △ | 110 | LWG | □ | — | FA | 1500/2000 | L.V.E.S. | N | 12.937 | 3.688 | 8JK | 2.68 | 0.45 |
| 21EXP4 | △ | 110 | G | □ | — | FA | 2000/2500 | L.V.E.S. | N | 12.562 | 3.562 | 8JR | 6.3 | 0.30 |
| 21EZP4 | △ | 110 | LWG | □ | — | FA | 2000/2500 | L.V.E.S.TPF | N | 12.812 | 3.562 | 8JR | 6.3 | 0.30 |
| 21FAP4 | △ | 110 | LWG | □ | — | FA | 2000/2500 | L.V.E.S.TPF | N | 12.812 | 3.562 | 8JR | 6.3 | 0.60 |

| ANODE KV. DESIGN-MAX. VALUES | TYPICAL OPERATING CONDITIONS | | | | | TUBE TYPE |
|------------------------------------|------------------------------|-----------|-----------------|----------------------------------|---------------------------|--------------|
| | DRIVE | ANODE KV. | GRID 2 VOLTS | FOCUS ELEC- TRODE VOLTS | RASTER CUTOFF VOLTS | |
| 19.8 | Grid | 16 | 300 | -64/352 | -28/-72 | 21AYP4 |
| 22.0 | Grid | 16 | 300 | 0/500 | -28/-72 | 21BAP4 |
| 22.0 | Grid | 16 | 300 | 50/550 | -28/-72 | 21BCP4 |
| 22.0 | Grid | 16 | 300 | 50/550 | -28/-72 | 21BDP4 |
| 22.0 | Grid | 16 | 300 | 0/500 | -28/-72 | 21BNP4 |
| 22.0 | Grid | 16 | 300 | — | -28/-72 | 21BSP4 |
| 22.0 | Grid | 16 | 300 | -64/352 | -28/-72 | 21BTP4 |
| 19.8 | Grid | 14 | 300 | -55/300 | -28/-72 | 21CBP4 |
| 22.0 | Grid | 16 | 300 | 0/400 | -28/-72 | 21CBP4A |
| 22.0 | Grid | 16 | 300 | 0/450 | -28/-72 | 21CBP4B |
| 22.0 | Grid | 16 | 300 | -64/352 | -28/-72 | 21CDP4 |
| 22.0 | Grid | 16 | 300 | -64/352 | -28/-72 | 21CDP4A |
| 19.8 | Grid | 14 | 300 | 0/400 | -28/-72 | 21CEP4 |
| 22.0 | Grid | 14 | 300 | 0/400 | -28/-72 | 21CEP4A |
| 22.0 | Cath. | 14 | 110 | -55/300 | 32/50 | 21CGP4 |
| 22.0 | Cath. | 14 | 110 | -50/350 | 32/50 | 21CHP4 |
| 22.0 | Grid | 16 | 300 | -50/350 | -28/-72 | 21CKP4 |
| 19.8 | Grid | 14 | 300 | -103/203 | -35/-75 | 21CLP4 |
| 22.0 | Grid | 16 | 300 | -64/352 | -28/-72 | 21CMP4 |
| 19.8 | Grid | 16 | 300 | -50/350 | -35/-72 | 21CQP4 |
| 19.8 | Grid | 16 | 300 | 0/400 | -35/-72 | 21CSP4 |
| 22.0 | Grid | 16 | 300 | — | -28/-72 | 21CUP4 |
| 22.0 | Grid | 16 | 300 | -64/352 | -28/-72 | 21CVP4 |
| 22.0 | Grid | 16 | 300 | -64/352 | -28/-72 | 21CWP4 |
| 22.0 | Grid | 18 | 50 | 0/350 | 35/50 | 21CXP4 |
| 19.8 | Grid | 17 | 300 | 0/500 | -28/-72 | 21CZP4 |
| 19.8 | Grid | 14 | 300 | 2750/3740 | -28/-72 | 21DP4 |
| 19.8 | Grid | 14 | 300 | 0/400 | -28/-72 | 21DAP4 |
| 19.8 | Grid | 17 | 300 | 0/500 | -28/-72 | 21DEP4 |
| 22.0 | Grid | 17 | 300 | 0/500 | -28/-72 | 21DEP4A |
| 22.0 | Grid | 17 | 300 | 0/500 | -28/-72 | SG-21DEP4A |
| 19.8 | Grid | 14 | 300 | 0/400 | -28/-72 | 21DFP4 |
| 19.8 | Grid | 16 | 300 | 0/400 | -35/-72 | 21DHP4 |
| 22.0 | Grid | 16 | 300 | -50/350 | -25/-72 | 21DJP4 |
| 19.8 | Grid | 16 | 300 | 0/400 | -35/-72 | 21DKP4 |
| 19.8 | Grid | 16 | 300 | 0/400 | -35/-72 | 21DKP4A |
| 22.0 | Grid | 16 | 300 | 0/400 | -28/-72 | 21DLP4 |
| 22.0 | Grid | 16 | 400 | -50/350 | -36/-92 | 21DMP4 |
| 22.0 | Grid | 16 | 300 | -64/352 | -35/-72 | 21DNP4 |
| 22.0 | Grid | 16 | 300 | -50/350 | -35/-72 | 21DQP4 |
| 22.0 | Grid | 16 | 300 | 0/450 | -28/-72 | 21DRP4 |
| 22.0 | Cath. | 16 | 50 | 0/450 | 32/50 | 21DSP4 |
| 22.0 | Grid | 14 | 300 | -50/300 | -28/-72 | 21DVP4 |
| 19.8 | Grid | 14 | 450 | -50/350 | 45/105 | 21DWP4 |
| 20.0 | Grid | 16 | 300 | 100/500 | -35/-72 | 21EAP4 |
| 22.0 | Grid | 16 | 450 | 0/400 | -45/-105 | 21ELP4 |
| 19.8 | Grid | 16 | 450 | 0/400 | -45/-105 | 21EMP4 |
| 22.0 | Grid | 16 | 300 | -64/352 | -35/-72 | 21ENP4 |
| 19.8 | Grid | 16 | 300 | — | -28/-72 | 21EP4 |
| 19.8 | Grid | 16 | 300 | — | -28/-72 | 21EP4A |
| 19.8 | Grid | 16 | 300 | — | -28/-72 | 21EP4B |
| 19.8 | Grid | 16 | 300 | — | -28/-72 | SG-21EP4B |
| 19.8 | Grid | 16 | 300 | — | -28/-72 | 21EP4C |
| 20.0 | Grid | 16 | 500 | 0/400 | -43/-78 | 21EQP4 |
| 20.0 | Grid | 16 | 500 | 0/400 | -43/-72 | 21ERP4 |
| 19.8 | Grid | 17 | 450 | 0/500 | -28/-72 | 21ESP4 |
| 20.0 | Grid | 16 | 300 | 100/500 | -35/-72 | 21EVP4 |
| 20.0 | Grid | 16 | 500 | 0/400 | -43/-78 | 21EXP4 |
| 19.8 | Cath. | 18 | 500 | 0/400 | 41/69 | 21EZP4 |
| 22.0 | Grid | 16 | 300 | 0/400 | -43/-78 | 21FAP4 |

EXPLANATION OF SYMBOLS

- M—Metal cone tube
G—Glass tube
LWG—Light weight glass tube
G^o—Glass tube, dimensions different from normal
MET—Metal tube
O—Round tube
□—Rectangular tube, spherical face
⊙—Rectangular tube, cylindrical face
B—Fiberglass wrap implosion protection
E—Filled rim type implosion protection
T—Molded glass implosion panel attached to face
P—Sagged glass implosion plate attached to face
L—Plastic implosion barrier attached to face
K—Banded tube with coated funnel for implosion protection
H—Tube sealed into steel sheath for implosion protection
C—Clear glass faceplate
F—Gray filter glass faceplate
R—Anti-reflection faceplate
A—Aluminized screen
V—Rim bands and tension band
W—Rim bands and tension band with mounting lugs
X—Formed with tension band
Y—Formed rim with tension band and mounting lugs
Mag.—Magnetic focus
L.V.E.S.—Low voltage electrostatic focus
H.V.E.S.—High Voltage electrostatic focus
Auto.Es.—Self-focusing electrostatic
Int.Mag.—Internal magnetic focus
TPF—Tri-potential focus
N—No ion trap
S—Single field ion trap
D—Double field ion trap
I—Internal ion trap
*—18 second heater warm-up time (all others are 11 second)
Grid—Grid drive service (all voltages with respect to cathode)
Cath.—Cathode drive service (all voltages with respect to Grid No. 1)

NOTES

◆ Design-Maximum Values Unless Otherwise Indicated

⊠ Absolute-Maximum Values

⊞ For X-Radiation Measurements, Characteristics, Limitations, and Warning see JEDEC Publication 64A, the latest EIA Published Product Information for this type, the specified applicable JEDEC X-Radiation Isodose and Limit Curves, and X-Radiation Warning page

△ The EIA Published Product Information as of March 1, 1972, does not contain an X-Radiation rating or reference to JEDEC X-Radiation Isodose and Limit Curves for this tube type. This does not necessarily mean the type is not capable of meeting an acceptable X-Radiation limit. Refer to the latest Published Product Information for X-Radiation Ratings and glass absorption characteristics.

☆ This type summary is based on EIA registered data, registered envelope data, and manufacturer's published data. Data presented herein have been carefully prepared from such publicly available data to assure technical correctness, however, no responsibility is assumed by the General Electric Company for possible inaccuracies.

Monochrome Picture Tubes—Condensed Data

336

| TUBE TYPE | X-RADIATION RATING | DEFL. ANGLE DEGREES | GLASS or METAL | FACEPLATE | | EXTERNAL COATING IN μ | FOCUS | ION TRAP MAG. | Overall Length (Inches) | NECK LENGTH (Inches) | BASING | HEATER | | |
|-----------|--------------------|---------------------|----------------|-----------|----------------------|---------------------------|---------------|---------------|-------------------------|----------------------|--------|-----------|-----|-------|
| | | | | SHAPE | IMPLOSION PROTECTION | | | | | | | TREATMENT | V. | A. |
| | | | | | | | | | | | | | | |
| 21FCP4 | △ | 110 | LWG | □ | — | FA | 2000/2500 | L.V.E.S. | N | 13.500 | 4.250 | 8HR | 6.3 | 0.60 |
| 21FDP4 | △ | 110 | LWG | □ | — | FA | 1500/2000 | L.V.E.S. | N | 13.125 | 3.875 | 8KW | 6.3 | 0.60 |
| 21FLP4 | △ | 90 | G | □ | — | FA | 500/2500 | L.V.E.S. | N | 18.000 | 5.500 | 12L | 6.3 | 0.60 |
| SG-21FLP4 | △ | 90 | G | □ | — | FA | 500/2500 | L.V.E.S. | N | 18.000 | 5.500 | 12L | 6.3 | 0.60 |
| 21FMP4 | □ | 110 | LWG | □ | — | FA | 2000/2500 | L.V.E.S. | N | 14.375 | 5.125 | 8HR | 6.3 | 0.60 |
| 21FP4 | △ | 70 | G | ⊙ | — | F | None | L.V.E.S. | S | 23.000 | 7.500 | 12M | 6.3 | 0.60 |
| 21FP4A | △ | 70 | G | ⊙ | — | F | 500/750 | L.V.E.S. | S | 23.000 | 7.500 | 12L | 6.3 | 0.60 |
| 21FP4C | △ | 70 | G | ⊙ | — | FA | 500/750 | L.V.E.S. | S | 23.000 | 7.500 | 12L | 6.3 | 0.60 |
| SG-21FP4C | △ | 70 | G | ⊙ | — | FA | 500/750 | L.V.E.S. | N | 22.000 | 6.500 | 12L | 6.3 | 0.60 |
| 21FP4D | △ | 70 | G | ⊙ | — | FA | 500/750 | L.V.E.S. | N | 23.031 | 7.500 | 12L | 6.3 | 0.60 |
| 21FUP4 | △ | 114 | G | □ | — | FA | 1700/2500 | L.V.E.S. | N | 12.656 | 4.375 | 8HR | 6.3 | 0.45 |
| 21FVP4 | △ | 114 | G | □ | — | FA | 1500/2300 | L.V.E.S. | N | 12.656 | 4.375 | 8HR | 6.3 | 0.45 |
| 21FWP4 | □ | 114 | G | □ | — | FA | 1500/2300 | L.V.E.S. | N | 12.656 | 4.375 | 8HR | 6.3 | 0.45 |
| 21FXP4 | △ | 114 | G | □ | — | FA | 1500/2300 | L.V.E.S. | N | 12.660 | 4.375 | 8HR | 6.3 | 0.45 |
| 21FYP4 | □ | 114 | G | □ | — | W | FA 1900/2400 | L.V.E.S. | N | 12.781 | 4.500 | 8HR | 6.3 | 0.45 |
| 21FZP4 | △ | 114 | G | □ | — | V | FA 1700/2500 | L.V.E.S. | N | 12.656 | 4.375 | 8HR | 6.3 | 0.45 |
| 21GAP4 | △ | 114 | G | □ | — | V | FA 1300/2000 | L.V.E.S. | N | 12.656 | 4.375 | 8HR | 6.3 | 0.45 |
| 21GAP4A | □ | 114 | G | □ | — | V | FA 1300/2000 | L.V.E.S. | N | 12.656 | 4.375 | 8HR | 6.3 | 0.45 |
| 21GBP4 | □ | 114 | G | □ | — | V | FA 1500/2300 | L.V.E.S. | N | 12.781 | 4.500 | 8HR | 6.3 | 0.45 |
| 21GCP4 | □ | 114 | G | □ | — | W | FA 1700/2500 | L.V.E.S. | N | 12.656 | 4.375 | 8HR | 6.3 | 0.45 |
| 21GEP4 | □ | 114 | G | □ | — | W | FA 1700/2300 | L.V.E.S. | N | 12.660 | 4.380 | 8HR | 6.3 | 0.45 |
| 21GHP4 | □ | 114 | G | □ | — | — | FA 1500/2300 | L.V.E.S. | N | 12.656 | 4.375 | 8HR | 6.3 | 0.45 |
| 21GJP4 | △ | 114 | G | □ | — | V | FA 1500/2300 | L.V.E.S. | N | 12.968 | 4.687 | 8HR | 6.3 | 0.60 |
| 21GKP4 | △ | 114 | G | □ | — | Y | FA 1700/2500 | L.V.E.S. | N | 12.656 | 4.375 | 8HR | 6.3 | 0.45 |
| 21GTP4 | □ | 114 | G | □ | — | Y | FA 1700/2500 | L.V.E.S. | N | 12.660 | 4.375 | 8HR | 6.3 | 0.315 |
| 21JP4 | △ | 70 | G | ⊙ | — | F | 500/750 | Int.Mag. | I | 23.031 | 7.500 | 12N | 6.3 | 0.60 |
| 21JP4A | △ | 70 | G | ⊙ | — | FA | 500/750 | Int.Mag. | I | 23.031 | 7.500 | 12N | 6.3 | 0.60 |
| 21KP4 | △ | 70 | G | ⊙ | — | F | None | Auto.Es. | S | 22.875 | 7.500 | 12S | 6.3 | 0.60 |
| 21KP4A | △ | 70 | G | ⊙ | — | F | 500/750 | Auto.Es. | S | 23.000 | 7.500 | 12P | 6.3 | 0.60 |
| 21MP4 | △ | 70 | M | □ | — | FR | None | L.V.E.S. | S | 22.625 | 7.500 | 12M | 6.3 | 0.60 |
| 21VASP4 | □ | 114 | G | □ | — | W | FA 2000/2500 | L.V.E.S. | N | 13.130 | 4.380 | 8HR | 6.3 | 0.45 |
| 21VATP4 | □ | 114 | G | □ | — | V | FA 2000/2500 | L.V.E.S. | N | 13.130 | 4.380 | 8HR | 6.3 | 0.45 |
| 21WP4 | △ | 70 | G° | □ | — | F | 500/750 | Mag. | S | 22.562 | 7.500 | 12N | 6.3 | 0.60 |
| 21WP4A | △ | 70 | G° | □ | — | FA | 500/750 | Mag. | S | 22.562 | 7.500 | 12N | 6.3 | 0.60 |
| SG-21WP4A | △ | 70 | G° | □ | — | FA | 500/750 | Mag. | N | 22.562 | 7.500 | 12N | 6.3 | 0.60 |
| 21WP4B | □ | 70 | G° | □ | — | FA | 500/750 | Mag. | N | 22.562 | 7.500 | 12N | 6.3 | 0.60 |
| 21XP4 | △ | 70 | G° | □ | — | F | 2000/2500 | L.V.E.S. | S | 22.438 | 7.500 | 12L | 6.3 | 0.60 |
| 21XP4A | △ | 70 | G° | □ | — | FA | 2000/2500 | L.V.E.S. | S | 22.438 | 7.500 | 12L | 6.3 | 0.60 |
| SG-21XP4A | △ | 70 | G° | □ | — | FA | 2000/2500 | L.V.E.S. | N | 21.438 | 7.500 | 12L | 6.3 | 0.60 |
| 21XP4B | △ | 70 | G° | □ | — | FA | 2000/2500 | L.V.E.S. | N | 21.438 | 7.500 | 12L | 6.3 | 0.60 |
| 21YP4 | △ | 70 | G | □ | — | F | 500/750 | L.V.E.S. | S | 23.000 | 7.500 | 12L | 6.3 | 0.60 |
| 21YP4A | △ | 70 | G | □ | — | FA | 500/750 | L.V.E.S. | S | 23.000 | 7.500 | 12L | 6.3 | 0.60 |
| SG-21YP4A | △ | 70 | G | □ | — | FA | 500/750 | L.V.E.S. | N | 22.000 | 7.500 | 12L | 6.3 | 0.60 |
| 21YP4B | □ | 70 | G | □ | — | FA | 500/750 | L.V.E.S. | N | 23.000 | 7.500 | 12L | 6.3 | 0.60 |
| 21ZP4 | □ | 70 | G | □ | — | F | None | Mag. | S | 23.031 | 7.500 | 12D | 6.3 | 0.60 |
| 21ZP4A | □ | 70 | G | □ | — | F | 500/750 | Mag. | S | 23.031 | 7.500 | 12N | 6.3 | 0.60 |
| 21ZP4B | △ | 70 | G | □ | — | FA | 500/750 | Mag. | S | 23.031 | 7.500 | 12N | 6.3 | 0.60 |
| SG-21ZP4B | △ | 70 | G | □ | — | FA | 500/750 | Mag. | N | 23.031 | 7.500 | 12N | 6.3 | 0.60 |
| 21ZP4C | □ | 70 | G | □ | — | FA | 500/750 | Mag. | N | 23.031 | 7.500 | 12N | 6.3 | 0.60 |
| 22AFP4 | □ | 114 | G | □ | — | V | FA 2000/2500 | L.V.E.S. | N | 13.130 | 4.380 | 8HR | 6.3 | 0.45 |
| 22TP4 | △ | 114 | G | □ | — | E | FA 1700/2200 | L.V.E.S. | N | 13.125 | 4.375 | 8HR | 6.3 | 0.45 |
| 22VABP4 | □ | 110 | G | □ | — | X | FA 1700/2500 | L.V.E.S. | N | 14.406 | 4.375 | 8HR | 6.3 | 0.45 |
| 22VACP4 | □ | 110 | G | □ | — | R | FA 1700/2500 | L.V.E.S. | N | 14.594 | 4.375 | 8HR | 6.3 | 0.45 |
| 22VAMP4 | □ | 110 | G | □ | — | V | FA 1700/2500 | L.V.E.S. | N | 14.870 | 5.120 | 8HR | 6.3 | 0.45 |
| 22VANP4 | □ | 110 | G | □ | — | V | FAR 2000/2500 | L.V.E.S. | N | 14.875 | 5.125 | 8HR | 6.3 | 0.45 |
| 22VARP4 | □ | 110 | G | □ | — | V | FA 2000/2500 | L.V.E.S. | N | 14.375 | 4.625 | 8HR | 6.3 | 0.45 |
| 22VASP4 | □ | 114 | G | □ | — | V | FA 2000/2500 | L.V.E.S. | N | 14.875 | 5.125 | 8HR | 6.3 | 0.45 |
| 22VATP4 | □ | 114 | G | □ | — | V | FA 2000/2500 | L.V.E.S. | N | 14.875 | 5.125 | 8HR | 6.3 | 0.45 |
| 22ZP4 | △ | 114 | G | □ | — | W | FA 2000/2500 | L.V.E.S. | N | 14.875 | 5.125 | 8HR | 6.3 | 0.45 |
| 23ACP4 | △ | 90 | G | □ | — | T | FA 2000/2500 | L.V.E.S. | N | 13.130 | 4.380 | 8HR | 6.3 | 0.45 |
| | | | | | | | | | N | 19.394 | 5.500 | 12L | 6.3 | 0.60 |

| ANODE KV. DESIGN-MAX. VALUES | TYPICAL OPERATING CONDITIONS | | | | | TUBE TYPE |
|------------------------------------|------------------------------|-----------|-----------------|----------------------------------|---------------------------|--------------|
| | DRIVE | ANODE KV. | GRID 2 VOLTS | FOCUS ELEC- TRODE VOLTS | RASTER CUTOFF VOLTS | |
| 18.0 | Cath. | 16 | 300 | 0/400 | 34/63 | 21FCP4 |
| 20.0 | Grid | 16 | 300 | 100/500 | -35/-72 | 21FDP4 |
| 22.0 | Grid | 16 | 300 | 0/450 | -28/-72 | 21FLP4 |
| 22.0 | Grid | 16 | 300 | 0/450 | -28/-72 | SG-21FLP4 |
| 22.0 | Cath. | 18 | 50 | 0/500 | 31/49 | 21FMP4 |
| 19.8 | Grid | 14 | 300 | -56/310 | -28/-72 | 21FP4 |
| 19.8 | Grid | 14 | 300 | -56/310 | -28/-72 | 21FP4A |
| 19.8 | Grid | 14 | 300 | -56/310 | -28/-72 | 21FP4C |
| 19.8 | Grid | 14 | 300 | -56/310 | -28/-72 | SG-21FP4C |
| 23.0 | Cath. | 16 | 50 | 0/400 | 35/55 | 21FP4D |
| 23.0 | Cath. | 20 | 400 | -100/300 | 36/78 | 21FVP4 |
| 23.0 | Cath. | 20 | 400 | -100/300 | 36/78 | 21FWP4 |
| 23.0 | Cath. | 16 | 400 | 0/500 | 35/72 | 21FXP4 |
| 22.0 | Cath. | 16 | 50 | 0/400 | 33/45 | 21FYP4 |
| 23.0 | Grid | 16 | 400 | 0/400 | -39/-93 | 21FZP4 |
| 23.5 | Cath. | 16 | 30 | 0/400 | 30/45 | 21GAP4 |
| 23.5 | Cath. | 16 | 30 | 0/400 | 30/45 | 21GAP4A |
| 20.0 | Cath. | 16 | 50 | — | 36/54 | 21GBP4 |
| 23.0 | Cath. | 16 | 400 | 0/400 | 39/93 | 21GCP4 |
| 23.0 | Cath. | 16 | 50 | -200/200 | 32/50 | 21GEP4 |
| 23.5 | Cath. | 16 | 30 | 0/400 | 30/45 | 21GHP4 |
| 20.0 | Cath. | 16 | 400 | 0/400 | 36/78 | 21GJP4 |
| 23.0 | Cath. | 16 | 50 | 0/400 | 35/55 | 21GKP4 |
| 23.0 | Cath. | 16 | 50 | 0/400 | 35/55 | 21GTP4 |
| 22.0 | Grid | 16 | 300 | — | -28/-72 | 21JP4 |
| 22.0 | Grid | 16 | 300 | — | -28/-72 | 21JP4A |
| 19.8 | Grid | 14 | 300 | — | -28/-72 | 21KP4 |
| 19.8 | Grid | 14 | 300 | — | -28/-72 | 21KP4A |
| 17.6 | Grid | 14 | 300 | -55/300 | -28/-72 | 21MP4 |
| 23.0 | Cath. | 20 | 400 | -200/-200 | 48/82 | 21VASP4 |
| 23.0 | Cath. | 20 | 400 | -200/-200 | 48/82 | 21VATP4 |
| 19.8 | Grid | 16 | 300 | — | -28/-72 | 21WP4 |
| 19.8 | Grid | 16 | 300 | — | -28/-72 | 21WP4A |
| 19.8 | Grid | 16 | 300 | — | -28/-72 | SG-21WP4A |
| 19.8 | Grid | 16 | 300 | — | -28/-72 | 21WP4B |
| 19.8 | Grid | 16 | 300 | -64/352 | -28/-72 | 21XP4 |
| 19.8 | Grid | 16 | 300 | -64/352 | -28/-72 | 21XP4A |
| 19.8 | Grid | 16 | 300 | -64/352 | -28/-72 | SG-21XP4A |
| 19.8 | Grid | 16 | 300 | -64/352 | -28/-72 | 21XP4B |
| 19.8 | Grid | 14 | 300 | -55/300 | -28/-72 | 21YP4 |
| 19.8 | Grid | 16 | 300 | -64/350 | -28/-72 | 21YP4A |
| 19.8 | Grid | 16 | 300 | -64/350 | -28/-72 | SG-21YP4A |
| 19.8 | Grid | 16 | 300 | -64/350 | -28/-72 | 21YP4B |
| 19.8 | Grid | 16 | 300 | — | -28/-72 | 21ZP4 |
| 19.8 | Grid | 16 | 300 | — | -28/-72 | 21ZP4A |
| 19.8 | Grid | 16 | 300 | — | -28/-72 | 21ZP4B |
| 19.8 | Grid | 16 | 300 | — | -28/-72 | SG-21ZP4B |
| 19.8 | Grid | 16 | 300 | — | -28/-72 | 21ZP4C |
| 23.0 | Cath. | 20 | 400 | -200/4-200 | 48/82 | 22AFP4 |
| 23.0 | Cath. | 18 | 400 | 0/500 | 35/72 | 22TP4 |
| 23.5 | Cath. | 18 | 30 | 0/+400 | 22/45 | 22VABP4 |
| 23.0 | Cath. | 18 | 30 | 0/+400 | 22/45 | 22VACP4 |
| 23.0 | Grid | 16 | 400 | 0/400 | -35/-94 | 22VAMP4 |
| 22.0 | Cath. | 18 | 300 | 0/400 | 36/54 | 22VANP4 |
| 22.0 | Cath. | 18 | 50 | 50/350 | 33/45 | 22VARP4 |
| 23.0 | Cath. | 20 | 400 | -200/200 | 48/82 | 22VASP4 |
| 23.0 | Cath. | 20 | 400 | -200/200 | 48/82 | 22VATP4 |
| 23.0 | Cath. | 20 | 400 | -200/200 | 48/82 | 22ZP4 |
| 18.0 | Grid | 16 | 300 | 0/400 | -35/-72 | 23ACP4 |

EXPLANATION OF SYMBOLS

- M—Metal cone tube
 G—Glass tube
 LWG—Light weight glass tube
 G*—Glass tube, dimensions different from normal
 MET—Metal tube
 O—Round tube
 □—Rectangular tube, spherical face
 ⊙—Rectangular tube, cylindrical face
 B—Fiberglass wrap implosion protection
 E—Filled rim type implosion protection
 T—Molded glass implosion panel attached to face
 P—Sagged glass implosion plate attached to face
 L—Plastic implosion barrier attached to face
 K—Banded tube with coated funnel for implosion protection
 H—Tube sealed into steel sheath for implosion protection
 C—Clear glass faceplate
 F—Gray filter glass faceplate
 R—Anti-reflection faceplate
 A—Aluminized screen
 V—Rim bands and tension band
 W—Rim bands and tension band with mounting lugs
 X—Formed with tension band
 Y—Formed rim with tension band and mounting lugs
 Mag.—Magnetic focus
 L.V.E.S.—Low voltage electrostatic focus
 H.V.E.S.—High Voltage electrostatic focus
 Auto.Es.—Self-focusing electrostatic
 Int.Mag.—Internal magnetic focus
 TPF—Tri-potential focus
 N—No ion trap
 S—Single field ion trap
 D—Double field ion trap
 I—Internal ion trap
 *—18 second heater warm-up time (all others are 11 second)
 Grid—Grid drive service (all voltages with respect to cathode)
 Cath.—Cathode drive service (all voltages with respect to Grid No. 1)
- NOTES**
- ◆ Design-Maximum Values Unless Otherwise Indicated
 ▣ Absolute-Maximum Values
 ☒ For X-Radiation Measurements, Characteristics, Limitations, and Warning see JEDEC Publication 64A, the latest EIA Published Product Information for this type, the specified applicable JEDEC X-Radiation Isodose and Limit Curves, and X-Radiation Warning, page
 △ The EIA Published Product Information as of March 1, 1972, does not contain an X-Radiation rating or reference to JEDEC X-Radiation Isodose and Limit Curves for this tube type. This does not necessarily mean the type is not capable of meeting an acceptable X-Radiation limit. Refer to the latest Published Product Information for X-Radiation Ratings and glass absorbtion characteristics.
- ☆ This type summary is based on EIA registered data, registered envelope data, and manufacturer's published data. Data presented herein have been carefully prepared from such publicly available data to assure technical correctness, however, no responsibility is assumed by the General Electric Company for possible inaccuracies.

Monochrome Picture Tubes — Condensed Data

338

| TUBE TYPE | X-RADIATION RATING | DEFL. ANGLE DEGREES | GLASS OR METAL | FACEPLATE | | | EXTERNAL COATING IN pf | FOCUS | ION TRAP MAG. | Overall Length (inches) | NECK LENGTH (inches) | BASING | HEATER | |
|-----------|--------------------|---------------------|----------------|-----------|----------------------|-----------|------------------------|-------------|---------------|-------------------------|----------------------|--------|--------|-------|
| | | | | SHAPE | IMPLISION PROTECTION | TREATMENT | | | | | | | V. | A. |
| | | | | | | | | | | | | | | |
| 23AFP4 | ☒ | 92 | G | □ | T | FA | 2000/2500 | L.V.E.S. | N | 18.812 | 6.000 | 12L | 6.3 | 0.60 |
| 23AHP4 | ☒ | 92 | G | □ | — | FA | 1700/2500 | L.V.E.S. | N | 18.000 | 5.500 | 12L | 6.3 | 0.60 |
| 23AKP4 | ☒ | 114 | G | □ | — | FA | 2000/2500 | L.V.E.S.TPF | N | 12.812 | 3.562 | 8JR | 6.3 | 0.60 |
| 23ALP4 | ☒ | 114 | G | □ | — | FA | 1700/2500 | L.V.E.S. | N | 14.531 | 5.125 | 8HR | 6.3 | 0.45 |
| 23AMP4 | △ | 114 | G | □ | — | FA | 1700/2500 | L.V.E.S. | N | 14.531 | 5.125 | 8HR | 6.3 | 0.30 |
| 23ANP4 | △ | 92 | G | □ | T | FA | 2000/2500 | L.V.E.S. | N | 18.438 | 5.625 | 12L | 6.3 | 0.60 |
| 23AQP4 | △ | 114 | G | □ | — | FA | 1700/2500 | L.V.E.S. | N | 14.531 | 5.125 | 8HR | 6.3 | 0.30* |
| 23ARP4 | ☒ | 110 | G | □ | — | FA | 1700/2500 | L.V.E.S. | N | 14.875 | 5.125 | 8HR | 6.3 | 0.60 |
| 23ASP4 | ☒ | 92 | G | □ | — | FA | 1700/2500 | L.V.E.S. | N | 17.000 | 4.500 | 12L | 6.3 | 0.60 |
| 23ATP4 | ☒ | 92 | G | □ | T | FAR | 2000/2500 | L.V.E.S. | N | 18.438 | 5.625 | 12L | 6.3 | 0.60 |
| 23AUP4 | △ | 92 | G | □ | — | FA | 1700/2500 | L.V.E.S. | N | 18.000 | 5.500 | 12L | 6.3 | 0.60 |
| 23AVP4 | △ | 110 | G | □ | T | FAR | 2000/2500 | L.V.E.S. | N | 15.188 | 5.125 | 8HR | 6.3 | 0.60 |
| 23AWP4 | △ | 92 | G | □ | — | FA | 1700/2500 | L.V.E.S. | N | 18.125 | 5.625 | 12L | 6.3 | 0.60 |
| 23AXP4 | △ | 110 | G | □ | — | FA | 2000/2500 | L.V.E.S. | N | 14.000 | 4.250 | 8HR | 6.3 | 0.30 |
| 23AYP4 | ☒ | 110 | G | □ | T | FAR | 2000/2500 | L.V.E.S. | N | 15.187 | 5.125 | 8HR | 6.3 | 0.30 |
| 23AZP4 | △ | 92 | G | □ | — | FA | 1700/2500 | L.V.E.S. | N | 18.000 | 5.500 | 12L | 6.3 | 0.30 |
| 23BAP4 | ☒ | 110 | G | □ | — | FAR | 2000/2500 | L.V.E.S. | N | 14.375 | 4.375 | 8HR | 6.3 | 0.60 |
| 23BCP4 | ☒ | 110 | G | □ | — | FA | 1700/2500 | L.V.E.S. | N | 18.875 | 5.125 | 8HR | 6.3 | 0.30 |
| 23BDP4 | ☒ | 92 | G | □ | T | FAR | 2000/2500 | L.V.E.S. | N | 18.312 | 5.500 | 12L | 6.3 | 0.60 |
| 23BEP4 | △ | 110 | G | □ | T | FA | 2000/2500 | L.V.E.S. | N | 15.188 | 5.125 | 8HR | 6.3 | 0.30* |
| 23BEP4A | △ | 110 | G | □ | T | FA | 2000/2500 | L.V.E.S. | N | 15.188 | 5.125 | 8HR | 6.3 | 0.30* |
| 23BGP4 | ☒ | 110 | G | □ | T | FA | 1700/2500 | L.V.E.S. | N | 15.188 | 5.125 | 8HR | 6.3 | 0.60 |
| 23BHP4 | ☒ | 110 | G | □ | T | FAR | 1700/2500 | L.V.E.S. | N | 15.188 | 5.125 | 8HR | 6.3 | 0.60 |
| 23BJP4 | ☒ | 92 | G | □ | — | FA | 1700/2500 | L.V.E.S. | N | 18.125 | 5.625 | 12L | 6.3 | 0.60 |
| 23BKP4 | ☒ | 92 | G | □ | T | FA | 1700/2500 | L.V.E.S. | N | 18.438 | 5.625 | 12L | 6.3 | 0.60 |
| 23BLP4 | △ | 92 | G | □ | T | FAR | 1700/2500 | L.V.E.S. | N | 18.438 | 5.625 | 12L | 6.3 | 0.60 |
| 23BMP4 | △ | 92 | G | □ | T | FA | 1200/2500 | L.V.E.S. | N | 18.312 | 5.500 | 12L | 6.3 | 0.60 |
| 23BP4 | △ | 110 | G | □ | T | FA | 2000/2500 | L.V.E.S. | N | 14.438 | 4.375 | 8HR | 6.3 | 0.60 |
| 23BNP4 | ☒ | 110 | G | □ | T | FA | 2000/2500 | L.V.E.S. | N | 15.188 | 5.125 | 8HR | 6.3 | 0.60 |
| 23BQP4 | ☒ | 110 | G | □ | T | FA | 2000/2500 | L.V.E.S. | N | 15.188 | 5.125 | 8HR | 6.3 | 0.45 |
| 23BRP4 | ☒ | 110 | G | □ | T | FAR | 2000/2500 | L.V.E.S.TPF | N | 13.625 | 3.562 | 8JR | 6.3 | 0.30 |
| 23BSP4 | △ | 110 | G | □ | T | FAR | 2000/2500 | L.V.E.S. | N | 15.188 | 5.125 | 8HR | 6.3 | 0.30* |
| 23BTP4 | ☒ | 92 | G | □ | T | FA | 2000/2500 | L.V.E.S. | N | 18.312 | 5.500 | 12L | 6.3 | 0.60 |
| 23BVP4 | ☒ | 92 | G | □ | T | FA | 2000/2500 | L.V.E.S. | N | 18.812 | 6.000 | 12L | 6.3 | 0.60 |
| 23BP4 | △ | 92 | G | □ | P | FA | 2000/2500 | L.V.E.S. | N | 18.250 | 5.500 | 12L | 6.3 | 0.60 |
| 23BYP4 | △ | 110 | G | □ | T | FA | 2000/2500 | L.V.E.S.TPF | N | 13.265 | 3.562 | 8JR | 6.3 | 0.30* |
| 23BZP4 | △ | 92 | G | □ | — | FA | 1700/2500 | L.V.E.S. | N | 18.000 | 5.500 | 12L | 8.4 | 0.45 |
| 23CAP4 | △ | 92 | G | □ | T | FA | 2000/2500 | L.V.E.S. | N | 18.312 | 5.500 | 12L | 8.4 | 0.45 |
| 23CBP4 | ☒ | 110 | G | □ | T | FAR | 2000/2500 | L.V.E.S. | N | 15.188 | 5.125 | 8HR | 6.3 | 0.45 |
| 23CDP4 | △ | 92 | G | □ | — | FA | 2000/2500 | L.V.E.S. | N | 18.312 | 5.500 | 12L | 6.3 | 0.30 |
| 23CEP4 | △ | 110 | G | □ | — | FA | 1700/2500 | L.V.E.S. | N | 14.875 | 5.125 | 8HR | 6.3 | 0.45 |
| 23CGP4 | △ | 92 | G | □ | — | FA | 1700/2500 | L.V.E.S. | N | 18.000 | 5.500 | 12L | 6.3 | 0.45 |
| 23CMP4 | △ | 110 | G | □ | — | FA | 1700/2500 | L.V.E.S. | N | 14.875 | 5.125 | 8HR | 6.3 | 0.30* |
| 23CP4 | ☒ | 110 | G | □ | T | FA | 2000/2500 | L.V.E.S. | N | 15.188 | 5.125 | 8HR | 6.3 | 0.60 |
| 23CP4A | ☒ | 110 | G | □ | T | FA | 2000/2500 | L.V.E.S. | N | 15.188 | 5.125 | 8HR | 6.3 | 0.60 |
| 23CQP4 | △ | 114 | G | □ | — | FA | 1700/2500 | L.V.E.S. | N | 13.781 | 4.375 | 8HR | 6.3 | 0.45 |
| 23CSP4 | △ | 110 | G | □ | T | FAR | 2000/2500 | L.V.E.S.TPF | N | 13.125 | 3.562 | 8JR | 6.3 | 0.30* |
| 23CTP4 | ☒ | 92 | G | □ | T | FA | 2000/2500 | L.V.E.S. | N | 18.312 | 5.500 | 12L | 6.3 | 0.45 |
| 23CUP4 | △ | 110 | G | □ | T | FAR | 2000/2500 | L.V.E.S.TPF | N | 13.625 | 3.562 | 8JR | 6.3 | 0.60 |
| 23CVP4 | △ | 114 | G | □ | — | FA | 2000/2500 | L.V.E.S.TPF | N | 12.812 | 3.562 | 8JR | 6.3 | 0.30* |
| 23CWP4 | △ | 110 | G | □ | — | FA | 2000/2500 | L.V.E.S.TPF | N | 13.312 | 3.562 | 8JR | 6.3 | 0.60 |
| 23CXP4 | △ | 110 | G | □ | — | FA | 2000/2500 | L.V.E.S.TPF | N | 13.312 | 3.562 | 8JR | 6.3 | 0.30* |
| 23CZP4 | ☒ | 92 | G | □ | — | FA | 2000/2500 | L.V.E.S. | N | 18.500 | 6.000 | 12L | 6.3 | 0.60 |
| 23DAP4 | △ | 94 | G | □ | — | FA | 1700/2500 | L.V.E.S. | N | 16.953 | 4.875 | 8HR | 6.3 | 0.60 |
| 23DBP4 | ☒ | 110 | G | □ | — | FA | 2000/2500 | L.V.E.S. | N | 14.875 | 5.125 | 8HR | 6.3 | 0.60 |
| 23DCP4 | △ | 94 | G | □ | — | FA | 1700/2500 | L.V.E.S. | N | 17.078 | 5.000 | 8HR | 6.3 | 0.45 |
| 23DEP4 | △ | 110 | G | □ | E | FA | 2000/2500 | L.V.E.S. | N | 14.000 | 4.250 | 8HR | 6.3 | 0.30 |
| 23DFP4 | △ | 110 | G | □ | — | FA | 1500/2000 | L.V.E.S. | N | 14.000 | 4.250 | 8HR | 6.3 | 0.30 |
| 23DHP4 | △ | 110 | G | □ | T | FA | 2000/2500 | L.V.E.S. | N | 14.188 | 4.125 | 8HR | 6.3 | 0.30 |
| 23JJP4 | △ | 110 | G | □ | T | FAR | 2000/2500 | L.V.E.S. | N | 14.188 | 4.125 | 8HR | 6.3 | 0.30 |
| 23DKP4 | ☒ | 92 | G | □ | V | FA | 1700/2500 | L.V.E.S. | N | 18.000 | 5.500 | 12L | 6.3 | 0.60 |

| ANODE KV. DESIGN-MAX. VALUES | TYPICAL OPERATING CONDITIONS | | | | | TUBE TYPE |
|------------------------------------|------------------------------|-----------|-----------------|----------------------------------|---------------------------|--------------|
| | DRIVE | ANODE KV. | GRID 2 VOLTS | FOCUS ELEC- TRODE VOLTS | RASTER CUTOFF VOLTS | |
| 25.0 | Grid | 20 | 300 | 0/400 | -35/-72 | 23AFP4 |
| 22.0 | Grid | 18 | 400 | 0/400 | -36/-94 | 23AHP4 |
| 22.0 | Grid | 16 | 500 | 0/400 | -43/-78 | 23AKP4 |
| 22.0 | Grid | 18 | 400 | 0/400 | -36/-94 | 23ALP4 |
| 22.0 | Grid | 18 | 400 | 0/400 | -36/-94 | 23AMP4 |
| 25.0 | Cath. | 20 | 50 | 0/400 | 35/50 | 23ANP4 |
| 19.8 | Grid | 18 | 400 | 0/400 | -44/-94 | 23AQP4 |
| 22.0 | Grid | 16 | 300 | 0/400 | -35/-72 | 23ARP4 |
| 22.0 | Grid | 18 | 400 | 0/400 | -36/-94 | 23ASP4 |
| 25.0 | Cath. | 20 | 50 | 0/400 | 35/50 | 23ATP4 |
| 25.0 | Grid | 18 | 400 | 0/400 | -36/-94 | 23AUP4 |
| 22.0 | Grid | 16 | 300 | 0/400 | -35/-72 | 23AVP4 |
| 22.0 | Cath. | 20 | 50 | 0/400 | 36/54 | 23AWP4 |
| 20.0 | Cath. | 16 | 400 | 0/400 | 42/72 | 23AXP4 |
| 22.0 | Grid | 16 | 300 | 0/400 | -35/-72 | 23AYP4 |
| 22.0 | Grid | 18 | 400 | 0/400 | -36/-94 | 23AZP4 |
| 22.0 | Grid | 14 | 450 | 0/400 | -45/-105 | 23BAP4 |
| 22.0 | Grid | 16 | 300 | 0/400 | -35/-72 | 23BCP4 |
| 22.0 | Cath. | 16 | 500 | 0/400 | 45/95 | 23BDP4 |
| 22.0 | Grid | 16 | 300 | 0/400 | -35/-72 | 23BEP4 |
| 22.0 | Grid | 16 | 300 | 0/400 | -35/-72 | 23BEP4A |
| 22.0 | Cath. | 16 | 50 | 0/400 | 32/50 | 23BGP4 |
| 22.0 | Cath. | 16 | 50 | 0/400 | 32/50 | 23BHP4 |
| 25.0 | Cath. | 20 | 50 | 0/400 | 36/54 | 23BJP4 |
| 25.0 | Cath. | 20 | 50 | 0/400 | 36/54 | 23BKP4 |
| 25.0 | Cath. | 20 | 50 | 0/400 | 36/54 | 23BLP4 |
| 22.0 | Grid | 16 | 300 | 0/400 | -35/-72 | 23BMP4 |
| 22.0 | Grid | 14 | 450 | 0/400 | -45/-105 | 23BP4 |
| 22.0 | Grid | 18 | 400 | -100/300 | -60/-110 | 23BNP4 |
| 23.0 | Grid | 16 | 300 | 0/400 | -35/-72 | 23BQP4 |
| 22.0 | Grid | 16 | 500 | 0/400 | -43/-78 | 23BRP4 |
| 22.0 | Grid | 16 | 300 | 0/400 | -35/-72 | 23BSP4 |
| 25.0 | Grid | 16 | 300 | 0/400 | -35/-72 | 23BTP4 |
| 25.0 | Grid | 20 | 300 | 0/400 | -35/-72 | 23BVP4 |
| 22.0 | Grid | 16 | 300 | 0/400 | -35/-72 | 23BXP4 |
| 22.0 | Grid | 16 | 500 | 0/400 | -43/-78 | 23BYP4 |
| 22.0 | Grid | 18 | 400 | 0/400 | -36/-94 | 23BZP4 |
| 22.0 | Grid | 16 | 300 | 0/400 | -35/-72 | 23CAP4 |
| 23.0 | Grid | 16 | 300 | 0/400 | -35/-72 | 23CBP4 |
| 22.0 | Grid | 16 | 300 | 0/400 | -35/-72 | 23CDP4 |
| 22.0 | Grid | 16 | 300 | 0/400 | -35/-72 | 23CEP4 |
| 22.0 | Cath. | 16 | 500 | 0/400 | 45/95 | 23CGP4 |
| 22.0 | Grid | 16 | 300 | 0/400 | -35/-72 | 23CMP4 |
| 22.0 | Grid | 16 | 300 | 0/400 | -35/-72 | 23CP4 |
| 23.5 | Grid | 16 | 300 | 0/400 | -35/-72 | 23CP4A |
| 23.5 | Grid | 14 | 450 | 0/400 | -45/-105 | 23CQP4 |
| 22.0 | Grid | 16 | 500 | 0/400 | -43/-78 | 23CSP4 |
| 22.0 | Grid | 16 | 300 | 0/400 | -35/-72 | 23CTP4 |
| 22.0 | Grid | 16 | 500 | 0/400 | -43/-78 | 23CUP4 |
| 22.0 | Grid | 16 | 500 | 0/400 | -43/-78 | 23CVP4 |
| 22.0 | Grid | 16 | 500 | 0/400 | -43/-78 | 23CWP4 |
| 22.0 | Grid | 16 | 500 | 0/400 | -43/-78 | 23CXP4 |
| 25.0 | Grid | 20 | 300 | 0/400 | -40/-76 | 23CZP4 |
| 23.5 | Cath. | 18 | 50 | -50/250 | 35/55 | 23DAP4 |
| 22.0 | Cath. | 18 | 50 | 0/500 | 36/54 | 23DBP4 |
| 23.5 | Cath. | 18 | 50 | 0/400 | 35/55 | 23DCP4 |
| 20.0 | Cath. | 16 | 400 | 0/400 | 42/78 | 23DEP4 |
| 20.0 | Cath. | 16 | 400 | 0/400 | 42/78 | 23DFP4 |
| 22.0 | Cath. | 16 | 400 | 0/400 | 36/78 | 23DHP4 |
| 22.0 | Cath. | 16 | 400 | 0/400 | 36/78 | 23DJP4 |
| 22.0 | Grid | 16 | 300 | 0/400 | -35/-72 | 23DKP4 |

EXPLANATION OF SYMBOLS

- M—Metal cone tube
G—Glass tube
LWG—Light weight glass tube
G°—Glass tube, dimensions different from normal
MET—Metal tube
O—Round tube
□—Rectangular tube, spherical face
⊙—Rectangular tube, cylindrical face
B—Fiberglass wrap implosion protection
E—Filled rim type implosion protection
T—Molded glass implosion panel attached to face
P—Sagged glass implosion plate attached to face
L—Plastic implosion barrier attached to face
K—Banded tube with coated funnel for implosion protection
H—Tube sealed into steel sheath for implosion protection
C—Clear glass faceplate
F—Gray filter glass faceplate
R—Anti-reflection faceplate
A—Aluminized screen
V—Rim bands and tension band
W—Rim bands and tension band with mounting lugs
X—Formed with tension band
Y—Formed rim with tension band and mounting lugs
Mag.—Magnetic focus
L.V.E.S.—Low voltage electrostatic focus
H.V.E.S.—High Voltage electrostatic focus
Auto.Es.—Self-focusing electrostatic
Int.Mag.—Internal magnetic focus
TPF—Tri-potential focus
N—No ion trap
S—Single field ion trap
D—Double field ion trap
I—Internal ion trap
*—18 second heater warm-up time (all others are 11 second)
Grid—Grid drive service (all voltages with respect to cathode)
Cath.—Cathode drive service (all voltages with respect to Grid No. 1)

NOTES

- ◆ Design-Maximum Values Unless Otherwise Indicated
⊠ Absolute-Maximum Values
⊠ For X-Radiation Measurements, Characteristics, Limitations, and Warning see JEDEC Publication 64A, the latest EIA Published Product Information for this type, the specified applicable JEDEC X-Radiation Isodose and Limit Curves, and X-Radiation Warning, page
△ The EIA Published Product Information as of March 1, 1972, does not contain an X-Radiation rating or reference to JEDEC X-Radiation Isodose and Limit Curves for this tube type. This does not necessarily mean the type is not capable of meeting an acceptable X-Radiation limit. Refer to the latest Published Product Information for X-Radiation Ratings and glass absorption characteristics.
☆ This type summary is based on EIA registered data, registered envelope data, and manufacturer's published data. Data presented herein have been carefully prepared from such publicly available data to assure technical correctness, however, no responsibility is assumed by the General Electric Company for possible inaccuracies.

Monochrome Picture Tubes—Condensed Data

340

| TUBE TYPE | X-RADIATION RATING | DEFL. ANGLE DEGREES | GLASS or METAL | FACEPLATE | | | EXTERNAL COATING IN pf | FOCUS | ION TRAP MAG. | Overall Length (Inches) | NECK LENGTH (Inches) | BASING | HEATER | |
|-----------|--------------------|---------------------|----------------|-----------|----------------------|-----------|------------------------|-------------|---------------|-------------------------|----------------------|--------|--------|-------|
| | | | | SHAPE | IMPLOSION PROTECTION | TREATMENT | | | | | | | V. | A. |
| 23DLP4 | □ | 92 | G | □ | V | FA | 1700/2500 | L.V.E.S. | N | 18.000 | 5.500 | 12L | 6.3 | 0.60 |
| 23DLP4A | △ | 92 | G | □ | V | FA | 1700/2500 | L.V.E.S. | N | 18.000 | 5.500 | 12L | 6.3 | 0.60 |
| 23DNP4 | △ | 92 | G | □ | T | FA | 2000/2500 | L.V.E.S. | N | 18.418 | 5.625 | 12L | 6.3 | 0.60 |
| 23DP4 | △ | 110 | G | □ | T | FA | 2000/2500 | L.V.E.S.TPF | N | 13.562 | 3.562 | 8JR | 6.3 | 0.60 |
| 23DQP4 | □ | 92 | G | □ | T | FA | 2000/2500 | L.V.E.S. | N | 18.688 | 5.875 | 8HR | 6.3 | 0.60 |
| 23DRP4 | △ | 114 | G | □ | V | FA | 2000/2500 | L.V.E.S. | N | 13.688 | 4.375 | 8HR | 6.3 | 0.30* |
| 23DSP4 | □ | 92 | G | □ | V | FA | 2000/2500 | L.V.E.S. | N | 18.375 | 5.875 | 8HR | 6.3 | 0.60 |
| 23DSP4A | □ | 92 | G | □ | V | FA | 2000/2500 | L.V.E.S. | N | 18.375 | 5.875 | 8HR | 6.3 | 0.60 |
| 23DTP4 | □ | 92 | G | □ | V | FA | 1700/2500 | L.V.E.S. | N | 18.500 | 6.000 | 12L | 6.3 | 0.60 |
| 23DVP4 | □ | 114 | G | □ | V | FA | 1700/2500 | L.V.E.S. | N | 14.438 | 5.125 | 8HR | 6.3 | 0.60 |
| 23DVP4A | □ | 114 | G | □ | V | FA | 1700/2500 | L.V.E.S. | N | 14.438 | 5.125 | 8HR | 6.3 | 0.60 |
| 23DWP4 | □ | 94 | G | □ | V | FA | 2000/2500 | L.V.E.S. | N | 17.188 | 5.125 | 8HR | 6.3 | 0.60 |
| 23DYP4 | □ | 110 | G | □ | V | FA | 2000/2500 | L.V.E.S. | N | 14.875 | 5.125 | 8HR | 6.3 | 0.60 |
| 23DZP4 | □ | 114 | G | □ | V | FA | 1700/2500 | L.V.E.S. | N | 14.438 | 5.125 | 8HR | 6.3 | 0.45 |
| 23EAP4 | □ | 92 | G | □ | T | FAR | 2000/2500 | L.V.E.S. | N | 18.312 | 5.500 | 12L | 6.3 | 0.45 |
| 23ECP4 | □ | 92 | G | □ | P | FA | 2000/2500 | L.V.E.S. | N | 18.312 | 5.625 | 12L | 6.3 | 0.60 |
| 23EDP4 | △ | 92 | G | □ | P | FA | 2000/2500 | L.V.E.S. | N | 18.188 | 5.500 | 12L | 6.3 | 0.60 |
| 23EFP4 | △ | 110 | G | □ | V | FA | 1700/2500 | L.V.E.S. | N | 14.875 | 5.125 | 8HR | 6.3 | 0.60 |
| 23EKP4 | □ | 92 | G | □ | V | FA | 1700/2500 | L.V.E.S. | N | 18.000 | 5.550 | 12L | 6.3 | 0.45 |
| 23ENP4 | □ | 92 | G | □ | V | FA | 1700/2500 | L.V.E.S. | N | 18.125 | 5.625 | 12L | 6.3 | 0.60 |
| 23EP4 | □ | 110 | G | □ | T | FA | 1700/2500 | L.V.E.S. | N | 15.188 | 5.125 | 8KP | 6.3 | 0.60 |
| 23EQP4 | □ | 114 | G | □ | V | FA | 1700/2500 | L.V.E.S. | N | 14.531 | 5.125 | 8HR | 6.3 | 0.45 |
| 23ERP4 | □ | 114 | G | □ | V | FA | 1700/2500 | L.V.E.S. | N | 14.531 | 5.125 | 8HR | 6.3 | 0.60 |
| 23ESP4 | □ | 110 | G | □ | V | FAR | 2000/2500 | L.V.E.S. | N | 14.875 | 5.125 | 8HR | 6.3 | 0.60 |
| 23ETP4 | □ | 110 | G | □ | V | FA | 1700/2500 | L.V.E.S. | N | 14.875 | 5.125 | 8HR | 6.3 | 0.60 |
| 23EWP4 | □ | 114 | G | □ | V | FA | 1700/2500 | L.V.E.S. | N | 14.437 | 5.125 | 8HR | 6.3 | 0.45 |
| 23EWP4A | □ | 114 | G | □ | V | FA | 1700/2500 | L.V.E.S. | N | 14.500 | 5.125 | 8HR | 6.3 | 0.45 |
| 23EYP4 | △ | 92 | G | □ | E | FA | 2000/2500 | L.V.E.S. | N | 18.125 | 5.625 | 12L | 6.3 | 0.60 |
| 23EZP4 | △ | 94 | G | □ | W | FA | 1700/2500 | L.V.E.S. | N | 17.078 | 5.000 | 8HR | 6.3 | 0.45 |
| 23FAP4 | □ | 114 | G | □ | E | FA | 1700/2500 | L.V.E.S. | N | 14.531 | 5.125 | 8HR | 6.3 | 0.60 |
| 23FBP4 | △ | 92 | G | □ | V | FAR | 1700/2500 | L.V.E.S. | N | 18.125 | 5.625 | 12L | 6.3 | 0.60 |
| 23FCP4 | △ | 110 | G | □ | V | FA | 1700/2500 | L.V.E.S. | N | 14.875 | 5.125 | 8HR | 6.3 | 0.45 |
| 23FDP4 | △ | 110 | G | □ | V | FA | 1700/2500 | L.V.E.S. | N | 14.875 | 5.125 | 8HR | 6.3 | 0.45 |
| 23FHP4 | □ | 110 | G | □ | V | FA | 1700/2500 | L.V.E.S. | N | 14.875 | 5.125 | 8HR | 6.3 | 0.45 |
| 23FKP4 | △ | 94 | G | □ | T | FA | 1700/2500 | L.V.E.S. | N | 17.531 | 5.125 | 8HR | 6.3 | 0.60 |
| 23FLP4 | □ | 92 | G | □ | V | FA | 1700/2500 | L.V.E.S. | N | 18.000 | 5.500 | 12L | 6.3 | 0.45 |
| 23FMP4 | △ | 110 | G | □ | V | FA | 1700/2500 | L.V.E.S. | N | 14.875 | 5.125 | 8HR | 6.3 | 0.45 |
| 23FNP4 | △ | 92 | G | □ | E | FA | 2000/2500 | L.V.E.S. | N | 18.000 | 5.500 | 12L | 6.3 | 0.45 |
| 23FP4 | △ | 114 | G | □ | — | FA | 1700/2500 | L.V.E.S. | N | 13.781 | 4.375 | 8HR | 6.3 | 0.60 |
| 23FP4A | △ | 114 | G | □ | — | FA | 1700/2500 | L.V.E.S. | N | 13.688 | 4.375 | 8HR | 6.3 | 0.60 |
| 23FRP4 | △ | 110 | G | □ | E | FA | 1700/2500 | L.V.E.S. | N | 14.250 | 4.500 | 8HR | 6.3 | 0.45 |
| 23FSP4 | △ | 110 | G | □ | E | FA | 1700/2500 | L.V.E.S. | N | 14.875 | 5.125 | 8HR | 6.3 | 0.60 |
| 23FVP4 | □ | 110 | G | □ | V | FA | 2000/2500 | L.V.E.S. | N | 14.875 | 5.125 | 8HR | 6.3 | 0.45 |
| 23FVP4-A | □ | 110 | G | □ | V | FA | 2000/2500 | L.V.E.S. | N | 14.875 | 5.125 | 8HR | 6.3 | 0.45 |
| 23FWP4 | △ | 92 | G | □ | V | FA | 1700/2500 | L.V.E.S. | N | 18.000 | 5.500 | 12L | 6.3 | 0.45 |
| 23FWP4A | △ | 92 | G | □ | V | FA | 1700/2500 | L.V.E.S. | N | 18.000 | 5.500 | 12L | 6.3 | 0.45 |
| 23GBP4 | △ | 110 | G | □ | V | FA | 1700/2500 | L.V.E.S. | N | 14.875 | 5.125 | 8HR | 6.3 | 0.45 |
| 23GDP4 | △ | 114 | G | □ | V | FA | 2000/2500 | L.V.E.S. | N | 14.500 | 5.125 | 8HR | 6.3 | 0.60 |
| 23GEP4 | □ | 92 | G | □ | V | FAR | 1700/2500 | L.V.E.S. | N | 18.125 | 5.625 | 12L | 6.3 | 0.60 |
| 23GHP4 | △ | 94 | G | □ | V | FA | 2000/2500 | L.V.E.S. | N | 16.812 | 4.750 | 8HR | 6.3 | 0.45 |
| 23GJP4 | △ | 110 | G | □ | V | FA | 1700/2500 | L.V.E.S. | N | 14.250 | 4.500 | 8HR | 6.3 | 0.45 |
| 23GJP4A | □ | 110 | G | □ | V | FA | 1700/2500 | L.V.E.S. | N | 14.250 | 4.500 | 8HR | 6.3 | 0.45 |
| 23GKP4 | △ | 92 | G | □ | E | FA | 2000/2500 | L.V.E.S. | N | 18.000 | 5.500 | 12L | 6.3 | 0.60 |
| 23GP4 | △ | 110 | G | □ | T | FA | 2000/2500 | L.V.E.S. | N | 15.187 | 5.125 | 8HR | 6.3 | 0.60 |
| 23GRP4 | △ | 92 | G | □ | E | FA | 2000/2500 | L.V.E.S. | N | 18.000 | 5.500 | 12L | 6.3 | 0.45 |
| 23GSP4 | △ | 110 | G | □ | W | FA | 1700/2500 | L.V.E.S. | N | 14.875 | 5.125 | 8HR | 6.3 | 0.60 |
| 23GTP4 | △ | 110 | G | □ | V | FA | 1700/2500 | L.V.E.S. | N | 14.875 | 5.125 | 8HR | 6.3 | 0.60 |
| 23GVP4 | △ | 114 | G | □ | V | FA | 2000/2500 | L.V.E.S. | N | 14.500 | 5.125 | 8HR | 6.3 | 0.45 |
| 23GWP4 | □ | 110 | G | □ | V | FA | 2000/2500 | L.V.E.S. | N | 14.375 | 4.625 | 8HR | 6.3 | 0.45 |
| 23GXP4 | △ | 110 | G | □ | W | FA | 2000/2500 | L.V.E.S. | N | 14.875 | 5.125 | 8HR | 6.3 | 0.60 |

| ANODE KV. DESIGN-MAX. VALUES | TYPICAL OPERATING CONDITIONS | | | | | TUBE TYPE |
|------------------------------------|------------------------------|-----------|-----------------|----------------------------------|---------------------------|--------------|
| | DRIVE | ANODE KV. | GRID 2 VOLTS | FOCUS ELEC- TRODE VOLTS | RASTER CUTOFF VOLTS | |
| 22.0 | Cath. | 20 | 50 | 0/500 | 36/54 | 23DLP4 |
| 22.0 | Cath. | 20 | 50 | 0/500 | 36/54 | 23DLP4A |
| 25.0 | Cath. | 20 | 35 | 0/500 | 25/50 | 23DNP4 |
| 22.0 | Grid | 16 | 500 | 0/400 | -43/-78 | 23DP4 |
| 25.0 | Cath. | 20 | 65 | -100/300 | 41/56 | 23DQP4 |
| 22.0 | Cath. | 16 | 400 | 9/300 | 33/78 | 23DRP4 |
| 25.0 | Cath. | 18 | 65 | -100/300 | 41/56 | 23DSP4 |
| 25.0 | Cath. | 18 | 65 | -100/300 | 41/56 | 23DSP4A |
| 25.0 | Grid | 20 | 300 | 0/400 | -40/76 | 23DTP4 |
| 22.0 | Grid | 18 | 400 | 0/400 | -46/-94 | 23DVP4 |
| 22.0 | Grid | 18 | 400 | 0/400 | -46/-94 | 23DVP4A |
| 22.0 | Cath. | 18 | 200 | 0/500 | 31/49 | 23DWP4 |
| 22.0 | Cath. | 18 | 300 | 0/500 | 36/54 | 23DYP4 |
| 22.0 | Grid | 18 | 400 | 0/400 | -46/-94 | 23DZP4 |
| 22.0 | Grid | 16 | 300 | 0/400 | -35/-72 | 23EAP4 |
| 25.0 | Cath. | 20 | 35 | 0/400 | 25/50 | 23ECP4 |
| 25.0 | Grid | 20 | 300 | 0/400 | -35/-72 | 23EDP4 |
| 22.0 | Cath. | 18 | 50 | 0/400 | 34/49 | 23EFP4 |
| 25.0 | Cath. | 20 | 400 | 0/400 | 36/78 | 23EKP4 |
| 25.0 | Cath. | 20 | 50 | 0/400 | 36/54 | 23ENP4 |
| 22.0 | Cath. | 16 | 50 | 0/400 | 32/50 | 23EP4 |
| 23.0 | Cath. | 18 | 300 | 0/400 | 28/62 | 23EQP4 |
| 23.0 | Cath. | 18 | 300 | 0/400 | 28/62 | 23ERP4 |
| 22.0 | Cath. | 18 | 300 | 0/500 | 36/54 | 23ESP4 |
| 23.0 | Cath. | 18 | 300 | 0/400 | 28/62 | 23ETP4 |
| 22.0 | Grid | 18 | 400 | 0/400 | -46/-94 | 23EWP4 |
| 22.0 | Grid | 18 | 400 | -200/200 | -48/-96 | 23EWP4A |
| 25.0 | Cath. | 20 | 30 | 0/500 | 25/50 | 23EYP4 |
| 23.5 | Cath. | 18 | 50 | 0/400 | 35/55 | 23EZP4 |
| 22.0 | Grid | 18 | 400 | -200/200 | -48/-96 | 23FAP4 |
| 25.0 | Cath. | 20 | 50 | 0/400 | 36/54 | 23FBP4 |
| 22.0 | Cath. | 18 | 50 | 0/400 | 34/49 | 23FCP4 |
| 23.0 | Cath. | 18 | 50 | 0/400 | 34/52 | 23FDP4 |
| 23.5 | Cath. | 16 | 50 | -200/200 | 32/50 | 23FHP4 |
| 23.5 | Cath. | 16 | 500 | 0/500 | 45/95 | 23FKP4 |
| 25.0 | Grid | 18 | 300 | -200/200 | -37/-74 | 23FLP4 |
| 23.0 | Cath. | 18 | 300 | 0/400 | 28/62 | 23FMP4 |
| 25.0 | Grid | 20 | 300 | 0/500 | -35/-72 | 23FNP4 |
| 22.0 | Grid | 14 | 450 | 0/400 | -45/-105 | 23FP4 |
| 23.5 | Grid | 14 | 450 | 0/400 | -45/-105 | 23FP4A |
| 23.0 | Cath. | 16 | 50 | 0/400 | 35/55 | 23FRP4 |
| 23.0 | Grid | 16 | 400 | 0/400 | -39/-94 | 23FSP4 |
| 22.0 | Cath. | 18 | 300 | 0/500 | 36/54 | 23FVP4 |
| 22.0 | Cath. | 18 | 300 | 0/500 | 36/54 | 23FVP4-A |
| 22.0 | Cath. | 20 | 50 | 0/500 | 36/54 | 23FWP4 |
| 22.0 | Cath. | 20 | 50 | 0/500 | 36/54 | 23FWP4A |
| 23.0 | Grid | 16 | 400 | 0/400 | -39/-94 | 23GBP4 |
| 22.0 | Grid | 18 | 400 | 0/400 | -36/-94 | 23GDP4 |
| 25.0 | Cath. | 20 | 50 | 0/400 | 36/54 | 23GEP4 |
| 23.0 | Cath. | 18 | 200 | 0/400 | 31/49 | 23GHP4 |
| 22.0 | Cath. | 18 | 50 | 0/400 | 32/50 | 23GJP4 |
| 22.0 | Cath. | 18 | 50 | 0/400 | 32/50 | 23GJP4A |
| 22.0 | Grid | 16 | 300 | 0/400 | -35/-72 | 23GKP4 |
| 22.0 | Grid | 16 | 300 | 0/400 | -28/-72 | 23GP4 |
| 22.0 | Grid | 16 | 300 | 0/400 | -35/-72 | 23GRP4 |
| 23.0 | Cath. | 18 | 300 | 0/400 | 28/62 | 23GSP4 |
| 23.0 | Cath. | 18 | 300 | 0/400 | 28/62 | 23GTP4 |
| 22.0 | Cath. | 18 | 45 | 0/500 | 35/50 | 23GVP4 |
| 22.0 | Cath. | 18 | 50 | 50/350 | 33/45 | 23GWP4 |
| 23.0 | Grid | 16 | 300 | 0/400 | -35/-72 | 23GXP4 |

EXPLANATION OF SYMBOLS

- M—Metal cone tube
 G—Glass tube
 LWG—Light weight glass tube
 G*—Glass tube, dimensions different from normal
- MET—Metal tube
 O—Round tube
 □—Rectangular tube, spherical face
 ⊙—Rectangular tube, cylindrical face
- B—Fiberglass wrap implosion protection
 E—Filled rim type implosion protection
 T—Molded glass implosion panel attached to face
 P—Sagged glass implosion plate attached to face
 L—Plastic implosion barrier attached to face
 K—Banded tube with coated funnel for implosion protection
 H—Tube sealed into steel sheath for implosion protection
 C—Clear glass faceplate
 F—Gray filter glass faceplate
 R—Anti-reflection faceplate
 A—Aluminized screen
 V—Rim bands and tension band
 W—Rim bands and tension band with mounting lugs
 X—Formed with tension band
 Y—Formed rim with tension band and mounting lugs
- Mag.—Magnetic focus
 L.V.E.S.—Low voltage electrostatic focus
 H.V.E.S.—High Voltage electrostatic focus
 Auto.Es.—Self-focusing electrostatic
 Int.Mag.—Internal magnetic focus

- TPF—Tri-potential focus
 N—No ion trap
 S—Single field ion trap
 D—Double field ion trap
 I—Internal ion trap
 *—18 second heater warm-up time (all others are 11 second)
- Grid—(Grid drive service (all voltages with respect to cathode))
 Cath.—Cathode drive service (all voltages with respect to Grid No. 1)

NOTES

⊕ Design-Maximum Values Unless Otherwise Indicated

⊖ Absolute-Maximum Values

⊠ For X-Radiation Measurements, Characteristics, Limitations, and Warning see JEDEC Publication 64A, the latest EIA Published Product Information for this type, the specified applicable JEDEC X-Radiation Isodose and Limit Curves, and X-Radiation Warning, page

△ The EIA Published Product Information as of March 1, 1972, does not contain an X-Radiation rating or reference to JEDEC X-Radiation Isodose and Limit Curves for this tube type. This does not necessarily mean the type is not capable of meeting an acceptable X-Radiation limit. Refer to the latest Published Product Information for X-Radiation Ratings and glass absorption characteristics.

☆ This type summary is based on EIA registered data, registered envelope data, and manufacturer's published data. Data presented herein have been carefully prepared from such publicly available data to assure technical correctness, however, no responsibility is assumed by the General Electric Company for possible inaccuracies.

Monochrome Picture Tubes—Condensed Data

342

| TUBE TYPE | X-RADIATION RATING | DEFL. ANGLE DEGREES | GLASS or METAL | FACEPLATE | | | EXTERNAL COATING IN pf | FOCUS | ION TRAP MAG. | Overall Length (inches) | NECK LENGTH (inches) | BASING | HEATER | |
|-----------|--------------------|---------------------|----------------|-----------|----------------------|-----------|------------------------|-------------|---------------|-------------------------|----------------------|--------|--------|-------|
| | | | | SHAPE | IMPLOSION PROTECTION | TREATMENT | | | | | | | V. | A. |
| | | | | | | | | | | | | | | |
| 23HBP4 | ☑ | 110 | G | □ | E | FA | 1700/2500 | L.V.E.S. | N | 14.000 | 4.250 | 8HR | 6.3 | 0.30 |
| 23HFP4 | ☑ | 110 | G | □ | V | FA | 1700/2500 | L.V.E.S. | N | 14.875 | 5.125 | 8HR | 6.3 | 0.45 |
| 23HFP4A | ☑ | 110 | G | □ | V | FA | 1700/2500 | L.V.E.S. | N | 14.875 | 5.125 | 8HR | 6.3 | 0.45 |
| 23HGP4 | ☑ | 110 | G | □ | W | FA | 1700/2500 | L.V.E.S. | N | 14.875 | 5.125 | 8HR | 6.3 | 0.45 |
| 23HKP4 | ☑ | 110 | G | □ | E | FA | 1700/2500 | L.V.E.S. | N | 14.875 | 5.125 | 8HR | 6.3 | 0.60 |
| 23HLP4 | △ | 110 | G | □ | W | FA | 1700/2500 | L.V.E.S. | N | 14.875 | 5.125 | 8HR | 6.3 | 0.60 |
| 23HMP4 | △ | 110 | G | □ | V | FA | 1700/2500 | L.V.E.S. | N | 14.875 | 5.125 | 8HR | 6.3 | 0.60 |
| 23HP4 | △ | 110 | G | □ | T | FA | 2000/2500 | L.V.E.S. | N | 15.500 | 5.438 | 8HR | 6.3 | 0.60 |
| 23HQP4 | △ | 110 | G | □ | W | FA | 1700/2500 | L.V.E.S. | N | 14.880 | 5.130 | 8HR | 6.3 | 0.45 |
| 23HRP4 | ☑ | 110 | G | □ | W | FA | 2000/2500 | L.V.E.S. | N | 14.375 | 4.625 | 8HR | 6.3 | 0.45 |
| 23HUP4 | ☑ | 110 | G | □ | V | FA | 1700/2500 | L.V.E.S. | N | 14.125 | 4.375 | 8HR | 6.3 | 0.45 |
| 23HUP4A | ☑ | 110 | G | □ | V | FA | 1700/2500 | L.V.E.S. | N | 14.125 | 4.375 | 8HR | 6.3 | 0.45 |
| 23HWP4 | ☑ | 110 | G | □ | W | FA | 2000/2500 | L.V.E.S. | N | 14.875 | 5.125 | 8HR | 6.3 | 0.45 |
| 23HWP4A | ☑ | 110 | G | □ | W | FA | 2000/2500 | L.V.E.S. | N | 14.875 | 5.125 | 8HR | 6.3 | 0.45 |
| 23HXP4 | △ | 110 | G | □ | V | FAR | 1700/2500 | L.V.E.S. | N | 14.875 | 5.125 | 8HR | 6.3 | 0.45 |
| 23HZP4 | △ | 110 | G | □ | W | FA | 1700/2500 | L.V.E.S. | N | 14.875 | 5.125 | 8HR | 6.3 | 0.30 |
| 23JAP4 | △ | 110 | G | □ | V | FA | 1300/2100 | L.V.E.S. | N | 14.250 | 4.500 | 8HR | 6.3 | 0.45 |
| 23JBP4 | ☑ | 110 | G | □ | E | FA | 1700/2500 | L.V.E.S. | N | 14.125 | 4.375 | 8HR | 6.3 | 0.60 |
| 23JEP4 | ☑ | 110 | G | □ | E | FA | 1700/2500 | L.V.E.S. | N | 14.875 | 5.125 | 8HR | 6.3 | 0.45 |
| 23JFP4 | ☑ | 110 | G | □ | W | FA | 1700/2500 | L.V.E.S. | N | 14.250 | 4.500 | 8HR | 6.3 | 0.315 |
| 23JGP4 | ☑ | 110 | G | □ | W | FA | 1700/2500 | L.V.E.S. | N | 14.875 | 5.125 | 8HR | 6.3 | 0.45 |
| 23JLP4 | ☑ | 110 | G | □ | V | FA | 1700/2500 | L.V.E.S. | N | 14.125 | 4.375 | 8HR | 6.3 | 0.45 |
| 23JP4 | △ | 110 | G | □ | T | FA | 2000/2500 | L.V.E.S. | N | 15.438 | 5.375 | 7FA | 6.3 | 0.45 |
| 23KP4 | ☑ | 114 | G | □ | -- | FA | 2000/2500 | L.V.E.S. | N | 13.500 | 4.250 | 8HR | 6.3 | 0.60 |
| 23KP4A | ☑ | 114 | G | □ | -- | FA | 2000/2500 | L.V.E.S. | N | 13.500 | 4.250 | 8HR | 6.3 | 0.60 |
| 23MP4 | △ | 114 | G | □ | -- | FA | 1700/2500 | L.V.E.S. | N | 14.531 | 5.125 | 8HR | 6.3 | 0.60 |
| 23MP4A | △ | 114 | G | □ | -- | FA | 1700/2500 | L.V.E.S. | N | 14.531 | 5.125 | 8HR | 6.3 | 0.60 |
| 23NP4 | ☑ | 114 | G | □ | -- | FA | 1700/2500 | L.V.E.S. | N | 14.531 | 5.125 | 8HR | 6.3 | 0.60 |
| 23RP4 | ☑ | 110 | G | □ | T | FA | 2000/2500 | L.V.E.S.TPF | N | 13.625 | 3.562 | 8JR | 6.3 | 0.30 |
| 23SP4 | ☑ | 110 | G | □ | T | FA | 2000/2500 | L.V.E.S. | N | 15.188 | 5.125 | 8HR | 6.3 | 0.30 |
| 23TP4 | △ | 90 | G | □ | T | FA | 1700/2500 | L.V.E.S. | N | 19.344 | 5.500 | 12L | 6.3 | 0.60 |
| 23UP4 | △ | 110 | G | □ | T | FA | 2000/2500 | L.V.E.S. | N | 15.188 | 5.125 | 8HR | 6.3 | 0.45 |
| 23VP4 | △ | 114 | G | □ | -- | FA | 2000/2500 | L.V.E.S. | N | 13.625 | 4.375 | 8HR | 6.3 | 0.30* |
| 23WP4 | △ | 114 | G | □ | -- | FA | 2000/2500 | L.V.E.S. | N | 14.688 | 5.438 | 8HR | 6.3 | 0.60 |
| 23XP4 | ☑ | 92 | G | □ | T | FA | 2000/2500 | L.V.E.S. | N | 18.312 | 5.500 | 12L | 6.3 | 0.60 |
| 23YP4 | ☑ | 92 | G | □ | T | FA | 2000/2500 | L.V.E.S. | N | 18.312 | 5.500 | 12L | 6.3 | 0.60 |
| 23ZP4 | △ | 90 | G | □ | T | FA | 2000/2500 | L.V.E.S. | N | 19.469 | 5.625 | 12L | 6.3 | 0.60 |
| 24ADP4 | △ | 90 | G | □ | -- | FA | 2000/2500 | Mag. | N | 21.125 | 7.500 | 12N | 6.3 | 0.60 |
| 24AEP4 | △ | 90 | G | □ | -- | FA | 2000/2500 | L.V.E.S. | N | 19.125 | 5.500 | 12L | 6.3 | 0.60 |
| SG-24AEP4 | △ | 90 | G | □ | -- | FA | 2000/2500 | L.V.E.S. | N | 19.125 | 5.500 | 12L | 6.3 | 0.60 |
| 24AHP4 | △ | 110 | G | □ | -- | FA | 1700/2500 | L.V.E.S. | N | 15.875 | 5.438 | 8HR | 6.3 | 0.60 |
| 24AJP4 | △ | 90 | G | □ | -- | FA | 2000/2500 | L.V.E.S. | N | 19.125 | 5.500 | 12L | 6.3 | 0.60 |
| 24ALP4 | ☑ | 110 | G | □ | -- | FA | 2000/2500 | L.V.E.S. | N | 15.875 | 5.438 | 8HR | 6.3 | 0.60 |
| 24AMP4 | △ | 110 | G | □ | -- | FA | 2000/2500 | L.V.E.S. | N | 15.625 | 5.187 | 7FA | 6.3 | 0.60 |
| 24ANP4 | △ | 90 | G | □ | -- | FA | 1700/2500 | L.V.E.S. | S | 20.125 | 6.500 | 12L | 6.3 | 0.60 |
| 24AP4 | △ | 70 | MET | ○ | -- | F | None | Mag. | S | 23.938 | 7.156 | 12D | 6.3 | 0.60 |
| 24AP4A | △ | 70 | MET | ○ | -- | FA | None | Mag. | S | 23.938 | 7.156 | 12D | 6.3 | 0.60 |
| 24AP4B | △ | 70 | MET | ○ | -- | FR | None | Mag. | S | 23.938 | 7.156 | 12D | 6.3 | 0.60 |
| 24AQP4 | △ | 110 | G | □ | -- | FA | 1700/2500 | L.V.E.S. | N | 15.875 | 5.438 | 8HR | 6.3 | 0.45 |
| 24ASP4 | △ | 90 | G | □ | -- | FA | 1700/2500 | L.V.E.S. | N | 19.125 | 5.500 | 12L | 6.3 | 0.30 |
| 24ATP4 | △ | 90 | G | □ | -- | FA | 2000/2500 | L.V.E.S. | N | 19.125 | 5.500 | 12L | 6.3 | 0.60 |
| 24AUP4 | △ | 90 | G | □ | -- | FA | 1700/2500 | L.V.E.S. | N | 18.125 | 4.500 | 12L | 6.3 | 0.60 |
| 24AVP4 | △ | 110 | G | □ | -- | FA | 1700/2500 | L.V.E.S. | N | 14.812 | 4.375 | 8JK | 2.35 | 0.60 |
| 24AWP4 | △ | 110 | G | □ | -- | FA | 2000/2500 | L.V.E.S. | N | 14.875 | 4.438 | 8HR | 6.3 | 0.60 |
| 24AXP4 | △ | 110 | G | □ | -- | FA | 1700/2500 | L.V.E.S. | N | 15.875 | 4.438 | 8HR | 6.3 | 0.30 |
| 24BAP4 | △ | 110 | G | □ | -- | FA | 1700/2500 | L.V.E.S. | N | 15.875 | 5.438 | 8HR | 6.3 | 0.60 |
| 24BCP4 | △ | 90 | G | □ | P | FA | 2000/2500 | L.V.E.S. | N | 19.375 | 5.500 | 12L | 6.3 | 0.60 |
| 24BEP4 | △ | 110 | G | □ | -- | FA | 1700/2500 | L.V.E.S. | N | 14.812 | 4.375 | 8KW | 6.3 | 0.60 |
| 24BP4 | △ | 70 | MET | ○ | -- | F | None | L.V.E.S. | S | 24.250 | 7.500 | 12M | 6.3 | 0.60 |
| 24CP4 | ☑ | 90 | G | □ | -- | F | 2000/2500 | Mag. | S | 21.125 | 7.500 | 12N | 6.3 | 0.60 |

| ANODE KV. DESIGN-MAX. VALUES | TYPICAL OPERATING CONDITIONS | | | | | TUBE TYPE |
|------------------------------------|------------------------------|-----------|-----------------|----------------------------------|---------------------------|--------------|
| | DRIVE | ANODE KV. | GRID 2 VOLTS | FOCUS ELEC- TRODE VOLTS | RASTER CUTOFF VOLTS | |
| 22.0 | Grid | 16 | 300 | 0/400 | -35/-72 | 23HBP4 |
| 23.0 | Grid | 16 | 400 | 0/400 | -39/-94 | 23HFP4 |
| 23.0 | Cath. | 18 | 300 | 0/400 | 28/62 | 23HFP4A |
| 23.0 | Cath. | 18 | 300 | 0/400 | 28/62 | 23HGP4 |
| 23.0 | Cath. | 16 | 150 | 0/400 | 36/54 | 23HKP4 |
| 23.0 | Cath. | 18 | 300 | 0/400 | 28/62 | 23HLP4 |
| 23.0 | Cath. | 18 | 300 | 0/400 | 28/62 | 23HMP4 |
| 20.0 | Grid | 16 | 300 | 0/400 | -35/-72 | 23HP4 |
| 23.0 | Cath. | 16 | 400 | 0/400 | 39/94 | 23HQP4 |
| 23.5 | Cath. | 18 | 30 | 0/400 | 30/45 | 23HRP4 |
| 23.5 | Cath. | 18 | 30 | 0/400 | 22/45 | 23HUP4 |
| 23.5 | Cath. | 17 | 30 | 0/400 | 22/45 | 23HUP4A |
| 22.0 | Cath. | 16 | 50 | 0/400 | 35/55 | 23HWP4 |
| 22.0 | Cath. | 16 | 50 | 0/400 | 35/55 | 23HWP4A |
| 23.0 | Cath. | 18 | 300 | 0/400 | 28/62 | 23HXP4 |
| 23.0 | Cath. | 18 | 300 | 0/400 | 28/62 | 23HZP4 |
| 22.0 | Cath. | 18 | 50 | 200/200 | 32/50 | 23JAP4 |
| 23.0 | Grid | 16 | 400 | 0/400 | -39/-94 | 23JBP4 |
| 23.0 | Cath. | 18 | 300 | 0/400 | 28/62 | 23JEP4 |
| 23.0 | Cath. | 16 | 50 | 0/400 | 35/55 | 23JFP4 |
| 23.5 | Cath. | 18 | 30 | 0/400 | 22/45 | 23JGP4 |
| 23.5 | Cath. | 18 | 30 | 0/400 | 22/45 | 23JLP4 |
| 22.0 | Cath. | 16 | 50 | 0/400 | 35/50 | 23JP4 |
| 20.0 | Grid | 16.5 | 450 | 0/500 | -28/-72 | 23KP4 |
| 22.0 | Grid | 16.5 | 450 | 0/500 | -28/-72 | 23KP4A |
| 22.0 | Grid | 18 | 400 | 0/400 | -36/-94 | 23MP4 |
| 23.5 | Grid | 18 | 400 | 0/400 | -36/-94 | 23MP4A |
| 22.0 | Cath. | 18 | 50 | 0/400 | 34/49 | 23NP4 |
| 22.0 | Grid | 16 | 500 | 0/400 | -43/-78 | 23RP4 |
| 22.0 | Grid | 16 | 300 | 0/400 | -35/-72 | 23SP4 |
| 22.0 | Grid | 16 | 300 | 0/400 | -28/-72 | 23TP4 |
| 18.0 | Grid | 16 | 300 | 0/400 | -35/-72 | 23UP4 |
| 22.0 | Grid | 14 | 450 | 0/400 | -45/-105 | 23VP4 |
| 20.0 | Grid | 16 | 300 | 0/400 | -35/-72 | 23WP4 |
| 18.0 | Grid | 16 | 300 | 0/400 | -35/-72 | 23XP4 |
| 22.0 | Grid | 16 | 300 | 0/400 | -35/-72 | 23YP4 |
| 22.0 | Grid | 18 | 50 | 0/500 | 35/50 | 23ZP4 |
| 24.2 | Grid | 18 | 300 | — | -28/-72 | 24ADP4 |
| 22.0 | Grid | 18 | 300 | -50/350 | -28/-72 | 24AEP4 |
| 22.0 | Grid | 18 | 300 | -50/350 | -28/-72 | SG-24AEP4 |
| 22.0 | Grid | 16 | 300 | -50/350 | -28/-72 | 24AHP4 |
| 22.0 | Grid | 18 | 50 | 0/350 | 35/50 | 24AJP4 |
| 22.0 | Grid | 17 | 300 | 0/500 | -28/-72 | 24ALP4 |
| 22.0 | Grid | 16 | 300 | 0/400 | -35/-72 | 24AMP4 |
| 22.0 | Grid | 18 | 300 | -72/396 | -35/-72 | 24ANP4 |
| 17.6 | Grid | 15 | 300 | — | -28/-72 | 24AP4 |
| 17.6 | Grid | 15 | 300 | — | -28/-72 | 24AP4A |
| 17.6 | Grid | 15 | 300 | — | -28/-72 | 24AP4B |
| 22.0 | Grid | 16 | 300 | 0/400 | -35/-72 | 24AQP4 |
| 22.0 | Grid | 18 | 300 | 0/400 | -35/-72 | 24ASP4 |
| 22.0 | Grid | 18 | 50 | 0/400 | 34/52 | 24ATP4 |
| 22.0 | Grid | 16 | 300 | -75/400 | -35/-72 | 24AUP4 |
| 20.0 | Grid | 16 | 300 | -100/300 | -35/-72 | 24AVP4 |
| 22.0 | Grid | 16 | 300 | 0/400 | -28/-72 | 24AWP4 |
| 22.0 | Grid | 16 | 300 | 0/400 | -35/-72 | 24AXP4 |
| 22.0 | Cath. | 16 | 50 | 0/400 | 32/47 | 24BAP4 |
| 22.0 | Grid | 18 | 400 | 0/400 | -36/-94 | 24BCP4 |
| 20.0 | Grid | 16 | 300 | -100/300 | -35/-72 | 24BEP4 |
| 17.6 | Grid | 14 | 300 | -56/310 | -28/-72 | 24BP4 |
| 22.0 | Grid | 18 | 300 | — | -28/-72 | 24CP4 |

EXPLANATION OF SYMBOLS

- M—Metal cone tube
 G—Glass tube
 LWG—Light weight glass tube
 G*—Glass tube, dimensions different from normal
 MET—Metal tube
 O—Round tube
 □—Rectangular tube, spherical face
 ⊙—Rectangular tube, cylindrical face
 B—Fiberglass wrap implosion protection
 E—Filled rim type implosion protection
 T—Molded glass implosion panel attached to face
 P—Sagged glass implosion plate attached to face
 L—Plastic implosion barrier attached to face
 K—Banded tube with coated funnel for implosion protection
 H—Tube sealed into steel sheath for implosion protection
 C—Clear glass faceplate
 F—Gray filter glass faceplate
 R—Anti-reflection faceplate
 A—Aluminized screen
 V—Rim bands and tension band
 W—Rim bands and tension band with mounting lugs
 X—Formed with tension band
 Y—Formed rim with tension band and mounting lugs
 Mag.—Magnetic focus
 L.V.E.S.—Low voltage electrostatic focus
 H.V.E.S.—High Voltage electrostatic focus
 Auto.Es.—Self-focusing electrostatic
 Int.Mag.—Internal magnetic focus
 TPF—Tri-potential focus
 N—No ion trap
 S—Single field ion trap
 D—Double field ion trap
 I—Internal ion trap
 *—18 second heater warm-up time (all others are 11 second)
 Grid—Grid drive service (all voltages with respect to cathode)
 Cath.—Cathode drive service (all voltages with respect to Grid No. 1)
- NOTES**
- ⊕ Design-Maximum Values Unless Otherwise Indicated
 ⊖ Absolute-Maximum Values
 ⊠ For X-Radiation Measurements, Characteristics, Limitations, and Warning see JEDEC Publication 64A, the latest EIA Published Product Information for this type, the specified applicable JEDEC X-Radiation Isodose and Limit Curves, and X-Radiation Warning, page
 △ The EIA Published Product Information as of March 1, 1972, does not contain an X-Radiation rating or reference to JEDEC X-Radiation Isodose and Limit Curves for this tube type. This does not necessarily mean the type is not capable of meeting an acceptable X-Radiation limit. Refer to the latest Published Product Information for X-Radiation Ratings and glass absorption characteristics.
- ☆ This type summary is based on EIA registered data, registered envelope data, and manufacturer's published data. Data presented herein have been carefully prepared from such publicly available data to assure technical correctness, however, no responsibility is assumed by the General Electric Company for possible inaccuracies.

Monochrome Picture Tubes—Condensed Data

344

| TUBE TYPE | X-RADIATION RATING | DEF. ANGLE DEGREES | GLASS or METAL | FACEPLATE | | | EXTERNAL COATING IN μ | FOCUS | ION TRAP MAG. | Overall Length (inches) | NECK LENGTH (inches) | BASING | HEATER | |
|-----------|--------------------|--------------------|----------------|-----------|----------------------|-----------|---------------------------|----------|---------------|-------------------------|----------------------|--------|--------|------|
| | | | | SHAPE | IMPLOSION PROTECTION | TREATMENT | | | | | | | V. | A. |
| 24CP4A | ☒ | 90 | G | ☐ | — | FA | 2000/2500 | Mag. | S | 21.125 | 7.500 | 12N | 6.3 | 0.60 |
| 5G-24CP4A | △ | 90 | G | ☐ | — | FA | 2000/2500 | Mag. | N | 21.125 | 7.500 | 12N | 6.3 | 0.60 |
| 24CP4B | ☒ | 90 | G | ☐ | — | FA | 2000/2500 | Mag. | N | 21.125 | 7.500 | 12N | 6.3 | 0.60 |
| 24DP4 | ☒ | 90 | G | ☐ | — | F | 2000/2500 | L.V.E.S. | S | 21.125 | 7.500 | 12L | 6.3 | 0.60 |
| 24DP4A | ☒ | 90 | G | ☐ | — | F | 500/750 | L.V.E.S. | S | 21.125 | 7.500 | 12L | 6.3 | 0.60 |
| 24QP4 | △ | 90 | G | ☐ | — | F | 500/750 | Mag. | S | 21.125 | 7.500 | 12N | 6.3 | 0.60 |
| 24TP4 | △ | 90 | G | ☐ | — | FA | 250/2500 | Mag. | S | 21.125 | 7.500 | 12N | 6.3 | 0.60 |
| 24VP4 | △ | 90 | G | ☐ | — | FA | 2000/2500 | Mag. | S | 21.125 | 7.500 | 12N | 6.3 | 0.60 |
| 24VP4A | △ | 90 | G | ☐ | — | FA | 2000/2500 | Mag. | S | 21.125 | 7.500 | 12N | 6.3 | 0.60 |
| 24XP4 | △ | 90 | G | ☐ | — | F | None | Mag. | S | 21.125 | 7.500 | 12D | 6.3 | 0.60 |
| 24YP4 | △ | 90 | G | ☐ | — | FA | 2000/2500 | L.V.E.S. | S | 21.125 | 7.500 | 12L | 6.3 | 0.60 |
| 24ZP4 | △ | 90 | G | ☐ | — | FA | 2000/2500 | L.V.E.S. | N | 21.125 | 7.500 | 12L | 6.3 | 0.60 |
| 25DP4 | △ | 110 | G | ☐ | E | FA | 2000/2500 | L.V.E.S. | N | 15.062 | 4.375 | 8HR | 6.3 | 0.30 |
| 25EP4 | △ | 110 | G | ☐ | E | FA | 2000/2500 | L.V.E.S. | N | 15.812 | 5.125 | 8HR | 6.3 | 0.30 |
| 25HP4 | △ | 110 | G | ☐ | E | FA | 2000/2500 | L.V.E.S. | N | 15.875 | 5.125 | 8HR | 6.3 | 0.45 |
| 25JP4 | △ | 110 | G | ☐ | — | FA | 2000/2500 | L.V.E.S. | N | 15.812 | 5.125 | 8HR | 6.3 | 0.30 |
| 25KP4 | △ | 110 | G | ☐ | P | FAR | 2000/2500 | L.V.E.S. | N | 16.000 | 5.125 | 8HR | 6.3 | 0.30 |
| 25LP4 | △ | 110 | G | ☐ | P | FA | 2000/2500 | L.V.E.S. | N | 16.312 | 5.437 | 8HR | 6.3 | 0.60 |
| 25TP4 | △ | 110 | G | ☐ | W | FA | 2000/2500 | L.V.E.S. | N | 15.813 | 5.125 | 8HR | 6.3 | 0.60 |
| 27ABP4 | △ | 110 | G | ☐ | P | FA | 2000/2500 | L.V.E.S. | N | 17.125 | 5.125 | 8HR | 6.3 | 0.60 |
| 27ACP4 | △ | 90 | G | ☐ | P | FA | 2000/2500 | L.V.E.S. | N | 21.812 | 6.000 | 12L | 6.3 | 0.60 |
| 27ADP4 | △ | 110 | G | ☐ | P | FA | 2000/2500 | L.V.E.S. | N | 17.562 | 5.375 | 8HR | 6.3 | 0.60 |
| 27AEP4 | △ | 110 | G | ☐ | — | FA | 2000/2500 | L.V.E.S. | N | 17.312 | 5.375 | 8HR | 6.3 | 0.60 |
| 27AFP4 | △ | 110 | G | ☐ | P | FA | 2000/2500 | L.V.E.S. | N | 17.562 | 5.375 | 8HR | 6.3 | 0.60 |
| 27AGP4 | △ | 110 | G | ☐ | P | FAR | 2000/2500 | L.V.E.S. | N | 17.125 | 5.125 | 8HR | 6.3 | 0.60 |
| 27AP4 | △ | 90 | MET | ☐ | — | FR | None | L.V.E.S. | S | 21.625 | 7.500 | 12M | 6.3 | 0.60 |
| 27EP4 | △ | 90 | G | ☐ | — | FA | None | Mag. | S | 23.062 | 7.500 | 12D | 6.3 | 0.60 |
| 27GP4 | △ | 90 | G | ☐ | — | F | None | Mag. | S | 23.062 | 7.500 | 12D | 6.3 | 0.60 |
| 27LP4 | △ | 90 | G° | ☐ | — | FA | 250/400 | Mag. | S | 24.359 | 9.703 | 12N | 6.3 | 0.60 |
| 27MP4 | △ | 90 | MET | ☐ | — | FAR | None | Mag. | S | 22.812 | 7.500 | 12D | 6.3 | 0.60 |
| 27NP4 | △ | 90 | G | ☐ | — | FA | 2000/2500 | Mag. | S | 26.812 | 7.500 | 12N | 6.3 | 0.60 |
| 27RP4 | △ | 90 | G | ☐ | — | FA | 500/2500 | Mag. | S | 23.062 | 7.500 | 12N | 6.3 | 0.60 |
| 27RP4A | △ | 90 | G | ☐ | — | FA | 500/2500 | Mag. | N | 23.062 | 7.500 | 12N | 6.3 | 0.60 |
| 5G-27RP4 | △ | 90 | G | ☐ | — | FA | 500/2500 | Mag. | N | 23.062 | 7.500 | 12N | 6.3 | 0.60 |
| 27SP4 | △ | 90 | G | ☐ | — | FA | 500/750 | L.V.E.S. | S | 23.062 | 7.500 | 12L | 6.3 | 0.60 |
| 27UP4 | △ | 90 | G | ☐ | — | F | 500/750 | L.V.E.S. | S | 23.062 | 7.500 | 12L | 6.3 | 0.60 |
| 27VP4 | △ | 90 | G | ☐ | — | FA | 2000/2500 | L.V.E.S. | N | 21.062 | 5.500 | 12L | 6.3 | 0.60 |
| 27WP4 | △ | 90 | G | ☐ | — | FA | 750/2500 | L.V.E.S. | S | 22.094 | 6.500 | 12AJ | 6.3 | 0.60 |
| 27XP4 | △ | 90 | G | ☐ | — | FA | 1700/2500 | L.V.E.S. | N | 20.062 | 4.500 | 12L | 6.3 | 0.60 |
| 27YP4 | △ | 90 | G | ☐ | P | FA | 2000/2500 | L.V.E.S. | N | 21.562 | 5.750 | 12L | 6.3 | 0.60 |
| 27ZP4 | △ | 110 | G | ☐ | — | FA | 2000/2500 | L.V.E.S. | N | 17.312 | 5.625 | 8HR | 6.3 | 0.60 |
| 30BP4 | △ | 90 | MET | ○ | — | F | None | Mag. | S | 23.562 | 7.187 | 12D | 6.3 | 0.60 |

| ANODE KV. DESIGN-MAX. VALUES | TYPICAL OPERATING CONDITIONS | | | | | TUBE TYPE |
|------------------------------------|------------------------------|-----------|-----------------|----------------------------------|---------------------------|--------------|
| | DRIVE | ANODE KV. | GRID 2 VOLTS | FOCUS ELEC- TRODE VOLTS | RASTER CUTOFF VOLTS | |
| 22.0 | Grid | 16 | 300 | — | -28/-72 | 24CP4A |
| 22.0 | Grid | 16 | 300 | — | -28/-72 | SG-24CP4A |
| 22.0 | Grid | 16 | 300 | — | -28/-72 | 24CP4B |
| 22.0 | Grid | 18 | 300 | -72/400 | -28/-72 | 24DP4 |
| 22.0 | Grid | 16 | 300 | -64/350 | -28/-72 | 24DP4A |
| 19.8 | Grid | 16 | 300 | — | -28/-72 | 24QP4 |
| 22.0 | Grid | 14 | 300 | — | -28/-72 | 24TP4 |
| 24.2 | Grid | 20 | 300 | — | -28/-72 | 24VP4 |
| 24.2 | Grid | 20 | 300 | — | -28/-72 | 24VP4A |
| 22.0 | Grid | 18 | 300 | — | -28/-72 | 24XP4 |
| 22.0 | Grid | 16 | 300 | -64/350 | -28/-72 | 24YP4 |
| 22.0 | Grid | 16 | 300 | 0/500 | -28/-72 | 24ZP4 |
| 22.0 | Cath. | 16 | 300 | -200/200 | 32/60 | 25DP4 |
| 22.0 | Cath. | 16 | 300 | -200/200 | 32/60 | 25EP4 |
| 23.0 | Cath. | 16 | 50 | 0/400 | 35/55 | 25HP4 |
| 22.0 | Grid | 16 | 300 | -200/200 | -35/-72 | 25JP4 |
| 22.0 | Grid | 16 | 300 | -200/200 | -35/-72 | 25KP4 |
| 22.0 | Grid | 18 | 400 | 0/400 | -36/-94 | 25LP4 |
| 22.0 | Cath. | 18 | 400 | 0/400 | 36/78 | 25TP4 |
| 22.0 | Grid | 18 | 300 | 0/400 | -35/-72 | 27ABP4 |
| 25.0 | Grid | 18 | 400 | 0/400 | -48/-96 | 27ACP4 |
| 22.0 | Grid | 18 | 300 | 0/400 | -37/-74 | 27ADP4 |
| 22.0 | Grid | 18 | 300 | 0/400 | -35/-72 | 27AEP4 |
| 22.0 | Grid | 18 | 300 | 0/400 | -37/-74 | 27AFP4 |
| 22.0 | Grid | 18 | 300 | 0/400 | -35/-72 | 27AGP4 |
| 19.8 | Grid | 15 | 300 | -60/300 | -28/-72 | 27AP4 |
| 22.0 | Grid | 16 | 300 | — | -28/-72 | 27EP4 |
| 24.8 | Grid | 16 | 300 | — | -28/-72 | 27GP4 |
| 24.2 | Grid | 20 | 300 | — | -28/-72 | 27LP4 |
| 19.8 | Grid | 16 | 300 | — | -37/-73 | 27MP4 |
| 19.8 | Grid | 16 | 300 | — | -28/-72 | 27NP4 |
| 22.0 | Grid | 16 | 300 | — | -28/-72 | 27RP4 |
| 22.0 | Grid | 16 | 300 | — | -28/-72 | 27RP4A |
| 22.0 | Grid | 16 | 300 | — | -28/-72 | SG-27RP4 |
| 22.0 | Grid | 18 | 300 | -72/396 | -28/-72 | 27SP4 |
| 22.0 | Grid | 16 | 300 | 0/396 | -28/-72 | 27UP4 |
| 19.8 | Grid | 16 | 300 | -72/396 | -28/-72 | 27VP4 |
| 22.0 | Grid | 18 | 300 | -60/350 | -40/-80 | 27WP4 |
| 23.0 | Grid | 18 | 400 | 0/400 | -36/-94 | 27XP4 |
| 25.0 | Grid | 18 | 300 | 0/450 | -28/-72 | 27YP4 |
| 22.0 | Grid | 18 | 300 | 0/450 | -35/-72 | 27ZP4 |
| 33.0 | Grid | 22 | 300 | — | -28/-72 | 30BP4 |

EXPLANATION OF SYMBOLS

- M—Metal cone tube
 G—Glass tube
 LWG—Light weight glass tube
 G°—Glass tube, dimensions different from normal
 MET—Metal tube
 O—Round tube
 □—Rectangular tube, spherical face
 ⊙—Rectangular tube, cylindrical face
 B—Fiberglass wrap implosion protection
 E—Filled rim type implosion protection
 T—Molded glass implosion panel attached to face
 P—Sagged glass implosion plate attached to face
 L—Plastic implosion barrier attached to face
 K—Banded tube with coated funnel for implosion protection
 H—Tube sealed into steel sheath for implosion protection
 C—Clear glass faceplate
 F—Gray filter glass faceplate
 R—Anti-reflection faceplate
 A—Aluminized screen
 V—Rim bands and tension band
 W—Rim bands and tension band with mounting lugs
 X—Formed with tension band
 Y—Formed rim with tension band and mounting lugs
 Mag.—Magnetic focus
 L.V.E.S.—Low voltage electrostatic focus
 H.V.E.S.—High Voltage electrostatic focus
 Auto.Es.—Self-focusing electrostatic
 Int.Mag.—Internal magnetic focus
 TPF—Tri-potential focus
 N—No ion trap
 S—Single field ion trap
 D—Double field ion trap
 I—Internal ion trap
 *—18 second heater warm-up time (all others are 11 second)
 Grid—Grid drive service (all voltages with respect to cathode)
 Cath.—Cathode drive service (all voltages with respect to Grid No. 1)

NOTES

◆ Design-Maximum Values Unless Otherwise Indicated

⊠ Absolute-Maximum Values


⊠ For X-Radiation Measurements, Characteristics, Limitations, and Warning see JEDEC Publication 64A, the latest EIA Published Product Information for this type, the specified applicable JEDEC X-Radiation Isodose and Limit Curves, and X-Radiation Warning, page

△ The EIA Published Product Information as of March 1, 1972, does not contain an X-Radiation rating or reference to JEDEC X-Radiation Isodose and Limit Curves for this tube type. This does not necessarily mean the type is not capable of meeting an acceptable X-Radiation limit. Refer to the latest Published Product Information for X-Radiation Ratings and glass absorbent characteristics.

☆ This type summary is based on EIA registered data, registered envelope data, and manufacturer's published data. Data presented herein have been carefully prepared from such publicly available data to assure technical correctness, however, no responsibility is assumed by the General Electric Company for possible inaccuracies.

| Tube Type | Typical Application | Focus Method | Deflection Method | Outline | Base | Filament | | Grid #1 Voltage Range | Grid #2 Voltage |
|------------|---|---------------|-------------------|---------|------|----------|------------|-----------------------|-----------------|
| | | | | | | Volts | Current mA | | |
| 7038 | Monochrome film and CCTV cameras | Magnetic | Magnetic | TX | 8HM | 6.3 | 600 | 0 to -100 | 300 |
| 7038V | Broadcast color television cameras | Magnetic | Magnetic | TX | 8HM | 6.3 | 600 | 0 to -100 | 300 |
| 7262A | General use CCTV and educational TV cameras | Magnetic | Magnetic | TX | 8HM | 6.3 | 90 | 0 to -100 | 300 |
| 7263A | Ruggedized use CCTV and educational TV Camera | Magnetic | Magnetic | TX | 8HM | 6.3 | 90 | 0 to -100 | 300 |
| 7735A | General use CCTV and educational TV cameras | Magnetic | Magnetic | TX | 8HM | 6.3 | 600 | 0 to -100 | 300 |
| 7735B | High quality CCTV and educational TV cameras | Magnetic | Magnetic | TX | 8HM | 6.3 | 600 | 0 to -100 | 300 |
| Z7911 | Low cost CCTV and educational TV cameras | Magnetic | Magnetic | TX | 8HM | 6.3 | 600 | 0 to -100 | 300 |
| Z7912 | Ruggedized use CCTV and military TV cameras | Magnetic | Magnetic | TX | 8ME | 6.3 | 90 | 0 to -100 | 300 |
| Z7919 | Low cost CCTV and educational TV cameras | Magnetic | Magnetic | TX | 8ME | 6.3 | 90 | 0 to -100 | 300 |
| Z7929R,B,G | Chroma channels Broadcast color cameras | Electrostatic | Magnetic | TX | 8LN | 6.3 | 95 | 0 to -100 | 300 |
| 8134 | General use CCTV and educational TV cameras | Electrostatic | Magnetic | TX | 8LN | 6.3 | 95 | 0 to -100 | 300 |
| 8134V | Broadcast color television cameras | Electrostatic | Magnetic | TX | 8LN | 6.3 | 95 | 0 to -100 | 300 |
| 8484H | Low light level CCTV and educational TV cameras | Magnetic | Magnetic | TX | 8HM | 6.3 | 600 | 0 to -100 | 300 |
| 8507A | Broadcast. CCTV and educational TV cameras | Magnetic | Magnetic | TX | 8ME | 6.3 | 600 | 0 to -100 | 300 |
| 8541A | Broadcast. CCTV and educational TV cameras | Magnetic | Magnetic | TX | 8ME | 6.3 | 90 | 0 to -100 | 300 |
| 8572 | Monochrome film and CCTV cameras | Magnetic | Magnetic | TX | 8ME | 6.3 | 600 | 0 to -100 | 300 |
| 8572V | Broadcast color television cameras | Magnetic | Magnetic | TX | 8ME | 6.3 | 600 | 0 to -100 | 300 |
| 8573A | Military, CCTV and educational TV cameras | Magnetic | Magnetic | TX | 8ME | 6.3 | 90 | 0 to -100 | 300 |
| 8604 | Monochrome film and CCTV cameras | Magnetic | Magnetic | TX | 8ME | 6.3 | 90 | 0 to -100 | 300 |
| 7735BX | High quality medical X-ray TV cameras | Magnetic | Magnetic | TX | 8HM | 6.3 | 600 | 0 to -100 | 300 |
| 8541X | High quality medical X-ray TV cameras | Magnetic | Magnetic | TX | 8ME | 6.3 | 90 | 0 to -100 | 300 |
| 8573X | High quality medical X-ray TV cameras | Magnetic | Magnetic | TX | 8ME | 6.3 | 90 | 0 to -100 | 300 |
| Z7975B | Low light level CCTV and educational TV cameras | Magnetic | Magnetic | TX | 8ME | 6.3 | 90 | 0 to -100 | 300 |
| Z7975HRB | Low light level CCTV and educational TV cameras | Magnetic | Magnetic | TX | 8ME | 6.3 | 90 | 0 to -100 | 300 |
| Z7996B | Low light level CCTV and educational TV cameras | Magnetic | Magnetic | TX | 8ME | 6.3 | 90 | 0 to -100 | 300 |
| Z7996HRB | Low light level CCTV and educational TV cameras | Magnetic | Magnetic | TX | 8ME | 6.3 | 90 | 0 to -100 | 300 |
| Z7927B | Low light level CCTV and educational TV cameras | Magnetic | Magnetic | TX | — | 6.3 | 90 | 0 to -150 | 290 |
| Z7927HRB | Low light level CCTV and educational TV cameras | Magnetic | Magnetic | TX | — | 6.3 | 90 | 0 to -150 | 290 |

| Grid #3 Volts 40-50 Gauss -60 | | Grid #4 Volts 40-50 Gauss -60 | | Grid #5 Voltage | Target Voltage Range | Blanking Volts When Applied To | | Sensitivity—Typical—Resolution | | |
|----------------------------------|-----|----------------------------------|-----|--------------------|----------------------------|-----------------------------------|------------|--|-------------------------------------|------|
| | | | | | | Grid #1 | Cathode | .02ua Dark Current 1.0 Ft. Candle Faceplate | Television Lines 40-50 Gauss -60 | |
| 300 | 600 | Inter. Conn. to G #3 | | — | 0 to +60 | -75 | +20 to +35 | .20 micro amps | 700 | 850 |
| 300 | 600 | Inter. Conn. to G #3 | | — | 0 to +60 | -75 | +20 to +35 | .23 micro amps | 700 | 850 |
| 300 | 600 | Inter. Conn. to G #3 | | — | 0 to +60 | -75 | +20 to +35 | .20 micro amps | 700 | 850 |
| 300 | 600 | Inter. Conn. to G #3 | | — | 0 to +60 | -75 | +20 to +35 | .20 micro amps | 700 | 850 |
| 300 | 600 | Inter. Conn. to G #3 | | — | 0 to +60 | -75 | +20 to +35 | .22 micro amps | 700 | 850 |
| 300 | 600 | Inter. Conn. to G #3 | | — | 0 to +60 | -75 | +20 to +35 | .25 micro amps | 700 | 850 |
| 300 | — | Inter. Conn. to G #3 | | — | 0 to +60 | -75 | +20 to +35 | .18 micro amps | 650 | — |
| 300 | 600 | 420 | 850 | — | 0 to +60 | -75 | +20 to +35 | .23 micro amps | 900 | 1100 |
| 300 | 600 | 420 | 850 | — | 0 to +60 | -75 | +20 to +35 | .18 micro amps | 800 | 1000 |
| 600 | — | +50 to +150 | — | 300 | 0 to +60 | -75 | +20 to +35 | .23 micro amps | 600 | — |
| 600 | — | +50 to +150 | — | 300 | 0 to +60 | -75 | +20 to +35 | .23 micro amps | 600 | — |
| 600 | — | +50 to +150 | — | 300 | 0 to +60 | -75 | +20 to +35 | .23 micro amps | 600 | — |
| 300 | 600 | Inter. Conn. to G #3 | | — | 0 to +60 | -75 | +20 to +35 | .25 micro amps | 700 | 850 |
| 300 | 600 | 420 | 850 | — | 0 to +60 | -75 | +20 to +35 | .23 micro amps | 900 | 1100 |
| 300 | 600 | 420 | 850 | — | 0 to +60 | -75 | +20 to +35 | .18 micro amps | 900 | 1100 |
| 300 | 600 | 420 | 850 | — | 0 to +60 | -75 | +20 to +35 | .20 micro amps | 900 | 1100 |
| 300 | 600 | 420 | 850 | — | 0 to +60 | -75 | +20 to +35 | .23 micro amps | 900 | 1100 |
| 300 | 600 | 420 | 850 | — | 0 to +60 | -75 | +20 to +35 | .18 micro amps | 900 | 1100 |
| 300 | 600 | 420 | 850 | — | 0 to +60 | -75 | +20 to +35 | .25 micro amps | 900 | 1100 |
| 300 | 600 | Inter. Conn. to G #3 | | — | 0 to +60 | -75 | +20 to +35 | .25 micro amps | 700 | 850 |
| 300 | 600 | 420 | 850 | — | 0 to +60 | -75 | +20 to +35 | .25 micro amps | 900 | 1100 |
| 300 | 600 | 420 | 850 | — | 0 to +60 | -75 | +20 to +35 | .25 micro amps | 900 | 1100 |
| 300 | 600 | 420 | — | — | +8 | -75 | +20 to +35 | 1.15 micro amps | 700 | — |
| 300 | — | 420 | — | — | +8 | -75 | +20 to +35 | 1.15 micro amps | 1000 | — |
| 300 | — | 420 | — | — | +8 | -75 | +20 to +35 | 1.15 micro amps | 700 | — |
| 300 | — | 420 | — | — | +8 | -75 | +20 to +35 | 1.15 micro amps | 1000 | — |
| 270 | — | 400 | — | — | +8 | -75 | +20 to +35 | .75 micro amps | 400 | — |
| 270 | — | 400 | — | — | +8 | -75 | +20 to +35 | .75 micro amps | 700 | — |




PHYSICAL DIMENSIONS

| OUTLINE DRAWING NUMBER | INCHES | | | | | | MILLIMETERS | | | | | | | | | |
|------------------------|--------|-------|-------|-------|-------|-------|-------------|------|-------|------|------|-------|------|------|------|------|
| | A ** | | B | | D | | E * | | A ** | | B | | D | | E * | |
| | MIN. | MAX. | MIN. | MAX. | MIN. | MAX. | MIN. | MAX. | MIN. | MAX. | MIN. | MAX. | MIN. | MAX. | MIN. | MAX. |
| 2-1 | 0.350 | 0.385 | 0.245 | 0.285 | 1.500 | 1.200 | 1.400 | 8.89 | 9.77 | 6.23 | 7.23 | 38.10 | 30.5 | 35.5 | | |
| 2-2 | 0.350 | 0.385 | 0.245 | 0.285 | 1.250 | 0.970 | 1.170 | 8.89 | 9.77 | 6.23 | 7.23 | 31.75 | 24.7 | 29.7 | | |
| 2-5 | 0.350 | 0.400 | 0.245 | 0.285 | 1.500 | 1.200 | 1.400 | 8.89 | 10.16 | 6.23 | 7.23 | 38.10 | 30.5 | 35.5 | | |
| 2-6 | 0.350 | 0.400 | 0.245 | 0.285 | 1.250 | 0.970 | 1.170 | 8.89 | 10.16 | 6.23 | 7.23 | 31.75 | 24.7 | 29.7 | | |

NOTES

- ** Measured from base seat to bulb-top line as determined by a ring gauge of 0.210" (5.333mm) I.D.
- * Minimum dimension applies in a zone 0.500" (12.70mm) up from lead in to 0.200" (5.08mm) down from bulb top line.

2-1 2-2 2-5 2-6




PHYSICAL DIMENSIONS

| OUTLINE DRAWING NUMBER | INCHES | | | | | MILLIMETERS | | | | |
|------------------------|--------|-------|-------|-------|-------|-------------|-------|-------|------|------|
| | A | | D | E * | | A | | D | E * | |
| | MIN. | MAX. | MAX. | MIN. | MAX. | MIN. | MAX. | MAX. | MIN. | MAX. |
| 3-1 | 0.366 | 0.400 | 1.375 | 1.015 | 1.135 | 9.30 | 10.16 | 34.92 | 25.8 | 28.8 |
| 3-2 | 0.366 | 0.400 | 1.500 | 1.140 | 1.260 | 9.30 | 10.16 | 38.10 | 29.0 | 32.0 |
| 3-3 | 0.366 | 0.400 | 1.750 | 1.390 | 1.510 | 9.30 | 10.16 | 44.45 | 35.3 | 38.3 |
| 3-4 | 0.366 | 0.400 | 2.000 | 1.640 | 1.760 | 9.30 | 10.16 | 50.80 | 41.7 | 44.7 |
| 3-8 | 0.366 | 0.400 | 1.625 | 1.265 | 1.385 | 9.30 | 10.16 | 41.27 | 32.2 | 35.1 |
| 3-11 | 0.366 | 0.400 | 1.250 | 0.890 | 1.010 | 9.30 | 10.16 | 31.75 | 22.7 | 25.6 |

NOTES

- * Measured from base seat to bulb top line as determined by ring gauge of minimum 0.209 (5.31 mm) and maximum 0.211 (5.36mm) internal diameter.

3-1 TO 3-4 3-8 3-11




PHYSICAL DIMENSIONS

| OUTLINE DRAWING NUMBER | INCHES | | | | | | MILLIMETERS | | | | | |
|------------------------|--------|-------|-------|-------|-------|-------|-------------|-------|-------|-------|------|------|
| | A * | | C | D | | E * | A * | | C | D | | E * |
| | MIN. | MAX. | MAX. | MAX. | MIN. | MAX. | MIN. | MAX. | MAX. | MAX. | MIN. | MAX. |
| 3-5 | 0.366 | 0.400 | 1.750 | 1.500 | 1.140 | 1.260 | 9.30 | 10.16 | 44.45 | 38.10 | 29.0 | 32.0 |
| 3-9 | 0.366 | 0.400 | 1.625 | 1.375 | 1.015 | 1.135 | 9.30 | 10.16 | 41.27 | 34.92 | 25.8 | 28.8 |
| 3-10 | 0.366 | 0.400 | 2.000 | 1.750 | 1.390 | 1.510 | 9.30 | 10.16 | 50.80 | 44.45 | 35.4 | 38.3 |
| 3-12 | 0.366 | 0.400 | 1.500 | 1.250 | 0.890 | 1.010 | 9.30 | 10.16 | 38.10 | 47.62 | 22.7 | 25.6 |
| 3-13 | 0.366 | 0.400 | 1.875 | 1.625 | 1.265 | 1.385 | 9.30 | 10.16 | 47.62 | 41.27 | 32.2 | 35.1 |
| 3-14 | 0.366 | 0.400 | 2.125 | 1.875 | 1.515 | 1.635 | 9.30 | 10.16 | 53.97 | 47.62 | 38.5 | 41.5 |
| 3-15 | 0.366 | 0.400 | 2.250 | 2.000 | 1.640 | 1.760 | 9.30 | 10.16 | 57.15 | 50.80 | 41.7 | 44.7 |

NOTES:

- * The minimum applies in zone starting 0.375" (9.52 mm) from base seat.
- * Measured from base seat to bulb-top line as determined by a ring gauge of 0.600" (15.24 mm.) I.D.

3-5 3-9 3-10 3-12 TO 3-15

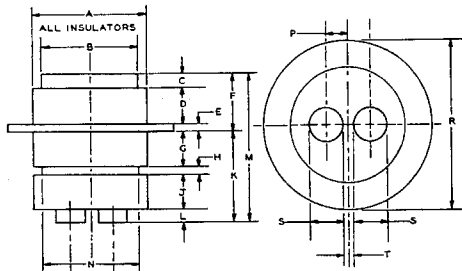


| REF. | INCHES | | | MILLIMETERS | | |
|------|--------|------|-------|-------------|------|-------|
| | MIN. | NOM. | MAX. | MIN. | NOM. | MAX. |
| A | --- | --- | 0.335 | --- | --- | 8.51 |
| B | 0.271 | --- | 0.279 | 6.88 | --- | 7.09 |
| C | 0.034 | --- | 0.046 | 0.86 | --- | 1.17 |
| D | 0.094 | --- | 0.104 | 2.39 | --- | 2.64 |
| E | 0.024 | --- | 0.030 | 0.61 | --- | 0.76 |
| F | 0.156 | --- | 0.174 | 3.96 | --- | 4.42 |
| G | 0.095 | --- | 0.105 | 2.41 | --- | 2.67 |
| H | 0.022 | --- | 0.028 | 0.56 | --- | 0.71 |
| J | 0.095 | --- | 0.105 | 2.41 | --- | 2.67 |
| K | 0.268 | --- | 0.292 | 6.81 | --- | 7.42 |
| L | 0.047 | --- | 0.063 | 1.19 | --- | 1.60 |
| M | 0.430 | --- | 0.460 | 10.92 | --- | 11.68 |
| N | 0.281 | --- | 0.289 | 7.14 | --- | 7.34 |
| P | 0.065 | --- | 0.081 | 1.48 | --- | 2.06 |
| R | 0.476 | --- | 0.484 | 12.09 | --- | 12.29 |
| S | 0.086 | --- | 0.094 | 2.18 | --- | 2.39 |
| T | 0.030 | --- | 0.076 | --- | --- | --- |

Notes: Maximum eccentricity of plate, cathode and grid contact surfaces 0.005" (0.127 mm) from center line.

Maximum eccentricity of insulators 0.010" (0.25 mm) from center line.

3-16


PHYSICAL DIMENSIONS




| OUTLINE DRAWING NUMBER | INCHES | | | | | | MILLIMETERS | | | | | |
|------------------------|--------|------|------|-------|-------|-------|-------------|-------|-------|-------|------|------|
| | A * | | B | D | E | | A * | | B | D | E | |
| | MIN. | MAX. | MAX. | MAX. | MIN. | MAX. | MIN. | MAX. | MAX. | MAX. | MIN. | MAX. |
| 3-6 | .366 | .400 | .400 | 1.500 | 1.150 | 1.350 | 9.30 | 10.16 | 10.16 | 38.10 | 29.3 | 34.2 |
| 3-7 | .366 | .400 | .410 | 1.500 | 1.150 | 1.350 | 9.30 | 10.16 | 10.16 | 38.10 | 29.3 | 34.2 |

* The minimum applies in a zone 0.500" (12.7mm) up from lead in to 0.200" (5.06mm) down from bulb top

3-6 TO 3-7

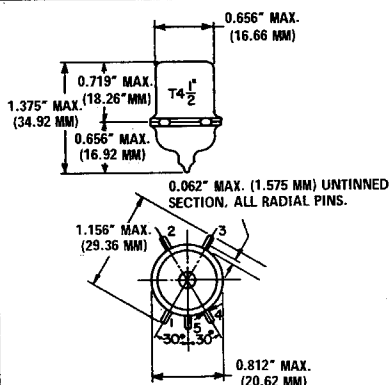




4-1

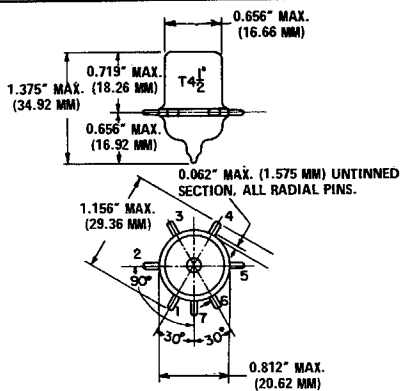

4-2

NOMINAL CAP DIAMETERS
MINIATURE OR SKIRTED MINIATURE - 0.250"

SMALL - 0.360"
MEDIUM - 0.566"

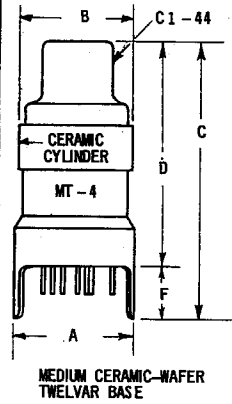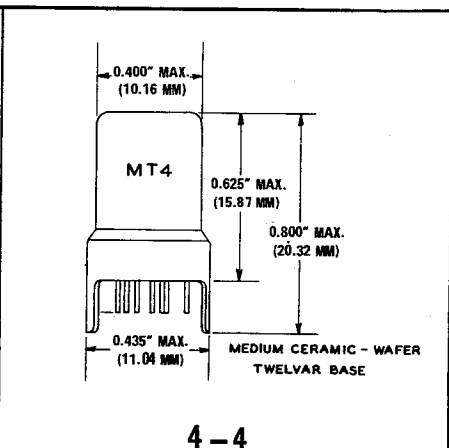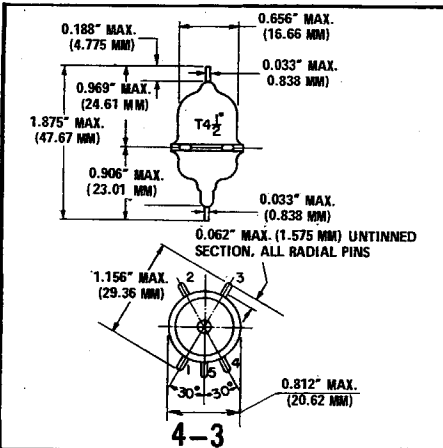


PHYSICAL DIMENSIONS

| OUTLINE DRAWING NUMBER | INCHES | | | | | | MILLIMETERS | | | | | |
|------------------------|--------|-------|-------|-------|-------|-------|-------------|-------|-------|------|------|------|
| | A | B | C | D | F | A | B | C | D | F | | |
| | MAX. | MAX. | MAX. | MIN. | MAX. | NOM. | MAX. | MAX. | MAX. | MIN. | MAX. | NOM. |
| 4-5 | 0.435 | 0.420 | 1.050 | 0.790 | 0.840 | 0.190 | 11.04 | 10.66 | 26.67 | 20.1 | 21.3 | 4.83 |
| 4-6 | 0.435 | 0.420 | 0.985 | 0.735 | 0.780 | 0.190 | 11.04 | 10.66 | 25.02 | 18.7 | 19.8 | 4.83 |
| | | | | | | | | | | | | |
| | | | | | | | | | | | | |
| | | | | | | | | | | | | |
| | | | | | | | | | | | | |
| | | | | | | | | | | | | |
| | | | | | | | | | | | | |
| | | | | | | | | | | | | |
| | | | | | | | | | | | | |

NOTES
 Maximum O.D. of 0.440'' (11.17mm) is permitted along the 0.190'' (4.83mm) lug length.

4-5 TO 4-6

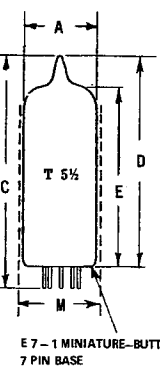


PHYSICAL DIMENSIONS

| OUTLINE DRAWING NUMBER | INCHES | | | | | | MILLIMETERS | | | | | | | |
|------------------------|--------|-------|-------|-------|-------|-------|-------------|-------|-------|-------|-------|-------|-------|-------|
| | A** | | C | D | E* | | M | A** | | C | D | E* | | M |
| | MIN. | MAX. | MAX. | MAX. | MIN. | MAX. | MAX. | MIN. | MAX. | MAX. | MAX. | MIN. | MAX. | MAX. |
| 5-1 | 0.695 | 0.737 | 1.750 | 1.500 | 1.031 | 1.219 | 0.750 | 17.65 | 18.72 | 44.45 | 38.10 | 26.19 | 30.96 | 19.05 |
| 5-2 | 0.695 | 0.737 | 2.125 | 1.875 | 1.406 | 1.594 | 0.750 | 17.65 | 18.72 | 53.97 | 47.62 | 35.71 | 40.49 | 19.05 |
| 5-3 | 0.695 | 0.737 | 2.625 | 2.375 | 1.906 | 2.094 | 0.750 | 17.65 | 18.72 | 66.67 | 60.32 | 48.41 | 53.19 | 19.05 |

NOTES
 ** Measured from base seat to bulb-top line as determined by a gauge of 0.438" I.D. (11.13mm).
 * Applies in zone starting 0.375" (9.525 mm) from base seat.

5-1 TO 5-3

PHYSICAL DIMENSIONS

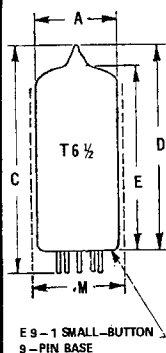

| OUTLINE DRAWING NUMBER | INCHES | | | | | | MILLIMETERS | | | | | | | |
|------------------------|--------|-------|-------|-------|-------|-------|-------------|-------|-------|-------|-------|-------|-------|-------|
| | A** | | C | D | E* | | M | A** | | C | D | E* | | M |
| | MIN. | MAX. | MAX. | MAX. | MIN. | MAX. | MAX. | MIN. | MAX. | MAX. | MAX. | MIN. | MAX. | MAX. |
| 6-1 | 0.800 | 0.845 | 1.750 | 1.500 | 1.031 | 1.219 | 0.875 | 20.32 | 21.46 | 44.45 | 38.10 | 26.19 | 30.96 | 22.22 |
| 6-2 | 0.800 | 0.845 | 2.187 | 1.937 | 1.469 | 1.656 | 0.875 | 20.32 | 21.46 | 55.54 | 49.20 | 37.31 | 42.06 | 22.22 |
| 6-3 | 0.800 | 0.845 | 2.625 | 2.375 | 1.906 | 2.094 | 0.875 | 20.32 | 21.46 | 66.67 | 60.32 | 48.41 | 53.19 | 22.22 |
| 6-4 | 0.800 | 0.845 | 3.062 | 2.812 | 2.344 | 2.531 | 0.875 | 20.32 | 21.46 | 77.77 | 71.42 | 59.54 | 64.29 | 22.22 |
| 6-10 | 0.800 | 0.845 | 2.440 | 2.190 | 1.720 | 1.910 | 0.875 | 20.32 | 21.46 | 61.98 | 55.63 | 43.69 | 48.51 | 22.22 |


NOTES:

* Measured from base seat to bulb-top line as determined by a gauge of 0.438" I.D. (11.13 mm).

** Applies in zone starting 0.375" (9.525 mm) from base seat.

6-1 TO 6-4 6-10

PHYSICAL DIMENSIONS

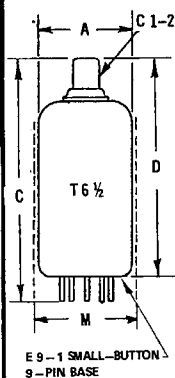

| OUTLINE DRAWING NUMBER | INCHES | | | | | | MILLIMETERS | | | | | |
|------------------------|--------|-------|-------|-------|-------|-------|-------------|-------|-------|-------|-------|-------|
| | A | | C | D | | M | A | | C | D | | M |
| | MIN. | MAX. | MAX. | MIN. | MAX. | MAX. | MIN. | MAX. | MAX. | MIN. | MAX. | MAX. |
| 6-5 | 0.800 | 0.845 | 1.969 | 1.437 | 1.687 | 0.875 | 20.32 | 21.46 | 50.01 | 36.50 | 42.85 | 22.22 |
| 6-6 | 0.800 | 0.845 | 2.406 | 1.875 | 2.125 | 0.875 | 20.32 | 21.46 | 61.11 | 47.52 | 53.97 | 22.22 |
| 6-7 | 0.800 | 0.845 | 2.844 | 2.312 | 2.562 | 0.875 | 20.32 | 21.46 | 72.24 | 58.72 | 65.07 | 22.22 |
| 6-8 | 0.800 | 0.845 | 3.281 | 2.750 | 3.000 | 0.875 | 20.32 | 21.46 | 83.34 | 69.85 | 76.20 | 22.22 |
| 6-9+ | 0.800 | 0.845 | 2.844 | 2.313 | 2.663 | 0.875 | 20.32 | 21.46 | 72.24 | 58.75 | 67.64 | 22.22 |
| 6-18± | 0.800 | 0.845 | 2.531 | 2.000 | 2.250 | 0.875 | 20.32 | 21.46 | 64.29 | 50.80 | 57.15 | 22.22 |


NOTES:

+ C1-40 Miniature Cap

± C1-45 Miniature Cap

6-5 TO 6-9 6-18

PHYSICAL DIMENSIONS

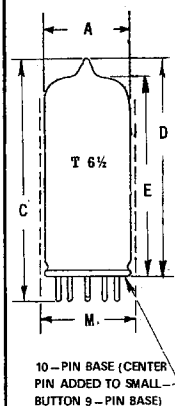

| OUTLINE DRAWING NUMBER | INCHES | | | | | | MILLIMETERS | | | | | | | |
|------------------------|--------|-------|-------|-------|-------|-------|-------------|-------|-------|-------|-------|-------|-------|-------|
| | A** | | C | D | E* | | M | A** | | C | D | E* | | M |
| | MIN. | MAX. | MAX. | MAX. | MIN. | MAX. | MAX. | MIN. | MAX. | MAX. | MAX. | MIN. | MAX. | MAX. |
| 6-11 | 0.800 | 0.845 | 1.750 | 1.500 | 1.020 | 1.220 | 0.875 | 20.32 | 21.46 | 44.45 | 38.10 | 25.91 | 30.99 | 22.22 |
| 6-12 | 0.800 | 0.845 | 1.970 | 1.720 | 1.240 | 1.440 | 0.875 | 20.32 | 21.46 | 30.04 | 43.69 | 31.50 | 36.58 | 22.22 |
| 6-13 | 0.800 | 0.845 | 2.190 | 1.940 | 1.460 | 1.660 | 0.875 | 20.32 | 21.46 | 55.63 | 49.28 | 37.08 | 42.16 | 22.22 |
| 6-14 | 0.800 | 0.845 | 2.410 | 2.160 | 1.680 | 1.880 | 0.875 | 20.32 | 21.46 | 61.21 | 54.86 | 42.67 | 47.75 | 22.22 |
| 6-15 | 0.800 | 0.845 | 2.630 | 2.380 | 1.900 | 2.100 | 0.875 | 20.32 | 21.46 | 66.80 | 59.45 | 48.66 | 53.34 | 22.22 |
| 6-16 | 0.800 | 0.845 | 2.850 | 2.600 | 2.220 | 2.320 | 0.875 | 20.32 | 21.46 | 72.39 | 66.04 | 56.39 | 58.93 | 22.22 |
| 6-17 | 0.800 | 0.845 | 3.070 | 2.820 | 2.340 | 2.540 | 0.875 | 20.32 | 21.46 | 77.98 | 71.63 | 59.44 | 64.52 | 22.22 |

NOTES:


* Measured from base seat to bulb-top line as determined by a gauge of 0.438" I.D. (11.13 mm).

** Applies in zone starting 0.375" (9.525 mm) from base seat.

6-11 TO 6-17


 NOMINAL CAP DIAMETERS
 MINIATURE OR SKIRTED MINIATURE -0.250"

 SMALL - 0.360"
 MEDIUM - 0.566"

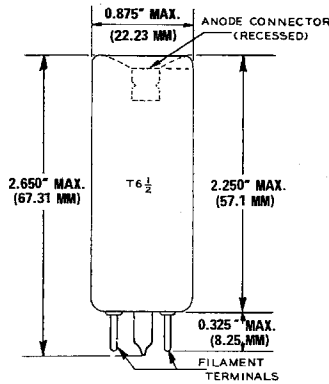

6 - 19

PHYSICAL DIMENSIONS

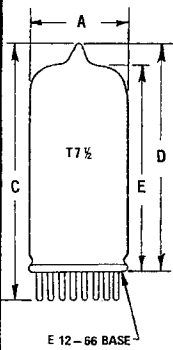


| OUTLINE DRAWING NUMBER | INCHES | | | | | | MILLIMETERS | | | | | |
|------------------------|--------|-------|-------|-------|-------|-------|-------------|------|-------|-------|------|------|
| | A* | | C | D | E* | | A* | | C | D | E* | |
| | MIN. | MAX. | MAX. | MAX. | MIN. | MAX. | MIN. | MAX. | MAX. | MAX. | MIN. | MAX. |
| 7-1 | 0.900 | 1.030 | 1.750 | 1.500 | 1.000 | 1.200 | 22.9 | 26.1 | 44.5 | 38.10 | 25.4 | 30.4 |
| 7-2 | 0.900 | 1.030 | 2.050 | 1.800 | 1.300 | 1.500 | 22.9 | 26.1 | 52.07 | 45.72 | 33.1 | 38.1 |
| 7-3 | 0.900 | 1.030 | 2.350 | 2.100 | 1.600 | 1.800 | 22.9 | 26.1 | 59.69 | 53.34 | 40.7 | 45.7 |
| 7-4 | 0.900 | 1.030 | 2.650 | 2.400 | 1.900 | 2.100 | 22.9 | 26.1 | 67.31 | 60.96 | 48.3 | 53.3 |
| 7-5 | 0.900 | 1.030 | 2.950 | 2.700 | 2.200 | 2.400 | 22.9 | 26.1 | 74.93 | 68.58 | 55.9 | 60.9 |
| 7-6 | 0.900 | 1.030 | 3.250 | 3.000 | 2.500 | 2.700 | 22.9 | 26.1 | 82.55 | 76.20 | 63.5 | 68.5 |


NOTES:

- The minimum applies in zone starting 0.375" (9.52 mm) from base seat.
- Measured from base seat to bulb-top line as determined by a ring gauge of 0.438" I.D. (11.13 mm).




7-1 TO 7-6




8 - 1

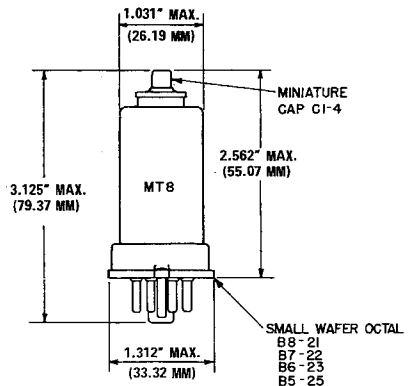

8 - 2

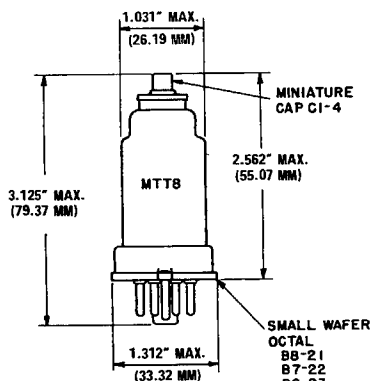
8-3

8-4

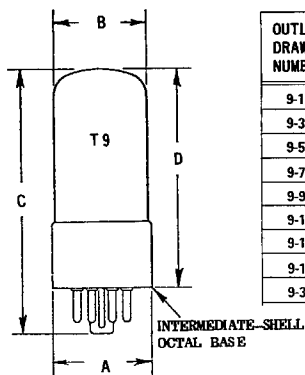PHYSICAL DIMENSIONS

| OUTLINE DRAWING NUMBER | INCHES | | | | | MILLIMETERS | | | | |
|------------------------------|--------|-------|-------|-------|-------|-------------|-------|-------|------|------|
| | A | B | C | D | | A | B | C | D | |
| | MAX. | MAX. | MAX. | MIN. | MAX. | MAX. | MAX. | MAX. | MIN. | MAX. |
| 8-5 | 1.312 | 1.031 | 1.750 | 1.000 | 1.188 | 33.33 | 26.19 | 44.45 | 25.4 | 30.1 |
| 8-6 | 1.312 | 1.031 | 3.125 | 2.500 | 2.688 | 33.33 | 26.19 | 82.55 | 63.5 | 68.2 |
| | | | | | | | | | | |
| | | | | | | | | | | |

8-5 TO 8-6

PHYSICAL DIMENSIONS


| OUTLINE DRAWING NUMBER | INCHES | | | | | MILLIMETERS | | | | |
|------------------------------|--------|-------|-------|-------|-------|-------------|------|------|-------|-------|
| | A | B | | C | D | A | B | | C | D |
| | MAX. | MIN. | MAX. | MAX. | MAX. | MAX. | MIN. | MAX. | MAX. | MAX. |
| 9-1 | 1.281 | 1.062 | 1.188 | 2.312 | 1.750 | 32.54 | 27.0 | 30.1 | 58.73 | 44.45 |
| 9-3 | 1.281 | 1.062 | 1.188 | 2.875 | 2.312 | 32.54 | 27.0 | 30.1 | 73.00 | 58.73 |
| 9-5 | 1.281 | 1.062 | 1.188 | 3.000 | 2.438 | 32.54 | 27.0 | 30.1 | 76.20 | 61.91 |
| 9-7 | 1.281 | 1.062 | 1.188 | 3.062 | 2.500 | 32.54 | 27.0 | 30.1 | 77.78 | 63.50 |
| 9-9 | 1.281 | 1.062 | 1.188 | 3.250 | 2.688 | 32.54 | 27.0 | 30.1 | 82.55 | 68.26 |
| 9-11 | 1.281 | 1.062 | 1.188 | 3.312 | 2.750 | 32.54 | 27.0 | 30.1 | 84.13 | 69.85 |
| 9-13 | 1.281 | 1.062 | 1.188 | 3.375 | 2.812 | 32.54 | 27.0 | 30.1 | 85.72 | 71.43 |
| 9-15 | 1.281 | 1.062 | 1.188 | 3.438 | 2.875 | 32.54 | 27.0 | 30.1 | 87.31 | 73.02 |
| 9-33 | 1.281 | 1.062 | 1.188 | 3.812 | 3.250 | 32.54 | 27.0 | 30.1 | 96.83 | 82.55 |

9-1 TO 9-15 (ODD)
9-33

 NOMINAL CAP DIAMETERS
 MINIATURE OR SKIRTED MINIATURE - 0.250"

 SMALL - 0.360"
 MEDIUM - 0.566"


PHYSICAL DIMENSIONS

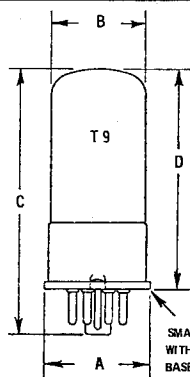

| OUTLINE DRAWING NUMBER | INCHES | | | | | | MILLIMETERS | | | | |
|------------------------|--------|-------|-------|-------|-------|-------|-------------|------|-------|-------|--|
| | A | | B | | C | | D | | | | |
| | MAX. | MIN. | MAX. | MAX. | MAX. | MAX. | MIN. | MAX. | MAX. | MAX. | |
| 9-2 | 1.312 | 1.062 | 1.188 | 2.312 | 1.750 | 33.33 | 27.0 | 30.1 | 58.73 | 44.45 | |
| 9-4 | 1.312 | 1.062 | 1.188 | 2.875 | 2.312 | 33.33 | 27.0 | 30.1 | 73.02 | 58.73 | |
| 9-6 | 1.312 | 1.062 | 1.188 | 3.000 | 2.438 | 33.33 | 27.0 | 30.1 | 76.20 | 61.93 | |
| 9-8 | 1.312 | 1.062 | 1.188 | 3.062 | 2.500 | 33.33 | 27.0 | 30.1 | 77.78 | 63.50 | |
| 9-10 | 1.312 | 1.062 | 1.188 | 3.250 | 2.688 | 33.33 | 27.0 | 30.1 | 82.55 | 68.26 | |
| 9-12 | 1.312 | 1.062 | 1.188 | 3.312 | 2.750 | 33.33 | 27.0 | 30.1 | 84.13 | 69.85 | |
| 9-14 | 1.312 | 1.062 | 1.188 | 3.375 | 2.812 | 33.33 | 27.0 | 30.1 | 85.72 | 71.42 | |
| 9-16 | 1.312 | 1.062 | 1.188 | 3.562 | 2.875 | 33.33 | 27.0 | 30.1 | 87.31 | 73.02 | |

9-2 TO 9-16 (EVEN)

PHYSICAL DIMENSIONS

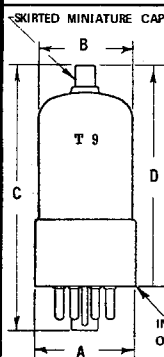


| OUTLINE DRAWING NUMBER | INCHES | | | | | | MILLIMETERS | | | | | | | | | |
|------------------------|--------|-------|-------|-------|-------|-------|-------------|------|------|-------|------|------|------|------|------|--|
| | A | | B | | C | | D | | A | | B | | C | | D | |
| | MAX. | MIN. | MAX. | MAX. | MIN. | MAX. | MAX. | MIN. | MAX. | MAX. | MIN. | MAX. | MAX. | MIN. | MAX. | |
| 9-17 | 1.281 | 1.062 | 1.188 | 3.312 | 2.312 | 2.750 | 32.54 | 27.0 | 30.1 | 84.13 | 58.8 | 69.8 | | | | |
| 9-19 | 1.281 | 1.062 | 1.188 | 3.438 | 2.312 | 2.875 | 32.54 | 27.0 | 30.1 | 87.31 | 58.8 | 73.0 | | | | |
| 9-21 | 1.281 | 1.062 | 1.188 | 3.500 | 2.312 | 2.938 | 32.54 | 27.0 | 30.1 | 88.90 | 58.8 | 74.6 | | | | |
| 9-23 | 1.281 | 1.062 | 1.188 | 3.562 | 2.312 | 3.000 | 32.54 | 27.0 | 30.1 | 90.48 | 58.8 | 76.2 | | | | |
| 9-50 | 1.281 | 1.062 | 1.188 | 3.875 | 2.875 | 3.312 | 32.54 | 27.0 | 30.1 | 98.42 | 73.0 | 84.1 | | | | |

NOTE

Also may use C1-2 or non-standard C1-33


9-17 TO 9-23 (ODD) 9-50

PHYSICAL DIMENSIONS

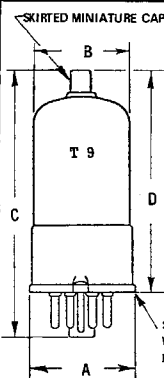

| OUTLINE DRAWING NUMBER | INCHES | | | | | | MILLIMETERS | | | | | | | | | |
|------------------------|--------|-------|-------|-------|-------|-------|-------------|------|------|-------|------|------|------|------|------|--|
| | A | | B | | C | | D | | A | | B | | C | | D | |
| | MAX. | MIN. | MAX. | MAX. | MIN. | MAX. | MAX. | MIN. | MAX. | MAX. | MIN. | MAX. | MAX. | MIN. | MAX. | |
| 9-18 | 1.312 | 1.062 | 1.188 | 3.312 | 2.312 | 2.750 | 33.33 | 27.0 | 30.1 | 84.13 | 58.8 | 69.8 | | | | |
| 9-20 | 1.312 | 1.062 | 1.188 | 3.438 | 2.312 | 2.875 | 33.33 | 27.0 | 30.1 | 87.31 | 58.8 | 73.0 | | | | |
| 9-22 | 1.312 | 1.062 | 1.188 | 3.500 | 2.312 | 2.938 | 33.33 | 27.0 | 30.1 | 88.90 | 58.8 | 74.6 | | | | |
| 9-24 | 1.312 | 1.062 | 1.188 | 3.562 | 2.312 | 3.000 | 33.33 | 27.0 | 30.1 | 90.48 | 58.8 | 76.2 | | | | |

9-18 TO 9-24 (EVEN)

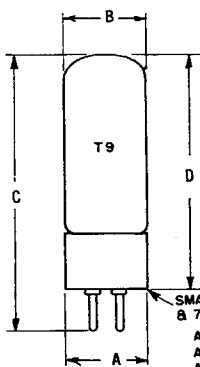


SMALL 4,5,6,
& 7 PIN BASE
A4-5
A5-6
A6-7
A7-8

PHYSICAL DIMENSIONS

| OUTLINE DRAWING NUMBER | INCHES | | | | | MILLIMETERS | | | | | | | | | |
|------------------------------|--------|-------|-------|-------|-------|-------------|-------|------|-------|--------|------|------|------|------|------|
| | A | | B | | C | D | | A | | B | | C | | D | |
| | MAX. | MIN. | MAX. | MAX. | MIN. | MAX. | MAX. | MIN. | MAX. | MAX. | MAX. | MIN. | MAX. | MIN. | MAX. |
| 9-25 | 1.188 | 1.062 | 1.188 | 4.000 | 3.000 | 3.375 | 30.15 | 27.0 | 30.15 | 101.6 | 76.2 | 85.7 | | | |
| 9-26 | 1.188 | 1.062 | 1.188 | 4.188 | 3.188 | 3.562 | 30.15 | 27.0 | 30.15 | 106.36 | 81.0 | 90.4 | | | |


9-25 TO 9-26

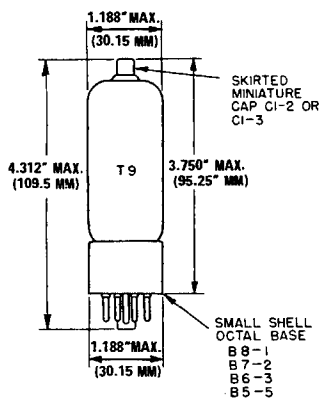

9-28

PHYSICAL DIMENSIONS

| OUTLINE DRAWING NUMBER | INCHES | | | | | MILLIMETERS | | | | | | | | | |
|------------------------------|--------|-------|-------|-------|-------|-------------|------|------|-------|-------|------|------|------|------|--|
| | A | | B | | C | D | | A | | B | | C | | D | |
| | MAX. | MIN. | MAX. | MAX. | MAX. | MAX. | MIN. | MAX. | MAX. | MAX. | MAX. | MAX. | MIN. | MAX. | |
| 9-29 | 1.188 | 1.062 | 1.188 | 2.031 | 1.500 | 30.16 | 27.0 | 30.1 | 51.59 | 38.10 | | | | | |
| 9-30 | 1.188 | 1.062 | 1.188 | 2.781 | 2.250 | 30.16 | 27.0 | 30.1 | 70.64 | 57.15 | | | | | |
| 9-31 | 1.188 | 1.062 | 1.188 | 3.156 | 2.625 | 30.16 | 27.0 | 30.1 | 80.16 | 66.67 | | | | | |
| 9-32 | 1.188 | 1.062 | 1.188 | 2.281 | 1.750 | 30.16 | 27.0 | 30.1 | 57.94 | 44.45 | | | | | |

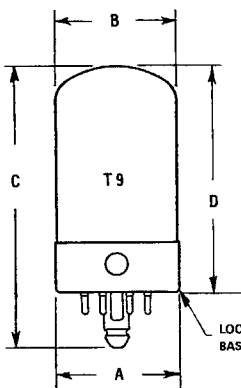


LOCKING-IN
BASE D8-1

9-29 TO 9-32

NOMINAL CAP DIAMETERS
MINIATURE OR SKIRTED MINIATURE - 0.250"

SMALL - 0.360"
MEDIUM - 0.566"

PHYSICAL DIMENSIONS

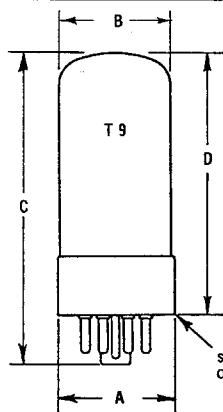


| OUTLINE DRAWING NUMBER | INCHES | | | | | MILLIMETERS | | | | | |
|------------------------------|--------|-------|-------|-------|-------|-------------|------|------|-------|-------|---|
| | A | | B | | C | D | A | | B | C | D |
| | MAX. | MIN. | MAX. | MAX. | MAX. | MAX. | MIN. | MAX. | MAX. | MAX. | |
| 9-36 | 1.281 | 1.062 | 1.188 | 2.312 | 1.750 | 32.54 | 27.0 | 30.1 | 58.73 | 44.45 | |
| 9-37 | 1.281 | 1.062 | 1.188 | 2.875 | 2.312 | 32.54 | 27.0 | 30.1 | 73.02 | 58.73 | |
| 9-38 | 1.281 | 1.062 | 1.188 | 3.000 | 2.438 | 32.54 | 27.0 | 30.1 | 76.20 | 61.91 | |
| 9-39 | 1.281 | 1.062 | 1.188 | 3.062 | 2.500 | 32.54 | 27.0 | 30.1 | 77.78 | 63.50 | |
| 9-40 | 1.281 | 1.062 | 1.188 | 3.250 | 2.688 | 32.54 | 27.0 | 30.1 | 82.55 | 68.26 | |
| 9-41 | 1.281 | 1.062 | 1.188 | 3.312 | 2.750 | 32.54 | 27.0 | 30.1 | 84.13 | 69.85 | |
| 9-42 | 1.281 | 1.062 | 1.188 | 3.375 | 2.812 | 32.54 | 27.0 | 30.1 | 85.72 | 71.43 | |
| 9-43 | 1.281 | 1.062 | 1.188 | 3.438 | 2.875 | 32.54 | 27.0 | 30.1 | 87.31 | 73.02 | |
| 9-44 | 1.281 | 1.062 | 1.188 | 3.812 | 3.250 | 32.54 | 27.0 | 30.1 | 96.83 | 82.55 | |

SHORT INTERMEDIATE - SHELL
OCTAL BASE

9-36 TO 9-44

PHYSICAL DIMENSIONS




| OUTLINE DRAWING NUMBER | INCHES | | | | | MILLIMETERS | | | | | | |
|------------------------------|--------|-------|-------|-------|-------|-------------|-------|------|------|-------|------|------|
| | A | | B | | C | D | A | | B | C | D | |
| | MAX. | MIN. | MAX. | MAX. | MIN. | MAX. | MAX. | MIN. | MAX. | MIN. | MAX. | |
| 9-45 | 1.281 | 1.062 | 1.188 | 3.312 | 2.312 | 2.750 | 32.54 | 27.0 | 30.1 | 84.13 | 58.8 | 69.8 |
| 9-46 | 1.281 | 1.062 | 1.188 | 3.438 | 2.312 | 2.875 | 32.54 | 27.0 | 30.1 | 87.31 | 58.8 | 73.0 |
| 9-47 | 1.281 | 1.062 | 1.188 | 3.500 | 2.312 | 2.938 | 32.54 | 27.0 | 30.1 | 88.90 | 58.8 | 74.6 |
| 9-48 | 1.281 | 1.062 | 1.188 | 3.562 | 2.312 | 3.000 | 32.54 | 27.0 | 30.1 | 90.48 | 58.8 | 76.2 |
| 9-49 | 1.281 | 1.062 | 1.188 | 3.875 | 2.875 | 3.312 | 32.54 | 27.0 | 30.1 | 98.42 | 73.0 | 84.1 |

NOTE

ALSO MAY USE C1-2 CAP OR NON-STANDARD C1-33


9-45 TO 9-49

PHYSICAL DIMENSIONS

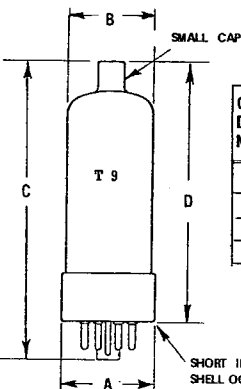

| OUTLINE DRAWING NUMBER | INCHES | | | | | MILLIMETERS | | | | | | |
|------------------------------|--------|-------|-------|-------|-------|-------------|--------|--------|--------|---------|--------|--------|
| | A | | B | | C | D | A | | C | D | | |
| | MAX. | MIN. | MAX. | MAX. | MIN. | MAX. | MAX. | MIN. | MAX. | | | |
| 9-51 | 1.281 | 1.062 | 1.187 | 4.062 | 3.125 | 3.500 | 32.543 | 26.975 | 30.162 | 103.187 | 79.375 | 88.900 |
| 9-53 | 1.281 | 1.062 | 1.187 | 3.563 | 2.625 | 3.000 | 32.543 | 26.975 | 30.162 | 80.488 | 66.68 | 76.2 |


9-51 9-53

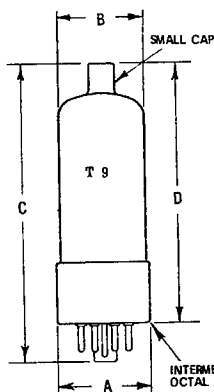

PHYSICAL DIMENSIONS

| OUTLINE DRAWING NUMBER | INCHES | | | | | | MILLIMETERS | | | | | |
|------------------------|--------|-------|-------|-------|-------|-------|-------------|--------|--------|---------|--------|--------|
| | A | | B | | C | | A | | B | | C | |
| | MAX | MIN. | MAX | MAX | MIN. | MAX | MAX | MIN. | MAX | MAX | MIN. | MAX |
| 9-52 | 1.281 | 1.062 | 1.187 | 4.062 | 3.125 | 3.500 | 32.543 | 26.975 | 30.162 | 103.187 | 79.375 | 88.900 |
| 9-54 | 1.281 | 1.062 | 1.187 | 3.563 | 2.625 | 3.000 | 32.543 | 26.975 | 30.162 | 80.488 | 66.68 | 76.2 |

9-52 9-54




PHYSICAL DIMENSIONS

| OUTLINE DRAWING NUMBER | INCHES | | | | | MILLIMETERS | | | | |
|------------------------|--------|-------|-------|-------|-------|-------------|------|-------|------|------|
| | A* | | C | D | | A* | | C | D | |
| | MIN. | MAX. | MAX. | MIN. | MAX. | MIN. | MAX. | MAX. | MIN. | MAX. |
| 9-55 | 1.062 | 1.188 | 1.625 | 1.000 | 1.250 | 27.0 | 30.1 | 41.27 | 25.4 | 31.7 |
| 9-56 | 1.062 | 1.188 | 1.875 | 1.250 | 1.500 | 27.0 | 30.1 | 47.62 | 31.8 | 38.1 |
| 9-57 | 1.062 | 1.188 | 2.125 | 1.500 | 1.750 | 27.0 | 30.1 | 53.97 | 38.1 | 44.4 |
| 9-58 | 1.062 | 1.188 | 2.375 | 1.750 | 2.000 | 27.0 | 30.1 | 60.32 | 44.5 | 50.8 |
| 9-59 | 1.062 | 1.188 | 2.615 | 2.000 | 2.250 | 27.0 | 30.1 | 66.67 | 50.8 | 57.1 |
| 9-60 | 1.062 | 1.188 | 2.875 | 2.250 | 2.500 | 27.0 | 30.1 | 73.02 | 57.2 | 63.5 |
| 9-61 | 1.062 | 1.188 | 3.125 | 2.500 | 2.750 | 27.0 | 30.1 | 79.37 | 63.5 | 69.8 |
| 9-62 | 1.062 | 1.188 | 3.375 | 2.750 | 3.000 | 27.0 | 30.1 | 85.72 | 69.9 | 76.2 |

NOTES:

- * Applies to minimum diameter except in the area of the seal.

9-55 TO 9-62



PHYSICAL DIMENSIONS


| OUTLINE DRAWING NUMBER | INCHES | | | | | | MILLIMETERS | | | | | |
|------------------------|--------|-------|-------|-------|-------|-------|-------------|------|-------|-------|------|------|
| | A* | | C | D | E* | | A* | | C | D | E* | |
| | MIN. | MAX. | MAX. | MAX. | MIN. | MAX. | MIN. | MAX. | MAX. | MAX. | MIN. | MAX. |
| 9-67 | 1.062 | 1.188 | 2.030 | 1.720 | 1.170 | 1.410 | 27.0 | 30.1 | 51.56 | 43.68 | 29.8 | 35.8 |
| 9-68 | 1.062 | 1.188 | 2.330 | 2.020 | 1.470 | 1.710 | 27.0 | 30.1 | 59.18 | 51.30 | 37.4 | 43.4 |
| 9-69 | 1.062 | 1.188 | 2.630 | 2.320 | 1.770 | 2.010 | 27.0 | 30.1 | 66.80 | 58.92 | 45.0 | 51.0 |
| 9-70 | 1.062 | 1.188 | 2.930 | 2.620 | 2.070 | 2.310 | 27.0 | 30.1 | 74.42 | 66.54 | 52.6 | 58.6 |
| 9-71 | 1.062 | 1.188 | 3.230 | 2.920 | 2.370 | 2.610 | 27.0 | 30.1 | 82.04 | 74.16 | 60.2 | 66.2 |
| 9-72 | 1.062 | 1.188 | 3.530 | 3.220 | 2.670 | 2.910 | 27.0 | 30.1 | 89.66 | 81.78 | 67.9 | 73.9 |

NOTES:

- * The minimum applies in zone starting 0.375" (9.52 mm) from base seat.
- * Measured from base seat to bulb-top line as determined by a ring gauge of 0.600" (15.24 mm.) I.D.

9-67 TO 9-72

PHYSICAL DIMENSIONS




| OUTLINE DRAWING NUMBER | INCHES | | | | | | MILLIMETERS | | | | | |
|------------------------|--------|-------|-------|-------|-------|-------|-------------|------|-------|-------|------|------|
| | A* | | C | D | E* | | A* | | C | D | E* | |
| | MIN. | MAX. | MAX. | MAX. | MIN. | MAX. | MIN. | MAX. | MAX. | MAX. | MIN. | MAX. |
| 9-73 | 1.062 | 1.188 | 1.990 | 1.710 | 1.150 | 1.400 | 27.0 | 30.1 | 50.54 | 43.43 | 29.2 | 35.5 |
| 9-74 | 1.062 | 1.188 | 2.240 | 1.960 | 1.400 | 1.650 | 27.0 | 30.1 | 56.90 | 49.78 | 35.6 | 41.9 |
| 9-75 | 1.062 | 1.188 | 2.490 | 2.210 | 1.650 | 1.900 | 27.0 | 30.1 | 63.24 | 56.13 | 41.9 | 48.2 |
| 9-76 | 1.062 | 1.188 | 2.740 | 2.460 | 1.900 | 2.150 | 27.0 | 30.1 | 69.59 | 62.48 | 48.3 | 54.6 |
| 9-77 | 1.062 | 1.188 | 2.990 | 2.710 | 2.150 | 2.400 | 27.0 | 30.1 | 75.94 | 68.83 | 54.6 | 60.9 |
| 9-78 | 1.062 | 1.188 | 3.240 | 2.960 | 2.400 | 2.650 | 27.0 | 30.1 | 82.29 | 75.18 | 61.0 | 67.3 |
| 9-79 | 1.062 | 1.188 | 3.490 | 3.210 | 2.650 | 2.900 | 27.0 | 30.1 | 88.64 | 81.53 | 67.3 | 73.6 |
| 9-80 | 1.062 | 1.188 | 3.740 | 3.460 | 2.900 | 3.150 | 27.0 | 30.1 | 94.99 | 87.88 | 73.7 | 80.0 |

NOTES:

- The minimum applies in zone starting 0.625" (15.88 mm) from base seat.
- Measured from base seat to bulb-top line as determined by a ring gauge of 0.600" (15.24 mm.) I.D.

9-73 TO 9-80

PHYSICAL DIMENSIONS

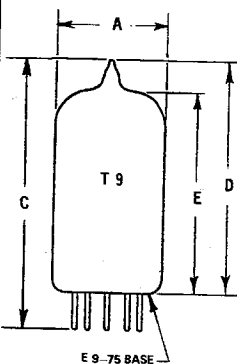


| OUTLINE DRAWING NUMBER | INCHES | | | | | | MILLIMETERS | | | | | |
|------------------------|--------|-------|-------|-------|-------|-------|-------------|------|-------|-------|------|------|
| | A* | | C | D | E* | | A* | | C | D | E* | |
| | MIN. | MAX. | MAX. | MAX. | MIN. | MAX. | MIN. | MAX. | MAX. | MAX. | MIN. | MAX. |
| 9-82 | 1.062 | 1.188 | 2.210 | 1.830 | 1.310 | 1.490 | 27.0 | 30.1 | 56.13 | 46.48 | 33.3 | 37.8 |
| 9-83 | 1.062 | 1.188 | 2.510 | 2.130 | 1.610 | 1.790 | 27.0 | 30.1 | 63.75 | 54.10 | 40.9 | 45.4 |
| 9-84 | 1.062 | 1.188 | 2.810 | 2.430 | 1.910 | 2.090 | 27.0 | 30.1 | 71.37 | 61.72 | 48.6 | 53.0 |
| 9-85 | 1.062 | 1.188 | 3.110 | 2.730 | 2.210 | 2.390 | 27.0 | 30.1 | 78.99 | 69.34 | 56.2 | 60.7 |
| 9-86 | 1.062 | 1.188 | 3.410 | 3.030 | 2.510 | 2.690 | 27.0 | 30.1 | 86.61 | 76.96 | 63.8 | 68.3 |
| 9-87 | 1.062 | 1.188 | 3.710 | 3.330 | 2.810 | 2.990 | 27.0 | 30.1 | 94.23 | 84.58 | 71.4 | 75.9 |

NOTES:

- The minimum applies in zone starting 0.375" (9.52 mm) from base seat.
- Measured from base seat to bulb-top line as determined by a ring gauge of 0.600" (15.24 mm.) I.D.

9-82 TO 9-87

PHYSICAL DIMENSIONS




| OUTLINE DRAWING NUMBER | INCHES | | | | | | MILLIMETERS | | | | | |
|------------------------|--------|-------|-------|-------|-------|------|-------------|--------|------|-------|--|--|
| | A* | | C | D | | A* | | C | D | | | |
| | MIN. | MAX. | MAX. | MIN. | MAX. | MIN. | MAX. | MAX. | MIN. | MAX. | | |
| 9-88 | 1.062 | 1.188 | 2.625 | 2.000 | 2.250 | 27.0 | 30.1 | 66.67 | 50.8 | 57.1 | | |
| 9-89 | 1.062 | 1.188 | 2.875 | 2.250 | 2.500 | 27.0 | 30.1 | 73.0 | 57.2 | 63.5 | | |
| 9-90 | 1.062 | 1.188 | 3.125 | 2.500 | 2.750 | 27.0 | 30.1 | 79.3 | 63.5 | 69.8 | | |
| 9-91 | 1.062 | 1.188 | 3.375 | 2.750 | 3.000 | 27.0 | 30.1 | 85.7 | 69.9 | 76.2 | | |
| 9-92 | 1.062 | 1.188 | 3.625 | 3.000 | 3.250 | 27.0 | 30.1 | 92.0 | 76.2 | 82.5 | | |
| 9-93 | 1.062 | 1.188 | 3.875 | 3.250 | 3.500 | 27.0 | 30.1 | 98.4 | 82.6 | 88.9 | | |
| 9-94 | 1.062 | 1.188 | 4.125 | 3.500 | 3.750 | 27.0 | 30.1 | 104.77 | 88.9 | 95.2 | | |
| 9-95 | 1.062 | 1.188 | 4.375 | 3.750 | 4.000 | 27.0 | 30.1 | 111.12 | 95.3 | 101.6 | | |

NOTES:

- Applies to minimum diameter except in the area of the seal.

9-88 TO 9-95



E 12-70 BASE

PHYSICAL DIMENSIONS


| OUTLINE DRAWING NUMBER | INCHES | | | | | MILLIMETERS | | | | |
|------------------------|--------|-------|-------|-------|-------|-------------|------|--------|------|-------|
| | A- | | C | D | | A- | | C | D | |
| | MIN. | MAX. | MAX. | MIN. | MAX. | MIN. | MAX. | MAX. | MIN. | MAX. |
| 9-96 | 1.062 | 1.188 | 2.625 | 2.000 | 2.250 | 27.0 | 30.1 | 66.67 | 50.8 | 57.1 |
| 9-97 | 1.062 | 1.188 | 2.875 | 2.250 | 2.500 | 27.0 | 30.1 | 73.0 | 57.2 | 63.5 |
| 9-98 | 1.062 | 1.188 | 3.125 | 2.500 | 2.750 | 27.0 | 30.1 | 79.30 | 63.5 | 69.8 |
| 9-99 | 1.062 | 1.188 | 3.375 | 2.750 | 3.000 | 27.0 | 30.1 | 85.70 | 69.9 | 76.2 |
| 9-100 | 1.062 | 1.188 | 3.625 | 3.000 | 3.250 | 27.0 | 30.1 | 92.07 | 76.2 | 82.5 |
| 9-101 | 1.062 | 1.188 | 3.875 | 3.250 | 3.500 | 27.0 | 30.1 | 98.42 | 82.6 | 88.9 |
| 9-102 | 1.062 | 1.188 | 4.125 | 3.500 | 3.750 | 27.0 | 30.1 | 104.77 | 88.9 | 95.2 |
| 9-103 | 1.062 | 1.188 | 4.375 | 3.750 | 4.000 | 27.0 | 30.1 | 111.12 | 95.3 | 101.6 |

NOTES:

- Applies to minimum diameter except in the area of the seal.

9-96 TO 9-103

PHYSICAL DIMENSIONS



E 9-89 BASE


| OUTLINE DRAWING NUMBER | INCHES | | | | | MILLIMETERS | | | | |
|------------------------|--------|-------|-------|-------|-------|-------------|------|-------|------|------|
| | A- | | C | D | | A- | | C | D | |
| | MIN. | MAX. | MAX. | MIN. | MAX. | MIN. | MAX. | MAX. | MIN. | MAX. |
| 9-104 | 1.062 | 1.188 | 1.630 | 1.000 | 1.250 | 27.0 | 30.1 | 41.40 | 25.4 | 31.7 |
| 9-105 | 1.062 | 1.188 | 1.880 | 1.250 | 1.500 | 27.0 | 30.1 | 47.75 | 31.8 | 38.1 |
| 9-106 | 1.062 | 1.188 | 2.130 | 1.500 | 1.750 | 27.0 | 30.1 | 54.10 | 38.1 | 44.4 |
| 9-107 | 1.062 | 1.188 | 2.380 | 1.750 | 2.000 | 27.0 | 30.1 | 60.45 | 44.5 | 50.8 |
| 9-108 | 1.062 | 1.188 | 2.630 | 2.000 | 2.250 | 27.0 | 30.1 | 66.80 | 50.8 | 57.1 |
| 9-109 | 1.062 | 1.188 | 2.880 | 2.250 | 2.500 | 27.0 | 30.1 | 73.15 | 57.2 | 63.5 |
| 9-110 | 1.062 | 1.188 | 3.130 | 2.500 | 2.750 | 27.0 | 30.1 | 79.50 | 63.5 | 69.8 |
| 9-111 | 1.062 | 1.188 | 3.380 | 2.750 | 3.000 | 27.0 | 30.1 | 85.85 | 69.9 | 72.6 |

NOTES:

- Applies to minimum diameter except in the area of the seal.

9-104 TO 9-111

PHYSICAL DIMENSIONS

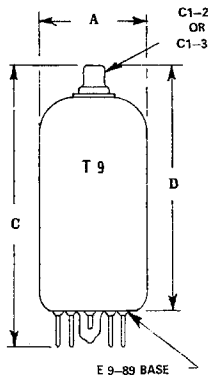

E 9-89 BASE

| OUTLINE DRAWING NUMBER | INCHES | | | | | MILLIMETERS | | | | |
|------------------------|--------|-------|-------|-------|-------|-------------|------|--------|------|-------|
| | A- | | C | D | | A- | | C | D | |
| | MIN. | MAX. | MAX. | MIN. | MAX. | MIN. | MAX. | MAX. | MIN. | MAX. |
| 9-112 | 1.062 | 1.188 | 2.630 | 2.000 | 2.250 | 27.0 | 30.1 | 66.80 | 50.8 | 57.1 |
| 9-113 | 1.062 | 1.188 | 2.880 | 2.250 | 2.500 | 27.0 | 30.1 | 73.15 | 57.2 | 63.5 |
| 9-114 | 1.062 | 1.188 | 3.130 | 2.500 | 2.750 | 27.0 | 30.1 | 79.50 | 63.5 | 69.8 |
| 9-115 | 1.062 | 1.188 | 3.380 | 2.750 | 3.000 | 27.0 | 30.1 | 85.85 | 69.9 | 76.2 |
| 9-116 | 1.062 | 1.188 | 3.630 | 3.000 | 3.250 | 27.0 | 30.1 | 92.20 | 76.2 | 82.5 |
| 9-117 | 1.062 | 1.188 | 3.880 | 3.250 | 3.500 | 27.0 | 30.1 | 98.55 | 82.6 | 88.9 |
| 9-118 | 1.062 | 1.188 | 4.130 | 3.500 | 3.750 | 27.0 | 30.1 | 104.90 | 88.9 | 95.2 |
| 9-119 | 1.062 | 1.188 | 4.380 | 3.750 | 4.000 | 27.0 | 30.1 | 111.25 | 95.3 | 101.6 |


NOTES:

- Applies to minimum diameter except in the area of the seal.

9-112 TO 9-119

 NOMINAL CAP DIAMETERS
 MINIATURE OR SKIRTED MINIATURE - 0.250"

 SMALL - 0.360"
 MEDIUM - 0.566"

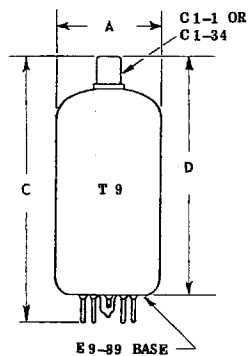


PHYSICAL DIMENSIONS

| OUTLINE DRAWING NUMBER | INCHES | | | | | MILLIMETERS | | | | |
|------------------------------|--------|-------|-------|-------|-------|-------------|------|--------|------|-------|
| | A* | | C | D | | A* | | C | D | |
| | MIN. | MAX. | MAX. | MIN. | MAX. | MIN. | MAX. | MAX. | MIN. | MAX. |
| 9-120 | 1.062 | 1.188 | 2.630 | 2.000 | 2.250 | 27.0 | 30.1 | 66.80 | 50.8 | 57.1 |
| 9-121 | 1.062 | 1.188 | 2.880 | 2.250 | 2.500 | 27.0 | 30.1 | 73.15 | 57.2 | 63.5 |
| 9-122 | 1.062 | 1.188 | 3.130 | 2.500 | 2.750 | 27.0 | 30.1 | 79.50 | 63.5 | 69.8 |
| 9-123 | 1.062 | 1.188 | 3.380 | 2.750 | 3.000 | 27.0 | 30.1 | 85.85 | 69.9 | 76.2 |
| 9-124 | 1.062 | 1.188 | 3.630 | 3.000 | 3.250 | 27.0 | 30.1 | 92.20 | 76.2 | 82.5 |
| 9-125 | 1.062 | 1.188 | 3.880 | 3.250 | 3.500 | 27.0 | 30.1 | 98.55 | 82.6 | 88.9 |
| 9-126 | 1.062 | 1.188 | 4.130 | 3.500 | 3.750 | 27.0 | 30.1 | 104.90 | 88.9 | 95.2 |
| 9-127 | 1.062 | 1.188 | 4.380 | 3.750 | 4.000 | 27.0 | 30.1 | 111.25 | 95.3 | 101.6 |


NOTES:

- * Applies to minimum diameter except in the area of the seal.

9-120 TO 9-127

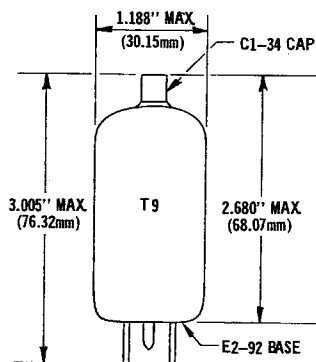

9-128

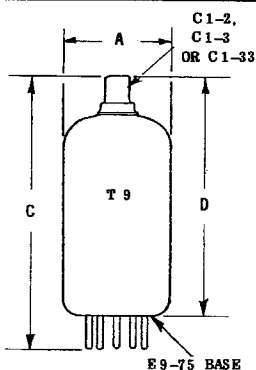

PHYSICAL DIMENSIONS


| OUTLINE DRAWING NUMBER | INCHES | | | | | MILLIMETERS | | | | |
|------------------------------|--------|-------|-------|-------|-------|-------------|------|-------|------|------|
| | A* | | C | D | | A* | | C | D | |
| | MIN. | MAX. | MAX. | MIN. | MAX. | MIN. | MAX. | MAX. | MIN. | MAX. |
| 9-130 | 1.062 | 1.188 | 2.350 | 1.710 | 1.970 | 27.0 | 30.1 | 59.69 | 43.4 | 49.9 |
| 9-131 | 1.062 | 1.188 | 2.650 | 2.010 | 2.270 | 27.0 | 30.1 | 67.31 | 51.0 | 57.5 |
| 9-132 | 1.062 | 1.188 | 2.950 | 2.310 | 2.570 | 27.0 | 30.1 | 74.93 | 58.7 | 65.2 |
| 9-133 | 1.062 | 1.188 | 3.250 | 2.610 | 2.870 | 27.0 | 30.1 | 82.55 | 66.3 | 72.8 |
| 9-134 | 1.062 | 1.188 | 3.550 | 2.910 | 3.170 | 27.0 | 30.1 | 90.17 | 74.0 | 80.5 |
| 9-135 | 1.062 | 1.188 | 3.850 | 3.210 | 3.470 | 27.0 | 30.1 | 97.79 | 81.6 | 88.1 |

NOTES:

- * Applies to minimum diameter except in the area of the seal.

9-130 TO 9-135

PHYSICAL DIMENSIONS

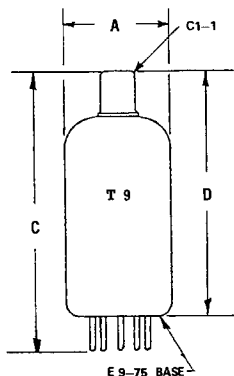


| OUTLINE DRAWING NUMBER | INCHES | | | | | | MILLIMETERS | | | | | |
|------------------------------|--------|-------|-------|-------|-------|------|-------------|-------|------|------|------|------|
| | A* | | C | | D | | A* | | C | | D | |
| | MIN. | MAX. | MAX. | MIN. | MAX. | MIN. | MAX. | MAX. | MIN. | MAX. | MIN. | MAX. |
| 9-136 | 1.062 | 1.188 | 2.350 | 1.710 | 1.970 | 27.0 | 30.1 | 59.69 | 43.4 | 49.9 | | |
| 9-137 | 1.062 | 1.188 | 2.650 | 2.010 | 2.270 | 27.0 | 30.1 | 67.31 | 51.0 | 57.5 | | |
| 9-138 | 1.062 | 1.188 | 2.950 | 2.310 | 2.570 | 27.0 | 30.1 | 74.93 | 58.7 | 65.2 | | |
| 9-139 | 1.062 | 1.188 | 3.250 | 2.610 | 2.870 | 27.0 | 30.1 | 82.55 | 66.3 | 72.8 | | |
| 9-140 | 1.062 | 1.188 | 3.550 | 2.910 | 3.170 | 27.0 | 30.1 | 90.17 | 74.0 | 80.5 | | |
| 9-141 | 1.062 | 1.188 | 3.850 | 3.210 | 3.470 | 27.0 | 30.1 | 97.79 | 81.6 | 88.1 | | |

NOTES:

- * Applies to minimum diameter except in the area of the seal.

9-136 TO 9-141

PHYSICAL DIMENSIONS

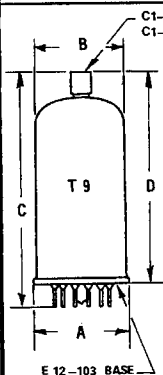


| OUTLINE DRAWING NUMBER | INCHES | | | | | | MILLIMETERS | | | | | | | | | |
|------------------------------|--------|-------|-------|-------|-------|-------|-------------|------|------|-------|------|-------|------|------|------|--|
| | A | | B* | | C | | D | | A | | B* | | C | | D | |
| | MAX. | MIN. | MAX. | MAX. | MIN. | MAX. | MAX. | MIN. | MAX. | MAX. | MIN. | MAX. | MAX. | MIN. | MAX. | |
| 9-142 | 1.250 | 1.062 | 1.188 | 2.625 | 2.000 | 2.250 | 31.75 | 27.0 | 30.1 | 66.6 | 50.8 | 57.1 | | | | |
| 9-143 | 1.250 | 1.062 | 1.188 | 2.875 | 2.250 | 2.500 | 31.75 | 27.0 | 30.1 | 73.0 | 57.2 | 63.5 | | | | |
| 9-144 | 1.250 | 1.062 | 1.188 | 3.125 | 2.500 | 2.750 | 31.75 | 27.0 | 30.1 | 79.3 | 63.5 | 69.8 | | | | |
| 9-145 | 1.250 | 1.062 | 1.188 | 3.375 | 2.750 | 3.000 | 31.75 | 27.0 | 30.1 | 85.7 | 69.9 | 76.2 | | | | |
| 9-146 | 1.250 | 1.062 | 1.188 | 3.625 | 3.000 | 3.250 | 31.75 | 27.0 | 30.1 | 92.0 | 76.2 | 82.5 | | | | |
| 9-147 | 1.250 | 1.062 | 1.188 | 3.875 | 3.250 | 3.500 | 31.75 | 27.0 | 30.1 | 98.4 | 82.6 | 88.9 | | | | |
| 9-148 | 1.250 | 1.062 | 1.188 | 4.125 | 3.500 | 3.750 | 31.75 | 27.0 | 30.1 | 104.7 | 88.9 | 95.2 | | | | |
| 9-149 | 1.250 | 1.062 | 1.188 | 4.375 | 3.750 | 4.000 | 31.75 | 27.0 | 30.1 | 111.1 | 95.3 | 101.6 | | | | |

NOTES

- * Applies to minimum diameter except in the areas of the seal.




9-142 TO 9-149


PHYSICAL DIMENSIONS

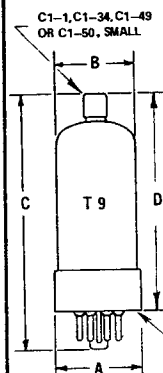

| OUTLINE DRAWING NUMBER | INCHES | | | | | | MILLIMETERS | | | | | | | | | |
|------------------------------|--------|-------|-------|-------|-------|-------|-------------|------|------|-------|-------|-------|------|------|------|--|
| | A | | B | | C | | D | | A | | B | | C | | D | |
| | MAX. | MIN. | MAX. | MAX. | MIN. | MAX. | MAX. | MIN. | MAX. | MAX. | MIN. | MAX. | MAX. | MIN. | MAX. | |
| 9-150 | 1.281 | 1.062 | 1.188 | 3.062 | 2.250 | 2.500 | 32.53 | 27.0 | 30.1 | 77.7 | 57.2 | 63.5 | | | | |
| 9-151 | 1.281 | 1.062 | 1.188 | 3.312 | 2.500 | 2.750 | 32.53 | 27.0 | 30.1 | 84.1 | 63.5 | 69.8 | | | | |
| 9-152 | 1.281 | 1.062 | 1.188 | 3.562 | 2.750 | 3.000 | 32.53 | 27.0 | 30.1 | 90.4 | 69.9 | 76.2 | | | | |
| 9-153 | 1.281 | 1.062 | 1.188 | 3.812 | 3.000 | 3.250 | 32.53 | 27.0 | 30.1 | 96.8 | 76.2 | 82.5 | | | | |
| 9-154 | 1.281 | 1.062 | 1.188 | 4.062 | 3.250 | 3.500 | 32.53 | 27.0 | 30.1 | 103.1 | 82.6 | 88.9 | | | | |
| 9-155 | 1.281 | 1.062 | 1.188 | 4.312 | 3.500 | 3.750 | 32.53 | 27.0 | 30.1 | 109.5 | 88.9 | 95.2 | | | | |
| 9-156 | 1.281 | 1.062 | 1.188 | 4.562 | 3.750 | 4.000 | 32.53 | 27.0 | 30.1 | 115.8 | 95.3 | 101.6 | | | | |
| 9-157 | 1.281 | 1.062 | 1.188 | 4.812 | 4.000 | 4.250 | 32.53 | 27.0 | 30.1 | 122.2 | 101.6 | 107.9 | | | | |

9-150 TO 9-157

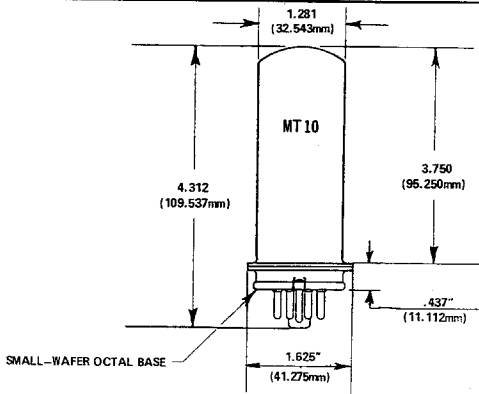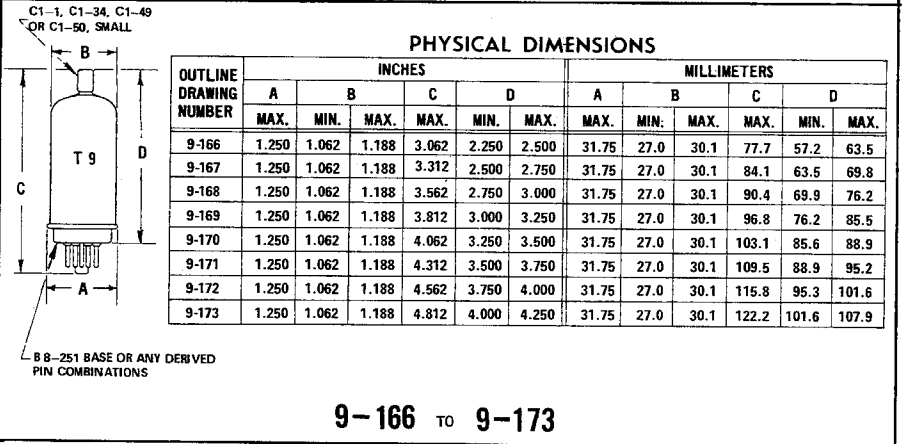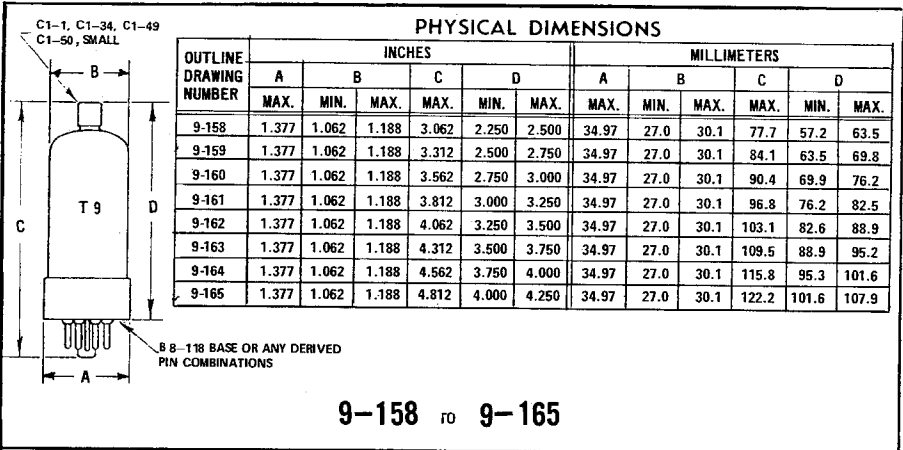


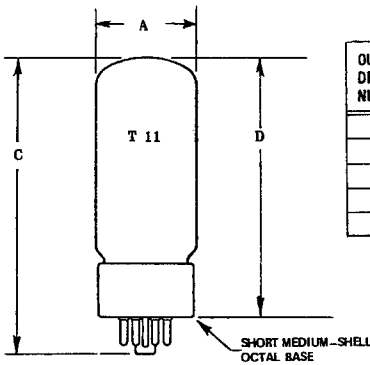

PHYSICAL DIMENSIONS

| OUTLINE DRAWING NUMBER | INCHES | | | | MILLIMETERS | | | |
|------------------------|--------|-------|-------|-------|-------------|------|--------|--------|
| | A | | C | D | A | | C | D |
| | MIN. | MAX. | MAX. | MAX. | MIN. | MAX. | MAX. | MAX. |
| 11-2 | 1.312 | 1.438 | 3.500 | 2.938 | 33.4 | 36.5 | 88.90 | 74.61 |
| 11-3 | 1.312 | 1.438 | 3.875 | 3.312 | 33.4 | 36.5 | 98.42 | 84.13 |
| 11-4 | 1.312 | 1.438 | 4.250 | 3.688 | 33.4 | 36.5 | 107.95 | 93.66 |
| 11-5 | 1.312 | 1.438 | 4.625 | 4.062 | 33.4 | 36.5 | 117.47 | 103.18 |


11-2 TO 11-5




PHYSICAL DIMENSIONS

| OUTLINE DRAWING NUMBER | INCHES | | | | | MILLIMETERS | | | | |
|------------------------|--------|-------|-------|-------|-------|-------------|------|--------|-------|-------|
| | A | | C | D | | A | | C | D | |
| | MIN. | MAX. | MAX. | MIN. | MAX. | MIN. | MAX. | MAX. | MIN. | MAX. |
| 11-6 | 1.312 | 1.438 | 3.875 | 2.938 | 3.312 | 33.4 | 36.5 | 98.2 | 74.7 | 84.1 |
| 11-7 | 1.312 | 1.438 | 4.250 | 3.312 | 3.688 | 33.4 | 36.5 | 107.95 | 84.2 | 93.6 |
| 11-8 | 1.312 | 1.438 | 4.625 | 3.688 | 4.062 | 33.4 | 36.5 | 117.47 | 93.7 | 103.1 |
| 11-9 | 1.312 | 1.438 | 5.000 | 4.062 | 4.432 | 33.4 | 36.5 | 127.0 | 103.2 | 112.7 |

11-6 TO 11-9

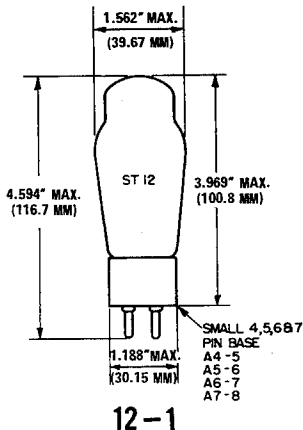


12-1

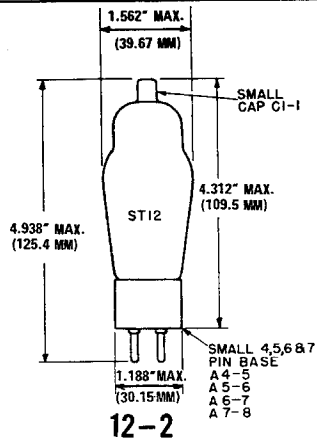


12-2

NOMINAL CAP DIAMETERS
MINIATURE OR SKIRTED MINIATURE - 0.250"


SMALL - 0.360"
MEDIUM - 0.566"

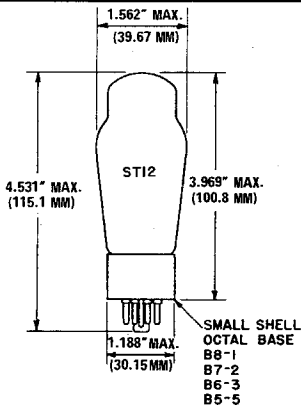


12-3

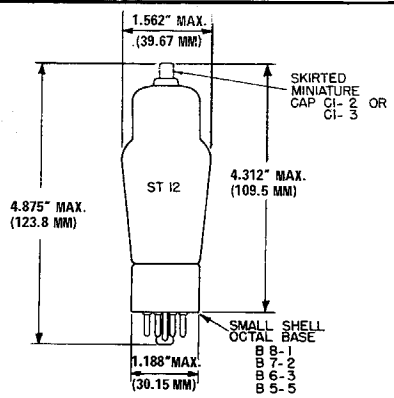


12-4

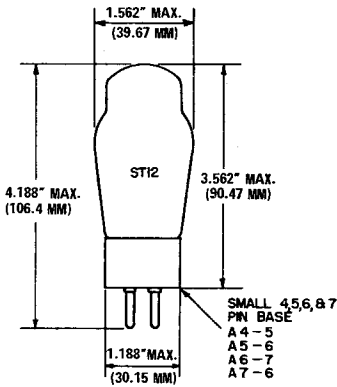


12-5

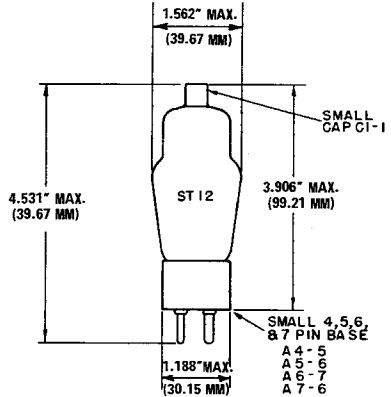


12-6

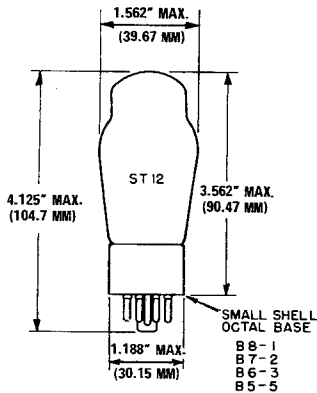


12-7

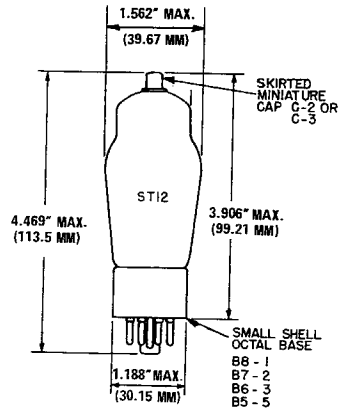


12-8

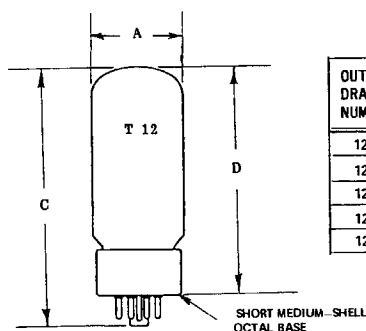
PHYSICAL DIMENSIONS

| OUTLINE DRAWING NUMBER | INCHES | | | | MILLIMETERS | | | |
|------------------------------|--------|-------|-------|-------|-------------|------|--------|--------|
| | A | | C | D | A | | C | D |
| | MIN. | MAX. | MAX. | MAX. | MIN. | MAX. | MAX. | MAX. |
| 12-13 | 1.438 | 1.562 | 3.500 | 2.938 | 36.6 | 39.6 | 88.90 | 74.61 |
| 12-14 | 1.438 | 1.562 | 3.875 | 3.312 | 36.6 | 39.6 | 98.42 | 84.13 |
| 12-15 | 1.438 | 1.562 | 4.250 | 3.688 | 36.6 | 39.6 | 107.95 | 93.66 |
| 12-16 | 1.438 | 1.562 | 4.625 | 4.062 | 36.6 | 39.6 | 117.47 | 103.18 |
| 12-17 | 1.438 | 1.562 | 5.000 | 4.438 | 36.6 | 39.6 | 127.0 | 112.71 |

12-13 TO 12-17

PHYSICAL DIMENSIONS
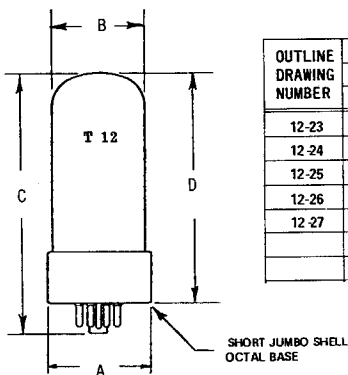
| OUTLINE DRAWING NUMBER | INCHES | | | | | MILLIMETERS | | | | |
|------------------------------|--------|-------|-------|-------|-------|-------------|------|--------|-------|-------|
| | A | | C | D | | A | | C | D | |
| | MIN. | MAX. | MAX. | MIN. | MAX. | MIN. | MAX. | MAX. | MIN. | MAX. |
| 12-18 | 1.438 | 1.562 | 3.875 | 2.938 | 3.312 | 36.6 | 39.6 | 98.42 | 74.7 | 84.1 |
| 12-19 | 1.438 | 1.562 | 4.125 | 3.312 | 3.688 | 36.6 | 39.6 | 107.95 | 84.2 | 93.6 |
| 12-20 | 1.438 | 1.562 | 4.625 | 3.688 | 4.062 | 36.6 | 39.6 | 117.47 | 93.7 | 103.1 |
| 12-21 | 1.438 | 1.562 | 5.000 | 4.062 | 4.438 | 36.6 | 39.6 | 127.0 | 103.2 | 112.7 |
| 12-22 | 1.438 | 1.562 | 5.375 | 4.438 | 4.812 | 36.6 | 39.6 | 136.5 | 112.8 | 122.2 |

12-18 TO 12-22

PHYSICAL DIMENSIONS


| OUTLINE DRAWING NUMBER | INCHES | | | | | MILLIMETERS | | | | |
|------------------------------|--------|-------|-------|-------|-------|-------------|------|------|--------|--------|
| | A | B | | C | D | A | B | | C | D |
| | MAX. | MIN. | MAX. | MAX. | MAX. | MAX. | MIN. | MAX. | MAX. | MAX. |
| 12-23 | 1.719 | 1.438 | 1.562 | 3.500 | 2.938 | 43.65 | 36.6 | 39.6 | 88.90 | 74.61 |
| 12-24 | 1.719 | 1.438 | 1.562 | 3.875 | 3.312 | 43.65 | 36.6 | 39.6 | 98.42 | 84.13 |
| 12-25 | 1.719 | 1.438 | 1.562 | 4.250 | 3.688 | 43.65 | 36.6 | 39.6 | 107.95 | 93.66 |
| 12-26 | 1.719 | 1.438 | 1.562 | 4.625 | 4.062 | 43.65 | 36.6 | 39.6 | 117.47 | 103.18 |
| 12-27 | 1.719 | 1.438 | 1.562 | 5.000 | 4.438 | 43.65 | 36.6 | 39.6 | 127.0 | 112.71 |

12-23 TO 12-27

 NOMINAL CAP DIAMETERS
 MINIATURE OR SKIRTED MINIATURE - 0.250"

 SMALL - 0.360"
 MEDIUM - 0.566"


PHYSICAL DIMENSIONS

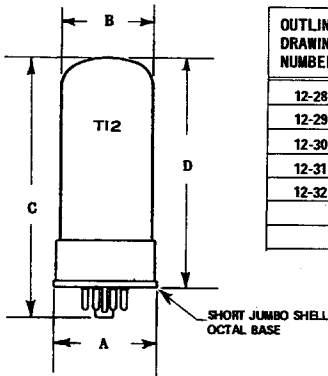

| OUTLINE DRAWING NUMBER | INCHES | | | | | MILLIMETERS | | | | | | |
|------------------------------|--------|-------|-------|-------|-------|-------------|------|------|--------|--------|------|---|
| | A | | B | | C | D | A | | B | | C | D |
| | MAX. | MIN. | MAX. | MAX. | MAX. | MAX. | MAX. | MIN. | MAX. | MAX. | MAX. | |
| 12-28 | 1.719 | 1.438 | 1.562 | 3.500 | 2.938 | 43.65 | 36.6 | 39.6 | 88.90 | 74.61 | | |
| 12-29 | 1.719 | 1.438 | 1.562 | 3.875 | 3.312 | 43.65 | 36.6 | 39.6 | 98.42 | 84.13 | | |
| 12-30 | 1.719 | 1.438 | 1.562 | 4.250 | 3.688 | 43.65 | 36.6 | 39.6 | 107.95 | 93.66 | | |
| 12-31 | 1.719 | 1.438 | 1.562 | 4.625 | 4.062 | 43.65 | 36.6 | 39.6 | 117.47 | 103.18 | | |
| 12-32 | 1.719 | 1.438 | 1.562 | 5.000 | 4.438 | 43.65 | 36.6 | 39.6 | 127.0 | 112.71 | | |
| | | | | | | | | | | | | |
| | | | | | | | | | | | | |

12-28 TO 12-32


PHYSICAL DIMENSIONS

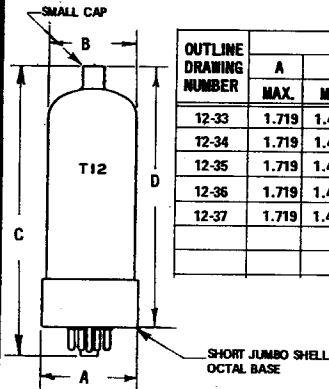

| OUTLINE DRAWING NUMBER | INCHES | | | | | MILLIMETERS | | | | | | |
|------------------------------|--------|-------|-------|-------|-------|-------------|-------|------|------|--------|-------|-------|
| | A | | B | | C | D | A | | B | | C | D |
| | MAX. | MIN. | MAX. | MAX. | MIN. | MAX. | MAX. | MIN. | MAX. | MAX. | MIN. | MAX. |
| 12-33 | 1.719 | 1.438 | 1.562 | 3.875 | 2.938 | 3.312 | 43.65 | 36.6 | 39.6 | 98.42 | 74.7 | 84.1 |
| 12-34 | 1.719 | 1.438 | 1.562 | 4.250 | 3.312 | 3.688 | 43.65 | 36.6 | 39.6 | 107.95 | 84.2 | 93.6 |
| 12-35 | 1.719 | 1.438 | 1.562 | 4.625 | 3.688 | 4.062 | 43.65 | 36.6 | 39.6 | 117.47 | 93.7 | 103.1 |
| 12-36 | 1.719 | 1.438 | 1.562 | 5.000 | 4.062 | 4.438 | 43.65 | 36.6 | 39.6 | 127.0 | 103.2 | 112.7 |
| 12-37 | 1.719 | 1.438 | 1.562 | 5.375 | 4.438 | 4.812 | 43.65 | 36.6 | 39.6 | 136.52 | 112.8 | 122.2 |
| | | | | | | | | | | | | |
| | | | | | | | | | | | | |


12-33 TO 12-37

PHYSICAL DIMENSIONS

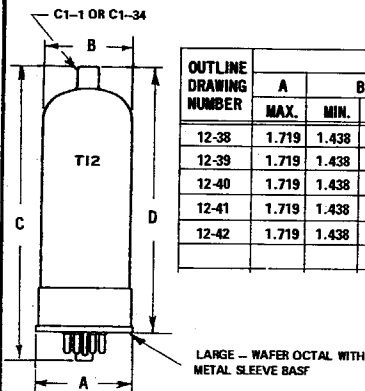


| OUTLINE DRAWING NUMBER | INCHES | | | | | MILLIMETERS | | | | | | |
|------------------------------|--------|-------|-------|-------|-------|-------------|-------|------|------|--------|-------|-------|
| | A | | B | | C | D | A | | B | | C | D |
| | MAX. | MIN. | MAX. | MAX. | MIN. | MAX. | MAX. | MIN. | MAX. | MAX. | MIN. | MAX. |
| 12-38 | 1.719 | 1.438 | 1.562 | 3.875 | 2.938 | 3.312 | 43.65 | 36.6 | 39.6 | 98.42 | 74.7 | 84.1 |
| 12-39 | 1.719 | 1.438 | 1.562 | 4.250 | 3.312 | 3.688 | 43.65 | 36.6 | 39.6 | 107.95 | 84.2 | 93.6 |
| 12-40 | 1.719 | 1.438 | 1.562 | 4.625 | 3.688 | 4.062 | 43.65 | 36.6 | 39.6 | 117.47 | 93.7 | 103.1 |
| 12-41 | 1.719 | 1.438 | 1.562 | 5.000 | 4.062 | 4.438 | 43.65 | 36.6 | 39.6 | 127.0 | 103.2 | 112.7 |
| 12-42 | 1.719 | 1.438 | 1.562 | 5.375 | 4.438 | 4.812 | 43.65 | 36.6 | 39.6 | 136.5 | 112.8 | 122.2 |
| | | | | | | | | | | | | |
| | | | | | | | | | | | | |


12-38 TO 12-42

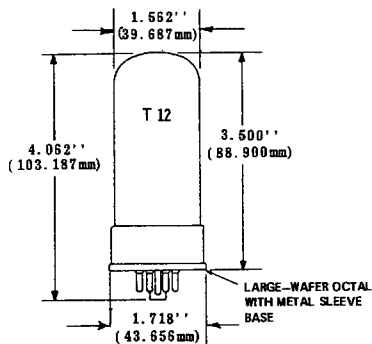

12-43

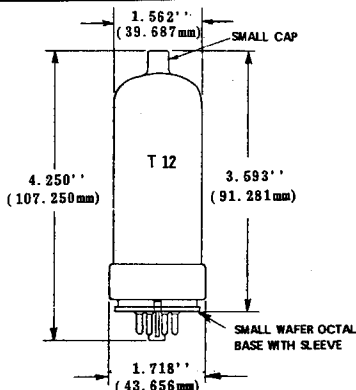


12-44

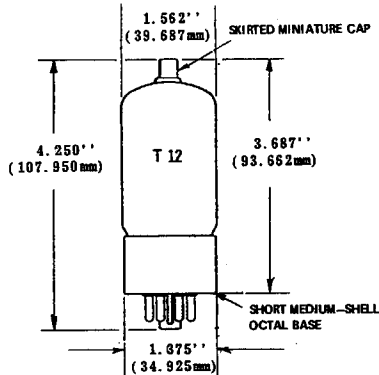

12-51

PHYSICAL DIMENSIONS



| OUTLINE DRAWING NUMBER | INCHES | | | | | MILLIMETERS | | | | |
|------------------------|--------|-------|-------|-------|-------|-------------|------|--------|------|-------|
| | A* | | C | D | | A* | | C | D | |
| | MIN. | MAX. | MAX. | MIN. | MAX. | MIN. | MAX. | MAX. | MIN. | MAX. |
| 12-52 | 1.437 | 1.563 | 1.875 | 1.250 | 1.500 | 36.5 | 39.7 | 47.62 | 31.8 | 38.1 |
| 12-53 | 1.437 | 1.563 | 2.125 | 1.500 | 1.750 | 36.5 | 39.7 | 53.97 | 38.1 | 44.4 |
| 12-54 | 1.437 | 1.563 | 2.375 | 1.750 | 2.000 | 36.5 | 39.7 | 60.32 | 44.5 | 50.8 |
| 12-55 | 1.437 | 1.563 | 2.625 | 2.000 | 2.250 | 36.5 | 39.7 | 66.67 | 50.8 | 57.1 |
| 12-56 | 1.437 | 1.563 | 2.875 | 2.250 | 2.500 | 36.5 | 39.7 | 73.00 | 57.2 | 63.5 |
| 12-57 | 1.437 | 1.563 | 3.125 | 2.500 | 2.750 | 36.5 | 39.7 | 79.3 | 63.5 | 69.8 |
| 12-58 | 1.437 | 1.563 | 3.375 | 2.750 | 3.000 | 36.5 | 39.7 | 85.7 | 69.9 | 76.2 |
| 12-59 | 1.437 | 1.563 | 3.625 | 3.000 | 3.250 | 36.5 | 39.7 | 92.0 | 76.2 | 82.5 |
| 12-60 | 1.437 | 1.563 | 3.875 | 3.250 | 3.500 | 36.5 | 39.7 | 98.4 | 82.6 | 88.9 |
| 12-61 | 1.437 | 1.563 | 4.125 | 3.500 | 3.750 | 36.5 | 39.7 | 104.77 | 88.9 | 95.2 |
| 12-62 | 1.437 | 1.563 | 4.375 | 3.750 | 4.000 | 36.5 | 39.7 | 111.12 | 95.3 | 101.6 |


12-52 TO 12-62

NOTES: * Applies to minimum diameter except in the area of the seal.

NOMINAL CAP DIAMETERS
MINIATURE OR SKIRTED MINIATURE - 0.250"

SMALL - 0.360"
MEDIUM - 0.566"


| OUTLINE DRAWING NUMBER | PHYSICAL DIMENSIONS | | | | | | | | | | | |
|------------------------|---------------------|-------|-------|-------|-------|-------|-------------|------|--------|--------|------|------|
| | INCHES | | | | | | MILLIMETERS | | | | | |
| | A* | | C | D | | E* | A* | | C | D | | E* |
| | MIN. | MAX. | MAX. | MAX. | MIN. | MAX. | MIN. | MAX. | MAX. | MAX. | MIN. | MAX. |
| 12-63 | 1.438 | 1.562 | 3.110 | 2.730 | 2.210 | 2.390 | 36.6 | 39.6 | 78.99 | 69.34 | 56.2 | 60.7 |
| 12-64 | 1.438 | 1.562 | 3.410 | 3.030 | 2.510 | 2.690 | 36.6 | 39.6 | 86.61 | 76.96 | 63.8 | 68.3 |
| 12-65 | 1.438 | 1.562 | 3.710 | 3.330 | 2.810 | 2.990 | 36.6 | 39.6 | 94.23 | 84.58 | 71.4 | 75.9 |
| 12-66 | 1.438 | 1.562 | 4.010 | 3.630 | 3.110 | 3.290 | 36.6 | 39.6 | 101.85 | 92.20 | 79.0 | 83.5 |
| 12-67 | 1.438 | 1.562 | 4.310 | 3.930 | 3.410 | 3.590 | 36.6 | 39.6 | 109.47 | 99.82 | 86.7 | 99.1 |
| 12-68 | 1.438 | 1.562 | 4.610 | 4.230 | 3.710 | 3.890 | 36.6 | 39.6 | 117.09 | 107.44 | 94.3 | 98.8 |



NOTES:

- The minimum applies in zone starting 0.375" (9.52 mm) from base seat.
- Measured from base seat to bulb-top line as determined by a ring gauge of 0.600" (15.24 mm.) I.D.

12-63 TO 12-68

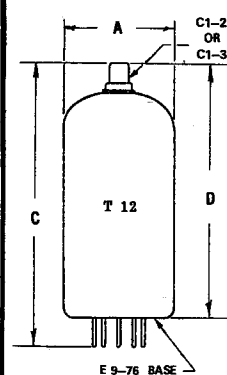


| OUTLINE DRAWING NUMBER | PHYSICAL DIMENSIONS | | | | | | | | | |
|------------------------|---------------------|-------|-------|-------|-------|------|-------------|--------|-------|-------|
| | INCHES | | | | | | MILLIMETERS | | | |
| | A* | | C | D | | E* | A* | | C | D |
| | MIN. | MAX. | MAX. | MIN. | MAX. | MIN. | MAX. | MAX. | MIN. | MAX. |
| 12-69 | 1.438 | 1.562 | 3.250 | 2.610 | 2.870 | 36.6 | 39.6 | 82.55 | 63.3 | 72.8 |
| 12-70 | 1.438 | 1.562 | 3.550 | 2.910 | 3.170 | 36.6 | 39.6 | 90.17 | 74.0 | 80.5 |
| 12-71 | 1.438 | 1.562 | 3.850 | 3.210 | 3.470 | 36.6 | 39.6 | 97.79 | 81.6 | 88.1 |
| 12-72 | 1.438 | 1.562 | 4.150 | 3.510 | 3.770 | 36.6 | 39.6 | 105.41 | 89.2 | 95.7 |
| 12-73 | 1.438 | 1.562 | 4.450 | 3.810 | 4.070 | 36.6 | 39.6 | 113.03 | 96.8 | 103.3 |
| 12-74 | 1.438 | 1.562 | 4.750 | 4.110 | 4.370 | 36.6 | 39.6 | 120.65 | 104.4 | 110.9 |

NOTES:

- Applies to minimum diameter except in the area of the seal.

12-69 TO 12-74

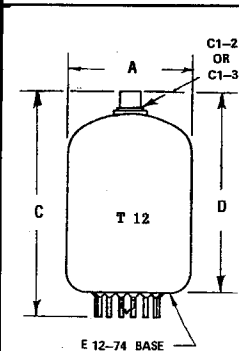


| OUTLINE DRAWING NUMBER | PHYSICAL DIMENSIONS | | | | | | | | | |
|------------------------|---------------------|-------|-------|-------|-------|------|-------------|--------|------|-------|
| | INCHES | | | | | | MILLIMETERS | | | |
| | A* | | C | D | | E* | A* | | C | D |
| | MIN. | MAX. | MAX. | MIN. | MAX. | MIN. | MAX. | MAX. | MIN. | MAX. |
| 12-75 | 1.437 | 1.563 | 2.625 | 2.000 | 2.250 | 36.5 | 39.7 | 66.67 | 50.8 | 57.1 |
| 12-76 | 1.437 | 1.563 | 2.875 | 2.250 | 2.500 | 36.5 | 39.7 | 73.00 | 57.2 | 63.5 |
| 12-77 | 1.437 | 1.563 | 3.125 | 2.500 | 2.750 | 36.5 | 39.7 | 79.3 | 63.5 | 69.8 |
| 12-78 | 1.437 | 1.563 | 3.375 | 2.750 | 3.000 | 36.5 | 39.7 | 85.7 | 69.9 | 76.2 |
| 12-79 | 1.437 | 1.563 | 3.625 | 3.000 | 3.250 | 36.5 | 39.7 | 92.0 | 76.2 | 85.5 |
| 12-80 | 1.437 | 1.563 | 3.875 | 3.250 | 3.500 | 36.5 | 39.7 | 98.4 | 82.6 | 89.9 |
| 12-81 | 1.437 | 1.563 | 4.125 | 3.500 | 3.750 | 36.5 | 39.7 | 104.77 | 89.9 | 95.2 |
| 12-82 | 1.437 | 1.563 | 4.375 | 3.750 | 4.000 | 36.5 | 39.7 | 111.12 | 95.3 | 101.6 |

NOTES:

- Applies to minimum diameter except in the area of the seal.


12-75 TO 12-82



| OUTLINE DRAWING NUMBER | PHYSICAL DIMENSIONS | | | | | | | | | |
|------------------------|---------------------|-------|-------|-------|-------|-------------|------|--------|------|-------|
| | INCHES | | | | | MILLIMETERS | | | | |
| | A* | | C | D | | A* | | C | D | |
| | MIN. | MAX. | MIN. | MAX. | MIN. | MAX. | MIN. | MAX. | MIN. | MAX. |
| 12-83 | 1.437 | 1.563 | 2.625 | 2.000 | 2.250 | 36.5 | 39.7 | 66.67 | 50.8 | 57.1 |
| 12-84 | 1.437 | 1.563 | 2.875 | 2.250 | 2.500 | 36.5 | 39.7 | 73.0 | 57.2 | 63.5 |
| 12-85 | 1.437 | 1.563 | 3.125 | 2.500 | 2.750 | 36.5 | 39.7 | 79.30 | 63.5 | 69.8 |
| 12-86 | 1.437 | 1.563 | 3.375 | 2.750 | 3.000 | 36.5 | 39.7 | 85.70 | 69.9 | 76.2 |
| 12-87 | 1.437 | 1.563 | 3.625 | 3.000 | 3.250 | 36.5 | 39.7 | 92.07 | 76.2 | 82.5 |
| 12-88 | 1.437 | 1.563 | 3.875 | 3.250 | 3.500 | 36.5 | 39.7 | 98.42 | 82.6 | 88.9 |
| 12-89 | 1.437 | 1.563 | 4.125 | 3.500 | 3.750 | 36.5 | 39.7 | 104.77 | 88.9 | 95.2 |
| 12-90 | 1.437 | 1.563 | 4.375 | 3.750 | 4.000 | 36.5 | 39.7 | 111.12 | 95.3 | 101.6 |

NOTES:


- * Applies to minimum diameter except in the area of the seal.

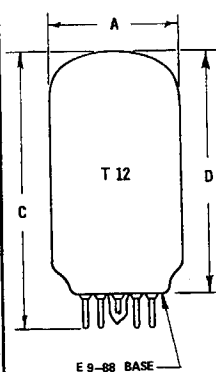12-83 TO 12-90


| OUTLINE DRAWING NUMBER | PHYSICAL DIMENSIONS | | | | | | | | | |
|------------------------|---------------------|-------|-------|-------|-------|-------------|------|--------|------|-------|
| | INCHES | | | | | MILLIMETERS | | | | |
| | A* | | C | D | | A* | | C | D | |
| | MIN. | MAX. | MIN. | MAX. | MIN. | MAX. | MIN. | MAX. | MIN. | MAX. |
| 12-91 | 1.438 | 1.562 | 1.880 | 1.250 | 1.500 | 36.6 | 39.6 | 47.75 | 31.8 | 38.1 |
| 12-92 | 1.438 | 1.562 | 2.130 | 1.500 | 1.750 | 36.6 | 39.6 | 54.10 | 38.1 | 44.4 |
| 12-93 | 1.438 | 1.562 | 2.380 | 1.750 | 2.000 | 36.6 | 39.6 | 60.45 | 44.5 | 50.8 |
| 12-94 | 1.438 | 1.562 | 2.630 | 2.000 | 2.250 | 36.6 | 39.6 | 66.80 | 50.8 | 57.1 |
| 12-95 | 1.438 | 1.562 | 2.880 | 2.250 | 2.500 | 36.6 | 39.6 | 73.15 | 57.2 | 63.5 |
| 12-96 | 1.438 | 1.562 | 3.130 | 2.500 | 2.750 | 36.6 | 39.6 | 79.50 | 63.5 | 69.8 |
| 12-97 | 1.438 | 1.562 | 3.380 | 2.750 | 3.000 | 36.6 | 39.6 | 85.5 | 69.9 | 76.2 |
| 12-98 | 1.438 | 1.562 | 3.630 | 3.000 | 3.250 | 36.6 | 39.6 | 92.20 | 76.2 | 82.5 |
| 12-99 | 1.438 | 1.562 | 3.880 | 3.250 | 3.500 | 36.6 | 39.6 | 98.55 | 82.6 | 88.9 |
| 12-100 | 1.438 | 1.562 | 4.130 | 3.500 | 3.750 | 36.6 | 39.6 | 104.90 | 88.9 | 95.2 |
| 12-101 | 1.438 | 1.562 | 4.380 | 3.750 | 4.000 | 36.6 | 39.6 | 111.25 | 95.3 | 101.6 |

NOTES:

- * Applies to minimum diameter except in the area of the seal.

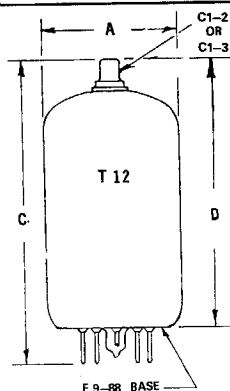12-91 TO 12-101


| OUTLINE DRAWING NUMBER | PHYSICAL DIMENSIONS | | | | | | | | | |
|------------------------|---------------------|-------|-------|-------|-------|-------------|------|--------|------|-------|
| | INCHES | | | | | MILLIMETERS | | | | |
| | A* | | C | D | | A* | | C | D | |
| | MIN. | MAX. | MIN. | MAX. | MIN. | MAX. | MIN. | MAX. | MIN. | MAX. |
| 12-102 | 1.438 | 1.562 | 2.630 | 2.000 | 2.250 | 36.6 | 39.6 | 66.80 | 50.8 | 57.1 |
| 12-103 | 1.438 | 1.562 | 2.880 | 2.250 | 2.500 | 36.6 | 39.6 | 73.15 | 57.2 | 63.5 |
| 12-104 | 1.438 | 1.562 | 3.130 | 2.500 | 2.750 | 36.6 | 39.6 | 79.50 | 63.5 | 69.8 |
| 12-105 | 1.438 | 1.562 | 3.380 | 2.750 | 3.000 | 36.6 | 39.6 | 85.50 | 69.9 | 76.2 |
| 12-106 | 1.438 | 1.562 | 3.630 | 3.000 | 3.250 | 36.6 | 39.6 | 92.20 | 76.2 | 85.5 |
| 12-107 | 1.438 | 1.562 | 3.880 | 3.250 | 3.500 | 36.6 | 39.6 | 98.55 | 82.6 | 88.9 |
| 12-108 | 1.438 | 1.562 | 4.130 | 3.500 | 3.750 | 36.6 | 39.6 | 104.90 | 88.9 | 95.2 |
| 12-109 | 1.438 | 1.562 | 4.380 | 3.750 | 4.000 | 36.6 | 39.6 | 111.25 | 95.3 | 101.6 |


NOTES:

- * Applies to minimum diameter except in the area of the seal.

12-102 TO 12-109

 NOMINAL CAP DIAMETERS
 MINIMATURE OR SKIRTED MINIMATURE - 0.250"

 SMALL - 0.360"
 MEDIUM - 0.566"

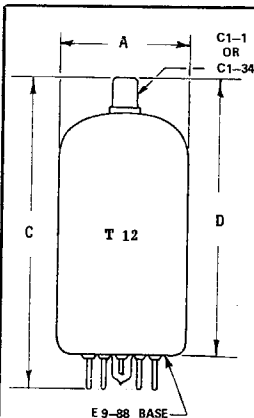


PHYSICAL DIMENSIONS

| OUTLINE DRAWING NUMBER | INCHES | | | | | MILLIMETERS | | | | |
|------------------------|--------|-------|-------|-------|-------|-------------|------|--------|------|-------|
| | A* | | C | D | | A* | | C | D | |
| | MIN. | MAX. | MAX. | MIN. | MAX. | MIN. | MAX. | MAX. | MIN. | MAX. |
| 12-110 | 1.438 | 1.562 | 2.630 | 2.000 | 2.250 | 36.6 | 39.6 | 66.80 | 50.8 | 57.1 |
| 12-111 | 1.438 | 1.562 | 2.880 | 2.250 | 2.500 | 36.6 | 39.6 | 73.15 | 57.2 | 63.5 |
| 12-112 | 1.438 | 1.562 | 3.130 | 2.500 | 2.750 | 36.6 | 39.6 | 79.50 | 63.5 | 69.8 |
| 12-113 | 1.438 | 1.562 | 3.380 | 2.750 | 3.000 | 36.6 | 39.6 | 85.85 | 69.9 | 76.2 |
| 12-114 | 1.438 | 1.562 | 3.630 | 3.000 | 3.250 | 36.6 | 39.6 | 92.20 | 76.2 | 82.5 |
| 12-115 | 1.438 | 1.562 | 3.880 | 3.250 | 3.500 | 36.6 | 39.6 | 98.55 | 82.6 | 88.9 |
| 12-116 | 1.438 | 1.562 | 4.130 | 3.500 | 3.750 | 36.6 | 39.6 | 104.90 | 88.9 | 95.2 |
| 12-117 | 1.438 | 1.562 | 4.380 | 3.750 | 4.000 | 36.6 | 39.6 | 111.25 | 95.3 | 101.6 |

NOTES:

- * Applies to minimum diameter except in the area of the seal.

12-110 TO 12-117

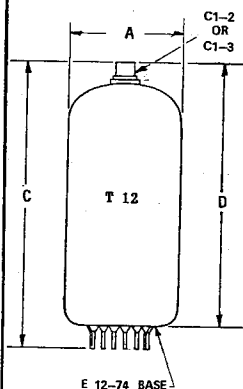


PHYSICAL DIMENSIONS

| OUTLINE DRAWING NUMBER | INCHES | | | | | MILLIMETERS | | | | |
|------------------------|--------|-------|-------|-------|-------|-------------|------|-------|-------|-------|
| | A* | | C | D | | A* | | C | D | |
| | MIN. | MAX. | MAX. | MIN. | MAX. | MIN. | MAX. | MAX. | MIN. | MAX. |
| 12-118 | 1.437 | 1.563 | 4.625 | 4.000 | 4.250 | 36.5 | 39.7 | 117.4 | 101.6 | 107.9 |
| 12-119 | 1.437 | 1.563 | 4.875 | 4.250 | 4.500 | 36.5 | 39.7 | 123.8 | 108.0 | 114.3 |
| | | | | | | | | | | |
| | | | | | | | | | | |

NOTES:

- * Applies to minimum diameter except in the area of the seal.

12-118 TO 12-119

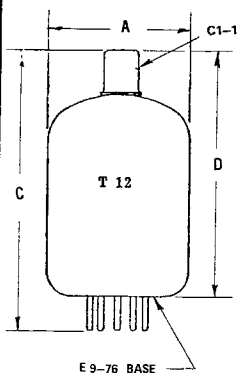

PHYSICAL DIMENSIONS


| OUTLINE DRAWING NUMBER | INCHES | | | | | MILLIMETERS | | | | |
|------------------------|--------|-------|-------|-------|-------|-------------|------|--------|-------|-------|
| | A* | | C | D | | A* | | C | D | |
| | MIN. | MAX. | MAX. | MIN. | MAX. | MIN. | MAX. | MAX. | MIN. | MAX. |
| 12-121 | 1.438 | 1.562 | 3.250 | 2.610 | 2.870 | 36.6 | 39.6 | 82.55 | 66.3 | 72.8 |
| 12-122 | 1.438 | 1.562 | 3.550 | 2.910 | 3.170 | 36.6 | 39.6 | 90.17 | 74.0 | 80.5 |
| 12-123 | 1.438 | 1.562 | 3.850 | 3.210 | 3.470 | 36.6 | 39.6 | 97.79 | 81.6 | 88.1 |
| 12-124 | 1.438 | 1.562 | 4.150 | 3.510 | 3.770 | 36.6 | 39.6 | 105.41 | 89.2 | 95.7 |
| 12-125 | 1.438 | 1.562 | 4.450 | 3.810 | 4.070 | 36.6 | 39.6 | 113.03 | 96.8 | 103.3 |
| 12-126 | 1.438 | 1.562 | 4.750 | 4.110 | 4.370 | 36.6 | 39.6 | 120.65 | 104.4 | 110.9 |
| | | | | | | | | | | |

NOTES:

- * Applies to minimum diameter except in the area of the seal.

12-121 TO 12-126

PHYSICAL DIMENSIONS

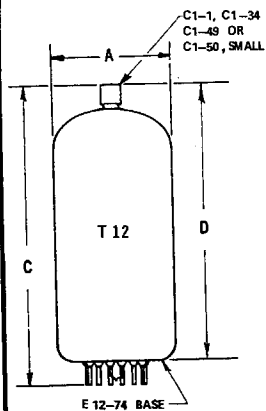


| OUTLINE DRAWING NUMBER | INCHES | | | | | MILLIMETERS | | | | |
|------------------------|--------|-------|-------|-------|-------|-------------|------|-------|-------|-------|
| | A- | | C | D | | A- | | C | D | |
| | MIN. | MAX. | MAX. | MIN. | MAX. | MIN. | MAX. | MAX. | MIN. | MAX. |
| 12-127 | 1.437 | 1.563 | 2.625 | 2.000 | 2.250 | 36.5 | 39.7 | 66.6 | 50.8 | 57.1 |
| 12-128 | 1.437 | 1.563 | 2.875 | 2.250 | 2.500 | 36.5 | 39.7 | 73.0 | 57.2 | 63.5 |
| 12-129 | 1.437 | 1.563 | 3.125 | 2.500 | 2.750 | 36.5 | 39.7 | 79.3 | 63.5 | 69.8 |
| 12-130 | 1.437 | 1.563 | 3.375 | 2.750 | 3.000 | 36.5 | 39.7 | 85.7 | 69.9 | 76.2 |
| 12-131 | 1.437 | 1.563 | 3.625 | 3.000 | 3.250 | 36.5 | 39.7 | 92.0 | 76.2 | 85.2 |
| 12-132 | 1.437 | 1.563 | 3.875 | 3.250 | 3.500 | 36.5 | 39.7 | 98.4 | 85.6 | 88.9 |
| 12-133 | 1.437 | 1.563 | 4.125 | 3.500 | 3.750 | 36.5 | 39.7 | 104.7 | 88.9 | 95.2 |
| 12-134 | 1.437 | 1.563 | 4.375 | 3.750 | 4.000 | 36.5 | 39.7 | 111.1 | 95.3 | 101.6 |
| 12-135 | 1.437 | 1.563 | 4.625 | 4.000 | 4.250 | 36.5 | 39.7 | 117.4 | 101.6 | 107.9 |
| 12-136 | 1.437 | 1.563 | 4.875 | 4.250 | 4.500 | 36.5 | 39.7 | 123.8 | 108.0 | 114.3 |

NOTES:

- Applies to minimum diameter except in the area of the seal.



12-127 TO 12-136

PHYSICAL DIMENSIONS

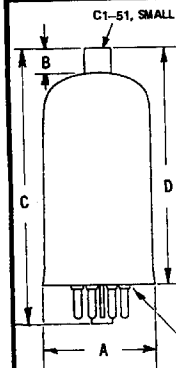


| OUTLINE DRAWING NUMBER | INCHES | | | | | | MILLIMETERS | | | | | | | |
|------------------------|--------|-------|-------|-------|-------|-------|-------------|-------|-------|-------|-------|-------|-------|-------|
| | A | | B | | C | | A | | B | | C | | D | |
| | MAX. | MIN. | MAX. | MAX. | MIN. | MAX. | MAX. | MIN. | MAX. | MAX. | MIN. | MAX. | MIN. | MAX. |
| 12-137 | 1.530 | 0.395 | 0.535 | 3.062 | 2.250 | 2.500 | 38.9 | 10.03 | 13.59 | 77.8 | 57.2 | 63.5 | 63.5 | 69.8 |
| 12-138 | 1.530 | 0.395 | 0.535 | 3.312 | 2.500 | 2.750 | 38.9 | 10.03 | 13.59 | 84.1 | 63.5 | 69.8 | 76.2 | 82.5 |
| 12-139 | 1.530 | 0.395 | 0.535 | 3.562 | 2.750 | 3.000 | 38.9 | 10.03 | 13.59 | 90.5 | 69.9 | 76.2 | 82.5 | 88.9 |
| 12-140 | 1.530 | 0.395 | 0.535 | 3.812 | 3.000 | 3.250 | 38.9 | 10.03 | 13.59 | 96.8 | 76.2 | 82.5 | 88.9 | 95.2 |
| 12-141 | 1.530 | 0.395 | 0.535 | 4.062 | 3.250 | 3.500 | 38.9 | 10.03 | 13.59 | 103.2 | 82.6 | 88.9 | 95.2 | 101.6 |
| 12-142 | 1.530 | 0.395 | 0.535 | 4.312 | 3.500 | 3.750 | 38.9 | 10.03 | 13.59 | 109.5 | 88.9 | 95.2 | 101.6 | 107.9 |
| 12-143 | 1.530 | 0.395 | 0.535 | 4.562 | 3.750 | 4.000 | 38.9 | 10.03 | 13.59 | 115.9 | 95.3 | 101.6 | 107.9 | 114.3 |
| 12-144 | 1.530 | 0.395 | 0.535 | 4.812 | 4.000 | 4.250 | 38.9 | 10.03 | 13.59 | 122.2 | 101.6 | 107.9 | 114.3 | 121.0 |


12-137 TO 12-144

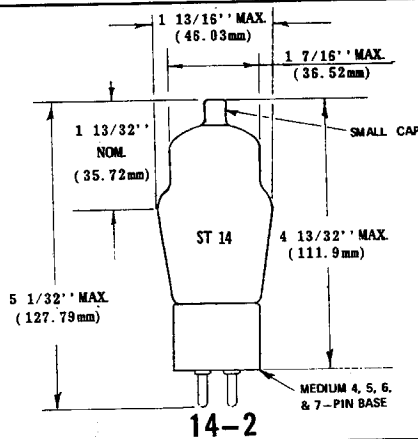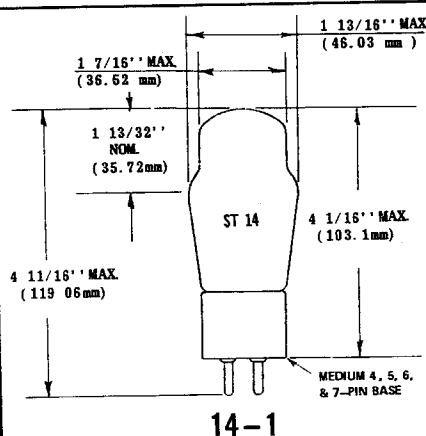
 NOMINAL CAP DIAMETERS
 MINIATURE OR SKIRTED MINIATURE - 0.250"

 SMALL - 0.360"
 MEDIUM - 0.566"

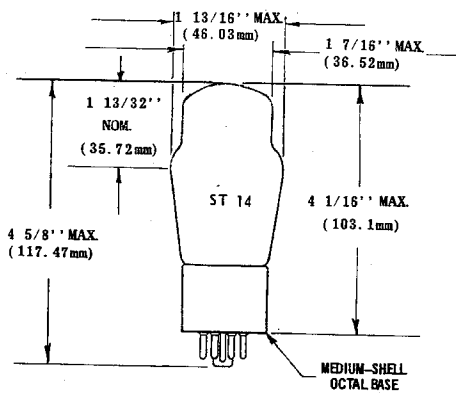

14-3

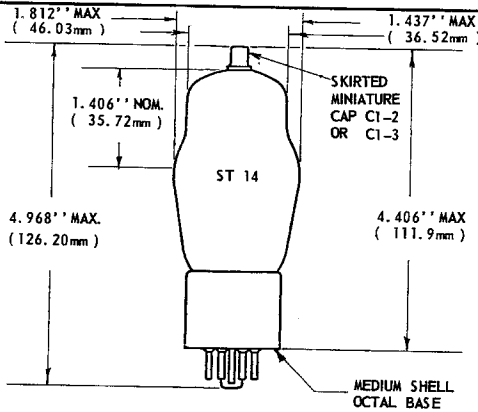

14-4


C1-1, SMALL

PHYSICAL DIMENSIONS

| OUTLINE DRAWING NUMBER | INCHES | | | | | | MILLIMETERS | | | | | |
|------------------------------|--------|-------|-------|-------|-------|-------|-------------|------|------|-------|-------|-------|
| | A | | B | C | D | | A | | B | C | D | |
| | MIN. | MAX. | MAX. | MAX. | MIN. | MAX. | MIN. | MAX. | MAX. | MAX. | MIN. | MAX. |
| 14-5 | 1.687 | 1.813 | 1.450 | 4.812 | 4.000 | 4.250 | 42.9 | 46.1 | 36.8 | 122.2 | 101.6 | 107.9 |
| 14-6 | 1.687 | 1.813 | 1.450 | 5.062 | 4.250 | 4.500 | 42.9 | 46.1 | 36.8 | 128.6 | 108.0 | 114.3 |
| 14-7 | 1.687 | 1.813 | 1.450 | 5.312 | 4.500 | 4.750 | 42.9 | 46.1 | 36.8 | 135.0 | 114.3 | 120.6 |
| 14-8 | 1.687 | 1.813 | 1.450 | 5.562 | 4.750 | 5.000 | 42.9 | 46.1 | 36.8 | 141.3 | 120.7 | 127.0 |
| 14-9 | 1.687 | 1.813 | 1.450 | 5.812 | 5.000 | 5.250 | 42.9 | 46.1 | 36.8 | 147.6 | 127.0 | 133.3 |
| 14-10 | 1.687 | 1.813 | 1.450 | 6.062 | 5.250 | 5.500 | 42.9 | 46.1 | 36.8 | 154.0 | 133.4 | 139.7 |
| 14-11 | 1.687 | 1.813 | 1.450 | 6.312 | 5.500 | 5.750 | 42.9 | 46.1 | 36.8 | 160.3 | 139.7 | 146.0 |

14-5 TO 14-11





PHYSICAL DIMENSIONS

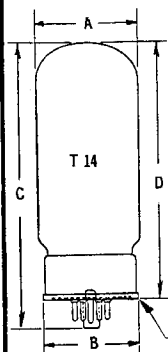

| OUTLINE DRAWING NUMBER | INCHES | | | | | | MILLIMETERS | | | | | |
|------------------------|--------|-------|-------|-------|-------|-------|-------------|------|------|-------|-------|-------|
| | A | | B | C | D | | A | | B | C | D | |
| | MIN. | MAX. | MAX. | MAX. | MIN. | MAX. | MIN. | MAX. | MAX. | MAX. | MIN. | MAX. |
| 14-12 | 1.687 | 1.813 | 1.718 | 3.562 | 2.750 | 3.000 | 42.9 | 46.1 | 43.6 | 90.5 | 69.9 | 76.2 |
| 14-13 | 1.687 | 1.813 | 1.718 | 3.812 | 3.000 | 3.250 | 42.9 | 46.1 | 43.6 | 98.6 | 76.2 | 82.5 |
| 14-14 | 1.687 | 1.813 | 1.718 | 4.062 | 3.250 | 3.500 | 42.9 | 46.1 | 43.6 | 103.2 | 82.6 | 88.9 |
| 14-15 | 1.687 | 1.813 | 1.718 | 4.312 | 3.500 | 3.750 | 42.9 | 46.1 | 43.6 | 109.5 | 88.9 | 95.2 |
| 14-16 | 1.687 | 1.813 | 1.718 | 4.562 | 3.750 | 4.000 | 42.9 | 46.1 | 43.6 | 115.9 | 95.3 | 101.6 |
| 14-17 | 1.687 | 1.813 | 1.718 | 4.812 | 4.000 | 4.250 | 42.9 | 46.1 | 43.6 | 122.2 | 101.6 | 107.9 |
| 14-18 | 1.687 | 1.813 | 1.718 | 5.062 | 4.250 | 4.500 | 42.9 | 46.1 | 43.6 | 128.6 | 108.0 | 114.3 |
| 14-19 | 1.687 | 1.813 | 1.718 | 5.312 | 4.500 | 4.750 | 42.9 | 46.1 | 43.6 | 134.9 | 114.3 | 120.6 |

B7-7 BASE OR ANY DERIVED PIN COMBINATIONS

14-12 TO 14-19

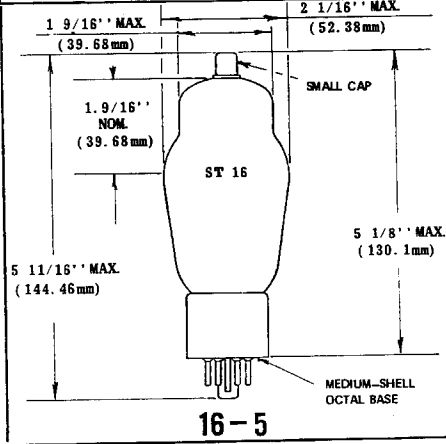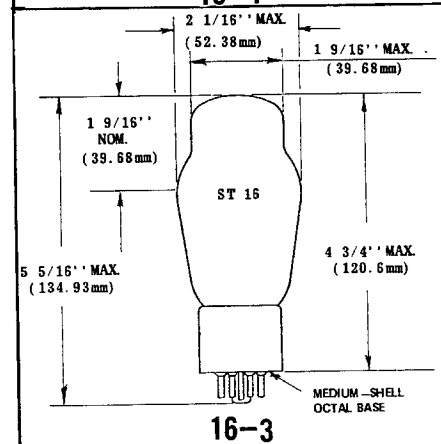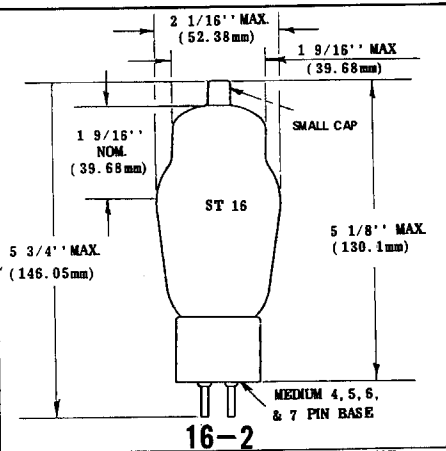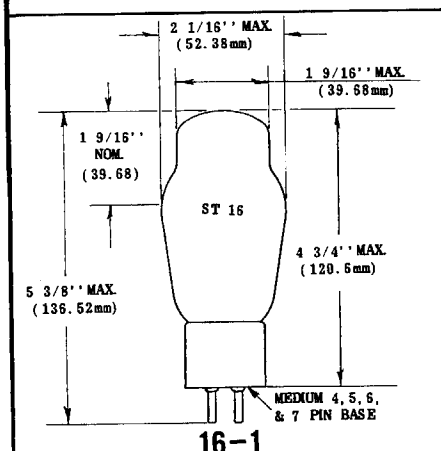

NOMINAL CAP DIAMETERS
MINIATURE OR SKIRTED MINIATURES - 0.250"

SMALL -0.360"
MEDIUM -0.566"

Physical dimensions of tube types not conforming to standard outline drawings appear on the following nine pages.

T-X TABLE

The following footnotes and symbols appear in the T-X Table:

- * FL—Flying Leads
- SL—Short Leads
- † Small Top Cap
- ‡ Plate terminal extends from top of envelope—dia. 0.031", length $\frac{5}{32}$ "
- § Skirted Miniature Top Cap
- ¶ Medium Top Cap
- # Special Insulated Miniature Top Cap
- || Plate terminal extends from top of envelope—diameter 0.566"
- + C1-5, Medium Top Cap (with Ceramic Collar) or C1-6, Skirted Medium Top Cap
- Large Top Cap
- ◆ Solder lugs on filament pins
- ▲ Flexible Lead with Lug
- ⊕ Plate Pin(s) on Top

OUTLINE DRAWINGS

T-X TABLE — Physical Characteristics of Types Not Conforming to Standard Outline Drawings

| Tube Type | Envelope | Style | Max Dimensions in Inches | | |
|-----------|----------|----------------------------------|--------------------------|-----------------|---------------|
| | | | Diameter | Over-all Length | Seated Height |
| OA5 | T-5½ | 7-Pin Miniature | 0.750 | 1.625 | 1.375 |
| OV4-G | T-7 | Octal | 1.078 | 2.625 | 2.063 |
| OZ4-G | T-7 | Octal | 1.063 | 2.625 | 2.063 |
| 1AE5 | T-2 x 3 | Inline Subm-FL* | 0.400 x 0.300 | | 1.500 |
| 1BH2 | T-6½ | 9-Pin Miniature † | 0.875 | 2.716 | 2.250 |
| 1BH2A | T-6½ | 9-Pin Miniature †§ | 0.875 | 2.716 | 2.250 |
| 1BV2 | T-6½ | 3-Pin—Solder Lugs †§ | 0.875 | 2.716 | 2.250 |
| 1G3-GTA | T-9 | Glass † | 1.377 | 3.563 | 3.000 |
| 1K3A | T-9 | Glass † | 1.377 | 3.563 | 3.000 |
| 1N2A | T-12 | Octal † | 1.562 | 3.562 | 3.000 |
| 1N6-G | T-9 | Octal | 1.188 | 4.000 | 3.438 |
| 1T2 | — | Diode | 0.531 | 1.906 | |
| 1Y2 | ST-12 | 4-Pin † | 1.563 | 4.594 | 3.989 |
| 1Z2 | T-5½ | 7-Pin Miniature § | 0.750 | 2.700 | 2.450 |
| 2B3 | T-9 | Octal † | 1.281 | 4.063 | 3.500 |
| 2B22 | Special | Glass & Metal | 1.313 | 1.938 | |
| 2C22 | T-9 | Octal § | 1.313 | 3.250 | 2.688 |
| 2C39 | Special | Metal & Ceramic | 1.260 | 2.750 | |
| 2C39A | Special | Metal & Ceramic | 1.260 | 2.750 | |
| 2C39WA | Special | Metal & Ceramic | 1.260 | 2.750 | |
| 2C39B | Special | Ceramic & Metal | 1.266 | 2.750 | |
| 2C40 | Special | Glass & Metal | 1.312 | 2.563 | |
| 2C40-A | Special | Glass & Metal | 1.312 | 2.688 | |
| 2C42 | Special | Glass & Metal | 1.312 | 2.688 | |
| 2C43 | Special | Glass & Metal | 1.312 | 2.688 | |
| 2C46 | Special | Glass & Metal | 1.312 | 2.688 | |
| 2C50 | T-9 | Octal | 1.315 | 2.750 | 3.313 |
| 2CN3-A | T-9 | Octal † | 1.281 | 3.812 | 3.250 |
| 2E24 | T-9 | Octal † | 1.313 | 3.656 | 3.094 |
| 2E26 | T-9 | Octal † | 1.313 | 3.656 | 3.094 |
| 2E31 | T-2 x 3 | Inline Subm-FL * | 0.400 x 0.300 | | 1.563 |
| 2E32 | T-2 x 3 | Inline Subm-SL * | 0.400 x 0.300 | | 1.563 |
| 2E35 | T-2 x 3 | Inline Subm-FL * | 0.390 x 0.290 | | 1.563 |
| 2E36 | T-2 x 3 | Inline Subm-SL * | 0.390 x 0.290 | | 1.563 |
| 2E41 | T-2 x 3 | Inline Subm-FL * | 0.390 x 0.290 | | 1.563 |
| 2E42 | T-2 x 3 | Inline Subm-SL * | 0.390 x 0.290 | | 1.563 |
| 2G21 | T-2 x 3 | Inline Subm-FL * | 0.400 x 0.300 | | 1.563 |
| 2G22 | T-2 x 3 | Inline Subm-SL * | 0.400 x 0.300 | | 1.563 |
| 2J2 | T-6½ | Noval—9 Pin | 0.827 | 3.000 | 2.710 |
| 2L2 | Special | Clear—Wire Leads | 0.748 | 2.284 | |
| 2V2 | T-11 | Octal † | 1.438 | 4.500 | 3.938 |
| 3A3-A | T-9 | Glass † | 1.188 | 3.812 | 3.250 |
| 3B2 | T-12 | Octal † | 1.719 | 5.219 | 4.688 |
| 3B28 | Special | 4-Pin ¶ | 2.063 | 6.150 | 5.530 |
| 3C23 | ST-16 | 4-Pin ¶ | 2.063 | 6.125 | 5.500 |
| 3CA3A | T-9 | Glass—Octal † | 1.188 | 3.812 | 3.250 |
| 3CN3 | T-9 | Octal † | 1.281 | 3.812 | 3.250 |
| 3CN3-A | T-9 | Octal † | 1.281 | 3.812 | 3.250 |
| 3CU3 | T-9 | Octal † | 1.281 | 3.812 | 3.250 |
| 3CX3 | T-9 | Octal † | 1.281 | 3.812 | 3.250 |
| 3CZ3 | T-9 | Glass—Octal † | 1.188 | 4.312 | 3.750 |
| 3CZ3A | T-9 | Glass—Octal † | 1.188 | 4.312 | 3.750 |
| 3DA3 | T-9 | Octal † | 1.281 | 3.812 | 3.250 |
| 3DB3 | T-9 | Octal † | 1.281 | 3.812 | 3.250 |
| 3DF3A | Special | Glass—Octal † | 1.205 | 3.812 | 3.250 |
| 3DS3 | Special | Glass—Octal with Bonded Shield † | 1.530 | 3.937 | 3.375 |
| 3EH7 | T-6½ | 9-Pin Miniature | 0.875 | 2.406 | 2.156 |
| 3EJ7 | T-6½ | 9-Pin Miniature | 0.875 | 2.406 | 2.156 |
| 3FW7 | Special | Metal Subm. | 0.512 | 1.969 | |
| 3FX7 | T-3 | Special Subm. | 0.512 | 1.969 | |
| 4EH7 | T-6½ | 9-Pin Miniature | 0.875 | 2.406 | 2.156 |

T-X TABLE — Physical Characteristics of Types

| Tube Type | Envelope | Style | Max Dimensions in Inches | | |
|-----------|--------------|-----------------------|--------------------------|-----------------|----------------|
| | | | Diameter | Over-all Length | Seated Height |
| 4EJ7 | T-6½ | 9-Pin Miniature | 0.875 | 2.406 | 2.156 |
| 4GJ7 | T-6½ | 9-Pin Miniature | 0.875 | 2.000 | 1.750 |
| 5AR4 | Special | Octal | 1.500 | 3.438 | 2.875 |
| 5AT4 | ST-16 | Octal | 2.000 | 4.750 | 4.175 |
| 5AU4 | T-12 | Octal | 1.688 | 4.750 | 4.188 |
| 5AW4 | T-12 | Octal | 1.563 | 5.188 | 4.625 |
| 5GJ7 | T-6½ | 9-Pin Miniature | 0.875 | 2.000 | 1.750 |
| 5R4-GYA | T-12 | Octal | 1.563 | 4.938 | 4.375 |
| 5U4-GA | T-11 | Octal | 1.438 | 4.750 | 4.188 |
| 6AB9 | T-6½ | 10-Pin Miniature | 0.875 | 2.190 | 1.660 |
| 6AL3 | T-6½ | 9-Pin Miniature § | 0.875 | 3.500 | 3.250 |
| 6AL6-G | ST-16 | Octal § | 2.063 | 5.688 | 5.125 |
| 6AR6 | T-11 | Octal | 1.438 | 3.469 | 2.906 |
| 6AV5-GA | T-11 or T-12 | Octal | 1.438 1.563 | 4.000 4.000 | 3.438 3.438 |
| 6AY3-B | T-9 | Novar (E9-89) Base | 1.188 | 3.005 | 2.625 |
| 6BA3 | T-9 | Novar | 1.188 | 3.080 | 2.700 |
| 6BA4 | Special | Rocket Type | 1.005 | 2.438 | |
| 6BD4 | T-12 | Octal † | 1.719 | 5.125 | 4.625 |
| 6BD4-A | T-12 | Octal † | 1.719 | 5.125 | 4.625 |
| 6BD5-GT | T-9 | Octal | 1.281 | 3.875 | 3.313 |
| 6BH3-A | T-9 | Novar (E9-89) Base | 1.188 | 3.005 | 2.625 |
| 6BQ6-GA | T-11 or T-12 | Octal § | 1.438 1.563 | 4.250 4.250 | 3.688 3.688 |
| 6BR3 | T-6½ | 9-Pin Miniature § | 0.875 | 3.500 | 3.250 |
| 6BS3-A | T-9 | Novar (E9-89) Base | 1.188 | 3.005 | 2.625 |
| 6BU4 | T-12 | Octal † | 1.719 | 5.063 | 4.531 |
| 6BU5 | T-12 | Octal † | 1.688 | 4.875 | 4.313 |
| 6BY4 | Special | Ceramic & Metal | 0.330 | 0.438 | |
| 6CA7 | T-10 | Octal | 1.500 | 4.438 | 3.875 |
| 6CB5 | ST-16 | Octal † | 2.063 | 5.125 | 4.594 |
| 6CK3 | T-9 | Novar (E9-89) Base | 1.188 | 3.005 | 2.625 |
| 6CL3 | T-9 | Novar (E9-89) Base | 1.188 | 3.005 | 2.625 |
| 6CM3 | T-9 | Novar (E9-89) Base | 1.188 | 3.005 | 2.625 |
| 6CT3 | T-6½ | 9-Pin Miniature | 0.875 | 3.125 | 2.875 |
| 6CU6 | T-11 or T-12 | Octal § | 1.438 1.563 | 4.250 4.250 | 3.688 3.688 |
| 6DB5 | T-6½ | 9-Pin Miniature | 0.875 | 2.750 | 2.500 |
| 6DL4 | T-6½ | 9-Pin Miniature | 0.875 | 1.968 | 1.718 |
| 6DQ6 | T-12 | Octal § | 1.563 | 4.250 | 3.750 |
| 6DW4-A | T-9 | Novar | 1.188 | 3.410 | 3.030 |
| 6DW4-B | T-9 | Novar (E9-89) Base | 1.188 | 3.005 | 2.625 |
| 6DZ8 | T-6½ | 9-Pin Miniature | 0.875 | 3.125 | 2.875 |
| 6EH7 | T-6½ | 9-Pin Miniature | 0.875 | 2.406 | 2.156 |
| 6EJ7 | T-6½ | 9-Pin Miniature | 0.875 | 2.406 | 2.156 |
| 6FG6 | T-6½ | 9-Pin Miniature | 0.875 | 2.844 | 2.594 |
| 6FW7 | Special | Metal Subm. | 0.512 | 1.969 | |
| 6FX7 | T-3 | Special Subm. | 0.512 | 1.969 | |
| 6GB5 | T-9 | Magnoval (E9-23) Base | 1.188 | 4.109 | 3.766 |
| 6GF7 | T-9 | Novar | 1.188 | 3.000 | 2.620 |
| 6GJ5 | T-12 | Novar (E9-76) Base § | 1.563 | 3.550 | 3.040 |
| 6GJ5-A | T-12 | Novar (E9-88) Base § | 1.563 | 3.505 | 3.125 |
| 6GJ7 | T-6½ | 9-Pin Miniature | 0.875 | 2.000 | 1.750 |
| 6GK7 | T-6½ | 9-Pin Miniature | 0.875 | 2.406 | 2.156 |
| 6GV7 | T-6½ | 9-Pin Miniature | 0.875 | 2.206 | 1.930 |
| 6HU6 | T-6½ | 9-Pin Miniature | 0.875 | 2.844 | 2.594 |
| 6HV5 | T-12 | Glass | 1.563 | 4.250 | 3.875 |
| 6HV5A | T-12 | Glass | 1.563 | 4.250 | 3.875 |
| 6JB6-A | T-12 | Novar (E9-88) Base § | 1.563 | 3.505 | 3.125 |
| 6JD5 | T-12 | Glass | 1.563 | 4.250 | 3.875 |
| 6JE6 | T-12 | Novar † | 1.563 | 4.600 | 4.220 |
| 6JF6 | T-12 | Novar (E9-88) Base § | 1.563 | 3.550 | 3.170 |

DRAWINGS

Not Conforming to Standard Outline Drawings

| Tube Type | Envelope | Style | Max Dimensions in Inches | | |
|-----------|--------------|-------------------------------|--------------------------|-----------------|----------------|
| | | | Diameter | Over-all Length | Seated Height |
| 6JH5 | T-12 | Glass | 1.563 | 4.250 | 3.875 |
| 6JK5 | T-12 | Glass | 1.563 | 4.250 | 3.875 |
| 6JT6 | T-12 | Novar | 1.563 | 3.180 | 2.800 |
| 6JU6 | T-12 | Novar (E9-76 or E9-88) Base § | 1.563 | 3.550 | 3.170 |
| 6KG6 | T-12 | Magnoval † | 1.563 | 4.906 | 4.312 |
| 6KM6 | T-12 | Novar (E9-88) Base § | 1.563 | 3.550 | 3.170 |
| 6LF6 | T-12 | Compactron | 1.563 | 4.950 | 4.570 |
| 6LV6 | T-12 | Glass § | 1.563 | 4.950 | 4.570 |
| 6M3 | T-12 | Octal § | 1.563 | 4.875 | 4.313 |
| 6MB6 | T-12 | Glass † | 1.563 | 4.750 | 4.375 |
| 6MC6 | T-12 | Novar † | 1.562 | 4.625 | 4.250 |
| 6MD8 | T-9 | Novar (E9-75 or E9-89) Base | 1.188 | 2.960 | 2.580 |
| 6V3-A | T-6½ | 9-Pin Miniature § | 0.875 | 3.063 | 2.750 |
| 7GV7 | T-6½ | 9-Pin Miniature | 0.875 | 2.206 | 1.930 |
| 8GJ7 | T-6½ | 9-Pin Miniature | 0.875 | 2.000 | 1.750 |
| 9DZ8 | T-6½ | 9-Pin Miniature | 0.875 | 3.125 | 2.875 |
| 10 | ST-16 | 4-Pin | 2.063 | 5.375 | 4.750 |
| 12AV5-GA | T-11 or T-12 | Octal | 1.438 1.563 | 4.000 4.000 | 3.438 3.438 |
| 12AY3-A | T-9 | Novar (E9-89) Base | 1.188 | 3.005 | 2.625 |
| 12BQ6-GA | T-11 or T-12 | Octal § | 1.438 1.563 | 4.250 4.250 | 3.688 3.688 |
| 12BR3 | T-6½ | 9-Pin Miniature § | 0.875 | 3.500 | 3.250 |
| 12BS3-A | T-9 | Novar (E9-89) Base | 1.188 | 3.005 | 2.625 |
| 12CK3 | T-9 | Novar (E9-89) Base | 1.188 | 3.005 | 2.625 |
| 12CL3 | T-9 | Novar (E9-89) Base | 1.188 | 3.005 | 2.625 |
| 12CT3 | T-6½ | 9-Pin Miniature | 0.875 | 3.125 | 2.875 |
| 12CU6 | T-11 or T-12 | Octal § | 1.438 1.563 | 4.250 4.250 | 3.688 3.688 |
| 12DB5 | T-6½ | 9-Pin Miniature | 0.875 | 2.750 | 2.500 |
| 12DQ6 | T-12 | Octal § | 1.563 | 4.250 | 3.750 |
| 12DZ8 | T-6½ | 9-Pin Miniature | 0.875 | 3.125 | 2.875 |
| 12GJ5 | T-12 | Novar (E9-76) Base § | 1.563 | 3.550 | 3.040 |
| 12JB6-A | T-12 | Novar (E9-88) Base § | 1.563 | 3.505 | 3.125 |
| 12JT6 | T-12 | Novar | 1.563 | 3.180 | 2.800 |
| 12MD8 | T-9 | Novar (E9-75 or E9-89) Base | 1.188 | 2.960 | 2.580 |
| 15AB9 | T-6½ | 10-Pin Miniature | 0.875 | 2.190 | 1.660 |
| 16AQ3 | T-6½ | 9-Pin Miniature † | 0.875 | 3.500 | 3.250 |
| 17AB9 | T-6½ | 10-Pin Miniature | 0.875 | 2.190 | 1.660 |
| 17AV5-GA | T-11 or T-12 | Octal | 1.438 1.563 | 4.000 4.000 | 3.438 3.438 |
| 17AY3-A | T-9 | Novar (E9-89) Base | 1.188 | 3.005 | 2.625 |
| 17BF11-A | T-9 | Compactron | 1.188 | 2.250 | 1.875 |
| 17BH3-A | T-9 | Novar (E9-89) Base | 1.188 | 3.005 | 2.625 |
| 17BR3 | T-6½ | 9-Pin Miniature § | 0.875 | 3.500 | 3.250 |
| 17BS3-A | T-9 | Novar (E9-89) Base | 1.188 | 3.005 | 2.625 |
| 17CK3 | T-9 | Novar (E9-89) Base | 1.188 | 3.005 | 2.625 |
| 17CL3 | T-9 | Novar (E9-89) Base | 1.188 | 3.005 | 2.625 |
| 17CT3 | T-6½ | 9-Pin Miniature | 0.875 | 3.125 | 2.875 |
| 17DQ6 | T-12 | Octal § | 1.563 | 4.250 | 3.750 |
| 17GJ5 | T-12 | Novar (E9-76) Base § | 1.563 | 3.550 | 3.040 |
| 17GJ5-A | T-12 | Novar (E9-88) Base § | 1.563 | 3.505 | 3.125 |
| 17JB6-A | T-12 | Novar (E9-88) Base § | 1.563 | 3.505 | 3.125 |
| 17JT6 | T-12 | Novar | 1.563 | 3.180 | 2.800 |
| 17LD8 | T-9 | 9T9 | 1.188 | 3.110 | 2.730 |
| 18DZ8 | T-6½ | 9-Pin Miniature | 0.875 | 3.125 | 2.875 |
| 18GB5 | T-9 | Magnoval (E9-23) Base | 1.188 | 4.109 | 3.766 |
| 21KQ6 | T-9 | Magnoval (E9-23) Base § | 1.188 | 4.133 | 3.760 |
| 22BH3-A | T-9 | Novar (E9-89) Base | 1.188 | 3.005 | 2.625 |
| 22JF6 | T-12 | Novar (E9-88) Base § | 1.563 | 3.550 | 3.170 |
| 22JU6 | T-12 | Novar (E9-76 or E9-88) Base § | 1.563 | 3.550 | 3.170 |
| 22KM6 | T-12 | Novar (E9-88) Base § | 1.563 | 3.550 | 3.170 |
| 23MB6 | T-12 | Glass † | 1.563 | 4.750 | 4.375 |

T-X TABLE — Physical Characteristics of Types

| Tube Type | Envelope | Style | Max Dimensions in Inches | | |
|------------------------|--------------|-------------------------|--------------------------|-----------------|----------------|
| | | | Diameter | Over-all Length | Seated Height |
| 25AV5-GA | T-11 or T-12 | Octal | 1.438 1.563 | 4.000 4.000 | 3.438 3.438 |
| 25BQ6-GA | T-11 or T-12 | Octal § | 1.438 1.563 | 4.250 4.250 | 3.688 3.688 |
| 25BR3 | T-6½ | 9-Pin Miniature § | 0.875 | 3.500 | 3.250 |
| 25CM3 | T-9 | Novar (E9-89) base | 1.188 | 3.005 | 2.625 |
| 25CT3 | T-6½ | 9-Pin Miniature | 0.875 | 3.125 | 2.875 |
| 25CU6 | T-11 or T-12 | Octal § | 1.438 1.563 | 4.250 4.250 | 3.888 3.688 |
| 25DQ6 | T-12 | Octal § | 1.563 | 4.250 | 3.750 |
| 25E5 | T-9 | Octal § | 1.281 | 4.313 | 3.750 |
| 25EC6 | T-12 | Octal † | 1.563 | 4.750 | 4.188 |
| 25HX5 | T-9 | Magnoval | 1.188 | 3.511 | 3.169 |
| 26E6-G | T-11 | Octal | 1.438 | 3.125 | 2.563 |
| FG-27-A | Special | 4-Pin ¶ | 3.000 | 7.250 | |
| 27GB5 | T-9 | Magnoval (E9-23) Base | 1.188 | 4.109 | 3.766 |
| 27KC6 | T-12 | Magnoval † | 1.563 | 4.906 | 4.312 |
| 28GB5 | T-9 | Magnoval (E9-23) Base | 1.188 | 4.109 | 3.766 |
| 29KQ6 | T-9 | Magnoval (E9-23) Base § | 1.188 | 4.133 | 3.760 |
| 29LE6 | T-9 | Magnoval | 1.188 | 4.133 | 3.760 |
| 30MB6 | T-12 | Glass † | 1.563 | 4.750 | 4.375 |
| A33 | Special | 2-Lead | 0.375 | | 0.225 |
| 34CM3 | T-9 | Novar (E9-89) base | 1.188 | 3.005 | 2.625 |
| A35 | Special | 2-Lead | 0.375 | | 0.225 |
| 35DZ8 | T-6½ | 9-Pin Miniature | 0.875 | 3.125 | 2.875 |
| 36MC6 | T-12 | Novar † | 1.562 | 4.625 | 4.250 |
| 40KG6 | T-12 | Magnoval † | 1.563 | 4.906 | 4.312 |
| B46 | Special | 2-Lead | 0.650 | | 0.350 |
| 50 | ST-19 | 4-Pin | 2.438 | 6.250 | 5.625 |
| 50E5 | T-9 | Octal § | 1.281 | 4.313 | 3.750 |
| 50JV6 | T-9 | Octal § | 1.281 | 4.331 | 3.740 |
| FG57 | Special | 4-Pin ¶ | 3.000 | 7.250 | |
| 81 | ST-19 | 4-Pin | 2.438 | 6.250 | 5.625 |
| FG-81-A | Special | 4-Pin ¶ | 2.438 | 6.625 | |
| FG-97 | Special | 4-Pin ¶ | 2.438 | 6.750 | |
| FG-98-A | Special | 4-Pin ¶ | 2.438 | 6.750 | |
| V-99 | T-8 | Special | 1.063 | 3.500 | |
| FG-105 | Special | Jumbo 4-Pin § | 3.000 | 11.250 | |
| FG-154 | Special | 4-Pin ¶ | 3.000 | 7.938 | |
| FG-172 | Special | Metal | 2.250 | 10.843 | |
| 393-A | ST-16 | Octal † | 2.063 | 6.625 | |
| GL414 | Special | Thyratron | 3.125 | 15.187 | |
| B425 | Special | 2-Lead | 0.650 | | 0.350 |
| 575-A | Special | 4-Pin † | 3.125 | 11.125 | |
| 627 | Special | 4-Pin ¶ | 2.438 | 7.000 | 6.594 |
| 672-A | Special | 4-Pin ¶ | 2.313 | 8.125 | 7.375 |
| 673 | Special | 4-Pin ¶ | 3.125 | 11.438 | 11.625 |
| 678 | Special | 4-Pin ¶ | 2.563 | 11.063 | |
| 816 | ST-12 | 4-Pin † | 1.563 | 4.688 | 4.063 |
| 866-A | ST-19 | 4-Pin ¶ | 2.438 | 6.563 | 5.938 |
| 872-A | Special | 4-Pin ¶ | 2.313 | 8.500 | |
| B1035 | Special | 2-Lead | 1.260 | | 0.365 |
| 1629 | T-9 | Octal | 1.188 | 4.125 | 3.438 |
| 1654 | T-5½ | 7-Pin Miniature ‡ | 0.750 | 2.438 | 2.188 |
| 5544 | Special | 4-Pin ¶ | 2.625 | 7.500 | 6.813 |
| GL5550 | Special | Metal ▲ | 2.140 | 9.062 | |
| GL5551A/ 5551A-PC | Special | Metal ▲ | 2.750 | 13.000 | |
| GL5552A/ 5552A-PC | Special | Metal ▲ | 4.250 | 14.000 | |
| GL5553B/ GL5553B-PC | Special | Metal ▲ | 5.625 | 19.500 | |
| GL5554 | Special | Metal ▲ | 4.125 | 17.000 | |

DRAWINGS

Not Conforming to Standard Outline Drawings

| Tube Type | Envelope | Style | Max Dimensions in Inches | | |
|-----------|----------|-----------------------|--------------------------|-----------------|---------------|
| | | | Diameter | Over-all Length | Seated Height |
| GL5555 | Special | Metal ▲ | 5.750 | 17.937 | |
| 5557 | ST-16 | 4-Pin ¶ | 2.063 | 6.125 | 5.500 |
| 5558 | Special | 4-Pin ¶ | 3.000 | 7.000 | |
| 5559 | Special | 4-Pin ¶ | 3.000 | 7.250 | |
| 5560 | Special | 4-Pin ¶ | 3.000 | 7.938 | |
| 5561 | Special | 4-Pin ¶ | 3.813 | 11.250 | |
| 5563-A | T-20 | 4-Pin ¶ | 2.625 | 10.531 | |
| GL5564 | Special | Metal ▲ | 9.125 | 25.937 | |
| GL5630 | Special | Metal ▲ | 5.750 | 22.187 | |
| 5632/C3J | Special | 4-Pin ¶ | 1.578 | 6.250 | |
| 5633 | T-3 | Special Subm-FL* | 0.400 | | 1.660 |
| 5634 | T-3 | Special Subm-FL* | 0.400 | | 1.660 |
| 5642 | T-3 | Special Subm-FL* | 0.400 | | 2.655 |
| 5645 | T-2 | Special Subm-FL* | 0.310 | | 1.300 |
| 5646 | T-2 | Special Subm-FL* | 0.310 | | 1.300 |
| 5647 | T-1 | Special Subm-FL* | 0.215 | | 1.250 |
| 5663 | T-5 ½ | 7-Pin Miniature | 0.750 | 1.500 | 1.250 |
| 5665/C16J | Special | Flexible Leads | 2.688 | 11.250 | |
| 5675 | Special | Pencil Type | 0.817 | 2.280 | 2.043 |
| 5676 | T-2 x 3 | Inline Subm-FL* | 0.400 x 0.300 | | 1.500 |
| 5677 | T-2 x 3 | Inline Subm-FL* | 0.400 x 0.300 | | 1.500 |
| 5678 | T-2 x 3 | Inline Subm-FL* | 0.400 x 0.300 | | 1.515 |
| 5704 | T-2 | Inline Subm-FL* | 0.315 | | 1.500 |
| 5720 | Special | 4-Pin ¶ | 3.000 | 7.500 | |
| 5728 | Special | 4-Pin ¶ | 3.000 | 7.000 | |
| 5767 | Special | Rocket Type | 1.005 | 2.375 | |
| 5785 | T-2 x 3 | Inline Subm-FL* | 0.400 x 0.300 | | 1.500 |
| GL5822A | Special | Metal ▲ | 4.250 | 14.000 | |
| 5825 | ST-16 | 4-Pin ¶ | 2.063 | 5.844 | 5.219 |
| GL5830 | Special | 4-Pin, Anode Cap C1-8 | 5.062 | 17.687 | 16.468 |
| 5838 | T-9 | Octal | 1.313 | 3.375 | 2.875 |
| 5839 | T-9 | Octal | 1.313 | 3.375 | 2.875 |
| 5851 | T-3 | Button Subm-FL* | 0.400 | | 1.600 |
| 5852 | T-9 | Octal | 1.313 | 3.375 | 2.875 |
| 5855 | Special | Lug Base | 3.625 | 11.328 | |
| 5876 | Special | Pencil Type | 0.817 | 2.252 | 2.012 |
| 5876-A | Special | Pencil Type | 0.817 | 2.252 | 2.012 |
| 5881 | T-11 | Octal | 1.438 | 3.938 | 2.906 |
| 5890 | T-11 | Duodecal † | 1.500 | 6.750 | 6.250 |
| 5894B | Special | 7-Pin ⊕ | 1.937 | 3.650 | 4.687 |
| 5930 | T-12 | 4-Pin | 1.700 | 4.500 | 3.875 |
| 5931 | T-12 | Octal | 1.700 | 4.906 | 4.344 |
| 5932 | T-12 | Octal | 1.700 | 3.844 | 3.281 |
| 5995 | T-3 | Inline Subm-FL* | 0.400 | | 1.750 |
| 6000 | T-11 | Octal | 1.438 | 3.468 | 2.906 |
| 6004 | T-9 | Octal # | 1.313 | 4.063 | |
| 6011/710 | Special | 4-Pin ¶ | 1.625 | 6.250 | |
| 6014/C1K | Special | 4-Pin | 1.5653 | 4.250 | |
| 6051 | T-2 x 3 | Inline Subm-FL* | 0.385 x 0.285 | 1.500 | |
| 6094 | T-6 ½ | 9-Pin Miniature | 0.875 | 3.000 | 2.750 |
| 6098 | T-11 | Octal | 1.438 | 3.469 | 2.906 |
| 6106 | T-9 | Octal | 1.320 | 3.375 | 2.880 |
| 6146 | T-12 | Octal † | 1.719 | 3.813 | 3.250 |
| 6146-A | T-12 | Octal † | 1.719 | 3.813 | 3.250 |
| 6146-B | T-12 | Octal † | 1.656 | 3.813 | 3.250 |
| 6159-A | T-12 | Octal † | 1.179 | 3.813 | 3.250 |
| 6159-B | T-12 | Octal † | 1.656 | 3.813 | 3.250 |
| 6173 | Special | Pencil Type | | 1.987 | |
| 6184 | T-3 | Button Subm-FL* | 0.400 | | 1.250 |
| 6195 | T-3 | Button Subm-FL* | 0.400 | | 1.600 |
| 6215 | T-9 | Octal † | 1.281 | 4.063 | 3.500 |
| GL6228 | Special | Metal ▲ | 9.000 | 42.000 | |

T-X TABLE — Physical Characteristics of Types

| Tube Type | Envelope | Style | Max Dimensions in Inches | | |
|-----------|----------|---------------------------------------|--------------------------|-----------------|---------------|
| | | | Diameter | Over-all Length | Seated Height |
| GL6251 | Special | Metal & Ceramic | 5.156 | 13.250 | |
| GL6283 | Special | Metal & Ceramic | 2.313 | 4.343 | |
| 6287 | T-6½ | 9-Pin Miniature | 0.875 | 2.470 | |
| 6299 | Special | Ceramic & Metal | 0.497 | 1.040 | |
| 6320 | T-3 | Button Subm-FL* | 0.400 | | 1.125 |
| 6321 | T-3 | Button Subm-FL* | 0.400 | | 1.125 |
| 6325 | T-9 | Octal | 1.281 | | 2.375 |
| 6327 | T-12 | Octal † | 1.750 | 4.500 | 3.938 |
| 6336 | ST-16 | Octal | 2.070 | 4.750 | 4.175 |
| 6336-A | ST-16 | Octal | 2.070 | 4.750 | 4.175 |
| 6355 | T-5½ | 7-Pin Miniature | 0.750 | 1.531 | 1.250 |
| 6384 | T-11 | Octal | 1.438 | 3.469 | 2.938 |
| 6394 | T-12 | 8-Pin Octal | 2.070 | 4.750 | 4.175 |
| 6394-A | T-12 | 8-Pin Octal | 2.070 | 4.750 | 4.175 |
| 6397 | T-3 | Button Subm-FL* | 0.400 | | 1.600 |
| 6418 | T-1½ x 2 | Inline Subm-FL* | 0.290 x 0.235 | | 1.250 |
| 6419 | T-1½ x 2 | Inline Subm-FL* | 0.290 x 0.235 | | 1.000 |
| 6442 | Special | Ceramic & Metal | 0.818 | 2.610 | |
| GL6512 | Special | Metal ▲ | 4.125 | 17.000 | |
| GL6513 | Special | Metal ▲ | 17.937 | 5.750 | |
| GL6515 | Special | Metal ▲ | 9.125 | 26.687 | |
| 6519 | T-1½ x 2 | Inline Subm-FL* | 0.290 x 0.220 | | 1.250 |
| 6528 | ST-16 | Octal | 2.070 | 4.750 | 4.175 |
| 6550 | ST-16 | Octal | 2.063 | 4.750 | 4.188 |
| 6690 | T-3 | Button Subm-FL* | 0.400 | | 1.000 |
| 6754 | T-6½ | 9-Pin Miniature | 0.875 | 2.750 | 2.500 |
| 6763 | T-5½ | 7-Pin Miniature | 0.875 | 2.375 | 2.094 |
| 6771 | Special | Ceramic & Metal | 0.818 | 2.610 | |
| 6792 | T-12 | Octal † | 1.719 | 5.063 | 4.531 |
| 6807 | Special | 4-Pin ¶ | 2.625 | 9.000 | |
| 6808 | Special | Flexible Leads ¶ | 2.625 | 8.313 | |
| 6809 | Special | Lug Base ¶ | 2.625 | 9.000 | |
| 6842 | T-5½ | 7-Pin Miniature § | 0.875 | 2.250 | 2.000 |
| 6848 | Special | Metal & Ceramic | 4.000 | 9.625 | |
| 6856/740 | Special | 4-Pin ¶ | 2.063 | 9.500 | |
| 6858/760 | Special | 4-Pin ¶ | 2.563 | 9.500 | |
| 6859/760P | Special | Flexible Leads ¶ | 2.563 | 8.750 | |
| 6883 | T-12 | Octal † | 1.719 | 3.813 | 3.250 |
| 6883-B | T-12 | Octal † | 1.656 | 3.813 | 3.250 |
| 6889 | T-11 | Octal † | 1.438 | 3.906 | 3.375 |
| 6897 | Special | Ceramic & Metal | 1.266 | 2.750 | |
| 6942 | Special | Metal & Ceramic | 3.260 | 8.500 | |
| 6999 | T-2 x 3 | Inline Subm-FL* | 0.385 x 0.285 | 1.750 | |
| 7027 | T-12 | Octal | 1.630 | 4.620 | 4.060 |
| 7027-A | T-12 | Octal | 1.630 | 4.620 | 4.060 |
| 7038 | T-8 | 8-Pin | 1.135 | 6.500 | |
| 7038V | T-8 | 8-Pin | 1.135 | 6.500 | |
| 7105 | T-12 | Octal | 1.719 | 4.063 | 3.563 |
| GL7151 | Special | Metal | 9.125 | 23.250 | |
| GL7171 | Special | Metal | 2.156 | 8.750 | |
| 7211 | Special | Ceramic & Metal | 1.264 | 2.701 | |
| 7212 | T-12 | Octal † | 1.656 | 3.813 | 3.250 |
| 7216/C3JL | Special | Lug Type Rectifier, Anode Cap C1-5 | 2.187 | 6.750 | |
| 7234 | T-6½ | 9-Pin Miniature § | 0.875 | 2.750 | 2.375 |
| 7235 | T-6½ | 9-Pin Miniature § | 0.875 | 2.750 | 2.375 |
| 7262A | T-8 | 8-Pin | 1.135 | 5.250 | |
| 7263A | T-8 | 8-Pin | 1.135 | 5.250 | |
| 7266 | Special | Ceramic & Metal | 0.335 | 0.327 | |
| 7289 | Special | Ceramic & Metal | 1.264 | 2.701 | |
| 7296 | Special | Ceramic & Metal | 0.510 | 0.890 | |
| 7310 | T-12 | 4-Pin † | 1.570 | 5.250 | |

DRAWINGS

Not Conforming to Standard Outline Drawings

| Tube Type | Envelope | Style | Max Dimensions in Inches | | |
|----------------------|----------|-------------------------------|--|-----------------|---------------|
| | | | Diameter | Over-all Length | Seated Height |
| 7311 | Special | Metal Miniature | 0.875 | 2.188 | 2.094 |
| 7312 | Special | Metal Miniature | 0.875 | 2.188 | 2.094 |
| 7313 | Special | Metal Miniature | 0.875 | 2.938 | 2.688 |
| 7314 | Special | Metal Miniature | 0.875 | 2.188 | 2.094 |
| 7357 | T-12 | Octal † | 1.656 | 3.813 | 3.250 |
| 7358 | T-12 | Octal † | 1.656 | 3.813 | 3.250 |
| 7391 | Special | Ceramic & Metal | 0.497 | 1.040 | |
| 7399 | Special | Metal & Ceramic | 2.291 | 4.281 | |
| 7403 | T-12 | Octal § | 1.719 | 4.281 | 3.750 |
| 7430 | Special | Glass | 0.875 x 1.188 x 0.5001, exclusive of leads | | |
| 7462 | Special | Ceramic & Metal | 0.330 | 0.490 | |
| 7518/710L | Special | Lug Base ¶ | 1.625 | 6.625 | |
| 7588 | Special | Ceramic & Metal | 0.565 | 0.890 | |
| 7623 | Special | Glass ¶ | 2.047 | 5.157 | 4.567 |
| 7624 | Special | Glass ¶ | 2.047 | 5.157 | 4.567 |
| 7625 | Special | Ceramic & Metal | 0.330 | 0.490 | |
| 7644 | Special | Ceramic & Metal | 0.497 | 1.040 | |
| GL7669/ GL7669-PC | Special | Metal ▲ | 3.250 | 9.875 | |
| GL7671/ GL7671-PC | Special | Metal ▲ | 4.625 | 11.875 | |
| GL7673/ GL7673-PC | Special | Metal ▲ | 7.125 | | |
| GL7681/ GL7681-PC | Special | Metal ▲ | 4.125 | 17.500 | |
| 7695 | T-9 | 9-Pin | 1.188 | 3.170 | 2.920 |
| GL7703 | Special | Metal-Threaded Anode Terminal | 2.250 | 7.625 | |
| 7720 | Special | Ceramic & Metal | 0.330 | 0.490 | |
| 7725 | Special | 4-Pin ¶ | 1.625 | 6.250 | |
| 7726 | Special | Lug Base ¶ | 1.625 | 6.625 | |
| 7735A | T-8 | 8-Pin | 1.135 | 6.500 | |
| 7735B | T-8 | 8-Pin | 1.135 | 6.500 | |
| 7735BX | T-8 | 8-Pin | 1.135 | 6.500 | |
| 7751 | Special | Octal | 1.300 | 4.140 | 3.380 |
| 7754 | T-9 | 9-Pin | 1.188 | 3.170 | 2.920 |
| 7757 | T-6 ½ | 9-Pin Miniature § | 0.875 | 3.000 | 2.750 |
| 7768 | Special | Ceramic & Metal | 0.758 | 0.959 | |
| 7784 | Special | Ceramic & Metal | 0.497 | 1.040 | |
| 7815 | Special | Ceramic & Metal | 1.195 | 2.701 | |
| 7815R | Special | Ceramic & Metal | 1.264 | 2.701 | |
| 7841 | Special | Ceramic & Metal | 0.335 | 0.327 | |
| 7851 | T-5 ½ | 7-Pin Miniature § | 0.750 | 1.880 | 1.600 |
| 7855 | Special | Ceramic & Metal | 1.264 | 2.386 | |
| 7894 | Special | Special Subm-FI* | 0.500 | 2.500 | |
| 7910 | Special | Ceramic & Metal | 0.484 | 0.677 | |
| 7911 | Special | Ceramic & Metal | 0.758 | 0.959 | |
| Z7911 | T-8 | 8-Pin | 1.135 | 6.500 | |
| Z7912 | T-8 | 8-Pin | 1.135 | 5.250 | |
| 7913 | Special | Ceramic & Metal | 0.758 | 0.959 | |
| Z7919 | T-8 | 8-Pin | 1.135 | 6.500 | |
| Z7927B | T-8 | 7-Pin | 0.767 | 3.650 | |
| Z7927HRB | T-8 | 7-Pin | 0.767 | 3.650 | |
| Z7929R,B,G | T-8 | 8-Pin | 1.135 | 6.350 | |
| Z7975HRB | T-8 | 8-Pin | 1.135 | 6.500 | |
| Z7975B | T-8 | 8-Pin | 1.135 | 6.500 | |
| 7979 | T-2 | Special Subm-FI* | 0.315 | | 1.250 |
| 7985 | Special | Metal & Ceramic | 2.766 | 8.562 | |
| Z7996B | T-8 | Special | 1.135 | 5.250 | |
| Z7996HRB | T-8 | Special | 1.135 | 5.250 | |
| GL7998/ GL7998-PC | Special | Metal ▲ | 5.312 | 26.500 | |
| 8008 | Special | 4-Pin ¶ | 2.313 | 8.750 | 8.000 |
| 8032 | T-12 | Octal † | 1.719 | 3.813 | 3.250 |

T-X TABLE — Physical Characteristics of Types

| Tube Type | Envelope | Style | Max Dimensions in Inches | | |
|-----------|----------|---------------------------------|--------------------------|-----------------|---------------|
| | | | Diameter | Over-all Length | Seated Height |
| 8032-A | T-12 | Octal † | 1.656 | 3.813 | 3.250 |
| 8042 | T-12 | Octal † | 1.750 | 3.844 | 3.281 |
| 8100 | Special | Glass, 2-Lead | 0.500 | 0.550 | |
| 8108 | Special | Glass & Metal | 1.291 | 2.362 | |
| 8116 | Special | Dual Tetrode ⊕ | 1.740 | 4.094 | 3.000 |
| 8116A | Special | Twin Tetrode ⊕ | 1.740 | 4.031 | 2.938 |
| 8117 | Special | Dual Tetrode ⊕ | 1.756 | 4.031 | 2.938 |
| 8117A | Special | Twin Tetrode ⊕ | 1.756 | 4.031 | 2.938 |
| 8118 | Special | Double Tetrode ⊕ | 1.811 | 3.375 | 2.894 |
| 8134 | T-8 | 8-Pin | 1.135 | 6.350 | |
| 8134V | T-8 | 8-Pin | 1.135 | 6.350 | |
| 8142 | Special | Glass, 2-Lead | 0.500 | 0.550 | |
| 8143 | Special | Glass, 2-Lead | 0.500 | 0.550 | |
| 8156 | T-9 | Compactron | 1.188 | 2.313 | 1.938 |
| GL8205 | Special | Metal ▲ | 9.125 | 23.000 | |
| 8210 | T-3 | Special Subm-FI* | 0.400 | | 1.795 |
| 8217 | Special | Glass, 2-Lead | 0.875 | 1.500 | |
| 8223 | T-6½ | 9-Pin Miniature | 0.875 | 2.430 | 2.154 |
| 8228 | T-2 | 2-Lead Subminiature | 0.240 | 1.200 | |
| 8233 | T-9 | Magnoval (E9-23) Base | 1.094 | 3.000 | 2.625 |
| 8236 | T-12 | Octal † | 1.719 | 4.750 | 4.200 |
| 8254 | T-3 | 8 Pin Subminiature (E8-10 base) | 0.400 | | 1.730 |
| 8255 | T-6½ | 9-Pin Miniature | 0.875 | 1.970 | 1.730 |
| 8278 | T-9 | Novar | 1.188 | 3.380 | 3.000 |
| 8298 | T-12 | Octal † | 1.719 | 3.813 | 3.250 |
| 8298-A | T-12 | Octal † | 1.656 | 3.813 | 2.350 |
| 8318 | Special | Glass, 2-Lead | 0.250 | | 0.550 |
| 8318-A | Special | Glass, 2-Lead | 0.260 | | 0.545 |
| 8345 | Special | Glass, 2-Lead | 0.500 | 0.550 | |
| 8346 | Special | Glass, 2-Lead | 0.500 | 0.550 | |
| 8347 | Special | Glass, 2-Lead | 0.500 | 0.550 | |
| 8403 | Special | Ceramic & Metal | 1.264 | 2.386 | |
| 8408 | T-6½ | 9-Pin Miniature | 0.875 | 2.875 | 2.594 |
| 8412 | Special | Ceramic & Metal | 0.921 | 2.413 | |
| 8413 | Special | Ceramic & Metal | 0.553 | 1.905 | |
| 8417 | T-12 | Octal | 1.563 | 4.500 | 3.875 |
| 8458 | T-9 | Novar | 1.188 | 3.250 | 2.813 |
| 8474 | Special | Glass, 2-Lead | 0.250 | | 0.550 |
| 8475 | Special | Glass, 2-Lead | 0.250 | | 0.550 |
| 8475-A | Special | Glass, 2-Lead | 0.260 | | 0.545 |
| 8476 | Special | Glass, 2-Lead | 0.250 | | 0.550 |
| 8477 | Special | Glass, 2-Lead | 0.250 | | 0.550 |
| 8477-A | Special | Glass, 2-Lead | 0.260 | | 0.545 |
| 8484H | T-8 | 8-Pin | 1.135 | 6.500 | |
| 8500 | Special | Metal & Ceramic | 2.323 | 3.453 | |
| 8506 | Special | Ceramic & Metal | 0.756 | 0.882 | |
| 8507A | T-8 | 8-Pin | 1.135 | 6.500 | |
| 8513 | Special | Metal & Ceramic | 6.031 | 9.625 | |
| 8524 | Special | Metal Shell | 0.434 | 1.082 | 0.867 |
| 8525 | Special | Metal Shell | 0.434 | 1.082 | 0.867 |
| 8526 | Special | Metal Shell | 0.434 | 1.082 | 0.867 |
| 8527 | Special | Metal Shell | 0.434 | 1.082 | 0.867 |
| 8528 | Special | Metal Shell | 0.434 | 1.436 | 1.221 |
| 8529 | Special | Metal Shell | 0.434 | 1.082 | 0.867 |
| 8530 | Special | Metal Shell | 0.434 | 1.082 | 0.867 |
| 8533 | Special | Metal & Ceramic | 1.195 | 2.701 | |
| 8534 | Special | Metal & Ceramic | 0.950 | 1.305 | |
| 8535 | Special | Metal & Ceramic | 1.265 | 2.040 | |
| 8536 | Special | Metal & Ceramic | 0.950 | 1.305 | |
| 8537 | Special | Metal & Ceramic | 1.265 | 1.565 | |
| 8538 | Special | Metal & Ceramic | 0.950 | 1.159 | |

DRAWINGS

Not Conforming to Standard Outline Drawings

| Tube Type | Envelope | Style | Max Dimensions in Inches | | |
|------------------------|----------|-----------------|--------------------------|-----------------|---------------|
| | | | Diameter | Over-all Length | Seated Height |
| 8539 | Special | Metal & Ceramic | 1.265 | 1.794 | |
| 8541A | T-8 | 8-Pin | 1.135 | 6.500 | |
| 8541X | T-8 | 8-Pin | 1.135 | 6.500 | |
| 8552 | T-12 | Octal † | 1.656 | 3.813 | 3.250 |
| 8572 | T-8 | 8-Pin | 1.135 | 6.500 | |
| 8572V | T-8 | 8-Pin | 1.135 | 6.500 | |
| 8573A | T-8 | 8-Pin | 1.135 | 5.250 | |
| 8573X | T-8 | 8-Pin | 1.135 | 5.250 | |
| 8582 | Special | Glass, 2-Lead | 0.250 | | 0.550 |
| 8582-A | Special | Glass, 2-Lead | 0.260 | | 0.545 |
| 8595 | T-6 ½ | 9-Pin Miniature | 0.875 | 2.625 | 2.375 |
| 8604 | T-8 | 8-Pin | 1.135 | 6.500 | |
| 8632 | T-9 | 8-Pin Octal † | 1.187 | 4.000 | 3.500 |
| 8639 | Special | 8-Pin Octal ⊕ | 1.811 | 5.090 | 4.560 |
| 8643 | Special | 7-Pin Septar ⊕ | 1.785 | 4.031 | 3.531 |
| 8727 | Special | Pencil Type | 0.557 | 1.485 | |
| 8745 | Special | Ceramic & Metal | 1.264 | 2.701 | |
| 8751 | Special | Metal & Ceramic | 0.758 | 1.054 | |
| 8755 | Special | Metal & Ceramic | 0.830 | 1.470 | |
| 8755A | Special | Metal & Ceramic | 0.785 | 1.370 | |
| 8760 | Special | Glass, 2-Lead | 0.500 | | 0.550 |
| 8797 | T-5 ½ | Miniature § | 0.750 | 2.750 | 2.500 |
| 8808 | Special | Nuvistor | 0.435 | 0.985 | 0.780 |
| 8847 | Special | Metal & Ceramic | 0.785 | 1.370 | |
| 8847A | Special | Metal & Ceramic | 0.785 | 1.370 | |
| 8859 | Special | Ceramic & Metal | 0.520 | 1.920 | |
| 8866 | Special | Metal & Ceramic | 1.760 | 3.125 | |
| 8892 | Special | Metal & Ceramic | 0.758 | 1.099 | |
| 8893 | Special | Metal & Ceramic | 0.758 | 0.974 | |
| 8906 | Special | Metal & Ceramic | 1.195 | 1.701 | |
| 8907 | Special | Metal & Ceramic | 1.264 | 1.701 | |
| 8917 | Special | Metal & Ceramic | 1.988 | 3.489 | |
| GE12661 | Special | Metal & Ceramic | 0.483 | 0.686 | |
| GE13971 | Special | Metal & Ceramic | 0.758 | 0.959 | |
| GE14501 | Special | Metal & Ceramic | 0.483 | 0.617 | |
| GE14811 | Special | Metal & Ceramic | 0.758 | 0.959 | |
| GE15371 | Special | Metal & Ceramic | 0.608 | 1.009 | |
| GE16231 | Special | Metal & Ceramic | 0.758 | 0.959 | |
| GE16841 | Special | Metal & Ceramic | 0.484 | 0.677 | |
| GE17241 | Special | Metal & Ceramic | 0.800 | 2.025 | |
| GE17701 | Special | Metal & Ceramic | 0.758 | 1.054 | |
| GE18651 | Special | Metal & Ceramic | 0.753 | 1.084 | |
| GL37207 | Special | Metal ▲ | 5.750 | 20.000 | |
| GL37248 | Special | Metal ▲ | 2.250 | 7.625 | |
| GL37250/ GL37250-PC | Special | Metal ▲ | 2.750 | 13.000 | |
| GL37251/ GL37251-PC | Special | Metal ▲ | 2.750 | 13.000 | |
| GL37252/ GL37252-PC | Special | Metal ▲ | 4.250 | 14.250 | |
| GL37253/ GL37253-PC | Special | Metal ▲ | 4.625 | 14.250 | |
| GL37254/ GL37254-PC | Special | Metal ▲ | 5.625 | 19.500 | |
| GL37255/ GL37255-PC | Special | Metal ▲ | 5.625 | 19.500 | |
| GL51025 | Special | Metal & Ceramic | 1.230 | 2.338 | |
| GL51038 | Special | Metal & Ceramic | 2.109 | 3.338 | |
| GL51064 | Special | Metal & Ceramic | 4.096 | 7.500 | |
| GL51065 | Special | Metal & Ceramic | 3.109 | 3.198 | |

REED SWITCH CONDENSED DATA

| | | Physical Characteristics | | | | | | Electrical Parameters | | | | | | | |
|-------------------------|-------------------|---------------------------|-------------------------|----------------------------|-------------------------|---------------------|--|---|---|-------------------------------------|--|--------------------------------------|---------------------------------|----------------------|-----------------------|
| | | Dimensions Inches | | | Construction | | | Initial Characteristics | | | | | Contact Ratings | | |
| Basic Type No. (New) | Previous Type No. | Glass Diameter Maximum | Glass Length Maximum | Over-All Length Nominal | Contact Material (1) | Contact Arrangement | Resonant Frequency of Single Reed Hz.—Min | Full Range Available Ampere Turns | Normally Stocked in Ranges of (2) | Contact Resistance Milliohms—Max | Breakdown Voltage DC Voltage Min (3) | Insulation Resistance Megohms—Min | Relative Load Maximum (4) | Current Amps, Max | Voltage, Volts—Max |

SUBMINIATURE

| | | | | | | | | | | | | | | | |
|-------|-------|-------|-------|-------|----------------|---------------|------|-------|--------|-----|--------|-----------------|------|------|-----|
| DR300 | DR159 | 0.090 | 0.560 | 2.000 | RH | Form A (5) | 3000 | 10-60 | 10A.T. | 250 | 100VDC | 10 ⁴ | 5VA | 0.25 | 50 |
| DR301 | DR157 | 0.090 | 0.750 | 2.250 | RH | " | 2000 | 10-60 | 10A.T. | 150 | 200VDC | 10 ⁴ | 10VA | 0.50 | 100 |
| DR302 | DR162 | 0.108 | 0.670 | 2.010 | AU-AG Alloy | " | 2000 | 10-60 | 10A.T. | 100 | 100VDC | 10 ⁴ | 5VA | 0.25 | 50 |
| DR303 | DR164 | 0.070 | 0.500 | 2.010 | RH | " | 3000 | 10-50 | 10A.T. | 200 | 100VDC | 10 ⁴ | 5VA | 0.20 | 50 |

MINIATURE

| | | | | | | | | | | | | | | | |
|-------|-------|-------|-------|-------|----|---------------|------|-------|--------|-----|--------|-----------------|------|------|-----|
| DR401 | DR145 | 0.108 | 0.840 | 2.530 | RH | Form A (5) | 2000 | 15-55 | 10A.T. | 150 | 300VDC | 10 ⁴ | 10VA | 0.50 | 250 |
|-------|-------|-------|-------|-------|----|---------------|------|-------|--------|-----|--------|-----------------|------|------|-----|

INTERMEDIATE

| | | | | | | | | | | | | | | | |
|-------|--------|-------|-------|-------|----------------|---------------|------|-------|--------|-----|--------|-----------------|------|------|-----|
| DR540 | DR163 | 0.173 | 1.200 | 1.750 | AU-AG Alloy | Form A (5) | 1500 | 25-70 | 10A.T. | 100 | 600VDC | 10 ⁴ | 10VA | 0.50 | 250 |
| DP541 | DRP160 | 0.173 | 1.200 | 1.750 | RH | " | 1500 | 25-70 | 10A.T. | 150 | 600VDC | 10 ⁴ | 15VA | 1.00 | 250 |

INTERMEDIATE FORM C

| | | | | | | | | | | | | | | | |
|-------|-------|-------|-------|-------|----|---------------|------|--------|--------|-----|--------|-----------------|------|------|-----|
| DR570 | DR158 | 0.215 | 1.600 | 2.935 | RH | Form C (6) | 1200 | 40-130 | 30A.T. | 100 | 250VDC | 10 ⁴ | 10VA | 0.50 | 250 |
|-------|-------|-------|-------|-------|----|---------------|------|--------|--------|-----|--------|-----------------|------|------|-----|

STANDARD 2"


| | | | | | | | | | | | | | | | | |
|-------|-------|-------|-------|-------|------------|---------------|-----|--------|--------|--------|--------|-------------------|-------------------|------|------|-----|
| DR600 | DR101 | 0.215 | 2.100 | 3.200 | DIF. AU | Form A (5) | 800 | 20-130 | 20A.T. | 50 | 500VDC | 5×10 ⁵ | 15VA | 1.00 | 250 | |
| DR601 | DR113 | 0.215 | 2.100 | 3.200 | RH | " | 750 | 30-130 | 20A.T. | 50 | 500VDC | 5×10 ⁵ | 50VA | 3.00 | 250 | |
| ** | DR602 | DR146 | 0.215 | 2.100 | 3.200 | RH | " | 750 | 40-100 | 20A.T. | 50 | 500VDC | 5×10 ⁵ | 50VA | 3.00 | 250 |

HIGH VOLTAGE 2"

| | | | | | | | | | | | | | | | |
|-------|--------|-------|-------|-------|---------------|---------------|-----|---------|--------|----|----------|-------------------|------|------|------|
| DR680 | DRV120 | 0.215 | 2.100 | 3.230 | AG-W Alloy | Form A (5) | 750 | 100-250 | 30A.T. | 50 | 7000VDC | 5×10 ⁵ | 50VA | 3.00 | 5000 |
| DR681 | DRV161 | 0.215 | 2.100 | 3.230 | AG-W Alloy | Form A (5) | 750 | 150-300 | 30A.T. | 50 | 10000VDC | 5×10 ⁵ | 50VA | 3.00 | 7500 |

- (1) Except for types DR540, DR541, and DR570, leads may be trimmed to a length shorter than that shown, if required. Intermediate and 2" types shown have tin-plated leads. All others shown have gold-plated leads.
 - (2) Types DR300, DR301, DR302 and DR401 are tested in a coil of 10,000 turns of No. 48 wire on a 0.75" long bobbin of 0.17" diameter. Types DR540 and DR541 are tested in a coil of 10,000 turns of No. 41 wire on a 1.00" long bobbin of 0.30" diameter. Types DR570, DR600, DR601 and DR602 are tested in a coil of 10,000 turns of No. 39 wire on a 2.0" long bobbin of 0.25" diameter. Types DR680 and DR681 are tested on a coil of 5700 turns of No. 36 wire on a 2.0" long bobbin having an oval cross-section of approximately 0.5" x 0.28".
 - (3) Will vary, depending on sensitivity range chosen (pull-in ampere turns).
 - (4) Some degradation or improvement in performance may be expected as operating voltages and currents are varied.
 - (5) Form A, single-pole, single-throw, normally open switch.
 - (6) Form C, single-pole, double-throw switch in which the reed is maintained against the normally-closed contact by mechanical bias.
- ** A close-differential design where drop-out is typically 75%-85% of pull-in.

REED SWITCH CONDENSED DATA (Cont'd)

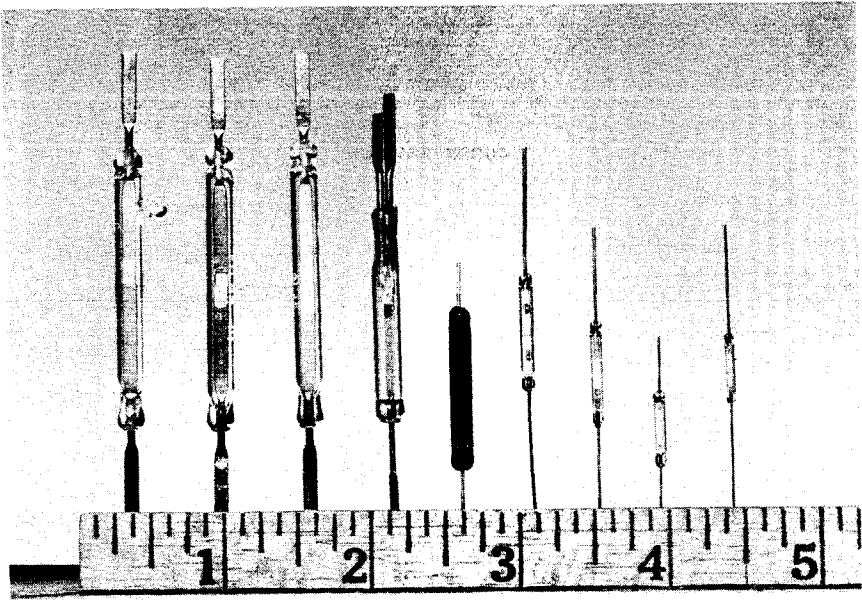

GE REED SWITCHES SHOWN ARE:

- | | |
|--|---------------------------|
| (A) DR-681, 2 in. High Voltage | (F) DR-401, Miniature |
| (B) DR-600, 2 in. Standard; Diffused Gold Contacts | (G) DR-301, Sub-miniature |
| (C) DR-601, 2 in. Standard; Rhodium Contacts | (H) DR-300, Sub-miniature |
| (D) DR-570, Intermediate Form C (SPDT) | (I) DR-303, Sub-miniature |
| (E) DR-540, Intermediate | |

DESCRIPTION

The heart of the GE reed switch is a set (two) of flat, metal reeds which are plated with a selected precious metal. These reeds are cantilever supported so that their free ends overlap and are separated by a small gap. The reeds are contained in a glass capsule which supports and holds the reeds in alignment. The capsule is hermetically sealed with dry gas; since the contacts are totally encapsulated, GE reed switches are ideal for environments containing explosive or corrosive gases or liquids.

OPERATION

GE Reed Switches can be actuated by moving a permanent magnet close to the switch or by energizing an electromagnetic coil located near the switch. With either method, the switch actuates when the magnet flux is strong enough to overcome the tension over the blade containing the normally-open "SPST" contacts.

APPLICATIONS

Reed Switches can be used in counters, instruments, key switches, limit switches, position indicators, flow meters, reed relays, toys, appliances, automobiles, cross-point switch systems, alarm devices, or any application where a small, simple, high-speed switching device is required.


FEATURES

- Rugged — The compact package is built to withstand mechanical shock, vibration, and other adverse environmental conditions.
- Fast Operation — Quicker to respond than "heavier" conventional relays, GE reed switches are ideal for applications which require high-speed switching operation.
- Wide Selection — Sizes available range from sub-miniature to standard which are designed to switch dry circuit to 50 watts; breakdown voltages range from 100 volts to 15KV; also available as SPST; SPDT (one form only).
- Long, Reliable Life — The basic GE switch design — plus customized plating of reed surfaces for your specification application — assures dependability, millions of trouble-free operations.
- High Quality Assured — GE provides 100% in-process quality control to assure that only switches built and designed to the customer's specifications leave the line.


REED SWITCH CONDENSED DATA (Cont'd)

OUTLINE DRAWINGS


DR300




DR301




DR302




DR303




DR401




DR540 — DR541




DR570

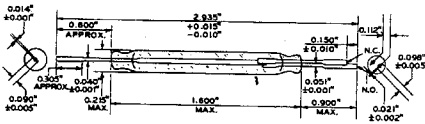

DR600 — DR601 — DR602



DR680 — DR681

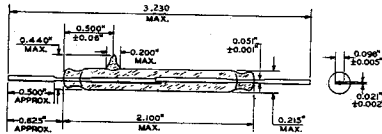

Entertainment Semiconductor Components

Meet your repair needs quickly and economically with . . .

GE UNIVERSAL REPLACEMENT TRANSISTORS



APPLICATION: General Electric Universal Replacement Transistors are specifically designed as general replacements for most types of transistors used in radios, TV and other entertainment applications where normal voltages exist. They are not recommended for use in critical high voltage applications. If the application is such that characteristic curves or design ratings are needed on the unit, it is recommended that the exact JEDEC replacement type be used.

TECHNICAL INFORMATION: Remembering a few general rules in the care and handling of solid-state components can very often mean the difference between success and failure in completing a repair job.

1) VOLTAGES: Observe voltage specifications. Watch for stray transient voltages which might come in on the power line, or which could be induced from adjacent circuits such as an automobile ignition system. (Use a thyrector or zener diode to protect semiconductors from these stray transients.) Check power-line voltage to make sure it is neither too high (above 120 volts) nor too low (below 110 volts).

No semiconductor should ever be connected or disconnected from a circuit with the power on. High transient currents may cause permanent damage to the semiconductor.

2) CURRENT: Do not overload semiconductors, even momentarily—an "arc-over" destroys them immediately. Double check circuits, polarities, component sizes, and wiring BEFORE closing the switch.

3) HEAT SINKS: Carefully observe the recommended heat sinks for stud-mounted devices. If heat can't get out of a semiconductor, damage is likely to result. Be sure air can circulate around lead mounted devices.

The stud end of a stud-mounted unit normally forms part of the electrical circuitry. Therefore, the heat sink to which the stud is mounted is electrically "live." If a "live" heat sink presents any safety hazard or might conceivably create a short circuit, the unit should be electrically insulated from the heat sink by mica and teflon[®] washers, or the best sink itself must be electrically insulated from the chassis.

Lead-mounted devices may be secured by soldering their leads to a terminal strip. This fastening point of the lead should be no less than $\frac{1}{8}$ inch away from the body of the device. Avoid bending the lead too near the component body. Do not try to bend the top terminals of stud-mounted devices.

4) SOLDERING: Use a small, hot soldering iron and high quality resincore solder. If a wire is tarnished or enameled, clean it with fine emery paper before soldering. Wrap the clean wire around the other wire or terminal once to hold it in place, then apply the tip of the iron and the solder to the joint together.

Solder as quickly as possible, then blow on the joint to cool it quickly. If possible, with lead mounted devices, use pliers to hold the lead between the body and the joint in order to avoid overheating the device. This is particularly important when soldering germanium devices.

Do not use acid flux.

5) MODIFICATIONS: Compare the base or lead arrangement of the GE Universal Replacement Transistor (see diagrams below) with the base or lead arrangement of the unit being replaced. If these are different it will be necessary to "bend and trim" to match up to the equipment.


6) CIRCUIT CHECKS: Anytime replacement of a transistor is made in equipment (even if it is a so called "exact" replacement), it is always good practice to check out the alignment of the associated tuned circuits to insure proper operation and achieve the required gain without loss of stability. If replacements are made in high power stages, the transistor bias should always be checked and adjusted in order to protect the replacement transistor against excessive dissipation and minimize distortion.

7) GERMANIUM OR SILICON? As an aid to determining whether you are working with a germanium or a silicon unit, a good indication is the bias between base and emitter. Germanium normally has less than .5 volts bias, and silicon normally has .5 volts or more bias between base and emitter.

APPLICATION AND TECHNICAL DATA CHART FOR UNIVERSAL TRANSISTORS

| GE Type | Description | Applications | Power Dissipation (Watts) | Max. Collector Current (IC) | Breakdown Voltage | | | Typical Current Gain | Outline Drawing (On Page 394-400) | Base Drawing (On Page 399) |
|---------|---------------|---|---------------------------|-----------------------------|--|---|--------------------------------------|----------------------|--------------------------------------|-------------------------------|
| | | | | | Collector to Base (BV _{CB0}) | Collector to Emitter (BV _{CE0}) | Emitter to Base (BV _{EB0}) | | | |
| GE-1 | PNP Germanium | Mixer/Oscillator Converter, RF & IF Amplifier (AM Radio) | 150 MW | 200 MA | 30 | 12 (CER) Min. | 20 | Fig. 6 TO-5 | ** H | |
| GE-2 | PNP Germanium | AF Amplifier | 200 MW | 200 MA | 20 | 20 | 5 | Fig. 6 TO-5 | ** H | |
| GE-3 | PNP Germanium | AF Power Amplifier | 25* | 3 A | 50 | 40 | 15 | Fig. 5 TO-3 | C | |
| GE-4 | PNP Germanium | AF High Power Amplifier | 50* | 12 A | 50 | 30 | 30 | Fig. 8 TO-36 | D | |
| GE-5 | NPN Germanium | Mixer/Oscillator Converter, RF & IF Amplifier (AM Radio) | 150 MW | 100 MA | 25 | 12 | 25 | Fig. 6 TO-5 | H | |
| GE-6 | NPN Germanium | Mixer/Oscillator Converter, RF Amplifier (AM Radio) | 65 MW | 20 MA | 20 | 9 (CER) | 10 | Fig. 1 OV-5 | A | |
| GE-7 | NPN Germanium | IF Amplifier (AM Radio) | 65 MW | 20 MA | 15 | 15 (CER) | 10 | Fig. 1 OV-5 | A | |
| GE-8 | NPN Germanium | AF Amplifier | 150 MW | 200 MA | 25 | 20 (CER) | 25 | Fig. 6 TO-5 | H | |
| GE-9 | PNP Germanium | Mixer/Oscillator Converter, RF & IF Amplifier (AM-FM Radio) | 70 MW | 10 MA | 30 | 20 (CER) | 2.5 | Fig. 10 TO-72 | F | |

| GE-10 | NPN Silicon | Mixer/Oscillator Converter, RF & IF Amplifier (AM Radio), AF Amplifier | 200 MW | 100 MA | 25 | 25 | 5 | 200 MHz Typ. | 150 | Fig. 12 TO-98 | E |
|---------|---------------|---|--------|--------|-----|-----|----|--------------|-----|---------------|---|
| GE-11 | NPN Silicon | Mixer/Oscillator Converter, RF & IF Amplifier (FM Radio) VHF Tuner, UHF Oscillator | 200 MW | 25 MA | 30 | 12 | 3 | 700 MHz Min. | 75 | Fig. 12 TO-98 | E |
| GE-12 | NPN Silicon | AF Power Amplifier for 120V Line Operated Stereo Phonographs, Television, Etc. - High Voltage | 10* | 400 MA | 300 | 300 | 5 | 30 MHz Min. | 140 | Fig. 9 TO-66 | C |
| GE-13MP | PNP Germanium | Matched Pairs of GE-3, AF Power Amplifier | 25* | 3 A | 50 | 40 | 15 | 400 KHz Typ. | 60 | Fig. 5 TO-3 | C |
| GE-14 | NPN Silicon | AF Power Amplifier - High Power | 115* | 15 A | 100 | 60 | 7 | 800 KHz Typ. | 45 | Fig. 5 TO-3 | C |
| GE-15MP | NPN Silicon | Matched Pairs of GE-14 for AF Power Amplifier | 115* | 15 A | 100 | 60 | 7 | 800 KHz Min. | 45 | Fig. 5 TO-3 | C |

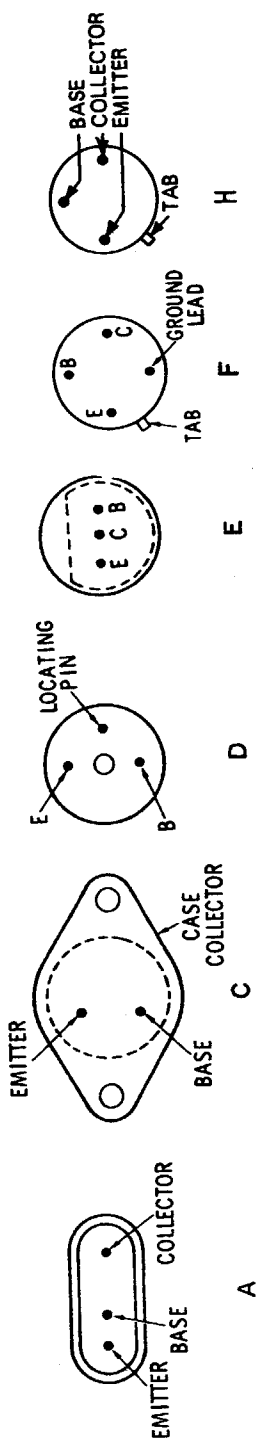

**Base tied to case.




***Collector may be tied to case.

*With heat sink.

APPLICATION AND TECHNICAL DATA CHART FOR UNIVERSAL TRANSISTORS

| GE Type | Description | Applications | Power Dissipation (Watts) | Max. Collector Current (IC) | Breakdown Voltage | | | Typical Current Gain | Outline Drawing (On Page 394-400) | Base Drawing (On Page 391) |
|---------|---------------|--|---------------------------|-----------------------------|--|---|--------------------------------------|----------------------|--------------------------------------|-------------------------------|
| | | | | | Collector to Base (BV _{CB0}) | Collector to Emitter (BV _{CE0}) | Emitter to Base (BV _{EB0}) | | | |
| GE-16 | PNP Germanium | AF High Power Amplifiers, Switching | 90* | 10 A | 60 | 45 | 30 | 60 | Fig. 5 TO-3 | C |
| GE-17 | NPN Silicon | FM RF & Oscillator, TV and Other Low Noise Circuits | 500 MW | 100 MA | 60 | 30 | 5 | 80 | Fig. 2 RO-97A | B |
| GE-18 | NPN Silicon | AF Amplifier, Output or Oscillator | 800 MW | 500 MA | 120 | 80 | 7 | 80 | Fig. 6 TO-5 | *** H |
| GE-19 | NPN Silicon | High Power AF Amplifier, Output Oscillator, Medium Current | 90* | 4 A | 50 | 50 | 5 | 40 | Fig. 5 TO-3 | C |
| GE-20 | NPN Silicon | Medium AF Amplifier, RF & IF Amplifier, Oscillator | 500 MW | 500 MA | 75 | 40 | 6 | 100 | Fig. 7 TO-18 | H |
| GE-21 | PNP Silicon | AF Amplifier, RF & IF Amplifier, Oscillator | 500 MW | 500 MA | 60 | 60 | 5 | 65 | Fig. 6 TO-5 | H |
| GE-22 | PNP Silicon | AF Amplifier, RF & IF Amplifier, Oscillator (AM & FM) | 500 MW | 500 MA | 25 | 25 | 4 | 50 | Fig. 3 RO-110 | B |
| GE-23 | NPN Silicon | AF Power Amplifier for use in class A and B AF Power Amplifiers, Communications, Hi-Fi | 15* | 2 A | 60 | 40 | 8 | 125 | Fig. 9 TO-66 | C |

| | | | | | | | | | | | |
|---------|---------------|--|----------|--------|-----|----------------------|---|-------------|-----|---------------------------------|---|
| GE-24MP | NPN Silicon | Matched Pairs of GE-23 | 15* | 2 A | 60 | 40 | 8 | 50 MHz Min. | 125 | Fig. 9 TO-66 | C |
| GE-25 | PNP Germanium | Horizontal and Vertical TV Sweep Circuits & Other High Voltage, High Current Amplifier Application | 56* | 10 A | 320 | 320 | 2 | 1 MHz Min. | 60 | Fig. 5 TO-3 | C |
| GE-26 | PNP Silicon | AF Power Amplifier - Stereo Tape Players, Communications and Hi-Fi | 20* | 2 A | 60 | 50 | 7 | 10 MHz Min. | 100 | Fig. 9 TO-66 | C |
| GE-27 | NPN Silicon | Color/BW video output Amplifier, High Voltage | 6* 1 | 100 MA | 300 | 300 (CER) | 5 | 80 MHz | 60 | Fig. 15 Plastic Pak GE-27 | I |
| GE-28 | NPN Silicon | AF Power Amplifier | 12* 2 | 3 A | | 60 (CES) 45 (CEO) | 5 | 50 MHz | 80 | Fig. 16 Plastic Pak GE-28 | J |
| GE-29 | PNP Silicon | AF Power Amplifier | 12* 2 | 3 A | | 60 (CES) 45 (CEO) | 5 | 40 MHz | 80 | Fig. 16 Plastic Pak GE-29 | J |



***Collector may be tied to case.


**Base tied to case.

*With heat sink

APPLICATION AND TECHNICAL DATA CHART FOR UNIVERSAL TRANSISTORS

| GE Type | Description | Applications | Power Dissipation (Watts) | Max. Collector Current (IC) | Breakdown Voltage | | | Typical Current Gain | Outline Drawing (On Pages 394-400) | Base Drawing (On Page 393) |
|---------|---------------|--|---------------------------|-----------------------------|--|---|--------------------------------------|----------------------|---------------------------------------|-------------------------------|
| | | | | | Collector to Base (BV _{CB0}) | Collector to Emitter (BV _{CE0}) | Emitter to Base (BV _{EB0}) | | | |
| GE-30 | PNP Germanium | Audio Power Output for Stereo Tape Players and Radios, Tape Recorders, CB Transceivers, etc. | 6* | 3 A | 60 | 60 | 12 | 1 MHz | Fig. 9 TO-66 | C |
| GE-31MP | PNP Germanium | Audio Power Output Matched Pair of GE-30's | 6* | 3 A | 60 | 60 | 12 | 1 MHz | Fig. 9 TO-66 | C |
| GE-32 | NPN Silicon | AC Line Operated AF Amplifier | 30* 1.5 | 1 A | 500 (CES) 300 (CEO) | 5 | 5 | 40 MHz | Fig. 17 Power Pac | L |
| GE-50 | PNP Germanium | FM, RF Amplifier TV, IF Amplifier | 140 MW | 15 MA | 25 (CER) | 25 (CER) | 5 | 250 MHz (Typ.) | R-90 (See Page 9) | O |
| GE-51 | PNP Germanium | AM, RF Amplifier AM, FM, IF Amplifier | 60 MW | 10 MA | 32 (CER) | 32 (CER) | 12 | 75 MHz (Typ.) | Fig. 10 TO-72 | O |
| GE-52 | PNP Germanium | Low Noise AF Amplifier | 150 MW | 150 MA | 30 (CER) | 20 (CER) | 12 | 2 MHz (Typ.) | Fig. 4 TO-1 | M |
| GE-53 | PNP Germanium | AF Amplifier, Output | 1* 220 MW | 1 A | 32 | 32 | 6 | 1.4 MHz | Fig. 4 TO-1 | M |
| GE-60 | NPN Silicon | RF, IF to 200 MHz; TV 1st or 2nd IF Amplifier | 180 MW | 25 MA | 40 | 40 | 4 | 500 MHz | Fig. 3 RO-110 | B |
| GE-61 | NPN Silicon | TV 3rd IF Amplifier | 300 MW | 85 MA | 50 | 40 | 4 | 500 MHz | Fig. 11 TO-92 | P |

| | | | | | | | | | | | |
|-------|--------------------------|-------------------------------------|--------------|--------|----|----------------------|----|---------|--------|-------------------|---|
| GE-62 | NPN Silicon | High Gain, Low Noise Amplifier | 360 MW | 100 mA | 66 | 50 | 5 | 150 MHz | 360 | Fig. 12 TO-98 | E |
| GE-63 | NPN Silicon | AF Amplifier Output | 1* 500 MW | 1 A | 66 | 60 | 5 | 160 MHz | 150 | Fig. 13 X-103 | N |
| GE-64 | NPN Silicon (DARLINGTON) | Very High Gain, Low Noise Amplifier | 360 MW | 275 MA | 40 | 40 | 12 | 90 MHz | 20,000 | Fig. 12 TO-98 | E |
| GE-66 | NPN Silicon | AF Power Output | 28* 1.5 | 4 A | 66 | 70 (CES) 60 (CEO) | 5 | 50 MHz | 70 | Fig. 17 Power Pac | L |
| GE-67 | PNP Silicon | AF Amplifier Output | 1* 500 MW | 1 A | 66 | 60 | 5 | 160 MHz | 150 | Fig. 13 X-103 | N |
| GE-69 | PNP Silicon | AF Power Output | 28* 1.3 | 4 A | | 70 (CES) 60 (CEO) | 5 | 40 MHz | 70 | Fig. 17 Power Pac | L |

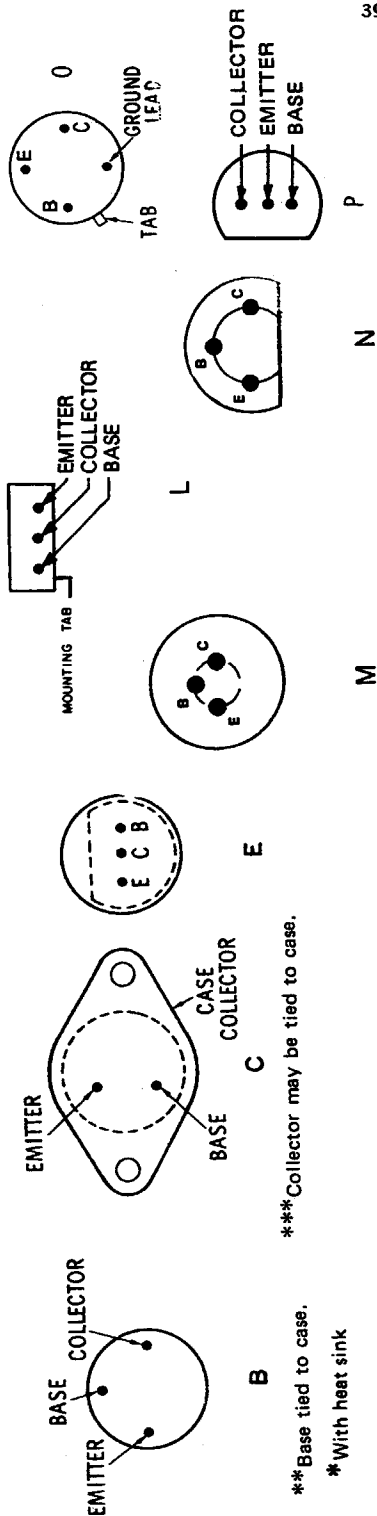


***Collector may be tied to case.

**Base tied to case.

*With heat sink


Outline Drawings . . . all dimensions in inches.

FIG. 1

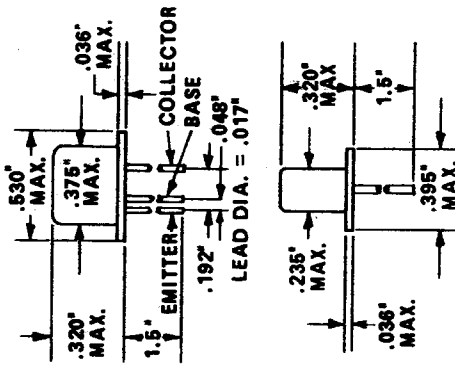


OV - 5

FIG. 2

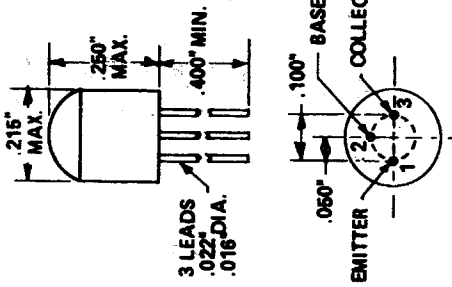


RO - 97A

FIG. 3

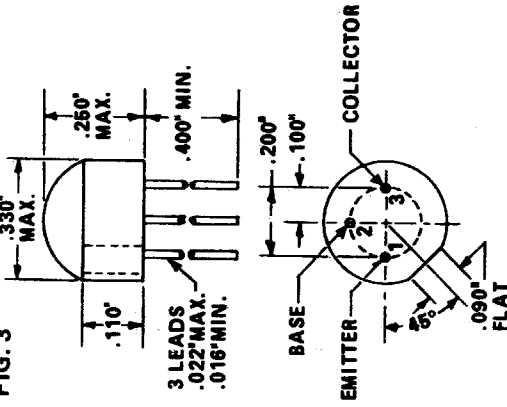


RO - 110

FIG. 4

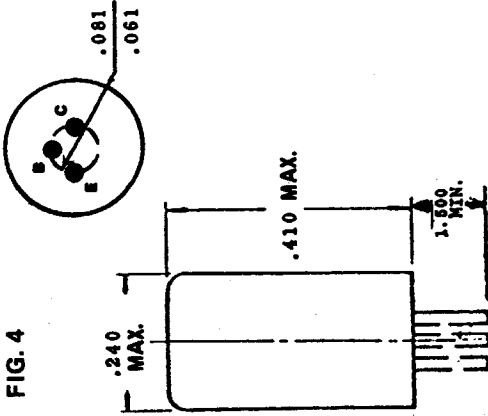


T0-1

FIG. 5

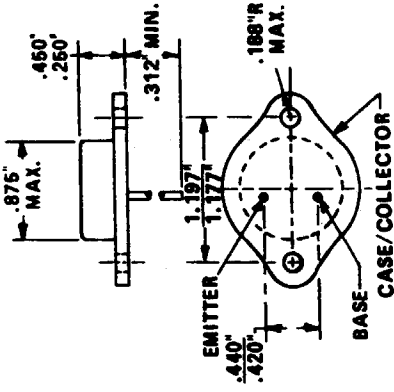

T0-3


FIG. 6

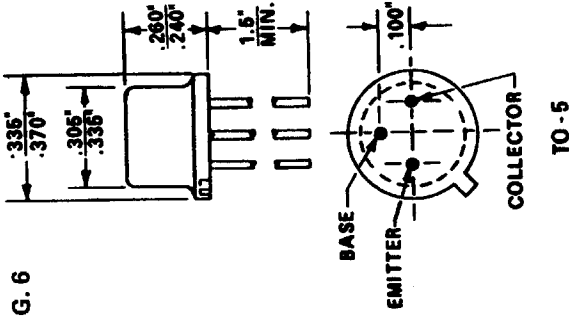

T0-5


Outline Drawings ... all dimensions in inches.

FIG. 7

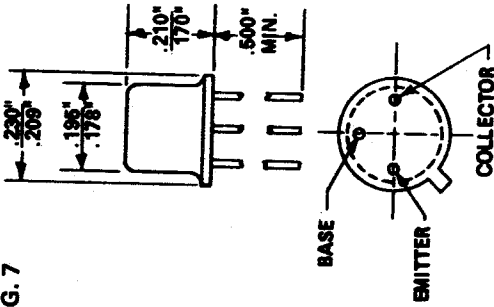


TO - 18

FIG. 8

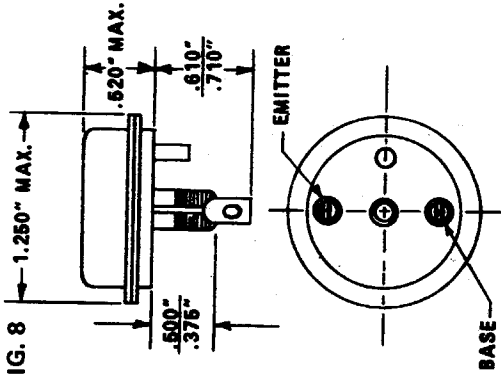


TO - 36

FIG. 9

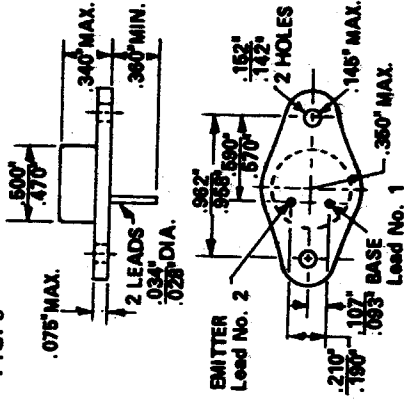

TO - 66


FIG. 14

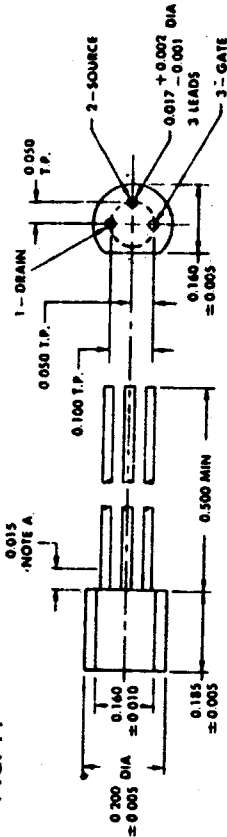

- NOTES:
- Lead diameter is not controlled in this area.
 - Leads having maximum diameter 0.019 shall be within 0.007 of their true positions measured in the gaging plane 0.054 below the seating plane of the device relative to a maximum-diameter package.
 - All dimensions are in inches.


X-55

FIG. 15

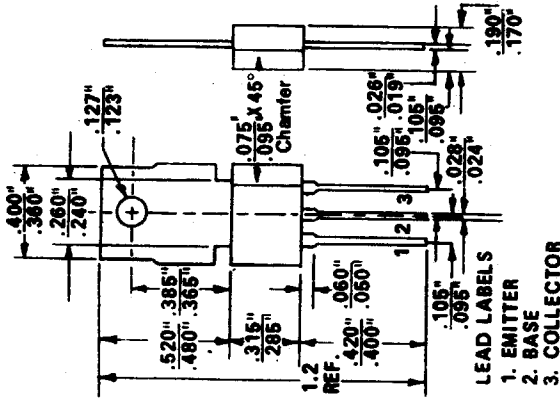

PLASTIC PAK
CAN BE FORMED TO TO-5


Mounting Suggestions for POWER PAC

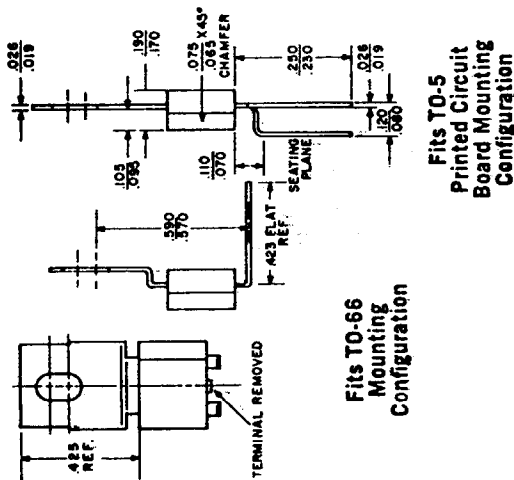

Fits TO-5
Printed Circuit
Board Mounting
Configuration


Fits TO-66
Mounting
Configuration

FIG. 17

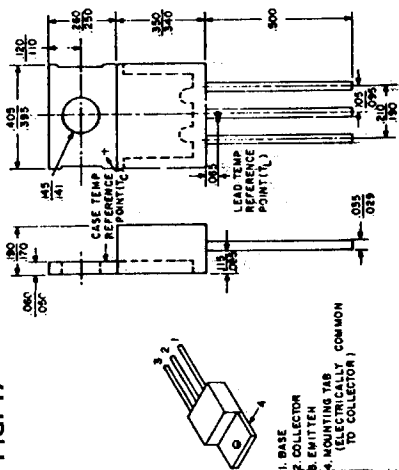


POWER PAC

FIG. 16

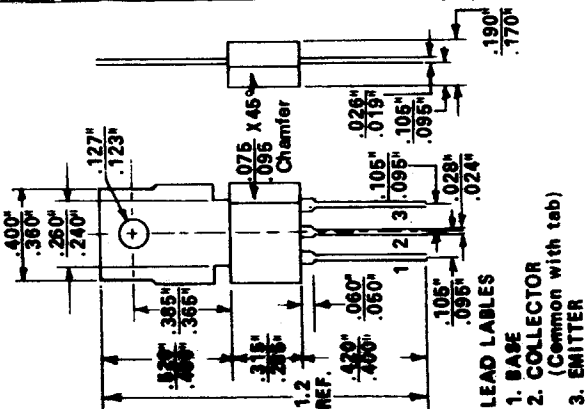

PLASTIC PAK
CAN BE FORMED TO TO-5 OR TO-66

Outline Drawing

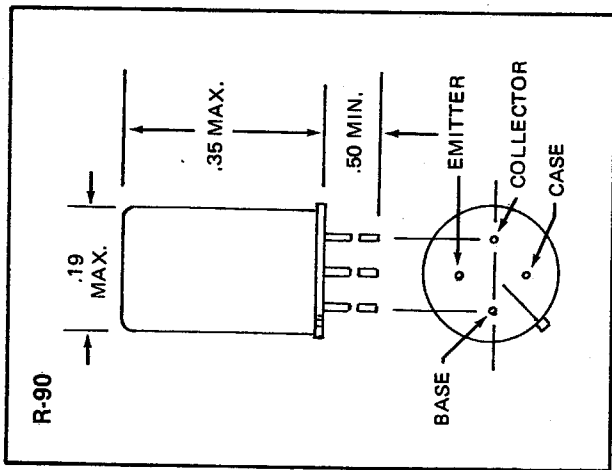




SILICON AND GERMANIUM RECTIFIERS

GE-504A AND GE-509 Universal replacement types GE-504A and GE-509 with a 60 amp surge rating, are recommended as a replacement for silicon rectifiers used in radio, black and white and color TV receivers, plus many other circuits.

The GE-504A and GE-509 have dual heatsink design. The pellet is securely sandwiched between two heavy thermally-matched slugs. These slugs provide rugged mechanical support for the pellet and leads. There are no potentially troublesome "S" springs or whaler contacts to fail or to increase thermal resistance.

The temperature coefficient of the glass is carefully matched to that of silicon for stress-free operation over a wide temperature range. Due to the inherent low OHMIC resistance of the GE-504A and GE-509 package, the devices can withstand current surges up to 100 amps.

The 1N91 is a germanium rectifier in a hermetic sealed package and has low forward voltage and other characteristics normally associated with germanium rectifiers. The GEBR-600 is a silicon rectifier utilizing GE-504A type units connected in full-wave bridge configuration; the total bridge is encapsulated in plastic.

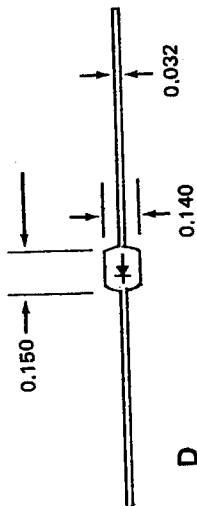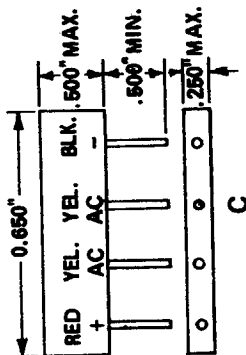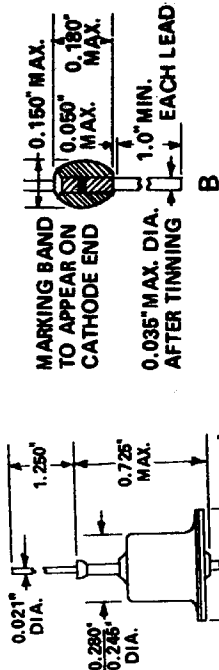

| Type | Diagram | PIV | Max. Ipc MA | Suggested List Price |
|----------|---------|------|-------------|----------------------|
| 1N91 | A | 100 | 150 | \$1.55 |
| GE-504A | B | 600 | 1 AMP | 1.10 |
| GE-509 | B | 1000 | 1 AMP | 1.25 |
| GE-510 | D | 1000 | 2.5 AMP | 1.30 |
| GEBR-600 | C | 600 | 1.5 AMP | 5.10 |

MARKING BAND TO APPEAR ON CATHODE END

0.050" MAX.

0.180" MAX.

0.035" MAX. DIA.

1.0" MIN.

AFTER TINNING EACH LEAD

B


C

D


| FIELD EFFECT TRANSISTORS | | | Applications | Common Source Forward Transfer Admittance (MINHOS) | Power Dissipation @25°C Free Air | Gate Current (IG) (MADC) | Zero Gate Voltage Drain Current (IDSS) | Drain Gate Voltage | Drain Source Voltage VDS (VDC) | Gate Source Breakdown Voltage V(BR) GSS | Case Package <small>(On Pages 397,398)</small> | Terminal Drawing |
|--------------------------|-----------------------|--------------------------------------|--------------|--|----------------------------------|--------------------------|--|--------------------|--------------------------------|---|---|------------------|
| GF Type | Description | | | | | | | | | | | |
| GE-FET-1 | N Channel Silicon FET | General Purpose Amplifier to 100 MHz | 6500 Max. | 200 MW | 10 MA | 2 to 20 MA** | 25 | 25 | 25 | -25 | Fig. 11 TO-92 | G |
| GE-FET-2 | N Channel Silicon FET | FM-TV RF Mixer VHF to 400 MHz | 5500 Typical | 350 MW | 50 MA | 5 to 15 MA** | 30 | 30 | | -30 | Fig. 14 X-55 | K |

** Pulse Test: Pulse Width = 100 MSEC, Duty Cycle ≤ 10% (FET)

* With heat sink



G




K

SELENIUM RECTIFIERS FOR USE IN COLOR TV SETS


| Catalog No. | Diagram | Type | Suggested List Price |
|-------------|---------|---------------|----------------------|
| GEGR-1 | 1 | Focus Rect. | \$ 3.75 |
| GEGR-2 | 2 | Boosted Boost | 1.65 |
| GEGR-3 | 3 | Convergence | 1.43 |

POLARITY INDICATED BY THREE (+) PLUS
SYMBOLS LOCATED 120° APART

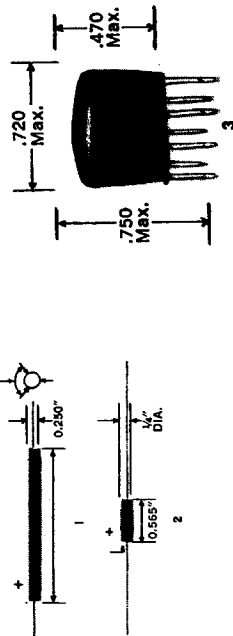



GE QUARTZ CRYSTALS


| Catalog No. | Resonant Frequency | Use | Suggested List Price |
|-------------|--------------------|------------------------------|----------------------|
| GE-41 | 3579,545 kc | Color burst filter | 5.60 |
| GE-42 | 3579,545 kc | Color subcarrier oscillators | 3.80 |

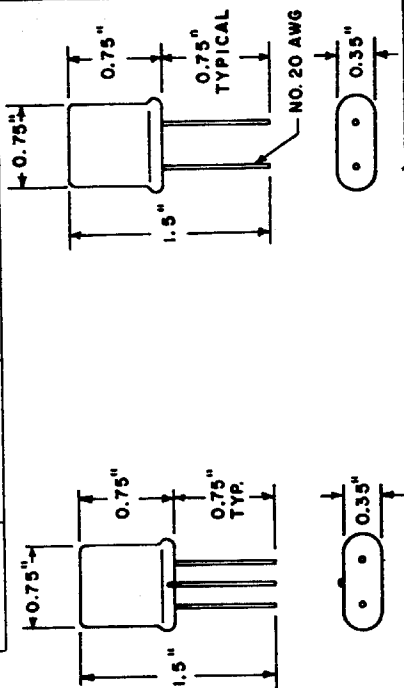

VARIABLE CAPACITANCE DIODES

| GE Type | Material | Reverse Voltage V_r Volts | Reverse Current I_A μ A | Capacitance AT $V_r = 4$ V μ F | Tuning Ratio | Case |
|---------|-------------------------------|--------------------------------|----------------------------------|--|--------------|------|
| GE-90 | Silicon | 20 | 2 | 30 | 2.8 | A |
| GE-305 | Silicon Damper Diode 5000 PRV | | | | | B |

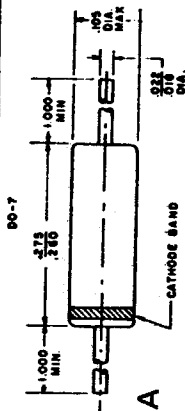


In application requiring the use of two (2) of the GE-305's in parallel, use paring clips, as illustrated  otherwise discard. One paring clip is packaged with each GE-305.

GE ENTERTAINMENT TRANSISTORS REGISTERED JEDEC TYPES

These types supplement the Universal Line of GE Transistors. Characteristics conform to JEDEC specifications.


| Type or JEDEC No. | Type | Use | Drawing No. | Pc, MW @25°C | BV_{CE} | I_{CMA} | T $^{\circ}$ C | Suggested List Price |
|-------------------|----------------------------|-----------|-------------|--------------|-----------|-----------|----------------|----------------------|
| 2N107 | PNP | AF | 1 | 50 | -6 | -10 | 60 | \$1.25 |
| 2N170 | NPN | IF | 3 | 25 | 6 | 20 | 50 | 1.70 |
| 2N188A | PNP | AF OUT | 1 | 200 | -25 | -200 | 85 | 3.05 |
| 2N190 | PNP | AF | 1 | 75 | -25 | -50 | 85 | 1.40 |
| 2N324 | PNP | AF | 2 | 140 | -16 | -100 | 60 | 1.20 |
| 2N404 | PNP | SW | 2 | 120 | -24 | -100 | 85 | .90 |
| 2N508 | PNP | AF OUT | 2 | 140 | -16 | -100 | 86 | 1.30 |
| 2N2160 | { SILICON { UNIJUNCTION | OSC | 4 | 450 | 30 | 50 | 86 | 2.75 |
| 2N5308A | NPN | Amplifier | 5 | 350 | 36 | 200 | 100 | 1.25 |

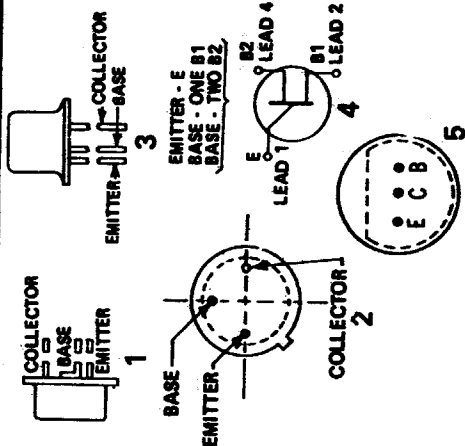

GERMANIUM AND SILICON DIODES

MARKING WIDE COLOR BAND ADJACENT TO CATHODE END

BOTH LEADS .020" MAX. DIA. (THINNED) 1.0" MIN LEADS





A

B

| Type | Description | Out-line (see above) | Temp. Range °C | Reverse Working Voltage (dc-volts) | Recurrent Peak Forward Current (ma) | Average Forward Current (ma) | Surge Current 1 sec.-max. (ma) | Peak Reverse Voltage (Volts) | CHARACTERISTICS | | Suggested List Price | |
|--------|----------------------------------|----------------------|----------------|------------------------------------|-------------------------------------|------------------------------|--------------------------------|------------------------------|---|--------------------------|----------------------|--------|
| | | | | | | | | | Forward Current (ma) at +1 volt Min Max | Reverse Current (µa max) | | |
| 1N34AS | General Purposes | A | -50 to +90 | 60 | 150 | 50 | 500 | 75 | 5 | 25 | 500 at -50V | \$.55 |
| 1N60 | Video Detector | A | -50 to +90 | 25 | 150 | 50 | 500 | 30 | 5 | — | — | .55 |
| 1N82A | Silicon UHF Mixer | A | -50 to +120 | 3 | 25 | — | — | 5 | 5 | 15 (.5v) | 500 at -3v | 1.45 |
| 1N295 | 50 MC Detector | A | -59 to +100 | 40 | 125 | 30 | 300 | 50 | — | — | 180 at -10v | .55 |
| GE-300 | General Purpose (50 NANO sec) | B | -65 to +150 | 200 | — | 250 | 2 A | 200 | 200 Min. | — | 1 at -200v | 1.35 |

Vac-u-521[®] SELENIUM DUAL-DIODE RECTIFIERS

APPLICATION: The principal application for the Dual-Diode is as a discriminator or phase detector in television receivers. They also can be used in other types of low power circuits where maximum dependability is required at minimum cost.

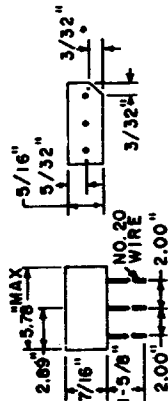

| Catalog No. | Type | Suggested List Price |
|-------------|------------------|----------------------|
| 6G61 | Common Cathode | \$.90 |
| 6G61 | Series Connected | .90 |
| 6G61 | Common Anode | .90 |

Forward current (min.) 1.1 ma at 2.5VDC
Reverse current (nominal) .4 ma at 20VDC

ZENER DIODES

ZENER DIODES A Zener diode is a two-layer device that above a certain reverse voltage (the zener value) has a sudden rise in current. If forward-biased, the diode is an ordinary rectifier. But when reversed-biased, the diode exhibits a typical knee, or sharp break, in its current-voltage graph. The voltage across the device remains essentially constant for any further increase of reverse current up to the allowable dissipation rating. The zener diode is a good voltage regulator, over-voltage protector, and voltage reference.

Zener diodes may be connected in a series to achieve desired zener voltage plus or minus tolerances. For best zener performance, specified IZT should be maintained during normal circuit conditions.

| GE Type | Material | Power Dissipation @ 25°C (Watts) | Breakdown Voltage V_Z @ IZT (Volts) | Test Current IZT (MA) | Zener Impedance ZZ @ IZT (OHMS) | DC Zener Current IZM (MA) | Suggested Retail |
|------------|----------|----------------------------------|---------------------------------------|-----------------------|---------------------------------|---------------------------|------------------|
| GE ZD-10-4 | Silicon | 400 MW | 10 | 20 | 17 | 20 | \$1.55 |
| GE ZD-3.6 | Silicon | 1 Watt | 3.6 | 69 | 10 | 253 | 1.99 |
| GE ZD-5.1 | Silicon | 1 Watt | 5.1 | 49 | 7 | 178 | 1.99 |
| GE ZD-5.6 | Silicon | 1 Watt | 5.6 | 45 | 5 | 162 | 1.99 |
| GE ZD-6.2 | Silicon | 1 Watt | 6.2 | 41 | 2 | 146 | 1.99 |
| GE ZD-7.5 | Silicon | 1 Watt | 7.5 | 34 | 4 | 121 | 1.99 |
| GE ZD-9.1 | Silicon | 1 Watt | 9.1 | 28 | 5 | 100 | 1.99 |
| GE ZD-12 | Silicon | 1 Watt | 12 | 21 | 9 | 76 | 1.99 |
| GE ZD-15 | Silicon | 1 Watt | 15 | 17 | 14 | 61 | 1.99 |
| GE ZD-18 | Silicon | 1 Watt | 18 | 14 | 20 | 50 | 1.99 |
| GE ZD-20 | Silicon | 1 Watt | 20 | 12.5 | 22 | 46 | 1.99 |
| GE ZD-27 | Silicon | 1 Watt | 27 | 9.5 | 35 | 34 | 1.99 |
| GE ZD-33 | Silicon | 1 Watt | 33 | 7.5 | 45 | 27 | 1.99 |
| GE ZD-39 | Silicon | 1 Watt | 39 | 6.5 | 60 | 23 | 1.99 |
| GE ZD-47 | Silicon | 1 Watt | 47 | 5.5 | 80 | 19 | 1.99 |


All Zeners $\pm 10\%$ tolerance in Voltage.
Junction operating and storage temperature -- 65° to 200°C.

| MAINTENANCE INDUSTRIAL REPLACEMENT SEMICONDUCTORS | | | | | | | | | | Suggested User Price |
|---|---|---|---------------------------------------|---|----------------------------|--|-----------------------------|----------------------------|---|----------------------|
| Catalog No. | Description | Repetitive PRV | Transient PRV | Max. IDC Stud Single Phase | Peak 1 Cycle Surge | Max. Rev. Cur. (Full Cycle Av @ Full Load) | Max. Full Load Voltage Drop | Max. Oper. $\circ\text{C}$ | Out-line Dwg. | |
| GEMR-1 | Silicon Rectifier | 200 | 350 | 12 A | 240 A | 2.0 mA | 0.55 V | 200 $^{\circ}$ | A | \$ 4.80 |
| GEMR-2 | Silicon Rectifier | 400 | - | 35* A | 500 A | 10* mA Dc | 0.65* V | 200 $^{\circ}$ | B | 6.90 |
| | | PRV and V (BO) | | Max. IDC @ Temp. $\circ\text{C}$ | Max. Temp. $\circ\text{C}$ | Max. Rev. Cur. (Full Cycle Av @ Full Load) | Max. Full Load Voltage Drop | Max. Oper. $\circ\text{C}$ | Max. Req'd. Gate Signal @ 25 $^{\circ}\text{C}$ T J | |
| GEMR-3 | Silicon Controlled Rectifier | 400 | 35 A @ 19 $^{\circ}\text{C}$ case | | 125 $^{\circ}$ | 150 $^{\circ}$ | 3 V, 40 mA | | C | 8.60 |
| GEMR-4 | Silicon Controlled Rectifier | 400 | 7.4 A @ 80 $^{\circ}\text{C}$ case | | 100 $^{\circ}$ | 100 $^{\circ}$ | 3 V, 25 mA | | D | 3.80 |
| GEMR-5 | Silicon Controlled Rectifier Economy Flat Pack Design | 200 | 4 A @ 75 $^{\circ}\text{C}$ anode tab | | 110 $^{\circ}$ | 150 $^{\circ}$ | 0.8 V, 200 μA Dc | | E | 1.40 |
| | | h_{FE} $V_{CE} = 1\text{V}$ $I_C = 1\text{A}$ | V_{CEO} $I_C = 1\text{mA}$ | $V_{CE(sat)}$ $I_C = 1\text{A}$ $I_B^{\circ} = 50\text{mA}$ | PT 70 $^{\circ}$ Tab | | | | | |
| GEMR-6 | Silicon Power Tab Transistor | 20 min. | 40 V | 1.0 V (Max.) | 8 W | | | | F | 1.42 |

* @ 140 $^{\circ}\text{C}$


MAINTENANCE INDUSTRIAL REPLACEMENT SEMICONDUCTORS

Outline Drawings

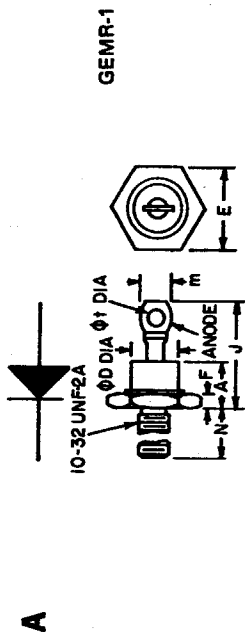

COMPLIES WITH
EIA REGISTERED OUTLINE DO-4

| SYMBOL | INCHES | | MILLIMETERS | |
|--------|--------|-----|-------------|-----|
| | MIN | MAX | MIN | MAX |
| A | .405 | | 10.29 | |
| ØD | .424 | | 10.77 | |
| E | .437 | | 11.10 | |
| F | .175 | | 4.45 | |
| J | .800 | | 20.32 | |
| m | .250 | | 6.35 | |
| N | .422 | | 10.72 | |
| ØI | .060 | | 1.52 | |
| W | | | | |

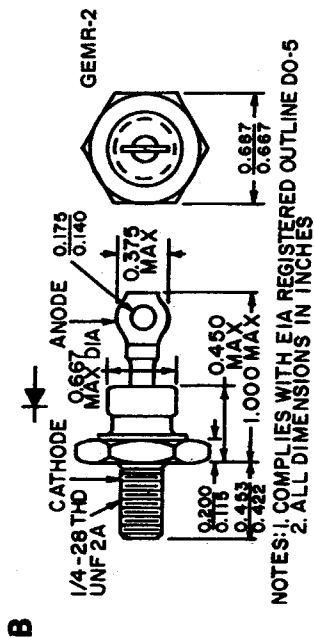


NOTES: 1. COMPLIES WITH EIA REGISTERED OUTLINE DO-5
2. ALL DIMENSIONS IN INCHES

C


GEMR-3

(COMPLIES WITH JEDEC TO-48)




| SYMBOL | INCHES | | MILLIMETERS | |
|----------------|--------|------|-------------|-------|
| | MIN | MAX | MIN | MAX |
| A | .350 | .505 | 8.93 | 12.83 |
| ØH | .115 | .140 | 2.92 | 3.56 |
| ØI | .210 | .300 | 5.33 | 7.62 |
| ØD | .544 | .569 | 13.82 | 14.27 |
| F | .115 | .200 | 2.87 | 5.08 |
| F ₁ | .060 | | 1.52 | |
| J ₁ | | .193 | | 30.30 |
| I | .120 | | .875 | 22.23 |
| ØM | | | 3.05 | |
| N | .422 | .453 | 10.72 | 11.51 |
| ØI | .060 | .075 | 1.52 | 1.91 |
| ØH | .125 | .165 | 3.18 | 4.19 |
| W | | | | |

GEMR-4

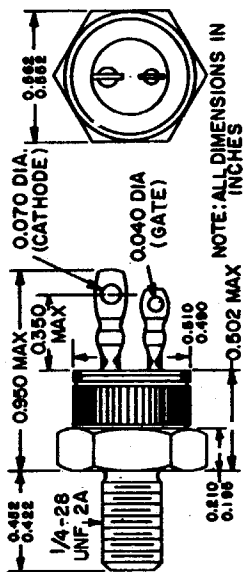


F

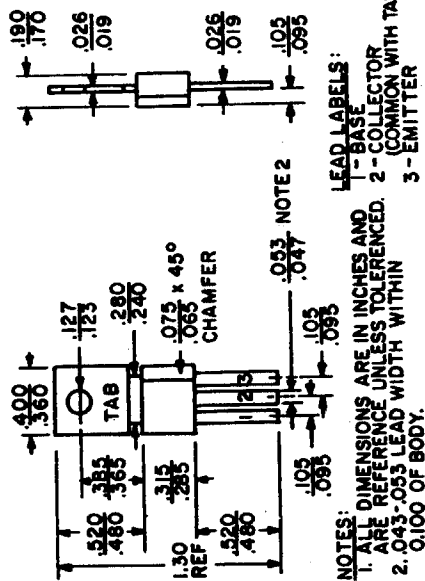

GEMR-6

D

GEMR-6

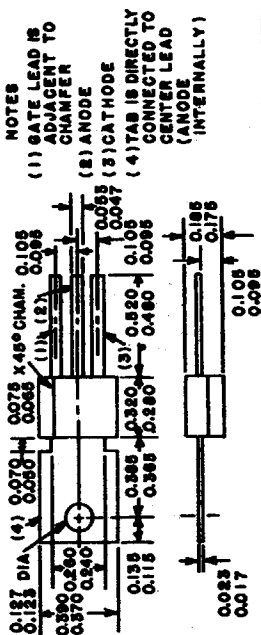

E

"INTEGRATED CIRCUITS"

| Type | Description |
|---|--|
| <p>GEIC-1 Audio Amplifier</p> | <p>Audio amplifier designed to deliver 2 watts of continuous power to a 16-ohm load. This integrated circuit is used in project A2 as described in Electronics Experimenters Circuit Manual ETRM-3960A.</p> |
| <p>GEIC-2 TV/FM Sound, IF, Detector (Figure No. 1 Below)</p> | <p>Suitable for a wide variety of applications including TV sound channels, line operated and automobile FM radios and mobile communications equipment. Features electronic attenuator. Max. supply voltage: 9V; Zener regulating voltage (V_Z): 11.2V typ.; Supply current: 16MA Typ; $T_A = 25^\circ\text{C}$. Replacement for Zenith 221-48; Sears 13-29-6; Sylvania 15-33201-1 and UA3065.</p> |
| <p>GEIC-3 Color TV Chroma Demodulator (Figure No. 2 Below)</p> | <p>Demodulates the chroma subcarrier information contained in a color television video signal and provides color difference signals at the outputs. Low voltage drift of the DC output insures excellent performance in direct-coupled chrominance output circuitry. Max. supply voltage: 28VDC; minimum load resistance: 3K ohm; peak to peak reference input voltage: 5V; peak to peak chroma input voltage: 5V; internal power dissipation: 450MW; operating temperature range: 0°C to $+70^\circ\text{C}$. Electrical characteristics ($T_A = 25^\circ\text{C}$, $V^+ = 24\text{V}$) as follows: Supply current ($e_c = 0$, $R_L = 1\text{M ohm}$) 9.0 MA Typ.; ($e_c = 0$) 22 MA typ.; DC Voltage at any output terminal ($e_c = 0$) 14.5V typ.; DC voltage at either reference terminal ($e_a = e_b = e_c = 0$) 5.8V typ.; DC voltage at either chroma terminal ($e_c = 0$) 3.2V typ. Replacement for Zenith 221-37 and 221-39; also replaces UA746.</p> |
| <p>GEIC-4 Color TV Subcarrier Regenerator (Figure No. 3 Below)</p> | <p>Replacement for Zenith 221-42 and UA780. Maximum ratings, supply current: 40MA; gate input current: 5MA; peak to peak voltage at either APC or ACC detector input terminals: 5V; internal power dissipation: 600MW. Electrical characteristics ($T_A = 25^\circ\text{C}$, Gate "ON"); supply current: 26MA typ.; voltage at supply terminal: 12V typ.; supply regulation ($V^+ = 21\text{V}$ to $V^+ = 27\text{V}$): 40MV typ.</p> |

"INTEGRATED CIRCUITS"

| Type | Description |
|---|---|
| <p align="center"> GEIC-5 Color TV Chroma Demodulator (Figure No. 4 Below) </p> | <p>Demodulates the chroma subcarrier information contained in a color TV video signal and provides color difference signals at the outputs. The low voltage drift of the DC output insures excellent performance in direct coupled chrominance output circuitry. Max. supply voltage: 28VDC; minimum load resistance: 3K ohm; peak to peak reference input voltage: 5V; peak to peak chroma input voltage: 5V; internal power dissipation: 450mW; operating temperature range: 0°C to +70°C. Electrical characteristics (TA = 25°C, V+ = 24V) as follows: Supply current (e_c = 0, R_L = 1M ohm) 9.0-MA typ.; (e_c = 0) 22MA typ.; DC voltage at any output terminal (e_c = 0) 14.5 V Typ.; DC voltage at either reference terminal (e_a = e_b = e_c = 0) 5.8V typ; DC voltage at either chroma terminal (e_c = 0) 3.2V typ. Replacement for Zenith 221-46 and UA746 (DIP).</p> |
| <p align="center"> GEIC-6 Gain Controlled IF Amplifier (Figure No. 4 Below) </p> | <p>Dual gain controlled IF amplifier designed for use as a color TV chroma IF amplifier. The first section is a gain controlled chroma signal amplifier whose output is used to drive a sub carrier regenerator circuit. The gain of the second section is controlled by means of an external DC voltage to set chroma level. In addition the second stage may be gated off to provide "color killing" action in the absence of a color signal with the trip point of the gate adjusted externally. Maximum ratings, supply voltage: 30V; internal power dissipation: 600mW; storage temperature range: -65°C to +150°C. Replacement for Zenith 221-43 and UA 781.</p> |
| <p align="center"> GEIC-7 FM Stereo Multiplex Decoder (Figure No. 4 Below) </p> | <p>Used to accomplish the demodulation of a stereo multiplex signal into the right and left audio channels while inherently suppressing SCA frequency components. Suitable for all line-operated and automotive FM stereo multiplex applications. Maximum ratings, supply voltage: 15V; voltage at stereo lamp driver terminal: 22V; current into stereo lamp driver terminal: 100mA; internal power dissipation: 400mW. Electrical characteristics (TA = 25°C, V+ = +12V, 200 mV RMS standard stereo multiplex signal applied to input). Supply current: 10mA typ.; input resistance: 20K ohms typ.; stereo separation (adjusted) f = 100Hz: 45dB typ.; f = 1kHz: 55dB typ.; f = 10kHz: 50dB typ.; total harmonic distortion: .5% typ.; 67kHz storecast rejection: 55dB typ.; 19kHz pilot level required at input for stereo indicator lamp on: 12 mVRMS typ.; stereo indicator lamp off: 8mVRMS typ. Replacement for Heath 442-9 and UA729.</p> |

Used to accomplish the demodulation of a stereo multiplex signal into the right and left audio channels while inherently suppressing SCA frequency components. Suitable for all line-operated and automotive FM stereo multiplex applications. Maximum ratings, supply voltage: 15V; voltage at stereo lamp driver terminal: 22V; current into stereo lamp driver terminal: 100mA; internal power dissipation: 400mW. Electrical characteristics ($T_A = 25^\circ\text{C}$, $V^+ = +12\text{V}$, 200 mV RMS standard stereo multiplex signal applied to input). Supply current: 11mA typ.; input resistance: 20K ohms typ.; stereo separation $f = 100\text{kHz}$: 40dB typ.; $f = 1\text{kHz}$: 45dB typ.; $f = 10\text{kHz}$: 40dB typ.; total harmonic distortion: .5% typ.; 67kHz storecast rejection: 55dB typ.; 19kHz pilot level required at input for stereo indicator lamp on: 12 mV RMS typ.; stereo indicator lamp off: 8 mV RMS typ. Replacement for 21B1M, UA732 and TLJ.

Used to accomplish the demodulation of a stereo multiplex signal into the right and left audio channels while inherently suppressing SCA frequency components. Suitable for all line-operated and automotive FM stereo multiplex applications. Maximum ratings, supply voltage: 15V; voltage at stereo lamp driver terminal: 22V; current into stereo lamp driver terminal: 100mA; internal power dissipation: 500mW. Electrical characteristics ($T_A = 25^\circ\text{C}$, $V^+ = +12\text{V}$, 200 mV RMS standard stereo multiplex signal applied to input). Supply current: 12mA typ.; input resistance: 20K ohms typ.; stereo separation $f = 100\text{Hz}$: 40 dB typ.; $f = 1\text{kHz}$: 45 dB typ.; $f = 10\text{kHz}$: 40dB typ.; total harmonic distortion: .5% typ.; 67kHz storecast rejection: 55dB typ.; 19kHz pilot level required at input for stereo indicator lamp on: 12mV RMS typ.; stereo indicator lamp off: 8 mV RMS typ. Replacement for 006B2M, UA767 and MC1307.

GEIC-8
FM Stereo Multiplex
Decoder
(Figure No. 1 Below)

GEIC-9
FM Stereo Multiplex
Decoder
(Figure No. 1 Below)

FIGURE 1

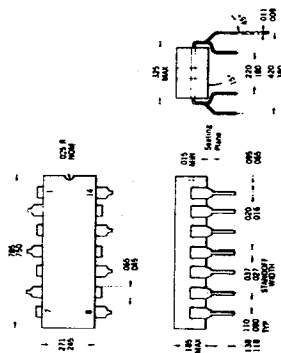


FIGURE 2





FIGURE 3

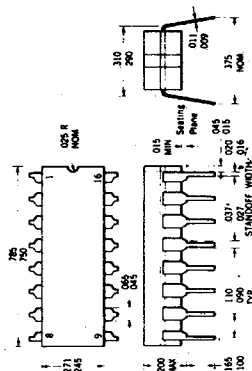

GEIC-10
FM Detector Limiter and
TV Sound
 (Figure No. 5 Below)

Comprises a three-state limiter and a balanced product detector. Applications include TV sound channels, FM receivers, automatic frequency control systems and communication receivers, 5KHz to 50 MHz frequency range permits use in a variety of communication receivers. Max. power supply: 16Vdc; Max. input voltage (pin4): 3.5Vp, Max. power dissipation: 625mW; derate above TA = 25°C: 5.0 mW/°C. Electrical characteristics (TA = 25°C) as follows: drain current (V+ = 12V) 15mA typ.; Detector output voltage (V+ = 12V) 5.4 Vdc typ. Replacement for Zenith 221-34 and MC1357.

GEIC-11
FM and TV Sound IF-
Detector and Limiter
 (Figure No. 6 Below)

Operation of this device on 8.0 Vdc supply makes it suitable for portable and vehicular use for FM and TV sound/IF detector and limiter stages. Max. power supply: 16Vdc; Max. input voltage (pin 4): 3.5Vp. Electrical characteristics (TA = 25°C) as follows: Drain current (V+ = 8V) 12 mA typ.; detector output voltage (V+ = 8V) 3.7 Vdc typ. Replacement for Delco DM-11.

FIGURE 4

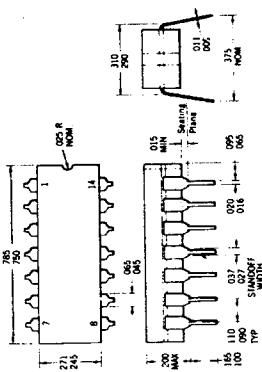


FIGURE 5


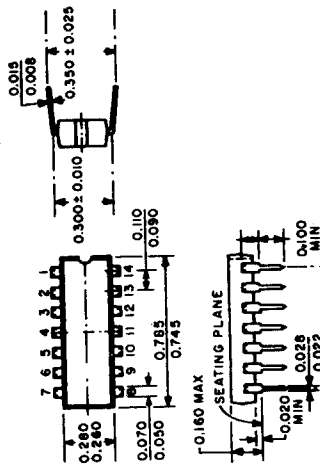


FIGURE 6

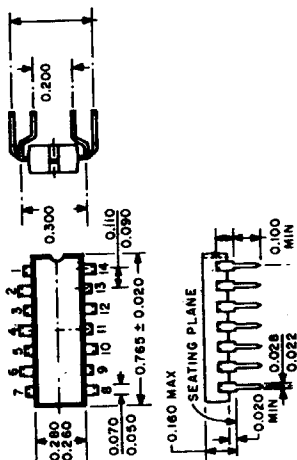

INDEX of BASING DIAGRAMS by TUBE TYPE

| Tube Type | Basing | Tube Type | Basing | Tube Type | Basing | Tube Type | Basing |
|-----------|--------|-----------|--------|-----------|--------|-----------|--------|
| 00A | 4D | 1G3-GT | 3C | 2C39A | 2C39A | 3B28 | 4P |
| 01-A | 4D | 1G3GTA | 3C | 2C39-B | 2C39-B | 3BA6 | 7BK |
| 0A2 | 5B0 | 1G4-GT | 5S | 2C39WA | 2C39WA | 3BC5 | 7BD |
| 0A3 | 4AJ | 1G5-G | 6X | 2C40 | 2C40 | 3BE6 | 7CH |
| 0A3-A | 4AJ | 1G6-GT | 7AB | 2C40-A | 2C40 | 3BF2 | 12GQ |
| 0A4-G | 4V | 1H2 | 9LX | 2C42 | 2C40 | 3BL2 | 12HK |
| 0A5 | 6CB | 1H4-GT | 5S | 2C43 | 2C43 | 3BL2A | 12HK |
| 0B2 | 5B0 | 1H5-GT | 5Z | 2C46 | 2C40 | 3BM2 | 12HK |
| 0B3 | 4AJ | 1H6-GT | 7AA | 2C50 | 8BD | 3BM2A | 12HK |
| 0B3-A | 4AJ | 1J3 | 3C | 2C51 | 8CJ | 3BN2 | 12FV |
| 0C2 | 5B0 | 1J3-A | 3C | 2C52 | 8BD | 3BN2A | 12FV |
| 0C3 | 4AJ | 1J5-G | 6X | 2CN3-A | 8MU | 3BN4 | 7EG |
| 0C3-A | 4AJ | 1J6-GT | 7AB | 2CN3B | 8MU | 3BN4-A | 7EG |
| 0D3 | 4AJ | 1K3 | 3C | 2CW4 | 12AQ | 3BN6 | 7DF |
| 0D3-A | 4AJ | 1L4 | 6AR | 2CY5 | 7BV | 3BS2 | 12HY |
| 0Y4-G | 4BU | 1L6 | 7DC | 2D21 | 7BN | 3BS2A | 12HY |
| 0Z4-G | 4R | 1LA4 | 5AD | 2DF4 | 9JL | 3BS2B | 12HY |
| 1A3 | 5AP | 1LA6 | 7AK | 2DS4 | 12AQ | 3BT2 | 12HY |
| 1A4-P | 4M | 1LB4 | 5AD | 2DV4 | 12EA | 3BT2A | 12HY |
| 1A4-i | 4K | 1LB6 | 8AX | 2DX4 | 7DK | 3BU8 | 9FG |
| 1A5-GT | 6X | 1LC5 | 7AO | 2DY4 | 7DK | 3BU8-A | 9FG |
| 1A6 | 6L | 1LC8 | 7AK | 2DY4-A | 7DK | 3BW2 | 12HY |
| 1A7-GT | 7Z | 1LD5 | 6AX | 2DZ4 | 7DK | 3BY6 | 7CH |
| 1AB5 | 5BF | 1LE3 | 4AA | 2E5 | 6R | 3BZ6 | 7CM |
| 1AC5 | 8CP | 1LF3 | 4AA | 2E24 | 7CL | 3C2 | 8FV |
| 1AD2 | 12GV | 1LG5 | 7AO | 2E26 | 7CK | 3C5-GT | 7AQ |
| 1AD2A | 12GV | 1LH4 | 5AG | 2E30 | 7CQ | 3C6 | 7BW |
| 1AD4 | 1AD4 | 1LN5 | 7AO | 2E31 | 2E31 | 3C23 | 3G |
| 1AD5 | 8CP | 1N2 | 3C | 2E32 | 2E31 | 3CA3 | 8MH |
| 1AE4 | 6AR | 1N2A | 3C | 2E35 | 2E31 | 3CA3A | 8EZ |
| 1AE5 | 1AE5 | 1N5-GT | 5Y | 2E36 | 2E31 | 3CB6 | 7CM |
| 1AF4 | 6AR | 1N6-GT | 7AM | 2E41 | 2E41 | 3CE5 | 7BD |
| 1AF5 | 6AU | 1P5-GT | 5Y | 2E42 | 2E41 | 3CF6 | 7CM |
| 1AG4 | 512-AX | 1Q5-GT | 6AF | 2EA5 | 7EW | 3CN3 | 8MU |
| 1AG5 | 1AG5 | 1Q6 | 8CO | 2EG4 | 12AQ | 3CN3-A | 8MU |
| 1AH4 | 1AD4 | 1R4 | 4AH | 2EN5 | 7FL | 3CN3B | 8MU |
| 1AJ2 | 12EL | 1R5 | 7AT | 2ER5 | 7FP | 3CS6 | 7CH |
| 1AJ5 | 1AG5 | 1S2 | 9DT | 2ES5 | 7FP | 3CU3 | 8MK |
| 1AK4 | 1AD4 | 1S2-A | 9DT | 2EV5 | 7EW | 3CU3A | 8MK |
| 1AK5 | 1AG5 | 1S4 | 7AV | 2FH5 | 7FP | 3CV3 | 8EZ |
| 1AM4 | 6AR | 1S5 | 6AU | 2FQ5 | 7FP | 3CV3A | 8EZ |
| 1AQ5 | 7AT | 1S6 | 8DA | 2FQ5-A | 7FP | 3CX3 | 8MT |
| 1AR5 | 6AU | 1SA6-GT | 6BD | 2FS5 | 7GA | 3CY3 | 8MX |
| 1AS5 | 6BW | 1SB6-GT | 6BE | 2FV6 | 7FQ | 3CY5 | 7EW |
| 1AU2 | 9U | 1T2 | 1AY2 | 2FY5 | 7FP | 3CZ3 | 8EZ |
| 1AU3 | 3C | 1T4 | 6AR | 2G21 | 2G21 | 3CZ3A | 8EZ |
| 1AX2 | 9Y | 1T5-GT | 6X | 2G22 | 2G21 | 3D6 | 6BA |
| 1AY2 | 1AY2 | 1T6 | 8DA | 2GK5 | 7FP | 3DA3 | 8MY |
| 1AY2A | 1AY2 | 1U4 | 6AR | 2GU5 | 7GA | 3DB3 | 8MX |
| 1B3-GT | 3C | 1U5 | 6BW | 2GW5 | 7GK | 3DC3 | 8MZ |
| 1B4-P | 4M | 1U6 | 7DC | 2HA5 | 7GM | 3DF3 | 8MT |
| 1B5 | 6M | 1-V | 4G | 2HK5 | 7GM | 3DF3A | 8MT |
| 1B7-GT | 7Z | 1V2 | 9U | 2HM5 | 7GM | 3DG4 | 5DE |
| 1B8-GT | 8AW | 1V5 | 8CP | 2HQ5- | 7GM | 3DH3 | 8NM |
| 1BC2 | 9RG | 1V6 | 1V6 | 2HR8 | 9BJ | 3DJ3 | 8MX |
| 1BC2A | 9RG | 1W4 | 5BZ | 2J2 | 9DT | 3DK6 | 7CM |
| 1BC2B | 9RG | 1W5 | 8CP | 2L2 | 2L2 | 3DR3 | 8NL |
| 1BH2 | 9RG | 1X2 | 9Y | 2T4 | 7DK | 3DS3 | 8NL |
| 1BH2A | 9RG | 1X2-A | 9Y | 2V2 | 8FV | 3DT6 | 7EN |
| 1BK2 | 9Y | 1X2-B | 9Y | 2V3-G | 4X | 3DT6-A | 7EN |
| 1BL2 | 1AY2 | 1X2C | 9Y | 2W3-GT | 4X | 3DX4 | 7DK |
| 1BV2 | 1BV2 | 1Y2 | 4P | 2X2 | 4AB | 3DY4 | 7DK |
| 1BX2 | 9Y | 1Z2 | 7CB | 2Y2 | 4P | 3DY4-A | 7DK |
| 1BY2 | 12HZ | 2A3 | 4D | 3A2 | 9DT | 3DZ4 | 7DK |
| 1BY2A | 12HZ | 2A4-G | 5S | 3A2A | 9RT | 3E5 | 6BX |
| 1C3 | 5CF | 2A5 | 6B | 3A3 | 8EZ | 3E6 | 7CJ |
| 1C5-GT | 6X | 2A6 | 6G | 3A3-A | 8EZ | 3EA5 | 7EW |
| 1C6 | 6L | 2A7 | 7C | 3A3B | 8EZ | 3EH7 | 9AQ |
| 1C7-G | 7Z | 2AF4 | 7DK | 3A3C | 8EZ | 3EJ7 | 9AQ |
| 1C8 | 8CN | 2AF4-A | 7DK | 3A4 | 7BC | 3ER5 | 7FP |
| 1D3 | 8DN | 2AF4-B | 7DK | 3A5 | 7BC | 3ES5 | 7FP |
| 1D5-Gp | 5Y | 2AH2 | 12DG | 3A8-GT | 8AS | 3EV5 | 7EW |
| 1D5-Gt | 5R | 2AS2 | 12EW | 3AF4-A | 7DK | 3FH5 | 7FP |
| 1D7-G | 7Z | 2AS2A | 12EW | 3AF4-B | 7DK | 3FQ5 | 7FP |
| 1D8-GT | 8AJ | 2AV2 | 9U | 3AL5 | 6BT | 3FQ5-A | 7FP |
| 1DG3 | 8ND | 2AZ2 | 9Y | 3AT2 | 12FV | 3FS5 | 7GA |
| 1DG3A | 8ND | 2B3 | 8HC | 3AT2A | 12FV | 3FW7 | 8LM |
| 1DN5 | 6BW | 2B7 | 7D | 3AT2B | 12FV | 3FX7 | 8LK |
| 1DY4 | 7DK | 2B22 | 2B22 | 3AU6 | 7BK | 3GK5 | 7FP |
| 1DY4-A | 7DK | 2BA2 | 9U | 3AV6 | 7BT | 3GS8 | 9LW |
| 1E4-G | 5S- | 2BJ2 | 9RT | 3AW2 | 12HA | 3GU5 | 7GA |
| 1E5-Gp | 5Y | 2BJ2A | 9RT | 3AW2A | 12HA | 3GW5 | 7GK |
| 1E7-GT | 8C | 2BN4 | 7EG | 3AW3 | 8EZ | 3HA5 | 7GM |
| 1E8 | 8CN | 2BN4-A | 7EG | 3B2 | 8GH | 3HK5 | 7GM |
| 1F4 | 5K | 2BU2 | 12HS | 3B4 | 7CY | 3HM5 | 7GM |
| 1F5-G | 6X | 2C21 | 7BH | 3B5-GT | 7AQ | 3HM6 | 9PM |
| 1F6 | 6W | 2C22 | 4AM | 3B7 | 7BE | 3HQ5 | 7GM |
| 1F7-GH | 7AF | 2C39 | 2C39 | | | 3HS8 | 9FG |

INDEX of BASING DIAGRAMS by TUBE TYPE

| Tube Type | Basing | Tube Type | Basing | Tube Type | Basing | Tube Type | Basing |
|-----------|--------|-----------|--------|-----------|--------|-----------|--------|
| 3HT6 | 9PM | 5AW4 | 5T | 6A6 | 7B | 6AV5-GT | 6CK |
| 3JC6 | 9PM | 5AX4-GT | 5T | 6A7 | 7C | 6AV6 | 7BT |
| 3JC6-A | 9PM | 5AZ3 | 12BR | 6A8-G | 8A | 6AV11 | 12BY |
| 3JD6 | 9PM | 5BZ3 | 5T | 6A8-GT | 8A | 6AW7-GT | 8CQ |
| 3KF8 | 9FG | 5B8 | 9EC | 6AB4 | 5CE | 6AW8 | 8DX |
| 3KT6 | 9PM | 5BC3 | 9CJ | 6AB5 | 6R | 6AW3-A | 9DX |
| 3LE4 | 6BA | 5BC3-A | 9CJ | 6AB7 | 8N | 6AX3 | 12BL |
| 3LF4 | 6BB | 5BE8 | 9EG | 6AB9 | 10N | 6AX4-GT | 4CG |
| 3Q4 | 7BA | 5BK7-A | 9AJ | 6AC5-GT | 6Q | 6AX4-GTA | 4CG |
| 3Q5-GT | 7AP | 5BQ7-A | 9AJ | 6AC6-GT | 7W | 6AX4-GTB | 4CG |
| 3S4 | 7BA | 5BR8 | 9FA | 6AC7 | 8N | 6AX5-GT | 6S |
| 3V4 | 6BX | 5BS8 | 9AJ | 6AC9 | 12GN | 6AX6-G | 7Q |
| 3W4 | 7BA | 5BT8 | 9FE | 6AC10 | 12FE | 6AX7 | 9A |
| 4A6-G | 8L | 5BW8 | 9HK | 6AD4 | 8DK | 6AX8 | 9AE |
| 4A06 | 7BK | 5BZ7 | 9AJ | 6AD6-G | 7AG | 6AY3 | 9HP |
| 4AV6 | 7BT | 5CG4 | 5L | 6AD7-G | 8AY | 6AY3-A | 9HP |
| 4BA6 | 7BK | 5CG8 | 9GF | 6AD10 | 12EZ | 6AY3-B | 9HP |
| 4BC5 | 7BD | 5CL8 | 9FX | 6AD10A | 12EZ | 6AY11 | 12DA |
| 4BC8 | 9AJ | 5CL8-A | 9FX | 6AE5-GT | 6Q | 6AZ5 | 8DF |
| 4BE6 | 7CH | 5CM6 | 9CK | 6AE6-G | 7AH | 6AZ6 | 8EH |
| 4BL8 | 9AE | 5CM8 | 9FZ | 6AE7-GT | 7AX | 6AZ8 | 9ED |
| 4BN4 | 7EG | 5CQ8 | 9GE | 6AF3 | 9CB | 6B4-G | 5S |
| 4BN6 | 7DF | 5CR8 | 9GJ | 6AF4 | 7DK | 6B5 | 6AS |
| 4BQ7-A | 9AJ | 5CU4 | 8KD | 6AF4-A | 7DK | 6B6-G | 7V |
| 4BS8 | 9AJ | 5CZ5 | 9HN | 6AF5-G | 6Q | 6B7 | 7D |
| 4BU8 | 9FG | 5DH8 | 9EG | 6AF6-G | 7AG | 6B8-G | 8E |
| 4BX8 | 9AJ | 5DJ4 | 8KS | 6AF10 | 12GX | 6B8-GT | 8E |
| 4BZ6 | 7CM | 5EA8 | 9AE | 6AF11 | 12DP | 6B10 | 12BF |
| 4BZ7 | 9AJ | 5EH8 | 9JG | 6AG5 | 7BD | 6BA3 | 9HP |
| 4BZ8 | 9AJ | 5EU8 | 9JF | 6AG7 | 8Y | 6BA4 | 6BA4 |
| 4CB6 | 7CM | 5EW6 | 7CM | 6AG9 | 12HE | 6BA5 | 8DY |
| 4CE5 | 7BD | 5FG7 | 9GF | 6AG10 | 12GT | 6BA6 | 7BK |
| 4CS6 | 7CH | 5F8 | 9FA | 6AG11 | 12DA | 6BA7 | 8CT |
| 4CX7 | 9FC | 5GH8 | 9AE | 6AH4-GT | 8EL | 6BA8 | 9DX |
| 4CY5 | 7EW | 5GH8-A | 9AE | 6AH6 | 7BK | 6BA8-A | 9DX |
| 4DE6 | 7CM | 5GJ7 | 9QA | 6AH7-GT | 8BE | 6BA11 | 12ER |
| 4DK6 | 7CM | 5GM6 | 7CM | 6AH9 | 12HJ | 6BC4 | 9DR |
| 4DT6 | 7EN | 5GS7 | 9GF | 6AJ4 | 9BX | 6BC5 | 7BD |
| 4DT6-A | 7EN | 5GX6 | 7EN | 6AJ5 | 7BD | 6BC7 | 9AX |
| 4EH7 | 9AQ | 5GX7 | 9QA | 6AJ7 | 8N | 6BC8 | 9AJ |
| 4EJ7 | 9AQ | 5HA7 | 12FQ | 6AK4 | 8DK | 6BD4 | 8FU |
| 4ES8 | 9DE | 5HB7 | 9QA | 6AK5 | 7BD | 6BD4-A | 8FU |
| 4EW6 | 7CM | 5HC7 | 12FR | 6AK6 | 7BK | 6BD5-GT | 6CK |
| 4FS7 | 9MP | 5HG8 | 9MP | 6AK7 | 8Y | 6BD6 | 7BK |
| 4GJ7 | 9QA | 5HZ6 | 7EN | 6AK9 | 12GZ | 6BD11 | 12DP |
| 4GK5 | 7FP | 5J6 | 7BF | 6AK10 | 12FE | 6BE3 | 12GA |
| 4GM6 | 7CM | 5JK6 | 7CM | 6AL3 | 9CB | 6BE3-A | 12GA |
| 4GS7 | 9GF | 5JL6 | 7CM | 6AL5 | 6BT | 6BE6 | 7CH |
| 4GS8 | 9LW | 5JW8 | 9DC | 6AL6-G | 6AM | 6BE8 | 9EG |
| 4GW5 | 7GK | 5KD8 | 9AE | 6AL7-GT | 8CH | 6BE8-A | 9EG |
| 4GX7 | 9QA | 5KE8 | 9DC | 6AL9 | 12HE | 6BF5 | 7BZ |
| 4GZ5 | 7CV | 5KZ8 | 9FZ | 6AL11 | 12BU | 6BF6 | 7BT |
| 4HA5 | 7GM | 5LJ8 | 9GF | 6AM4 | 9BX | 6BF7 | 8DG |
| 4HA7 | 12FQ | 5BM8 | 9FA | 6AM8 | 9CY | 6BF7-A | 8DG |
| 4HC7 | 12FR | 5MB8 | 9FA | 6AM8-A | 9CY | 6BF8 | 9NX |
| 4HG8 | 9MP | 5MQ8 | 9AE | 6AN4 | 7DK | 6BF11 | 12EZ |
| 4HK5 | 7GM | 5R4-G | 5T | 6AN5 | 7BD | 6BG6-G | 5BT |
| 4HM5 | 7GM | 5RA-4-GY | 5T | 6AN6 | 7BJ | 6BG6-GA | 5BT |
| 4HM6 | 9PM | 5R4-GYA | 5T | 6AN8 | 9DA | 6BG7 | 8DG |
| 4HQ5 | 7GM | 5R4-GYB | 5T | 6AN8-A | 9DA | 6BH3 | 9HP |
| 4HR8 | 9BJ | 5T4 | 5T | 6AQ5 | 7BZ | 6BH3-A | 9HP |
| 4HS8 | 9FG | 5T8 | 9E | 6AQ5-A | 7BZ | 6BH6 | 7CM |
| 4HT6 | 9PM | 5U4-G | 5T | 6AQ6 | 7BT | 6BH8 | 9DX |
| 4JC6 | 9PM | 5U4-GA | 5T | 6AQ7-GT | 8CK | 6BH11 | 12FP |
| 4JC6-A | 9PM | 5U4-GB | 5T | 6AQ8 | 9AJ | 6BJ3 | 12BL |
| 4JD6 | 9PM | 5U8 | 9AE | 6AR5 | 6CC | 6BJ6 | 7CM |
| 4JH6 | 7CM | 5U9 | 10K | 6AR6 | 6BQ | 6BJ6-A | 7CM |
| 4JK6 | 7CM | 5V3 | 5T | 6AR8 | 9DP | 6BJ7 | 9AX |
| 4JL6 | 7CM | 5V3-A | 5T | 6AR11 | 12DM | 6BJ8 | 9ER |
| 4JW8 | 9DC | 5V4-G | 5L | 6AS5 | 7CV | 6BK4 | 8CC |
| 4KE8 | 9DC | 5V4-GA | 5L | 6AS6 | 7CM | 6BK4-A | 8CC |
| 4KF8 | 9FG | 5V6-GT | 7AC | 6AS7-G | 8BD | 6BK4-B | 8CC |
| 4KN8 | 9AJ | 5W4-GT | 5T | 6AS7-GA | 8BD | 6BK4C | 8CC |
| 4KT6 | 9PM | 5X4-G | 5Q | 6AS7-GYB | 8BD | 6BK5 | 9BQ |
| 4LJ8 | 9GF | 5X4-GA | 5Q | 6AS8 | 9DS | 6BK6 | 7BT |
| 4LU6 | 7CM | 5X8 | 9AK | 6AS11 | 12DP | 6BK7 | 9AJ |
| 4MK8 | 9GF | 5X9 | 10K | 6AT6 | 7BT | 6BK7-A | 9AJ |
| 5AF4-A | 7DK | 5Y3-G | 5T | 6AT8 | 9DW | 6BK7-B | 9AJ |
| 5AM8 | 9CY | 5Y3-GA | 5T | 6AT8-A | 9DW | 6BK11 | 12BY |
| 5AN8 | 9DA | 5Y3-GT | 5T | 6AU4-GT | 4CG | 6BL4 | 8GB |
| 5AQ5 | 7BZ | 5Y4-G | 5Q | 6AU4-GTA | 4CG | 6BL7-GT | 8BD |
| 5AR4 | 5DA | 5Y4-GA | 5Q | 6AU5-GT | 6CK | 6BL7-GTA | 8BD |
| 5AS4-A | 5T | 5Y4-GT | 5Q | 6AU6 | 7BK | 6BL8 | 9AE |
| 5AS8 | 9DS | 5Z3 | 4C | 6AU6-A | 7BK | 6BM8 | 9EX |
| 5AT4 | 5L | 5Z4-GT | 5L | 6AU7 | 9A | 6BN4 | 7EG |
| 5AT8 | 9DW | 6A3 | 4D | 6AU8 | 9DX | 6BN4-A | 7EG |
| 5AU4 | 5T | 6A4/LA | 5B | 6AU8-A | 9DX | 6BN6 | 7DF |
| 5AV8 | 9DZ | 6A5-G | 6T | 6AV5-GA | 6CK | 6BN7 | 9BT |

INDEX of BASING DIAGRAMS by TUBE TYPE

| Tube Type | Basing | Tube Type | Basing | Tube Type | Basing | Tube Type | Basing |
|-----------|--------|-----------|--------|-----------|--------|-----------|--------|
| 6BN8 | 9ER | 6CS7 | 9EF | 6EL4 | 8MW | 6GV5 | 12DR |
| 6BN11 | 12GF | 6CS8 | 9FZ | 6ELAA | 8MW | 6GV7 | 9KN |
| 6BQ5 | 9CV | 6CT3 | 9RX | 6EM5 | 9HN | 6GV8 | 9LY |
| 6BQ6-G | 6AM | 6CU5 | 7CV | 6EM7 | 8BD | 6GW5 | 7GK |
| 6BQ6-GTA | 6AM | 6CU6 | 6AM | 6EN4 | 8NJ | 6GW6 | 6AM |
| 6BQ6-GTB | 6AM | 6CU8 | 9GM | 6EQ7 | 9LQ | 6GW8 | 9LZ |
| 6BQ7 | 9AJ | 6CW4 | 12AQ | 6ER5 | 7FP | 6GX6 | 7EN |
| 6BQ7-A | 9AJ | 6CW5 | 9CV | 6ES5 | 7FP | 6GX7 | 9QA |
| 6BR3 | 9CB | 6CX7 | 9PC | 6ES8 | 9DE | 6GY5 | 12DR |
| 6BR8 | 9FA | 6CX8 | 9DX | 6ET7 | 9LT | 6GY6 | 7EN |
| 6BR8-A | 9FA | 6CY5 | 7EW | 6EU7 | 9LS | 6GY8 | 9MB |
| 6BS3 | 9HP | 6CY7 | 9LG | 6EU8 | 9JF | 6GZ5 | 7CV |
| 6BS3-A | 9HP | 6CZ5 | 9HN | 6EV5 | 7EW | 6H4-GT | 5AF |
| 6BS8 | 9AJ | 6D4 | 5AY | 6EV7 | 9LP | 6H6-GT | 7Q |
| 6BT6 | 7BT | 6D6 | 6F | 6EW6 | 7CM | 6HA5 | 7GM |
| 6BT8 | 9FE | 6D7 | 7H | 6EW7 | 9HF | 6HA6 | 9NW |
| 6BU4 | 8GC | 6D8-G | 8A | 6EX6 | 5BT | 6HB5 | 12BJ |
| 6BU5 | 6BU5 | 6D10 | 12BY | 6EY6 | 7AC | 6HB6 | 9NW |
| 6BU6 | 7BT | 6DA4 | 4CG | 6EZ5 | 7AC | 6HB7 | 9QA |
| 6BU8 | 9FG | 6DA4-A | 4CG | 6EZ8 | 9KA | 6HC8 | 9EX |
| 6BU8-A | 9FG | 6DA5 | 9DB | 6F4 | 7BR | 6HD5 | 12ES |
| 6BV8 | 9FJ | 6DA7 | 9EF | 6F5-G | 5M | 6HD7 | 9QA |
| 6BV11 | 12HB | 6DB5 | 9GR | 6F5-GT | 5M | 6HE5 | 12EY |
| 6BW3 | 12FX | 6DB6 | 7CM | 6F6-G | 7S | 6HE7 | 12FS |
| 6BW4 | 9DJ | 6DC6 | 7CM | 6F6-GT | 7S | 6HF5 | 12FB |
| 6BW6 | 9AM | 6DC8 | 9HE | 6F7 | 7E | 6HF8 | 9DX |
| 6BW8 | 9HK | 6DE4 | 4CG | 6F8-G | 8G | 6HG5 | 7BZ |
| 6BW11 | 12HD | 6DE6 | 7CM | 6FA7 | 9MR | 6HG8 | 9MP |
| 6BX7-GT | 8BD | 6DE7 | 9HF | 6FD6 | 7BK | 6HJ5 | 12FL |
| 6BX8 | 9AJ | 6DGG-GT | 7S | 6FD7 | 9HF | 6HJ7 | 9QA |
| 6BY4 | 6BY4 | 6DJ8 | 9DE | 6FE5 | 8KB | 6HJ8 | 9CY |
| 6BY5-G | 6CN | 6DK3 | 9SG | 6FG5 | 7GA | 6HK5 | 7GM |
| 6BY5-GA | 6CN | 6DK6 | 7CM | 6FG6 | 9GA | 6HL5 | 9QW |
| 6BY6 | 7CH | 6DL3 | 9GD | 6FG7 | 9GF | 6HL8 | 9AE |
| 6BY8 | 9FN | 6DL4 | 9NY | 6FH5 | 7FP | 6HM5 | 7GM |
| 6BY11 | 12EZ | 6DM4 | 4CG | 6FH6 | 6AM | 6HM6 | 9PM |
| 6BZ3 | 12FX | 6DM4-A | 4CG | 6FH8 | 9KP | 6HQ5 | 7GM |
| 6BZ6 | 7CM | 6DN3 | 9HP | 6FJ7 | 12BM | 6HQ6 | 7CM |
| 6BZ7 | 9AJ | 6DN6 | 5BT | 6FM7 | 12EJ | 6HR5 | 7BZ |
| 6BZ8 | 9AJ | 6DN7 | 8BD | 6FM8 | 9KR | 6HR6 | 7BK |
| 6C4 | 6BG | 6DQ8 | 12HF | 6FQ5 | 7FP | 6HS5 | 12GY |
| 6C5-GT | 6Q | 6DQ8A | 12HF | 6FQ5-A | 7FP | 6HS6 | 7BK |
| 6C6 | 6F | 6DQ4 | 4CG | 6FQ7 | 9LP | 6HS8 | 9FG |
| 6C7 | 7G | 6DQ5 | 8JC | 6FR7 | 9HF | 6HT6 | 9PM |
| 6C8-G | 8G | 6DQ6 | 6AM | 6FS5 | 7GA | 6HU6 | 9GA |
| 6C9 | 10F | 6DQ6-A | 6AM | 6FV6 | 7FQ | 6HV5 | 12GY |
| 6C10 | 12BQ | 6DQ6-B | 6AM | 6FV8 | 9FA | 6HV5A | 12GY |
| 6CA4 | 9M | 6DR4 | 6BG | 6FV8-A | 9FA | 6HW8 | 9NQ |
| 6CA5 | 7CV | 6DR7 | 9HF | 6FW5 | 6CK | 6HZ5 | 12EY |
| 6CA7 | 8EP | 6DS4 | 12AQ | 6FW7 | 8LM | 6HZ6 | 7EN |
| 6CA11 | 12HN | 6DS5 | 7BZ | 6FW8 | 9AJ | 6HZ8 | 9DX |
| 6CB5 | 8GD | 6DT3 | 12HF | 6FX7 | 8LK | 6J4 | 7BQ |
| 6CB5-A | 8GD | 6DT4 | 4CG | 6FY5 | 7FP | 6J5-GT | 6Q |
| 6CB6 | 7CM | 6DT5 | 9HN | 6FY7 | 12EO | 6J6 | 7BF |
| 6CB6-A | 7CM | 6DT6 | 7EN | 6FY8 | 9EX | 6J6-A | 7BF |
| 6CD3 | 12FX | 6DT6-A | 7EN | 6G6-G | 7S | 6J7-G | 7R |
| 6CD6-G | 5BT | 6DT8 | 9DE | 6G6-GT | 7S | 6J7-GT | 7R |
| 6CD6-GA | 5BT | 6DW4 | 9HP | 6G11 | 12BU | 6J8-G | 8H |
| 6CE3 | 12GK | 6DW4-A | 9HP | 6GA7 | 12EB | 6J9 | 10G |
| 6CE5 | 7BD | 6DW4-B | 9HP | 6GB5 | 9NH | 6J10 | 12BT |
| 6CF6 | 7CM | 6DW5 | 9CK | 6GC5 | 9EU | 6J11 | 12BW |
| 6CG3 | 12HF | 6DX4 | 7DK | 6GC6 | 8JX | 6JA5 | 12EY |
| 6CG6 | 7BK | 6DX8 | 9HX | 6GD7 | 9GF | 6JA8 | 9DX |
| 6CG7 | 9AJ | 6DY4 | 7DK | 6GE5 | 12BJ | 6JB5 | 12EY |
| 6CG8 | 9GF | 6DY4-A | 7DK | 6GE8 | 9LC | 6JB6 | 9QL |
| 6CG8-A | 9GF | 6DY7 | 8JP | 6GF5 | 12BJ | 6JB6-A | 9QL |
| 6CH3 | 9HP | 6DZ4 | 7DK | 6GF7 | 9QD | 6JC5 | 12EY |
| 6CH7 | 9FC | 6DZ7 | 8JP | 6GF7-A | 9QD | 6JC6 | 9PM |
| 6CH8 | 9FT | 6DZ8 | 9JE | 6GH8 | 9AE | 6JC6-A | 9PM |
| 6CJ3 | 9SD | 6E5 | 6R | 6GH8-A | 9AE | 6JC8 | 9FA |
| 6CK3 | 9HP | 6E6 | 7B | 6GJ5 | 9QK | 6JD5 | 12GY |
| 6CK4 | 8JB | 6E7 | 7H | 6GJ5-A | 9QK | 6JD6 | 9PM |
| 6CL3 | 9HP | 6EA4 | 12FA | 6GJ7 | 9QA | 6JE6 | 9QL |
| 6CL5 | 8GD | 6EA5 | 7EW | 6GJ8 | 9AE | 6JE6-A | 9QL |
| 6CL6 | 9BV | 6EA7 | 8BD | 6CK5 | 7FP | 6JE6-B | 9QL |
| 6CL8 | 9FX | 6EA8 | 9AE | 6CK6 | 9GK | 6JE6-C | 9QL |
| 6CL8-A | 9FX | 6EB5 | 6BT | 6CK7 | 9AQ | 6JE8 | 9DX |
| 6CM3 | 9HP | 6EB8 | 9DX | 6GL7 | 8BD | 6JF6 | 9QL |
| 6CM6 | 9CK | 6EP4 | 12HC | 6GM5 | 9MQ | 6JG5 | 8SF |
| 6CM7 | 9ES | 6EP6 | 7S | 6GM6 | 7CM | 6JG6 | 9QU |
| 6CM8 | 9FZ | 6EH4 | 12FA | 6GM8 | 9DE | 6JG6-A | 9QU |
| 6CN7 | 9EN | 6EHA4 | 12FA | 6GN8 | 9DX | 6JH5 | 12EY |
| 6CQ4 | 4CG | 6EH5 | 7CV | 6GQ7 | 9QM | 6JB6 | 7CM |
| 6CQ8 | 9GE | 6EH7 | 9AQ | 6GS8 | 9LW | 6JB8 | 9DP |
| 6CR6 | 7EA | 6EH8 | 9JG | 6GT5 | 9NZ | 6JK5 | 12EY |
| 6CR8 | 9GJ | 6EJ4 | 12HC | 6GT5-A | 9NZ | 6JK6 | 7CM |
| 6CS5 | 9GR | 6EJ4A | 12HC | 6GU5 | 7QA | 6JK8 | 9AJ |
| 6CS6 | 7CH | 6EJ7 | 9AQ | 6GU7 | 9LP | 6JL6 | 7CM |

INDEX of BASING DIAGRAMS by TUBE TYPE

| Tube Type | Basing | Tube Type | Basing | Tube Type | Basing | Tube Type | Basing |
|-----------|--------|-----------|--------|-----------|--------|-----------|--------|
| 6JL8 | 9DX | 6LV6 | 12GW | 6V7-G | 7V | 8BN11 | 12GF |
| 6JM6 | 12FJ | 6LW6 | 8NC | 6V8 | 9AH | 8BQ5 | 9CV |
| 6JM6-A | 12FJ | 6LX6 | 12JA | 6W4-GT | 4CG | 8BQ11 | 12DM |
| 6JN6 | 12FK | 6LY8 | 9DC | 6W4-GTA | 4CG | 8BU11 | 12FP |
| 6JN6-A | 12FK | 6LY8 | 9DX | 6W5-G | 6S | 8CB11 | 12DM |
| 6JN8 | 9FA | 6LZ6 | 9QL | 6W6-GT | 7AC | 8CG7 | 9AJ |
| 6JQ6 | 9RA | 6M3 | 8GV | 6W7-G | 7R | 8CM7 | 9ES |
| 6JR6 | 9QU | 6M11 | 12CA | 6X4 | 5BS | 8CN7 | 9EN |
| 6JS6 | 12FY | 6MA6 | 8NP | 6X5-GT | 6S | 8CS7 | 9EF |
| 6JS6-A | 12FY | 6MB6 | 12FY | 6X8 | 9AK | 8CW5 | 9CV |
| 6JS6-B | 12FY | 6MB8 | 9FA | 6X8-A | 9AK | 8CW5-A | 9CV |
| 6JS6C | 12FY | 6MC6 | 9QL | 6X9 | 10K | 8CX8 | 9DX |
| 6JT6 | 9U | 6MD8 | 9RQ | 6Y3-G | 4AC | 8CY7 | 9LG |
| 6JT6-A | 9QU | 6ME6 | 9QL | 6Y6-G | 7AC | 8EB8 | 9DX |
| 6JT8 | 9DX | 6ME8 | 9RU | 6Y6-GA | 7AC | 8EM5 | 9HN |
| 6JU6 | 9QL | 6MF8 | 12DZ | 6Y6-GT | 7AC | 8ET7 | 9LT |
| 6JU8-A | 9PQ | 6MG8 | 9DC | 6Y7-G | 8B | 8FQ7 | 9LP |
| 6JV8 | 9DX | 6MJ8 | 12HG | 6Y9 | 10L | 8GJ7 | 9QA |
| 6JW6 | 9PU | 6MK8 | 9FG | 6Y10 | 12EZ | 8GN8 | 9DX |
| 6JW8 | 9DC | 6MK8A | 9FG | 6Z5 | 6K | 8GU7 | 9LP |
| 6JZ6 | 12GD | 6ML8 | 9RQ | 6Z7-G | 8B | 8GX7 | 9QA |
| 6K26 | 12DZ | 6MN8 | 12HU | 6Z10 | 12BT | 8HA6 | 9NP |
| 6K4 | 6K4 | 6MQ8 | 9AE | 6Z5-G | 6S | 8HG8 | 9MW |
| 6K5-G | 5U | 6MU8 | 9AE | 7A4 | 5AC | 8JES | 9DX |
| 6K5-GT | 5U | 6MV8 | 9DX | 7A5 | 6AA | 8JK8 | 9AJ |
| 6K6-GT | 7S | 6MY8 | 12DZ | 7A6 | 7AJ | 8JL8 | 9DX |
| 6K7-G | 7R | 6N4 | 7CA | 7A7 | 8U | 8JT8 | 9DX |
| 6K7-GT | 7R | 6N6-G | 7AU | 7A8 | 8U | 8JU8-A | 9PQ |
| 6K8-G | 8K | 6N7-G | 8B | 7AB7 | 8BO | 8JV8 | 9DX |
| 6K8-GT | 8K | 6M7-GT | 8B | 7AD7 | 8V | 8KA8 | 9PV |
| 6K11 | 12BY | 6P5-GT | 6Q | 7AF7 | 8AC | 8KR8 | 9DX |
| 6KA8 | 9PV | 6P7-G | 7U | 7AG7 | 8V | 8KS8 | 9DX |
| 6KD6 | 12GW | 6Q7-G | 7V | 7AH7 | 8V | 8LC8 | 9QY |
| 6KD8 | 9AE | 6Q7-GT | 7V | 7AJ7 | 8V | 8LES | 9QZ |
| 6KE6 | 12GM | 6Q11 | 12BY | 7AK7 | 8V | 8LS6 | 9GK |
| 6KES | 9DC | 6R3 | 9CB | 7AU7 | 9A | 8LT8 | 9RL |
| 6KFS | 9FG | 6R7-G | 7V | 7B4 | 5AC | 8MU8 | 9AE |
| 6KG6 | 9RJ | 6R7-GT | 7V | 7B5 | 6AE | 8SN7-GTB | 8BD |
| 6KL8 | 9LQ | 6R8 | 9E | 7B6 | 8W | 8U9 | 10K |
| 6KM6 | 9QL | 6S4 | 9AC | 7B7 | 8V | 8X9 | 10K |
| 6KM8 | 9QG | 6S4-A | 9AC | 7B8 | 8X | 9A8 | 9DC |
| 6KN6 | 12GU | 6S7-G | 7R | 7C4 | 4AH | 9AH9 | 12HJ |
| 6KN8 | 9AJ | 6S8-GT | 8CB | 7C5 | 6AA | 9AK10 | 12FE |
| 6KR8 | 9DX | 6SA7 | 8R | 7C6 | 8W | 9AU7 | 9A |
| 6KR8-A | 9DX | 6SA7-GT | 8AD | 7C7 | 8V | 9BJ11 | 12FU |
| 6KS6 | 7DF | 6SB7-Y | 8R | 7E5 | 8BN | 9BR7 | 9CF |
| 6KSS | 9DX | 6SC7-GT | 8S | 7E6 | 8W | 9CG8-A | 9GF |
| 6KT6 | 9PM | 6SD7-GT | 8N | 7E7 | 8AE | 9CL8 | 9FX |
| 6KT8 | 9QP | 6SE7-GT | 8N | 7EY6 | 7AC | 9DZ8 | 9JE |
| 6KU8 | 9LT | 6SF5-GT | 6AB | 7F7 | 8AC | 9EA8 | 9AE |
| 6KV6 | 9QU | 6SF7 | 7AZ | 7F8 | 8BW | 9EF6 | 7S |
| 6KV6A | 9QU | 6SG7-GT | 8BK | 7G7 | 8V | 9GH8-A | 9AE |
| 6KV8 | 9DX | 6SH7-GT | 8BK | 7G8 | 8BV | 9GV8 | 9LY |
| 6KY6 | 9GK | 6SJ7-GT | 8N | 7GS7 | 9GF | 9JW8 | 9DC |
| 6KY8 | 9QT | 6SK7-GT | 8N | 7GV7 | 9KN | 9KC6 | 9RF |
| 6KY8-A | 9QT | 6SL7-GT | 8BD | 7H7 | 8V | 9KX6 | 9GK |
| 6KZ8 | 9FZ | 6SN7-GT | 8BD | 7HG8 | 9MP | 9KZ8 | 9FZ |
| 6L4 | 7BR | 6SN7-GTB | 8BD | 7J7 | 8BL | 9LA6 | 9GK |
| 6L5-G | 6Q | 6SN7-GTB | 8BD | 7K7 | 8BF | 9ML8 | 9RQ |
| 6L6-G | 7AC | 6SQ7-GT | 8Q | 7KY6 | 9GK | 9MN8 | 9AE |
| 6L6-GA | 7AC | 6SR7-GT | 8Q | 7KZ6 | 9GK | 9U8-A | 9AE |
| 6L6-GB | 7AC | 6SS7 | 8N | 7L7 | 8V | 9X8 | 9AK |
| 6L6-GC | 7AC | 6ST7 | 8Q | 7N7 | 8AC | 10 | 4D |
| 6L7-G | 7T | 6SU7-GTY | 8BD | 7Q7 | 8AL | 10AL11 | 12BU |
| 6LB6 | 12GJ | 6SV7 | 7AZ | 7R7 | 8AE | 10BQ5 | 9CV |
| 6LB8 | 9DX | 6ST7 | 8Q | 7S7 | 8BL | 10C8 | 9DA |
| 6LC6 | 8ML | 6T4 | 7DK | 7T7 | 8V | 10CW5 | 9CV |
| 6LC8 | 9QY | 6T5 | 6R | 7V7 | 8V | 10DA7 | 9EF |
| 6LE8 | 9QZ | 6T7-G | 7V | 7W7 | 8BJ | 10DE7 | 9HF |
| 6LF6 | 12GW | 6T8 | 9E | 7X6 | 7AJ | 10DR7 | 9HF |
| 6LF8 | 9DX | 6T8-A | 9E | 7X7 | 8BZ | 10DX8 | 9HX |
| 6LG6 | 12HL | 6T9 | 12FM | 7Y4 | 5AB | 10EB8 | 9DX |
| 6LH6 | 8ML | 6T10 | 12EZ | 7Z4 | 5AB | 10EC7 | 8DB |
| 6LH6-A | 8ML | 6U4-GT | 4CG | 8A8 | 9DC | 10EM7 | 8BD |
| 6LJ6 | 8MQ | 6U5 | 6R | 8AC9 | 12GN | 10EW7 | 9HF |
| 6LJ6-A | 8MQ | 6UG-GT | 7AC | 8AC10 | 12FE | 10FD7 | 9HF |
| 6LJ8 | 9GF | 6U7-G | 7R | 8AC10A | 12FE | 10FR7 | 9HF |
| 6LM8 | 9AE | 6U8 | 9AE | 8AL9 | 12HE | 10GF7 | 9QD |
| 6LM8A | 9AE | 6U8-A | 9AE | 8AR11 | 12DM | 10GF7-A | 9QD |
| 6LN8 | 9AE | 6U9 | 10K | 8AU8 | 9DX | 10GK6 | 9GK |
| 6LQ6 | 9QL | 6U10 | 12FE | 8AU8-A | 9DX | 10GN8 | 9DX |
| 6LQ8 | 9DX | 6V3 | 9BD | 8AW8-A | 9DX | 10HA6 | 9NW |
| 6LR6 | 12FY | 6V3-A | 9BD | 8B10 | 12BF | 10HF8 | 9DX |
| 6LR8 | 9QT | 6V4 | 9M | 8BA8-A | 9DX | 10JA5 | 12EY |
| 6LT8 | 9RL | 6V5-GT | 6AO | 8BA11 | 12ER | 10JA8 | 9DX |
| 6LU6 | 7CM | 6V6 | 7AC | 8BB8 | 9DX | 10JT8 | 9DX |
| 6LU8 | 12DZ | 6V6-GT | 7AC | 8BM11 | 12FU | 10JY8 | 9DX |
| | | 6V6-GTA | 7AC | 8BN8 | 9ER | | |

INDEX of BASING DIAGRAMS by TUBE TYPE

| Tube Type | Basing | Tube Type | Basing | Tube Type | Basing | Tube Type | Basing |
|-----------|--------|-----------|--------|-----------|--------|-----------|--------|
| 10KR8 | 9DX | 12BE6-A | 7CH | 12EL6 | 7FB | 13FM7 | 12EJ |
| 10KU8 | 9LT | 12BR6 | 7BT | 12EM6 | 9HV | 13FR7 | 9HF |
| 10LB8 | 9DX | 12BF11 | 12EZ | 12EN6 | 7AC | 13GB5 | 9NH |
| 10LE8 | 9QZ | 12BH7 | 9A | 12EQ7 | 9LQ | 13GP7 | 9QD |
| 10LW8 | 9DX | 12BH7-A | 9A | 12EZ6 | 7BK | 13GF7-A | 9QD |
| 10LY8 | 9DX | 12BK5 | 9BQ | 12F5-GT | 5M | 13J10 | 12BT |
| 10LZ8 | 9DX | 12BK6 | 7BT | 12F8 | 9FH | 13JZ8 | 12DZ |
| 10T10 | 12EZ | 12BL6 | 7BK | 12FA6 | 7CH | 13JZ8A | 12DZ |
| 10Z10 | 12B1 | 12BN6 | 7DF | 12FK6 | 7BT | 13V10 | 12EZ |
| 11AR11 | 12DM | 12BN6-A | 7DF | 12FM6 | 7BT | 13Z10 | 12BT |
| 11BM8 | 9EX | 12BQ6-GTA | 6AM | 12FQ7 | 9LP | 14A4 | 5AC |
| 11BQ11 | 12DM | 12BQ6-GTB | 6AM | 12FQ8 | 9KT | 14A5 | 6AA |
| 11BT11 | 12GS | 12BR3 | 9CB | 12FR8 | 9KU | 14A7 | 8V |
| 11C5 | 7CV | 12BR7 | 9CF | 12FT6 | 7BT | 14AF7 | 8AC |
| 11CA11 | 12HN | 12BR7-A | 9CF | 12FV7 | 9A | 14B6 | 8W |
| 11CF11 | 12HW | 12BS3 | 9HP | 12FX5 | 7CV | 14B8 | 8X |
| 11CH11 | 12GS | 12BS3-A | 9HP | 12FX8 | 9KV | 14BL11 | 12GC |
| 11CY7 | 9LG | 12BT3 | 12BL | 12FX8-A | 9KV | 14BR11 | 12GL |
| 11DS5 | 7BZ | 12BT6 | 7BT | 12FY8 | 9EX | 14C5 | 6AA |
| 11FY7 | 12EO | 12BU6 | 7BT | 12G4 | 6BG | 14C7 | 8V |
| 11HM7 | 9BF | 12BV7 | 9BF | 12G7 | 9CZ | 14E6 | 8W |
| 11JES | 9DX | 12BV11 | 12HB | 12G11 | 12BU | 14E7 | 8AE |
| 11KV8 | 9DX | 12BW4 | 9DJ | 12GA6 | 7CH | 14F7 | 8AC |
| 11LQ8 | 9DX | 12BY3 | 9CB | 12GC6 | 8JX | 14F8 | 8BW |
| 11LT8 | 9RL | 12BY7 | 9BF | 12GE5 | 12BJ | 14GT8 | 9KR |
| 11LY6 | 9GK | 12BY7-A | 9BF | 12GJ5 | 9QK | 14GT8-A | 9KR |
| 11MS8 | 9LY | 12BZ6 | 7CM | 12GN7 | 9BF | 14H7 | 8V |
| 11Y9 | 10L | 12BZ7 | 9A | 12GN7-A | 9BF | 14J7 | 8BL |
| 12A | 4D | 12C5 | 7CV | 12GT5 | 9NZ | 14JG8 | 9KR |
| 12A4 | 9AG | 12C8 | 8E | 12GT5-A | 9NZ | 14N7 | 8AC |
| 12A5 | 7F | 12CA5 | 7CV | 12GW6 | 6AM | 14Q7 | 8AL |
| 12A6-GT | 7AC | 12CK3 | 9HP | 12H4 | 7DW | 14R7 | 8AE |
| 12A7 | 7K | 12CL3 | 9HP | 12H6 | 7QD | 14S7 | 8BL |
| 12A8-G | 8A | 12CM6 | 9CK | 12HE7 | 12FS | 14W7 | 8BJ |
| 12A8-GT | 8A | 12CN5 | 7CV | 12HG7 | 9BF | 14X7 | 8BZ |
| 12AB5 | 9EU | 12CR6 | 7EA | 12HL5 | 9QW | 14Y4 | 5AB |
| 12AC6 | 7BK | 12CS5 | 9GR | 12J5-GT | 6Q | 14 | 5F |
| 12AC10 | 12FE | 12CS6 | 7CH | 12J7-GT | 7R | 15A8 | 8GS |
| 12AD6 | 7CH | 12CT3 | 9RX | 12J8 | 9GC | 15AB9 | 10N |
| 12AD7 | 9A | 12CT8 | 9DA | 12JB6 | 9QL | 15AF11 | 12DP |
| 12AE6 | 7BT | 12CU5 | 7CV | 12JB6-A | 9QL | 15BD11 | 12DP |
| 12AE6-A | 7BT | 12CU6 | 6AM | 12JF5 | 12JH | 15BD11-A | 12DP |
| 12AE7 | 9A | 12CX6 | 7BK | 12JN6 | 12FK | 15CW5 | 9CV |
| 12AE10 | 12EZ | 12CY6 | 7BK | 12JN6-A | 12FK | 15DQ8 | 9HX |
| 12AF3 | 9CB | 12D4 | 4CG | 12JN8 | 9FA | 15EA7 | 8BD |
| 12AF6 | 7BK | 12D4-A | 4CG | 12JQ6 | 9RA | 15EW6 | 7CM |
| 12AG6 | 7CH | 12DB5 | 9GR | 12JS6 | 12FY | 15EW7 | 9HF |
| 12AH7-GT | 8BE | 12DE8 | 9HG | 12JT6 | 9QU | 15FM7 | 12EJ |
| 12AJ6 | 7BT | 12DF5 | 9BS | 12JT6-A | 9QU | 15FY7 | 12EO |
| 12AL5 | 6BT | 12DP7 | 9A | 12K5 | 7FD | 15HA6 | 9NW |
| 12AL8 | 9GS | 12DJ8 | 9DE | 12K7-GT | 7R | 15HB6 | 9NW |
| 12AL11 | 12BU | 12DK5 | 9GT | 12KL8-GT | 8K | 15KY8 | 9QT |
| 12AQ5 | 7BZ | 12DK6 | 7CM | 12KL8 | 9LQ | 15KY8-A | 9QT |
| 12AS5 | 7CV | 12DK7 | 9HZ | 12L6-GT | 7AC | 15LE8 | 9QZ |
| 12AT6 | 7BT | 12DL8 | 9HR | 12L8-GT | 8BU | 15MFB | 12DZ |
| 12AT6-A | 7BT | 12DM4 | 4CG | 12MD8 | 9RQ | 15MX8 | 9QT |
| 12AT7 | 9A | 12DM4-A | 4CG | 12Q7-GT | 7V | 16A8 | 9EX |
| 12AU6 | 7BK | 12DM5 | 7CV | 12R5 | 7CV | 16AK9 | 12GZ |
| 12AU6-A | 7BK | 12DM7 | 9A | 12S8-GT | 8CB | 16AQ3 | 9CB |
| 12AU7 | 9A | 12DQ4 | 4CG | 12SA7 | 8R | 16BQ11 | 12DM |
| 12AU7-A | 9A | 12DQ6 | 6AM | 12SA7-GT | 8AD | 16BX11 | 12CA |
| 12AU8 | 9DX | 12DQ6-A | 6AM | 12SC7 | 8S | 16GK6 | 9GK |
| 12AV5-GA | 6CK | 12DQ6-B | 6AM | 12SF5-GT | 6AB | 16GY5 | 12DR |
| 12AV6 | 7BT | 12DQ7 | 9BF | 12SF7-GT | 7AZ | 16KA6 | 12GH |
| 12AV6-A | 7BT | 12DS7 | 9JU | 12SG7 | 8BK | 16LU8 | 12DZ |
| 12AV7 | 9A | 12DS7-A | 9JU | 12SH7 | 8BK | 16LU8A | 12DZ |
| 12AW6 | 7CM | 12DT5 | 9HN | 12SJ7-GT | 8N | 16MY8 | 12DZ |
| 12AX3 | 12BL | 12DT6 | 7EN | 12SK7-GT | 8N | 16Y9 | 10L |
| 12AX4-GT | 4CG | 12DT7 | 9A | 12SL7-GT | 8BD | 17A8 | 9DC |
| 12AX4-GTA | 4CG | 12DT8 | 9DE | 12SN7-GT | 8BD | 17AB9 | 10N |
| 12AX4-GTB | 4CG | 12DU7 | 9JX | 12SN7-GTA | 8BD | 17AB10 | 12BT |
| 12AX7 | 9A | 12DV7 | 9JY | 12SQ7-GT | 8Q | 17AV5-GA | 6CK |
| 12AX7-A | 9A | 12DV8 | 9HR | 12SR7-GT | 8Q | 17AX3 | 12BL |
| 12AY3 | 9HP | 12DW4-A | 9HP | 12SW7 | 8Q | 17AX4-GT | 4CG |
| 12AY3-A | 9HP | 12DW5 | 9CK | 12SX7-GT | 8BD | 17AX4-GTA | 4CG |
| 12AY7 | 9A | 12DW7 | 9A | 12SY7 | 8R | 17AY3 | 9HP |
| 12AZ7 | 9A | 12DW8 | 9JC | 12SY7-GT | 8AD | 17AY3-A | 9HP |
| 12AZ7-A | 9A | 12DY8 | 9JD | 12T10 | 12EZ | 17BE3 | 12GA |
| 12B4 | 9AG | 12DZ6 | 7BK | 12U7 | 9A | 17BE3-A | 12GA |
| 12B4-A | 9AG | 12DZ8 | 9JE | 12V6-GT | 7AC | 17BF11 | 12EZ |
| 12B8-GT | 8T | 12E5-GT | 6Q | 12W6-GT | 7AC | 17BF11-A | 12EZ |
| 12BA6 | 7BK | 12EA6 | 7BK | 12X4 | 5BS | 17BH3 | 9HP |
| 12BA6-A | 7BK | 12EC8 | 9FA | 12Z3 | 4G | 17BH3-A | 9HP |
| 12BA7 | 8CT | 12ED5 | 7CV | 13CW4 | 12AQ | 17BQ6-GTB | 6AM |
| 12BD6 | 7BK | 12EF6 | 7S | 13DE7 | 9HF | 17BR3 | 9CB |
| 12BE3 | 12GA | 12EG6 | 7CH | 13DR7 | 9HF | 17BS3 | 9HP |
| 12BE3-A | 12GA | 12EH5 | 7CV | 13EM7 | 8BD | 17BS3-A | 9HP |
| 12BE6 | 7CH | 12EK6 | 7BK | 13FD7 | 9HF | 17BW3 | 12FX |

INDEX of BASING DIAGRAMS by TUBE TYPE

| Tube Type | Basing | Tube Type | Basing | Tube Type | Basing | Tube Type | Basing |
|-----------|--------|-----------|--------|-----------|---------|-----------|--------|
| 17BZ3 | 12FX | 19HR6 | 7BK | 25EH5 | 7CV | 35Z3 | 4Z |
| 17C5 | 7CV | 19HS6 | 7BK | 25F5 | 7CV | 35Z4-GT | 5AA |
| 17C9 | 10F | 19HV8 | 9FA | 25F5-A | 7CV | 35Z5-GT | 6AD |
| 17C9-A | 10F | 19I6 | 7BF | 25FY8 | 9EX | 35Z6-G | 7Q |
| 17CA5 | 7CV | 19JN8 | 9FA | 25HX5 | 9SB | 36 | 5E |
| 17CK3 | 9HP | 19KG8 | 9LY | 25JQ6 | 9RA | 36AM3 | 5BQ |
| 17CL3 | 9HP | 19Q9 | 10H | 25JZ8 | 12DZ | 36AM3-A | 5BQ |
| 17CT3 | 9RX | 19T8 | 9E | 25L6 | 7AC | 36AM3-B | 5BQ |
| 17CU5 | 7CV | 19T8-A | 9E | 25M-GT | 7AC | 36KD6 | 12GW |
| 17D4 | 4CG | 19V8 | 9AH | 25M6-G | 7W | 36MC6 | 9QL |
| 17D4-A | 4CG | 19X8 | 9AK | 25W4-GT | 4CG | 37 | 5A |
| 17DE4 | 4CG | 20 | 4D | 25W6-GT | 7AC | 38 | 5F |
| 17DM4 | 4CG | 20EQ7 | 9LQ | 25X6-GT | 7Q | 38HE7 | 12FS |
| 17DM4-A | 4CG | 20EW7 | 9HF | 25Y5 | 6E | 38HK7 | 12FS |
| 17DQ4 | 4CG | 20EZ7 | 9PG | 25Z4 | 5AA | 39/44 | 5F |
| 17DQ6 | 6AM | 21EX6 | 5BT | 25Z5 | 6E | 40 | 4D |
| 17DQ6-A | 6AM | 21GY5 | 12DR | 25Z6-GT | 7Q | 40FR5 | 7CV |
| 17DQ6-B | 6AM | 21HB5 | 12BJ | 26 | 4D | 40KD6 | 9RW |
| 17DW4-A | 9HP | 21HB5-A | 12BJ | 26A6 | 7BK | 40KG6 | 9RJ |
| 17EW8 | 9AJ | 21HD5 | 12ES | 26A7-GT | 8BU | 41 | 6B |
| 17GE5 | 12RJ | 21HJ5 | 12FL | 26C6 | 7BT | 42 | 6E |
| 17GJ5 | 9QK | 21J5A | 12FY | 26CG6 | 7BK | 42KN6 | 12GU |
| 17GJ5-A | 9QK | 21JV6 | 12FK | 26D6 | 7CH | 43 | 6B |
| 17GT5 | 9NZ | 21JZ6 | 12GD | 26E6-G | 7S | 45 | 4D |
| 17GT5-A | 9NZ | 21KA6 | 12GH | 26HU5 | 8NB | 45B5 | 9CV |
| 17GV5 | 12DR | 21KQ6 | 9RJ | 26LW6 | 8NC | 45Z3 | 5AM |
| 17GW6 | 6AM | 21LG6 | 12HL | 26Z5 | 9BS | 45Z5-GT | 6AD |
| 17H3 | 9FK | 21LGA | 12HL | 27 | 5A | 46 | 5C |
| 17HC8 | 9EX | 21LR8 | 9QT | FG-27-A | FG-27-A | 47 | 5B |
| 17JB6 | 9QL | 21LU8 | 12DZ | 27GB5 | 9NH | 48 | 6A |
| 17JB6-A | 9QL | 21MY8 | 12DZ | 27KG6 | 9RJ | 49 | 5C |
| 17JF6 | 9QL | 22 | 4K | 28D7 | 8BS | 50 | 4D |
| 17JG6 | 9QU | 22BH3 | 9HP | 28GB5 | 9NH | 50A5 | 6AA |
| 17JG6-A | 9QU | 22BH3-A | 9HP | 28HA6 | 9NW | 50AX6-G | 7Q |
| 17JK8 | 9AJ | 22BWX | 12FX | 28HD5 | 12ES | 50B5 | 7BZ |
| 17JM6 | 12FJ | 22DE4 | 4CG | 28Z5 | 6BJ | 50BK5 | 9BQ |
| 17JM6-A | 12FJ | 22JF6 | 9QL | 29LE6 | 9RJ | 50BM8 | 9EX |
| 17JN6 | 12FK | 22JG6 | 9QU | 29GK6 | 9GK | 50C5 | 7CV |
| 17JN6-A | 12FK | 22JG6-A | 9QU | 29KQ6 | 9RJ | 50C5-A | 7CV |
| 17JQ6 | 9RA | 22JR6 | 9QU | 30 | 4D | 50C6-G | 7AC |
| 17JR6 | 9QU | 22JU6 | 9QU | 30AG11 | 12DA | 50C6-GA | 7AC |
| 17JT6 | 9QU | 22KM6 | 9QL | 30CW5 | 9CV | 50CA5 | 7CV |
| 17JT6-A | 9QU | 22KV6A | 9QU | 30HJ5 | 12FL | 50DC4 | 5BQ |
| 17JZ8 | 12DZ | 23J56-A | 12FY | 30JZ6 | 12GD | 50E5 | 8GT |
| 17JZ8A | 12DZ | 23MB6 | 12FY | 30KD6 | 12GW | 50EH5 | 7CV |
| 17KV6 | 9QU | 23Z9 | 12GZ | 30MB6 | 12FY | 50EH5-A | 7CV |
| 17KV6A | 9QU | 24A | 5E | 31 | 4D | 50FA5 | 7CV |
| 17L6-GT | 7AC | 24BF11 | 12EZ | 31AL10 | 12HR | 50FE5 | 8KB |
| 17LD8 | 9QT | 24J56-A | 9QL | 31J56-A | 12FY | 50FK5 | 7CV |
| 17R5 | 7CV | 24JZ8 | 12DZ | 31J56C | 12FY | 50FY8 | 9EX |
| 17W6-GT | 7AC | 24LQ6 | 9QL | 31LQ6 | 9QL | 50GY7 | 12FN |
| 17X10 | 12BT | 24LZ6 | 9QL | 31LR8 | 9QT | 50GY7A | 12FN |
| 18A5 | 6CK | 25A6-GT | 7S | 31LZ6 | 9QL | 50HC6 | 7FZ |
| 18AJ10 | 12EZ | 25A7-GT | 8F | 32 | 4K | 50HK6 | 7FZ |
| 18DZ8 | 9JE | 25AC5-GT | 6Q | 32ET5 | 7CV | 50HN5 | 9QW |
| 18FW6 | 7CC | 25AV5-GA | 6CK | 32ET5-A | 7CV | 50JY6 | 8MG |
| 18FW6-A | 7CC | 25AV5-GT | 6CK | 32HQ7 | 12HT | 50L6-GT | 7AC |
| 18FX6 | 7CH | 25AX4-GT | 4CG | 32L7-GT | 8Z | 50X6 | 7AJ |
| 18FX6-A | 7CH | 25B5 | 5B5 | 33 | 5K | 50Y6-GT | 7Q |
| 18FY6 | 7BT | 25B6-G | 7S | 33GT7 | 12FC | 50Y7-GT | 7AN |
| 18FY6-A | 7BT | 25B8-GT | 8T | 33GY7 | 12FN | 50Z6-G | 8Q |
| 18GB5 | 9NH | 25BK5 | 9BQ | 33GY7-A | 12FN | 50Z7-G | 8AN |
| 18GD6 | 7BK | 25BQ6-GA | 6AM | 33HE7 | 12FS | 53 | 7B |
| 18GD6-A | 7BK | 25BQ6-GT | 6AM | 33JR6 | 9QU | 53HK7 | 12FS |
| 18GE6 | 7BT | 25BQ6-GTB | 6AM | 33JV6 | 12FK | 55 | 6G |
| 18GE6-A | 7BT | 25BR3 | 9CB | 34 | 4M | 56 | 5A |
| 18GV3 | 9LY | 25C5 | 7CV | 34CD3 | 12FX | 56R9 | 12EN |
| 18HB8 | 9ME | 25C6-G | 7AC | 34CE3 | 12GK | 57 | 6F |
| 19 | 6C | 25C6-GA | 7AC | 34CM3 | 9HP | 58 | 6F |
| 19AU4 | 4CG | 25CA5 | 7CV | 34GD5 | 7CV | 58HE7 | 12FS |
| 19AU4-GTA | 4CG | 25CD6-G | 5BT | 34GD5-A | 7CV | 59 | 7A |
| 19BG6-G | 5BT | 25CD6-GA | 5BT | 34R3 | 9CB | 60FX5 | 7CV |
| 19BG6-GA | 5BT | 25CD6-GB | 5BT | 35/51 | 5E | 60HL5 | 9QW |
| 19C8 | 9E | 25CG3 | 12HF | 35A5 | 6AA | 70A7-GT | 8AB |
| 19CG3 | 12HF | 25CK3 | 9HP | 35B5 | 7BZ | 70L7-GT | 8AA |
| 19CL8-A | 9FX | 25CM3 | 9HP | 35C5 | 7CV | 71-A | 4D |
| 19CL8-B | 9FX | 25CT3 | 9RX | 35C5-A | 7CV | 75 | 6G |
| 19DE3 | 12HX | 25CU6 | 6AM | 35CD6-GA | 5BT | 76 | 5A |
| 19DE7 | 9HF | 25D4 | 4CG | 35DZ8 | 9JE | 77 | 6F |
| 19DK3 | 9SG | 25D8-GT | 8AF | 35EH5 | 7CV | 78 | 6F |
| 19DQ3 | 12HF | 25DK3 | 9SG | 35EH5-A | 7CV | 79 | 6H |
| 19DQ3A | 12HF | 25DK4 | 5BQ | 35GL6 | 7FZ | 80 | 4C |
| 19EA8 | 9AE | 25DN6 | 5BT | 35HB8 | 9ME | 81 | 4B |
| 19EA8-A | 9AE | 25DQ6 | 6AM | 35L6-GT | 7AC | FG-81-A | 3G |
| 19EW7 | 9HF | 25DL6-A | 6AM | 35LR6 | 12FY | 82 | 4C |
| 19EZ8 | 9KA | 25DT5 | 9HN | 35W4 | 5BQ | 83 | 4C |
| 19FX5 | 7CV | 25E5 | 8GT | 35W4-A | 5BQ | 83-V | 4AD |
| 19GQ7 | 9QM | 25EC6 | 5BT | 35Y4 | 5AL | 84/6Z4 | 5D |

INDEX of BASING DIAGRAMS by TUBE TYPE

| Tube Type | Basing | Tube Type | Basing | Tube Type | Basing | Tube Type | Basing |
|------------|---------|------------|---------|-----------|---------|-----------|--------|
| 85 | 6G | 5636 | 8DC | 5902 | 8DL | 6197 | 9BV |
| 89 | 6F | 5637 | 5637 | 5903 | 8DJ | 6201 | 9A |
| FG-97 | FG-97 | 5638 | 5638 | 5904 | 8DK | 6202 | 3BS |
| FG-98-A | FG-97 | 5639 | 8DL | 5905 | 8DL | 6203 | 9CD |
| V99 | 4E | 5640 | 5640 | 5906 | 8DL | 6205 | 8DC |
| X99 | 4D | 5641 | 6CJ | 5907 | 8DL | 6206 | 8DC |
| FG-105 | FG-105 | 5642 | 5642 | 5908 | 8DC | 6211 | 9A |
| 117L7-GT | 8AO | 5645 | 5645 | 5910 | 6AR | 6211-A | 9A |
| 117M7-GT | 8AO | 5646 | 5645 | 5915 | 7CH | 6215 | 3C |
| 117N7-GT | 8AV | 5647 | 5647 | 5915-A | 7CH | 6216 | 9CE |
| 117P7-GT | 8AV | 5651 | 5B0 | 5915 | 8DC | 6221 | 8HF |
| 117Z3 | 4CB | 5651-A | 5B0 | 5930 | 4D | 6222 | 8HF |
| 117Z4-GT | 5AA | 5654 | 7BD | 5931 | 5T | 6223 | 8DL |
| 117Z6-GT | 7Q | 5663 | 6CE | 5932 | 7AC | 6224 | 8DL |
| FG-154 | FG-154 | 5665 | 5665 | 5963 | 9A | 6225 | 8DL |
| FG-172 | FG172 | 5670 | 8CJ | 5964 | 7BF | GL6228 | GL6228 |
| 182-B | 4D | 5672 | 2E31 | 5965 | 9A | 6245 | 5702 |
| 183 | 4D | 5675 | 5675 | 5965-A | 9A | 6247 | 8FO |
| 393-A | 5AV | 5676 | 5676 | 5967 | 8DQ | GL-6251 | GL6251 |
| 407-A | 407-A | 5677 | 5676 | 5968 | 8DQ | 6265 | 7CM |
| 408-A | 7BD | 5678 | 1AD4 | 5969 | 8DR | 6267 | 9CQ |
| 414 | 414 | 5679 | 7CX | 5970 | 8DS | 6281 | 2E31 |
| 485 | 5A | 5686 | 9G | 5971 | 5971 | GL-6283 | GL6283 |
| 502-A | 6BS | 5687 | 9H | 5972 | 1AD4 | 6286 | 5676 |
| 512-AX | 512-AX | 5890 | 5690 | 5975 | 5975 | 6287 | 9CT |
| 575-A | 575-A | 5691 | 8BD | 5977 | 8DK | 6299 | 6299 |
| 627 | 4BZ | 5692 | 8BD | 5987 | 8DM | 6320 | 8DG |
| 672-A | 672-A | 5693 | 8N | 5992 | 7AC | 6321 | 8DG |
| 673 | 2P | 5694 | 8CS | 5993 | 5993 | 6325 | 6325 |
| 678 | 678 | 5696 | 7BN | 5995 | 5995 | 6327 | 6327 |
| 807 | 5AW | 5696-A | 7BN | 5998 | 8BD | 6336 | 8BD |
| 816 | 4P | 5702 | 5702 | 5998-A | 8BD | 6336-A | 8BD |
| 866-A | 4P | 5703 | 5703 | 6000 | 6CK | 6350 | 9CZ |
| 872-A | 4AT | 5704 | 5704 | 6004 | 2AJ | 6352 | 8EY |
| 884 | 6Q | 5718 | 8DK | 6005 | 7BZ | 6355 | 6355 |
| 950 | 5K | 5719 | 8DK | 6011/710 | FG-27-A | 6360 | 9PW |
| 954 | 5BB | 5720 | 5559 | 6012 | 6CO | 6384 | 6BQ |
| 955 | 5BC | 5725 | 7CM | 6014/C1K | 4AX | 6385 | 8CJ |
| 956 | 5BB | 5726 | 6BT | 6021 | 8DG | 6286 | 8CJ |
| 957 | 5BD | 5727 | 7BN | 6028 | 7BD | 6394 | 8BD |
| 958-A | 5BD | 5728 | 5559 | 6029 | 5676 | 6394-A | 8BD |
| 959 | 5BE | 5731 | 5BC | 6045 | 7BF | 6397 | 6CL |
| 1612 | 7T | 5744 | 5744 | 6046 | 7AC | 6414 | 9A |
| 1614 | 7AC | 5749 | 7BK | 6049 | 8DL | 6418 | 512-AX |
| 1620 | 7R | 5750 | 7CH | 6050 | 5676 | 6419 | 512-AX |
| 1621 | 7S | 5751 | 9A | 6051 | 6051 | 6442 | 6442 |
| 1622 | 7AC | 5763 | 9K | 6072 | 9A | 6463 | 9CZ |
| 1625 | 5AZ | 5767 | 5767 | 6072-A | 9A | 6485 | 7BK |
| 1629 | 7AL | 5784 | 5702 | 6080 | 8BD | 6486 | 9DV |
| 1631 | 7AC | 5785 | 5785 | 6082 | 8BD | 6486-A | 9DV |
| 1632 | 7AC | 5797 | 8CY | 6082-A | 8BD | GL6512 | GL6512 |
| 1633 | 8BD | 5798 | 8CZ | 6087 | 5L | GL6513 | GL6513 |
| 1634 | 8S | 5814 | 9A | 6088 | 512-AX | GL6515 | GL6515 |
| 1635 | 8B | 5814-A | 9A | 6092 | 2E31 | 6519 | 512-AX |
| 1644 | 8BU | GL5822A | GL5822A | 6094 | 9DH | 6520 | 8BD |
| 1654 | 2Z | GL5822A-PC | GL5822A | 6095 | 7BZ | 6525 | 7BN |
| 2050 | 6BS | 5823 | 4CK | 6096 | 7DB | 6526 | 512-AX |
| 2050-A | 6BS | 5824 | 7AC | 6097 | 6BT | 6528 | 8BD |
| 5544 | 4BZ | 5825 | 4P | 6098 | 6BQ | 6533 | 8FY |
| GL5550 | GL5550 | 5829 | 5829 | 6100 | 6BG | 6540 | 5702 |
| GL5551A/ | | 5830 | 5830 | 6101 | 7BF | 6550 | 7AC |
| GL5551A-PC | GL5551A | 5838 | 6S | 6106 | 5L | 6582 | 9EJ |
| GL5551A | GL5551A | 5839 | 6S | 6110 | 8DJ | 6582-A | 9EJ |
| GL5551A-PC | GL5551A | 5840 | 8DE | 6111 | 8DG | 6611 | 512-AX |
| GL5552A/ | | 5842 | 9V | 6112 | 8DG | 6612 | 512-AX |
| GL5552A-PC | GL5552A | 5844 | 7BF | 6121 | 8BD | 6660 | 7BK |
| GL5553B/ | | 5847 | 9X | 6123 | 5676 | 6661 | 7CM |
| GL5553B-PC | GL5553B | 5847-A | 9X | 6134 | 8N | 6662 | 7CM |
| GL5553B | GL5553B | 5851 | 6CL | 6135 | 6BG | 6663 | 6BT |
| GL5553B-PC | GL5553B | 5852 | 6S | 6136 | 7BK | 6664 | 5CE |
| GL5554 | GL5554 | 5854 | 2E31 | 6137 | 8N | 6669 | 7BZ |
| GL5555 | GL5555 | 5855 | 5855 | 6145 | 8V | 6676 | 7CM |
| 5557 | 3G | 5873 | 5873 | 6146 | 7CK | 6677 | 9BV |
| 5558 | 5558 | 5875 | 1AD4 | 6146-A | 7CK | 6678 | 9AE |
| 5559 | 4BL | 5876 | 5675 | 6146-B | 7CK | 6679 | 9A |
| 5560 | 4CD | 5876-A | 5675 | 6147 | 5975 | 6680 | 9A |
| 5561 | 5561 | 5879 | 9AD | 6152 | 7CK | 6681 | 9A |
| 5563-A | 5563-A | 5881 | 7AC | 6159-A | 7CK | 6688 | 9EQ |
| GL5564 | GL5564 | 5885 | 5885 | 6159-B | 7CK | 6690 | 8GQ |
| 5590 | 7BD | 5886 | 5886 | 6169 | 8EE | 6754 | 9ET |
| 5591 | 7BD | 5890 | 12J | 6173 | 6173 | 6763 | 6763 |
| 5608-A | 7B | 5894B | 5894B | 6184 | 6184 | 6771 | 6442 |
| 5610 | 6CG | 5896 | 8DJ | 6186 | 7BD | 6788 | 8DL |
| GL5630 | GL5630 | 5897 | 8DK | 6187 | 7CM | 6792 | 8GL |
| 5632 | FG-27-A | 5898 | 8DK | 6188 | 8BD | 6807 | 6807 |
| 5633 | 5633 | 5899 | 8DL | 6189 | 9A | 6808 | 6808 |
| 5634 | 5633 | 5900 | 8DL | 6193 | 6193 | 6809 | 6807 |
| 5635 | 8DB | 5901 | 8DL | 6195 | 6CL | 6814 | 8DK |

INDEX of BASING DIAGRAMS by TUBE TYPE

| Tube Type | Basing | Tube Type | Basing | Tube Type | Basing | Tube Type | Basing |
|------------|-----------|-----------|-----------|-----------|---------|-----------|---------|
| 6829 | 9A | 7360 | 9KS | 7841 | 7266 | 8348 | 9QN |
| 6832 | 8DG | 7370 | 9H | 7851 | 7GE | 8358 | 9QR |
| 6840 | 9CZ | 7391 | 6299 | 7855 | 7815-R | 8380 | 9AS |
| 6842 | 7EQ | GL-7399 | GL7399 | 7861 | 8CJ | 8382 | 12AQ |
| GL-6848 | GL6848 | 7403 | 8JU | 7867 | 5BT | 8393 | 12AQ |
| 6851 | 9A | 7408 | 7AC | 7868 | 9RW | 8403 | 7815-R |
| 6853 | 8HE | 7427 | 9LN | 7887 | 8DG | 8408 | 9QV |
| 6854 | 8CJ | 7430 | 7430 | 7888 | 8DK | 8412 | 8412 |
| 6856/740 | 6856 | 7462 | 7462 | 7889 | 8DG | 8413 | 8413 |
| 6858/760 | 6807 | 7486 | 7077 | 7892 | 9H | 8414 | 8DC |
| 6859/760-P | 6808 | 7518/710L | 7518/710L | 7894 | 7894 | 8417 | 7S |
| 6872 | 5702 | 7543 | 7BK | 7895 | 12AQ | 8425 | 7BK |
| 6877 | 9GB | 7548 | 9LJ | 7898 | 9ET | 8425-A | 7BK |
| 6883 | 7CK | 7550 | 8DG | 7905 | 9EB | 8426 | 7BK |
| 6883-A | 7CK | 7551 | 9LK | 7910 | 7910 | 8426-A | 7BK |
| 6883-B | 7CK | 7558 | 9LK | 7911 | 7911 | 8431 | 9AJ |
| 6887 | 6BT | 7576 | 8KM | 7913 | 7768 | 8441 | 12AQ |
| 6888 | 8N | 7581 | 7AC | 7962 | 8DG | 8444 | 8DC |
| 6889 | 8HG | 7581-A | 7AC | 7963 | 8DG | 8445 | 9AE |
| 6897 | 2C39-B | 7586 | 12AQ | 7979 | 7979 | 8446 | 9FA |
| 6900 | 9H | 7587 | 12AS | 7983 | 9PS | 8447 | 9CF |
| 6913 | 9A | 7588 | 7296 | 7984 | 12EU | 8448 | 9BF |
| 6919 | 6BT | 7591 | 8KQ | GL-7985 | GL7985 | 8456 | 12AQ |
| 6922 | 9AJ | 7591-A | 8KQ | 7994 | 8KM | 8457 | 9PW |
| GL-6942 | GL6942 | 7607 | 7CK | 7995 | 8KZ | 8458 | 9PW |
| 6943 | 8DC | 7623 | 6AM | GL7998/ | GL7998/ | 8463 | 9QX |
| 6944 | 8DC | 7624 | 6AM | GL7998-PC | GL7998 | 8474 | 8100 |
| 6945 | 8DL | 7625 | 7482 | GL7998 | GL7998 | 8475 | 8100 |
| 6946 | 8DK | 7626 | 7626 | GL7998-PC | GL7998 | 8475-A | 8100 |
| 6947 | 8DG | 7644 | 6299 | 8006 | 2F | 8477 | 8100 |
| 6948 | 8DG | 7645 | 9HL | 8032 | 7CK | 8477-A | 8100 |
| 6954 | 7CM | GL7669/ | | 8032-A | 7CK | 8478 | 8100 |
| 6955 | 9A | GL7669-PC | GL7669 | 8042 | 8LJ | 8489 | 9DA |
| 6968 | 7BD | GL7669 | GL7669 | 8056 | 12AQ | GL-8500 | GL8500 |
| 6973 | 9EU | GL7669-PC | GL7669 | 8058 | 12CT | 8506 | 8506 |
| 6999 | 6999 | GL7671/ | | 8064 | 8DL | GL-8513 | GL8513 |
| 7025 | 9A | GL7671-PC | GL7671 | 8068 | 8LC | 8517 | 8DC |
| 7027 | 8HY | GL7672 | GL7672 | 8070 | 8LD | 8522 | 8DC |
| 7027-A | 8HY | GL7672-PC | GL7672 | 8071 | 8LE | 8524 | 8DC |
| 7036 | 7CH | GL7673/ | | 8077 | 9GK | 8525 | 8DG |
| 7044 | 9H | GL7673-PC | GL7673 | 8081 | 8081 | 8526 | 8DG |
| 7054 | 9GT | GL7673 | GL7673 | 8082 | 8081 | 8527 | 8DK |
| 7055 | 6BT | GL7673-PC | GL7673 | 8083 | 8081 | 8528 | 8DE |
| 7056 | 7CM | GL7681/ | | 8084 | 7CM | 8529 | 8DE |
| 7057 | 9AJ | GL7681-PC | GL7681 | 8096 | 8FY | 8530 | 8DE |
| 7058 | 9AJ | GL7681 | GL7681 | 8100 | 8100 | 8532 | 7BQ |
| 7059 | 9AE | GL7681-PC | GL7681 | 8102 | 9PJ | 8533 | 8533 |
| 7060 | 9DA | 7683 | 9MN | 8103 | 8DG | 8534 | 8534 |
| 7061 | 9EU | 7687 | 9AE | 8106 | 9PL | 8535 | 8535 |
| 7077 | 7077 | 7688 | 12BA | 8108 | 8108 | 8536 | 8536 |
| 7079 | 8DG | 7689 | 12BA | 8113 | 7EW | 8537 | 8537 |
| 7083 | 5702 | 7690 | 12BA | 8116 | 8116 | 8538 | 8538 |
| 7105 | 8BD | 7695 | 9PX | 8116A | 8116 | 8539 | 8539 |
| 7137 | 7BQ | 7701 | 9MS | 8117 | 8116 | 8552 | 7CK |
| GL7151 | GL7151 | GL7703 | GL7703 | 8117A | 8116 | 8582 | 8100 |
| 7167 | 7EW | 7716 | 9DX | 8118 | 8118 | 8582-A | 8100 |
| GL7171 | GL7171 | 7717 | 7EW | 8136 | 7CM | 8595 | 8595 |
| 7189 | 9CV | 7719 | 9MX | 8142 | 8100 | 8627 | 12CT |
| 7189-A | 9LE | 7720 | 7462 | 8143 | 8100 | 8628 | 12AQ |
| 7199 | 9JT | 7721 | 9EQ | 8149 | 12DT | 8632 | 8632 |
| 7211 | 7815-R | 7722 | 9EQ | 8150 | 12DU | 8639 | 8639 |
| 7212 | 7CK | 7724 | 9KR | 8156 | 12EU | 8643 | 8643 |
| 7216/C3JL | 7216/C3JL | 7725 | FG-27-A | 8185 | 8KM | 8727 | 8727 |
| 7233 | 9FD | 7726 | 7518/710L | 8186 | 8KM | 8745 | 7815-R |
| 7234 | 9KD | 7728 | 9A | 8203 | 12AQ | GL-8751 | GL8751 |
| 7235 | 9KE | 7729 | 9A | GL8205 | GL8205 | 8755 | 8755 |
| 7236 | 8BD | 7730 | 9A | 8210 | 8LS | 8755A | 8755A |
| 7239 | 9KH | 7731 | 9AE | 8211 | 8DL | 8760 | 8100 |
| 7244 | 7BF | 7732 | 7CM | 8212 | 9PY | 8808 | 8808 |
| 7244-A | 7BF | 7733 | 9BF | 8213 | 8LT | 8847 | 8847 |
| 7245 | 7BQ | 7734 | 9LC | 8217 | 8100 | 8847A | 8847A |
| 7245-A | 7BQ | 7737 | 9MZ | 8318-A | 8100 | 8859 | 8413 |
| 7246 | 5676 | 7738 | 7DK | 8223 | 9AJ | GL-8866 | GL8866 |
| 7247 | 9A | 7751 | 8KB | 8228 | 7894 | 8892 | 8892 |
| 7258 | 9DA | 7754 | 9PX | 8233 | 9PZ | 8893 | 8893 |
| 7266 | 7266 | 7757 | 9NE | 8236 | 8JC | 8906 | 8906 |
| 7289 | 7289 | 7759 | 8DG | 8254 | 8LW | 8907 | 8907 |
| 7296 | 7296 | 7760 | 8DG | 8255 | 9NY | 8917 | 8917 |
| 7310 | 4P | 7761 | 8DL | 8278 | 9QB | 9001 | 7BD |
| 7311 | 7311 | 7762 | 8DL | 8298 | 7CK | 9002 | 7BS |
| 7312 | 7312 | 7763 | 9NF | 8298-A | 7CK | 9003 | 7BD |
| 7313 | 7313 | 7768 | 7768 | 8318 | 8100 | 9004 | 4BJ |
| 7314 | 7314 | 7784 | 7784 | 8319 | 8LD | 9005 | 5BG |
| 7318 | 9A | 7788 | 9NK | 8327 | 9CV | 9006 | 6BH |
| 7327 | 8DG | 7802 | 8BD | 8334 | 7DK | GE12661 | GE12661 |
| 7355 | 8KN | 7803 | 9AJ | 8345 | 8100 | GE13971 | GE13971 |
| 7357 | 7CK | 7815 | 7815 | 8346 | 8100 | GE14501 | GE14501 |
| 7358 | 7CK | 7815-R | 7815-R | 8347 | 8100 | GE14811 | GE14811 |

INDEX of BASING DIAGRAMS by TUBE TYPE

| Tube Type | Basing | Tube Type | Basing | Tube Type | Basing | Tube Type | Basing |
|-----------|---------|-----------|---------|-----------|---------|-----------|---------|
| GE15371 | GE15371 | GE17241 | GE17241 | GL37248 | GL37248 | GL51065 | GL51065 |
| GE16231 | GE16231 | GE17701 | GE17701 | GL51025 | GL51025 | GL51070 | GL51070 |
| GE16411 | GE16411 | GE18651 | GE18651 | GL51038 | GL51038 | GL51074 | GL51074 |
| GE16841 | GE16841 | GL37207 | GL37207 | GL51064 | GL51064 | | |

| Tube Type | Basing | Tube Type | Basing | Tube Type | Basing | Tube Type | Basing |
|-----------|--------|-----------|--------|-----------|--------|-----------|--------|
| 10VABP22 | 14BM | 19GYP22 | 14BE | 22ANP22 | 14BH | 25VBKP22 | 14BE |
| 11SP22 | 14BJ | 19GZP22 | 14BE | 22ARP22 | 14BE | 25VBLP22 | 14BE |
| 11WP22 | 14BJ | 19HBP22 | 14BE | 22ASP22 | 14BE | 25VBMP22 | 14BE |
| 12DCP22 | 14BH | 19HCP22 | 14BE | 22ATP22 | 14BE | 25WP22 | 14BE |
| 12VAHP22 | 14BH | 19HFP22 | 14BE | 22EP22 | 14W | 25XP22 | 14BE |
| 13GP22 | 14BH | 19HJP22 | 14BE | 22JP22 | 14BE | 25YP22 | 14BE |
| 13JP22 | 14BH | 19HKP22 | 14BE | 22KP22 | 14BE | 25ZP22 | 14BE |
| 13LP22 | 14BH | 19HMP22 | 14BE | 22LP22 | 14BE | 370AB22 | 14BH |
| 13MP22 | 14BH | 19HNP22 | 14BH | 22QP22 | 14BE | 370CB22 | 14BH |
| 14BCP22 | 14AU | 19HP22 | 14BE | 22RP22 | 14BE | 490AB22 | 14BE |
| 14VABP22 | 14BH | 19HRP22 | 14BE | 22SP22 | 14BE | 490ACB22 | 14BE |
| 14VADP22 | 14BH | 19HTP22 | 14BH | 22UP22 | 14BE | 490ADB22 | 14BE |
| 14VAEP22 | 14BH | 19HXP22 | 14BE | 22WP22 | 14BE | 490AEB22 | 14BE |
| 14VAFP22 | 14BH | 19HY22 | 14BH | 22YP22 | 14BE | 490AFB22 | 14BE |
| 14VAGP22 | 14BH | 19JAP22 | 14BH | 23EGP22 | 14BE | 490AGB22 | 14BE |
| 14VAHP22 | 14BH | 19JBP22 | 14BE | 23EGP22A | 14BE | 490AHB22 | 14BE |
| 14VALP22 | 14BH | 19JDP22 | 14BE | 23VABP22 | 14BE | 490AHB22A | 14BE |
| 15ACP22 | 14BH | 19JGP22 | 14BE | 23VACP22 | 14BE | 490AJB22 | 14BE |
| 15AEP22 | 14BH | 19JHP22 | 14BE | 23VADP22 | 14BE | 490AJB22A | 14BE |
| 15AFP22 | 14BH | 19JKP22 | 14BE | 23VALP22 | 14BE | 490AKB22 | 14BE |
| 15GP22 | 20A | 19JLP22 | 14BE | 23VAMP22 | 14BE | 490ALB22 | 14BE |
| 15HP22 | 20A | 19JNP22 | 14BE | 23VANP22 | 14BE | 490AMB22 | 14BE |
| 15KP22 | 14BH | 19JQP22 | 14BE | 23VAQP22 | 14BE | 490ANB22 | 14BE |
| 15LP22 | 14BH | 19JSP22 | 14BH | 23VAP22 | 14BE | 490ARB22 | 14BE |
| 15MP22 | 14BK | 19JWP22 | 14BH | 23VAP22 | 14BE | 490ASB22 | 14BE |
| 15NP22 | 14BH | 19JYP22 | 14BE | 23VAP22 | 14BE | 490BAB22 | 14BE |
| 15RP22 | 14BH | 19JZP22 | 14BE | 23VAXP22 | 14BE | 490BCB22 | 14BE |
| 15SP22 | 14BH | 19KBP22 | 14BH | 23VAXP22 | 14BE | 490BDB22 | 14BE |
| 15WP22 | 14BH | 19KCP22 | 14BH | 23VAZP22 | 14BE | 490CB22 | 14BH |
| 15XP22 | 14BH | 19KDP22 | 14BH | 23VBP22 | 14BE | 490BHB22 | 14BE |
| 15YP22 | 14BK | 19KLP22 | 14BE | 23VBCP22 | 14BE | 490BIB22 | 14BH |
| 16CDP22 | 14BE | 19TP22 | 20A | 23VBP22 | 14BE | 490BRB22 | 14BE |
| 16CSF22 | 14BE | 19VABP22 | 14AU | 23VBJP22 | 14BE | 490BUB22 | 14BE |
| 16CV22 | 14BH | 19VAFP22 | 14BE | 23VBF22 | 14BE | 490BVB22 | 14BH |
| 16DAP22 | 14BE | 19VAGP22 | 14BE | 23VBNP22 | 14BE | 490BVB22 | 14BE |
| 16VABP22 | 14BH | 19VAMP22 | 14BE | 23VBRP22 | 14BE | 490CB22 | 14BE |
| 16VACP22 | 14BH | 19VANP22 | 14BH | 23VBS22 | 14BE | 490DB22 | 14BE |
| 16VAFP22 | 14BH | 19VAQP22 | 14BE | 23VBT22 | 14BE | 490EB22 | 14BE |
| 16VAHP22 | 14BH | 19VATP22 | 14BE | 25ABF22 | 14BE | 490EB22A | 14BE |
| 16VAKP22 | 14BH | 19VAUP22 | 14BE | 25AEP22 | 14BE | 490FB22 | 14BE |
| 16VASP22 | 14BE | 19VBDP22 | 14BE | 25AFP22 | 14BE | 490GB22 | 14BE |
| 16VATP22 | 14BE | 19VBL22 | 13C | 25AJ22 | 14BE | 490HB22 | 14BE |
| 16VAWP22 | 14BK | 19VBQP22 | 14BH | 25AKP22 | 14BE | 490JB22 | 14BE |
| 16VBDP22 | 14BK | 19VBR22 | 14BE | 25ALP22 | 14BE | 490JB22A | 14BE |
| 17ETP22 | 14BE | 19VBS22 | 14BE | 25ALP22A | 14BE | 490KB22 | 14BE |
| 17EVP22 | 14BH | 19VBWP22 | 14BE | 25AMP22 | 14BE | 490KB22A | 14BE |
| 17EXP22 | 14BK | 19VC22 | 14BE | 25ANP22 | 14BE | 490LB22 | 14BE |
| 17EZF22 | 14BH | 19VCP22 | 14BE | 25AP22 | 14BE | 490MB22 | 14BE |
| 17FGP22 | 14BH | 19VCF22 | 14BE | 25AP22A | 14BE | 490NB22 | 14BE |
| 17FHP22 | 14BH | 19VCP22 | 14BE | 25AQP22 | 14BE | 490RB22 | 14BE |
| 17FJP22 | 14BK | 19VCS22 | 14BE | 25AWP22 | 14BE | 490SB22 | 14BE |
| 17FKP22 | 14BH | 19VP22 | 14W | 25AY22 | 14BE | 490TB22 | 14BE |
| 17VABP22 | 14BH | 20VABP22 | 14BE | 25AZP22 | 14BE | 490UB22 | 14BE |
| 17VACP22 | 14BH | 20VADP22 | 14BE | 25BAP22 | 14BE | 490VB22 | 14BE |
| 17VADP22 | 14BH | 20VAEP22 | 14BE | 25BCP22 | 14BE | 490WB22 | 14BE |
| 18VABP22 | 14BE | 20VAFP22 | 14BE | 25BDP22 | 14BE | 490XB22 | 14BE |
| 18VACP22 | 14BE | 20VAGP22 | 14BH | 25BFP22 | 14BE | 490YB22 | 14BE |
| 18VADP22 | 14BE | 20VAJP22 | 14BE | 25BGP22 | 14BE | 490ZB22 | 14BE |
| 18VAFP22 | 14BH | 20VAMP22 | 14BE | 25BHP22 | 14BE | | |
| 18VAHP22 | 14BE | 20VANP22 | 14BE | 25BKP22 | 14BE | | |
| 18VAJP22 | 14BE | 20VASP22 | 14BE | 25BMP22 | 14BE | | |
| 18VAKP22 | 14BE | 21AXP22 | 14W | 25BP22 | 14BE | | |
| 18VALP22 | 14BH | 21AXP22A | 14AH | 25BP22A | 14BE | | |
| 18VAMP22 | 14BH | 21CYP22 | 14AL | 25CAP22 | 14BE | | |
| 18VANP22 | 13C | 21CYP22A | 14AL | 25CBP22 | 14BE | | |
| 18VAQP22 | 14BE | 21FBP22 | 14AU | 25FP22 | 14BE | | |
| 18VARP22 | 14BE | 21FBP22A | 14AU | 25FP22A | 14BE | | |
| 18VASP22 | 14BE | 21FJP22 | 14AU | 25GP22 | 14BE | | |
| 18VATP22 | 14BE | 21FJP22A | 14AU | 25GP22A | 14BE | | |
| 18VAZP22 | 14BH | 21FKP22 | 14AU | 25RP22 | 14BE | | |
| 18VBAP22 | 14BE | 21GFP22 | 14BE | 25SP22 | 14BE | | |
| 18VBCP22 | 14BE | 21GRP22 | 14BE | 25UP22 | 14BE | | |
| 18VBDP22 | 14BH | 21GUP22 | 14AU | 25VABP22 | 14BE | | |
| 18VBEP22 | 14BH | 21GVP22 | 14AU | 25VACP22 | 14BE | | |
| 18VBGP22 | 14BH | 21GWP22 | 14BE | 25VADP22 | 14BE | | |
| 18VBHP22 | 14BE | 21GY22 | 14AU | 25VAEP22 | 14BE | | |
| 18VBJP22 | 14BH | 21HBP22 | 14BE | 25VAFP22 | 14BE | | |
| 18VBKP22 | 14BE | 21VABP22 | 14BE | 25VAGP22 | 14BE | | |
| 18VBMP22 | 14BE | 21VACP22 | 14BE | 25VAJP22 | 14BE | | |
| 19EXP22 | 14BE | 21VADP22 | 14BE | 25VAKP22 | 14BE | | |
| 19EYP22 | 14BE | 21VAJP22 | 14BE | 25VAMP22 | 14BE | | |
| 19FMP22 | 14BE | 21VAKP22 | 14BE | 25VAQP22 | 14BE | | |
| 19FXP22 | 14BE | 21VALP22 | 14BE | 25VAWP22 | 14BE | | |
| 19GLP22 | 14BE | 21VAQP22 | 14BE | 25VAXP22 | 14BE | | |
| 19GSP22 | 14BE | 21VARP22 | 14BE | 25VAZP22 | 14BE | | |
| 19GV22 | 14BE | 21VAUP22 | 14BE | 25VBAP22 | 14BE | | |
| 19GVP22 | 14BE | 22AHP22 | 14BE | 25VBP22 | 14BE | | |
| 19GXP22 | 14BE | 22ALP22 | 14BE | 25VBJP22 | 14BE | | |

INDEX of BASING DIAGRAMS by TUBE TYPE

Monochrome Picture Tubes

| Tube Type | Basing | Tube Type | Basing | Tube Type | Basing | Tube Type | Basing |
|-----------|--------|-----------|--------|-----------|--------|-----------|--------|
| 2EP4 | 8JK | 12CTP4 | 7GR | 16BNP4 | 8HR | 17CP4A | 12D |
| 5AXP4 | 12S | 12CVP4 | 7GR | 16BRP4 | 8HR | 17CAP4 | 8HR |
| 7DP4 | 12C | 12CWP4 | 7GR | 16BSP4 | 8HR | 17CBP4 | 12L |
| 7RP4 | 12D | 12CZP4 | 7GR | 16BUP4 | 8HR | 17CDP4 | 8HR |
| 8AP4 | 12H | 12DEP4 | 7GR | 16BVP4 | 8HR | 17CEP4 | 12L |
| 8AP4A | 12H | 12DFP4 | 7GR | 16BWP4 | 8HR | 17CFP4 | 12L |
| 8DP4 | 12AB | 12DGP4 | 7GR | 16BXP4 | 7FA | 17CGP4 | 12L |
| 8JP4 | 8IL | 12DHP4 | 8HR | 16BYP4 | 8HR | 17CKP4 | 8HR |
| 8LP4 | 7FA | 12DKP4 | 7GR | 16CP4 | 12D | SG-17CKP4 | 8HR |
| 8MP4 | 12L | 12DMP4 | 8HR | 16CAP4 | 8HR | 17CLP4 | 12L |
| 8XP4 | 12S | 12DQP4 | 8HR | 16CEP4 | 8HR | 17CMP4 | 12L |
| 8YP4 | 7FG | 12KP4 | 12N | 16CFP4 | 7GR | 17CNP4 | 12L |
| 9ACP4 | 7GR | 12KP4A | 12N | 16CHP4 | 8HR | 17CRP4 | 12L |
| 9AGP4 | 7GR | SG-12KP4A | 12N | 16CHP4A | 8HR | 17CRP4 | 7FA |
| 9QP4 | 12AD | 12LP4 | 12N | 16CJP4 | 8HR | 17CTP4 | 8HR |
| 9QP4A | 12AD | 12LP4A | 12N | 16CKP4 | 8HR | 17CUP4 | 12L |
| 9SP4 | 8HR | 12LPC | 12N | 16CMP4 | 8HR | 17CVP4 | 8HR |
| 9TP4 | 8HR | 12TP4 | 12D | 16CNP4 | 7GR | 17CWP4 | 8HR |
| 9UP4 | 7GR | 12UP4 | 12D | 16CQP4 | 7GR | 17CXp4 | 12L |
| 9VP4 | 7GR | 12UP4A | 12D | 16TP4 | 8HR | 17CYP4 | 12L |
| 9WP4 | 7GR | 12UP4B | 12D | 16CUP4 | 8HR | 17CZP4 | 12L |
| 9YP4 | 7GR | 12VABP4 | 8HR | 16CWP4 | 7GR | 17DAP4 | 8JK |
| 10ABP4 | 12L | 12VP4 | 12G | 16CXP4 | 7GR | 17DBP4 | 12L |
| 10ABP4A | 12L | 12VP4A | 12G | 16DP4 | 12D | 17DCP4 | 12L |
| 10ABP4B | 12L | 12YP4 | 12P | 16DP4A | 12D | 17DEP4 | 8JN |
| 10ABP4C | 12L | 12ZP4 | 12N | 16DCP4 | 7GR | 17DHP4 | 8HR |
| 10ADP4 | 12L | 12ZPA4 | 12N | 16DCP4A | 7GR | 17DJP4 | 12L |
| 10AEP4 | 12L | 13AP4 | 8HR | 16EP4 | 12D | 17DKP4 | 8JR |
| 10ARP4 | 7GR | 13DP4 | 8HR | 16EP4A | 12D | 17DRP4 | 8HR |
| 10ASP4 | 7GR | 14ACP4 | 12L | 16EP4B | 12D | 17DQP4 | 7FA |
| 10BP4 | 12N | 14AEP4 | 12L | 16GP4 | 12D | 17DRP4 | 8JK |
| 10BP4A | 12N | 14AJP4 | 8HR | 16GP4A | 12D | 17DSP4 | 8HR |
| 10BP4C | 12N | SG-14AJP4 | 8HR | 16GP4B | 12D | 17DTP4 | 8HR |
| 10BP4D | 12N | 14ARP4 | 12L | 16GP4C | 12D | 17DWP4 | 12L |
| 10DP4 | 12M | 14ASP4 | 8HR | 16HP4 | 12N | 17DXP4 | 8JR |
| 10FP4 | 12N | 14ATP4 | 12L | 16HP4A | 12N | 17DZP4 | 8HR |
| 10FP4A | 12N | 14AUP4 | 12L | 16JP4 | 12N | 17EAP4 | 12AT |
| SG-10FP4A | 12N | 14AVP4 | 8HR | 16JP4A | 12N | 17EBP4 | 8HR |
| 10MP4 | 12G | 14AWP4 | 12L | 16KP4 | 12N | 17EFP4 | 8HR |
| 10MP4A | 12G | 14BP4 | 12N | 16KP4A | 12N | 17EHP4 | 8HR |
| 10RP4 | 12L | 14BP4A | 12N | SG-16KP4A | 12N | 17EKP4 | 12L |
| 11AP4 | 8ER | 14DP4 | 12L | 16LP4 | 12N | 17ELP4 | 8HR |
| 11BP4 | 8ER | 14CP4 | 12N | 16LP4A | 12N | 17EMP4 | 8HR |
| 11CP4 | 8ER | 14CP4A | 12N | 16MP4 | 12N | 17EQP4 | 8HR |
| 11DP4 | 8HR | SG-14CP4A | 12N | 16MP4A | 12N | 17ESP4 | 8HR |
| 11EP4 | 8HR | 14CP4B | 12N | 16QP4 | 12D | 17FCP4 | 8HR |
| 11FP4 | 8HR | 14DP4 | 12D | 16RP4 | 12N | 17FDP4 | 8HR |
| 11GP4 | 8HR | 14EP4 | 12N | 16RP4A | 12N | 17FP4 | 12L |
| 11HP4 | 8HR | 14GP4 | 12L | 16RP4B | 12N | 17FP4A | 12L |
| 11HP4A | 8HR | 14HP4 | 12L | 16SP4 | 12N | 17G4 | 12M |
| 11JP4 | 8HR | 14NP4 | 12L | 16SP4A | 12N | 12HP4 | 12L |
| 11KP4 | 8HR | 14NP4A | 12L | 16TP4 | 12N | 17HP4A | 12L |
| 11LP4 | 8HR | 14QP4 | 12L | 16UP4 | 12D | 17HP4B | 12L |
| 11MP4 | 8HR | 14QP4A | 12L | 16VAUP4 | 8HR | SG-17HP4B | 12L |
| 11QP4 | 7GR | 14QP4B | 12L | 16VP4 | 12D | 17HP4C | 12L |
| 11RP4 | 7GR | SG-14QP4A | 12L | 16WP4 | 12D | 17JP4 | 12N |
| 11TP4 | 8HR | 14RP4 | 12L | 16WP4A | 12N | 17KP4 | 12P |
| 11UP4 | 7GR | 14RP4A | 12L | 16WP4B | 12N | 17KP4A | 12P |
| 12AYP4 | 8HR | 14SP4 | 12L | 16XP4 | 12D | 17LP4 | 12L |
| 12AZP4 | 8HR | 14UP4 | 12D | 16YP4 | 12D | 17LP4A | 12L |
| 12BAP4 | 8HR | 14WP4 | 12L | 16ZP4 | 12N | SG-17LP4A | 12L |
| 12BEP4 | 7FA | SG-14WP4 | 12L | 17AP4 | 12N | 17LP4B | 12L |
| 12BFP4 | 7GR | 14XP4 | 12L | 17ATP4 | 12L | 17QP4 | 12N |
| 12BGP4 | 8HR | 14XPA4 | 12L | 17ATP4A | 12L | 17QP4A | 12N |
| 12BJP4 | 8HR | 14ZP4 | 12L | 17AVP4 | 12L | SG-17QP4A | 12N |
| 12BKP4 | 8HR | 15ADP4 | 8HR | 17AVP4A | 12L | 17QP4B | 12N |
| 12BLP4 | 8HR | 15JP4 | 8HR | 17BP4 | 12D | 17RP4 | 12L |
| 12BMP4 | 7GR | 16AP4 | 12D | 17BP4A | 12N | 17RP4C | 12L |
| 12BP4 | 8HR | 16APA4 | 12D | 17BP4B | 12N | 17SP4 | 12P |
| 12BNP4A | 8HR | 16ABP4 | 12P | SG-17BP4B | 12N | 17TP4 | 12M |
| 12BQP4 | 8HR | 16ACP4 | 12P | 17BP4C | 12N | 17UP4 | 12N |
| 12BSP4 | 8HR | 16AEP4 | 12L | 17BP4D | 12N | 17VP4 | 12L |
| 12BTP4 | 8HR | 16ANP4 | 8HR | 17BJP4 | 12L | 17VP4B | 12L |
| 12BUP4 | 8HR | 16AQP4 | 8HR | SG-17BJP4 | 12L | 17YP4 | 12N |
| 12BUP4A | 8HR | 16ASP4 | 8HR | 17BKP4 | 12L | 18VAGP4 | 8HR |
| 12BUP4B | 8HR | 16ATP4 | 8HR | 17BKP4A | 12L | 19AP4 | 12D |
| 12BUP4C | 8HR | 16AUP4 | 8HR | 17BMP4 | 12L | 19AP4A | 12D |
| 12BVP4 | 7GR | 16AVP4 | 7FA | 17BNP4 | 12L | 19AP4B | 12D |
| 12BZP4 | 7GR | 16AWP4 | 8HR | 17BRP4 | 8HR | 19AP4C | 12D |
| 12CBP4 | 7FA | 16AXP4 | 8HR | 17BSP4 | 12L | 19AP4D | 12D |
| 12CDP4 | 7GR | 16AYP4 | 8HR | 17BTP4 | 12AJ | 19ABP4 | 8JK |
| 12CEP4 | 7GR | 16AZP4 | 8HR | 17BUP4 | 12L | 19ACP4 | 8HR |
| 12CFP4 | 7GR | 16BAP4 | 8HR | 17BVP4 | 7FA | 19AEP4 | 8HR |
| 12CHP4 | 7GR | 16BDP4 | 8HR | 17BWP4 | 7FA | 19AFP4 | 8HR |
| 12CNP4 | 7GR | 16BEP4 | 8HR | SG-17BWP4 | 7FA | 19AHP4 | 8HR |
| 12CNP4A | 7GR | 16BFP4 | 8HR | 17BYP4 | 7FA | 19AJP4 | 7FA |
| 12CQP4 | 8HR | 16BGP4 | 8HR | 17BZP4 | 8HR | 19ALP4 | 8HR |
| 12CSP4 | 7GR | 16BMP4 | 8HR | 17CP4 | 12D | 19ANP4 | 8JR |

INDEX of BASING DIAGRAMS by TUBE TYPE
Monochrome Picture Tubes

| Tube Type | Basing | Tube Type | Basing | Tube Type | Basing | Tube Type | Basing |
|-----------|--------|------------|--------|------------|--------|-----------|--------|
| 19AQP4 | 8HR | 19FHP4 | 8HR | SG-21AUP4B | 12L | 21GBP4 | 8HR |
| 19ARP4 | 8HR | 19FJP4 | 8HR | 21AUP4C | 12L | 21GCP4 | 8HR |
| 19ASP4 | 8HR | 19FJP4A | 8HR | 21AVP4 | 12L | 21GEP4 | 8HR |
| 19ATP4 | 8JR | 19FKP4 | 8HR | 21AVP4A | 12L | 21GHP4 | 8HR |
| 19AUP4 | 8HR | 19FLP4 | 8HR | 21AVP4B | 12L | 21GJP4 | 8HR |
| 19AVP4 | 8HR | 19FNP4 | 8HR | 21AVP4C | 12L | 21GKP4 | 8HR |
| 19AXP4 | 8HR | 19FRP4 | 8HR | 21AWP4 | 12N | 21GTP4 | 8HR |
| 19AYP4 | 8HR | 19FTP4 | 8HR | 21AWP4A | 12N | 21JP4 | 12N |
| 19BAP4 | 8HR | 19FWP4 | 8HR | SG-21AWP4 | 12N | 21JP4A | 12N |
| 19BCP4 | 8HR | 19GP4 | 12D | SG-21AWP4A | 12N | 21KP4 | 12S |
| 19BDP4 | 12L | 12GAP4 | 8HR | 21AYP4 | 12L | 21KPA4 | 12P |
| 19BEP4 | 8HR | 19GBP4 | 8HR | 21BAP4 | 12L | 21MP4 | 12M |
| 19BFP4 | 12L | 19GEP4 | 8HR | 21BCP4 | 12L | 21VASP4 | 8HR |
| 19BHP4 | 8HR | 19GFP4 | 8HR | 21BDP4 | 12L | 21VATP4 | 8HR |
| 19BLP4 | 8HR | 19GHP4 | 8HR | 21BNP4 | 12L | 21WP4 | 12N |
| 19BMP4 | 8HR | 19GJP4 | 8HR | 21BSP4 | 12N | 21WP4A | 12N |
| 19BNP4 | 8HR | 19GJP4A | 8HR | 21BTP4 | 12L | SG-21WP4A | 12N |
| 19BP4 | 8HR | 19GKP4 | 8HR | 21CBP4 | 12L | 21WP4B | 12N |
| 19BRP4 | 8HR | 19GMP4 | 8HR | 21CBP4A | 12L | 21XP4 | 12L |
| 19BSP4 | 8HR | 19HAP4 | 8HR | 21CBP4B | 12L | 21XP4A | 12L |
| 19BTP4 | 8JR | 19GAP4 | 8HR | 21CDP4 | 12L | SG-21XP4A | 12L |
| 19BUP4 | 8HR | 19JP4 | 12D | 21CDP4A | 12L | 21XP4B | 12L |
| 19BVP4 | 8HR | 19QP4 | 12L | 21CEP4 | 8HR | 21YP4 | 12L |
| 19BWP4 | 8HR | 19VAHP4 | 8HR | 21CEP4A | 8HR | 21YP4A | 12L |
| 19CAP4 | 8JR | 19VAJP4 | 8HR | 21CGP4 | 12L | SG-21YP4A | 12L |
| 19CDP4 | 7FA | 19VBNP4 | 8HR | 21CHP4 | 12L | 21YF4B | 12L |
| 19CEP4 | 8HR | 19XP4 | 8HR | 21CKP4 | 12L | 21ZP4 | 12D |
| 19CFP4 | 8HR | 19YP4 | 8JR | 21CLP4 | 12AJ | 21ZP4A | 12N |
| 19CGP4 | 12L | 19ZP4 | 8HR | 21CMP4 | 12L | 21ZP4B | 12N |
| 19CHP4 | 8HR | 20ABP4 | 8HR | 21CQP4 | 7FA | SG-21ZP4B | 12N |
| 19CJP4 | 8HR | 20ADP4 | 8HR | 21CSP4 | 7FA | 21ZPC | 12N |
| 19CKP4 | 8HR | 20AEP4 | 8HR | 21CUP4 | 12N | 22AFP4 | 8HR |
| 19CLP4 | 12L | 20AHP4 | 8HR | 21CVP4 | 12L | 22TP4 | 8HR |
| 19CMP4 | 8HR | 20CP4 | 12D | 21CWP4 | 12L | 22VABP4 | 8HR |
| 19CMP4A | 8HR | 20CP4A | 12N | 21CXP4 | 12L | 22VACP4 | 8HR |
| 19CQP4 | 7FA | 20CP4B | 12D | 21CZP4 | 8HR | 22VAMP4 | 8HR |
| 19CRP4 | 12L | 20CP4C | 12D | 21DP4 | 12M | 22VANP4 | 8HR |
| 19CUP4 | 8HR | 20CP4D | 12N | 21DAP4 | 8HR | 22VARP4 | 8HR |
| 19CVP4 | 7FA | SG-20CP4D | 12N | 21DEP4 | 8HR | 22VASP4 | 8HR |
| 19CXP4 | 8HR | 20DP4 | 12D | 21DEP4A | 8HR | 22VATP4 | 8HR |
| 19CYP4 | 8HR | 20DP4A | 12N | SG-21DEP4A | 8HR | 22ZP4 | 8HR |
| 19CZP4 | 8HR | 20DP4B | 12D | 21DFP4 | 8HR | 23ACP4 | 12L |
| 19DP4 | 12N | 20DP4C | 12N | 21DHP4 | 8HR | 23AFP4 | 12L |
| 19DPA4 | 12N | 20DP4D | 12N | 21DP4 | 12L | 23AHP4 | 12L |
| 19DAP4 | 8HR | 20FP4 | 12M | 21DKP4 | 8HR | 23AKP4 | 8JR |
| 19DBP4 | 7FA | 20GP4 | 12L | 21DKP4A | 8HR | 23ALP4 | 8HR |
| 19DCP4 | 8HR | 20HP4 | 12M | 21DLP4 | 12L | 23AMP4 | 8HR |
| 19DEP4 | 8HR | 20HP4A | 12L | 21DMP4 | 8HR | 23ANP4 | 12L |
| 19DFP4 | 8HR | 20HP4B | 12M | 21DNP4 | 12L | 23AQP4 | 8HR |
| 19DHP4 | 8HR | 20HP4C | 12M | 21DQP4 | 12L | 23ARP4 | 8HR |
| 19DJF4 | 8HR | 20HP4D | 12L | 21DRP4 | 12L | 23ASP4 | 12L |
| 19DKP4 | 8HR | SG-20HP4D | 12L | 21DSP4 | 12L | 23ATP4 | 12L |
| 19DLLP4 | 8HR | 20HP4E | 12L | 21DVP4 | 12L | 23AUP4 | 12L |
| 19DNP4 | 8HR | 20JP4 | 12P | 21DWP4 | 8HR | 23AVP4 | 8HR |
| 19DQP4 | 8HR | 20LP4 | 12L | 21EP4 | 12D | 23AWP4 | 12L |
| 19DRP4 | 8HR | 20MP4 | 12L | 21EP4A | 12N | 23AXP4 | 8HR |
| 19DSP4 | 8HR | 20RP4 | 8HR | 21EP4B | 12N | 23AYP4 | 8HR |
| 19DUP4 | 8HR | 20SP4 | 8HR | SG-21EP4B | 12N | 23AZP4 | 12L |
| 19DVP4 | 8HR | 20TP4 | 8HR | 21EP4C | 12N | 23BP4 | 8HR |
| 19DWP4 | 8HR | 20UP4 | 8HR | 21EAP4 | 8JK | 23BP4 | 8HR |
| 19DYP4 | 8HR | 20WP4 | 8HR | 21ELP4 | 12L | 23BAP4 | 8HR |
| 19DZP4 | 8HR | 20XP4 | 8HR | 21EMP4 | 8HR | 23BCP4 | 8HR |
| 19EP4 | 12D | 20YP4 | 8HR | 21ENP4 | 12L | 23BDP4 | 12L |
| 19EAP4 | 8HR | 20ZP4 | 8HR | 21EQP4 | 8JR | 23BEP4 | 8HR |
| 19EBP4 | 8HR | 21AP4 | 12D | 21ERP4 | 8JR | 23BEP4A | 8HR |
| 19ECP4 | 8HR | 21ACP4 | 12N | 21ESP4 | 8JS | 23BGP4 | 8HR |
| 19EDP4 | 8HR | 21ACP4A | 12N | 21FVP4 | 8JK | 23BHP4 | 8HR |
| 19EFP4 | 8HR | SG-21ACP4A | 12M | 21EXP4 | 8JR | 23BJP4 | 12L |
| 19EGP4 | 8HR | 21AFP4 | 12M | 21EYP4 | 8JR | 23BKP4 | 12L |
| 19EHP4 | 8HR | 21ALP4 | 12L | 21FP4 | 12M | 23BLP4 | 12L |
| 19EHP4A | 8HR | 21ALP4A | 12L | 21FPA | 12L | 23BMP4 | 12L |
| 19EJP4 | 8HR | 21ALP4B | 12L | 21FPC | 12L | 23BNP4 | 8HR |
| 19EKP4 | 7FA | 21AMP4 | 12L | SG-21FPC | 12L | 23BQP4 | 8HR |
| 19ELP4 | 8HR | 21AMP4A | 12L | 21FPA4 | 12L | 23BRP4 | 8JR |
| 19ENP4 | 8HR | 21AMP4B | 12L | 21FPA4 | 8JR | 23BT4 | 8HR |
| 19ENP4A | 8HR | 21ANP4 | 12M | 21FPC4 | 8HR | 23BV4 | 12L |
| 19ESP4 | 8HR | 21ANP4A | 12M | 21FDP4 | 8KW | 23BX4 | 12L |
| 19ETP4 | 8HR | 21AQP4 | 12D | 21FLP4 | 12L | 23BY4 | 8JR |
| 19EUP4 | 8HR | 21AQP4A | 12D | SG-21FLP4 | 12L | 23BZP4 | 12L |
| 19EZP4 | 7FA | 21ARP4 | 12N | 21FMP4 | 8HR | 23CP4 | 8HR |
| 19FP4 | 12D | 21ARP4A | 12N | 21FUP4 | 8HR | 23CAP4 | 8HR |
| 19FBP4 | 8HR | 21ASP4 | 12M | 21FVP4 | 8HR | 23CBP4 | 8HR |
| 19FCP4 | 8HR | 21ATP4 | 12L | 21FWP4 | 8HR | 23CDP4 | 12L |
| 19FDP4 | 8HR | 21ATP4A | 12L | 21FXP4 | 8HR | 23CEP4 | 8HR |
| 19FEP4 | 8HR | 21ATP4B | 12L | 21FYP4 | 8HR | 23CGP4 | 12L |
| 19FEP4A | 8HR | 21AUP4 | 12L | 21FZP4 | 8HR | 23CMP4 | 8HR |
| 19FEP4B | 8HR | 21AUP4A | 12L | 21GAP4 | 8HR | 23CQP4 | 8HR |
| 19GFP4 | 8JR | 21AUP4B | 12L | 21GAP4A | 8HR | | |

INDEX of BASING DIAGRAMS by TUBE TYPE

Monochrome Picture Tubes

| Tube Type | Basing | Tube Type | Basing | Tube Type | Basing | Tube Type | Basing |
|-----------|--------|-----------|--------|-----------|--------|-----------|--------|
| 23CSP4 | 8JR | 23FP4A | 8HR | 23HZP4 | 8HR | 24CP4A | 12N |
| 23CTP4 | 12L | 23FAP4 | 8HR | 23JP4 | 7FA | SG-24CP4A | 12N |
| 23CUP4 | 8JR | 23FBP4 | 12L | 23JAP4 | 8HR | 24CP4B | 12L |
| 23CVB4 | 8JR | 23FCP4 | 8HR | 23JBP4 | 8HR | 24DP4 | 12L |
| 23CWP4 | 8JR | 23FDP4 | 8HR | 23JEP4 | 8HR | 24DP4A | 12L |
| 23CX4 | 8JR | 23FHP4 | 8HR | 23JFP4 | 8HR | 24QP4 | 12N |
| 23CZP4 | 12L | 23FKP4 | 8HR | 23JGP4 | 8HR | 24TP4 | 12N |
| 23DP4 | 8JR | 23FLP4 | 12L | 23JLP4 | 8HR | 24VP4 | 12L |
| 23DAP4 | 8HR | 23FMP4 | 8HR | 23KP4 | 8HR | 24VP4A | 12N |
| 23DBP4 | 8HR | 23FNP4 | 12L | 23KCP4A | 8HR | 24XP4 | 12D |
| 23DCP4 | 8HR | 23FRP4 | 8HR | 23MP4 | 8HR | 24YP4 | 12L |
| 23DEP4 | 8HR | 23FSP4 | 8HR | 23MP4A | 8HR | 24ZP4 | 12L |
| 23DFP4 | 8HR | 23FVP4 | 8HR | 23NP4 | 8HR | 25DP4 | 8HR |
| 23DHP4 | 8HR | 23FVP4A | 8HR | 23RP4 | 8JR | 25EP4 | 8HR |
| 23DJP4 | 8HR | 23FWP4 | 12L | 23SP4 | 8HR | 25HP4 | 8HR |
| 23DKP4 | 12L | 23FWP4A | 12L | 23TP4 | 12L | 25JP4 | 8HR |
| 23DLP4 | 12L | 23GP4 | 8HR | 23UP4 | 8HR | 25KP4 | 8HR |
| 23DLP4A | 12L | 23GBP4 | 8HR | 23VP4 | 8HR | 25LP4 | 8HR |
| 23DNP4 | 12L | 23GDP4 | 8HR | 23WP4 | 8HR | 25TP4 | 8HR |
| 23DQP4 | 8HR | 23GEP4 | 12L | 23XP4 | 12L | 27AP4 | 12M |
| 23DRP4 | 8HR | 23GHP4 | 8HR | 23YP4 | 12L | 27ABP4 | 8HR |
| 23DSP4 | 8HR | 23GJP4 | 8HR | 23ZP4 | 12L | 27ACP4 | 12L |
| 23DSP4A | 8HR | 23GJP4A | 8HR | 24AP4 | 12D | 27ADP4 | 8HR |
| 23DTP4 | 12L | 23GKP4 | 12L | 24AP4A | 12D | 27AEP4 | 8HR |
| 23DVP4 | 8HR | 23GRP4 | 12L | 23AP4B | 12D | 27AFP4 | 8HR |
| 23DVP4A | 8HR | 23GSP4 | 8HR | 24ADP4 | 12N | 27AGP4 | 8HR |
| 23DWP4 | 8HR | 23GTP4 | 8HR | 24AEP4 | 12L | 27EP4 | 12D |
| 23DYP4 | 8HR | 23GVP4 | 8HR | SG-24AEP4 | 12L | 27GP4 | 12D |
| 23DZP4 | 8HR | 23GWP4 | 8HR | 24AHP4 | 8HR | 27LP4 | 12N |
| 23EP4 | 8KP | 23GXP4 | 8HR | 24AJP4 | 12L | 27MP4 | 12D |
| 23EAP4 | 12L | 23HP4 | 8HR | 24ALP4 | 8HR | 27NP4 | 12N |
| 23ECP4 | 12L | 23HBP4 | 8HR | 24AMP4 | 7FA | 27RP4 | 12N |
| 23EDP4 | 12L | 23HFP4 | 8HR | 24ANP4 | 12L | 27RPA | 12N |
| 23EFP4 | 8HR | 23HFP4A | 8HR | 24AQP4 | 8HR | SG-27RP4 | 12N |
| 23EKP4 | 12L | 23HGP4 | 8HR | 24ASP4 | 12L | 27SP4 | 12L |
| 23ENP4 | 12L | 23HKKP4 | 8HR | 24ATP4 | 12L | 27UP4 | 12L |
| 23EQP4 | 8HR | 23HLP4 | 8HR | 24AUP4 | 12L | 27VP4 | 12L |
| 23ERP4 | 8HR | 23HMP4 | 8HR | 24AVP4 | 8JK | 27WP4 | 12AJ |
| 23ESP4 | 8HR | 23HQ4 | 8HR | 24AWP4 | 8HR | 27XP4 | 12L |
| 23ETP4 | 8HR | 23HRP4 | 8HR | 24AXP4 | 8HR | 27YP4 | 12L |
| 23EWP4 | 8HR | 23HUP4 | 8HR | 24BP4 | 12M | 27ZP4 | 8HR |
| 23EWP4A | 8HR | 23HUP4A | 8HR | 24BAP4 | 8HR | 30BP4 | 12D |
| 23EYP4 | 12L | 23HWP4 | 8HR | 24BCP4 | 12L | | |
| 23EZP4 | 8HR | 23HWP4A | 8HR | 24BEP4 | 8KW | | |
| 23FP4 | 8HR | 23HXP4 | 8HR | 24CP4 | 12N | | |

Vidicons

| Tube Type | Basing | Tube Type | Basing | Tube Type | Basing | Tube Type | Basing |
|-----------|--------|------------|----------|-----------|--------|-----------|--------|
| 7038 | 8HM | Z7911 | 8HM | Z7975HRB | 8ME | 8541A | 8ME |
| 7038V | 8HM | Z7912 | 8ME | Z7996B | 8ME | 8541X | 8ME |
| 7262A | 8HM | Z7919 | 8ME | Z7996HRB | 8ME | 8572 | 8ME |
| 7263A | 8HM | Z7927B | Z7927B | 8134 | 8LN | 8572V | 8ME |
| 7735A | 8HM | Z7927HRB | Z7927HRB | 8134V | 8LN | 8573A | 8ME |
| 7735B | 8HM | Z7929R,B,G | 8LN | 8484H | 8HM | 8573X | 8ME |
| 7735BX | 8HM | Z7975B | 8ME | 8507A | 8ME | 8604 | 8ME |


ESSENTIAL CHARACTERISTICS BASING DIAGRAMS


Basing diagrams on the following pages are schematic representations of the terminal connections for tube types shown on pages 22 thru 275 and pages 306 thru 347.

The diagrams are arranged in numerical-alphabetical order with a listing of all tube types having that particular basing arrangement. This listing is useful as a preliminary search for interchangeable tube types.


Basing diagrams for Color Picture Tubes, listed on pages 306 thru 317, appear on page 471. Basing diagrams for Monochrome Picture Tubes, listed on pages 318 thru 345, appear on page 472. Basing diagrams for Vidicons, listed on pages 346, and 347 appear on page 473.

RECEIVING TUBES



IAD4


 1AD4, 1AH4, 1AK4,
5678, 5875, 5972

IAE5

IAE5



IAG5

1AG5, 1AJ5, 1AK5



1AY2

 1AY2, 1AY2-A,
1BL2, 1T2

1BV2


1BV2


IV6


IV6


2AJ

6004



2B22


2B22



2C39B

2C39, 2C39A, 2C39B


2C39WA, 6897


2C40


 2C40, 2C40-A, 2C42,
2C43, 2C46

2E31

 2E31, 2E32, 2E35, 2E36,
5672, 5854, 6092, 6281

2E41


2E41, 2E42


2G21


2G21, 2G22



2P

673, 8008



2Z

1654



3C

 1AU3, 1B3-GT, 1G3-GT,
1G3-GTA, 1J3, 1J3A,
1K3, 1N2, 1N2-A, 6215

3G


3C23, FG-81-A, 5557


4AA

11E3, 11F3



4AB

2X2, 2X2-A



4AC

6Y3-G


RECEIVING TUBES




4AD
83-V




KEY
4AH
1R4, 7C4




S/NC
KEY
4AJ
OA3, OA3-A, OB3,
OB3-A, OC3, OC3-A,
OD3, OD3-A




S/NC
KEY
4AM
2C22



4AT
872-A




4AX
6014/C1K



4B
81




4BJ
9004




4BL


5559, 5720, 5728, 5830



KEY
4BU
OY4, OY4-G




4BZ
627, 5544




4C

5Z3, 80, 82, 83




4CB

11723



4CD


5560



KEY
4CG


6AU4-GT, 6AU4-GTA,
6AX4-GT, 6AX4-GTA,

6AX4-GTB, 6CQ4,
6DA4, 6DA4-A, 6DE4,
6DM4, 6DM4-A, 6DQ4,
6DT4, 6U4-GT, 6W4-GT,
6W4-GTA, 12AX4-GT,
12AX4-GTA, 12AX4-
GTB, 12D4, 12D4-A,
12DM4, 12DM4-A, 12DQ4,
17AX4-GT, 17AX4-
GTA, 17D4, 17D4-A,
17DE4, 17DM4, 17DM4-A,
17DQ4, 19AU4,
19AU4-GTA, 22DE4,
25AX4-GT, 25D4,
25W4-GT



4CK


5823



4D

00A, 01-A, 2A3, 6A3,
10, 12A, 20, (Cont'd)


4D (Cont'd)
26, 30, 31, 40, 45,
50, 71-A, X99, 182-B/
482B, 183/483, 5930




4E

v99


RECEIVING TUBES


4G


1-V, 12Z3



4K

1A4-t, 22, 32







4M

1A4-p, 184-p, 34












4P

 1Y2, 2Y2, 3B28, 816,
866-A, 5825, 7310

KEY
4R


0Z4, 0Z4-A, 0Z4-G


S/NC
KEY
4V
0A4-G

S/NC
KEY
4X
2W3, 2W3-GT

KEY
4Y
2V3-G

KEY
4Z
35Z3

5A

27, 37, 56, 76, 485



S/NC
KEY
5AA
2524, 3524-GT,
11724-GT

KEY
5AB
7Y4, 7Z4, 14Y4, 28Z5

KEY
5AC
7A4, 7B4, 14A4

KEY
5AD
11A4, 11B4

S/NC
KEY
5AF
6H4-GT

KEY
5AG
1LH4

KEY
5AL
35Y4

5AM
45Z3

5AP
1A3

KEY
5AV
393-A

RECEIVING TUBES




5AW

807




5AY

6D4




5AZ

1625



5B

6A4/LA



5BB

954, 956




5BC

955, 5731




5BD

957, 958-A




5BE

959


KEY
5BF

1AB5




5BG


9005



5B0



0A2, 0B2, 0C2, 5651,
5651-A

5BQ

25DK4, 35W4, 36AM3,
36AM3-A, 36AM3-B,
50DC4


5BS

6X4, 12X4, 6202

KEY
5BT6BG6-G, 6BG6-GA,
6CD6-G, 6CD6-GA,6DN6, 6EX6,
19BG6-G, 19BG6-GA,
21EX6, 25CD6-G,
25CD6-GA,
25CD6-GB, 25DN6,
25EC6, 35CD6-GA,
7867


5BZ

1W4




5C

46, 49




5CE

6AB4, 6664



5CF












1C3











5D

84/6Z4


RECEIVING TUBES



5AZ4, 5R4-G, 5R4-GY,
5R4-GYA, 5R4-GYB,
5T4, 5U4-G, 5U4-GA,
5U4-GB, 5V3, 5V3-A,
5W4, 5W4-GT, 5Y3-G,
5Y3-GA, 5Y3-GT, 5931



RECEIVING TUBES




6AF
1Q5-GT




6AM
6AL6-G, 6BQ6-G,
6BQ6-GA, 6BQ6-GT,
6BQ6-GTA,

6BQ6-GTB, 6CU6,
6DQ6, 6DQ6-A,
6DQ6-B, 6FH6,
6GW6, 12BQ6-GA,
12BQ6-GTA,
12BQ6-GTB, 12CU6,
12DQ6, 12DQ6-A,
12DQ6-B, 12GW6,
17BQ6-GTB, 17DQ6,
17DQ6-A, 17DQ6-B,
17GW6, 25BQ6-GA,
25BQ6-GT,
25BQ6-GTB, 25CU6,
25DQ6, 25DQ6-A,
7623, 7624




6AO
6V5-GT




6AR

1AE4, 1AF4, 1AM4,
1LA, 1T4, 1U4, 5910



6AS

6B5




6AU

1AF5, 1AR5, 1S5




6AX

1L5




6B

2A5, 41, 42, 43




6BA

3D6, 3LE4




6BA4




6BB

3LF4




6BD

1SA6-GT




6BE

1SB6-GT




6BG

6C4, 6DR4, 12G4,
6100, 6135




6BH

9006




6BJ

28Z5




6BQ

6AR6, 6098, 6384



6BS












502-A, 2050, 2050-A











6BT

3AL5, 6AL5, 6EB5, 12AL5,
5726, 6097, 6663, 6887,
6919, 7055


RECEIVING TUBES




6FW5, 12AV5-GA, 17AV5-GA, 18A5, 25AV5-GA, 25AV5-GT, 6000




RECEIVING TUBES




6K
6Z5




6K4



6L
1A6, 1C6




6M
1B5/25-S




6AC5-GT, 6AE5-GT,
6AF5-G, 6CS, (Cont'd)


6Q (Cont'd)
6C5-GT, 6J5,
6J5-GT, 6L5-G,
6P5-GT, 12E5-GT,
12J5, 12J5-GT,
25AC5-GT, 884




6R
2E5, 6A85/6N5, 6E5,
6T5, 6U5




6AX-5-GT, 6W5-G,
6X5, 6X5-GT, 6ZY5-G,
5838, 5839, 5852




6T
6A5-G




6W
1F6




6X
1A5-GT, 1C5-GT,
1F5-G, 1G5-G,
1J5-G, 1T5-GT




7A
59



7AA
1H6-G, 1H6-GT




7AB
1G6-GT, 1J6-G,
1J6-GT




7AC
5V6-GT, 6EY6, 6EZ5,
6L6, 6L6-G, 6L6-GA,
6L6-GC, 6U6-GT,


6V6, 6V6-GT,
6V6-GTA, 6W6-GT,
6Y6-G, 6Y6-GA,
6Y6-GT, 7EY6, 12A6,
12A6-GT, 12EN6,
12L6-GT, 12V6-GT,
12W6-GT, 17L6-GT,
17W6-GT, 25C6-G,
25C6-GA, 25L6,
25L6-GT, 25W6-GT,
35L6-GT, 50C6-G,
50C6-GA, 50L7-GT,
1614, 1622, 1631,
1632, 5824, 5881,
5932, 5992, 6046,
7408, 7581, 7581-A




7AF
1F7-GH, 1F7-GV



7AG
6AD6-G, 6AF6-G




7AH
6AE6-G




7AJ
7A6, 7X6, 50X6


RECEIVING TUBES




7AK
1LA6, 1LC6



7AL
1629




7AM
1N6-G, 1N6-GT




7A0
1LC5, 1LG5, 1LN5

7AP
(SEE 7AQ)


3Q5-GT




7AQ
3B5-GT, 3C5-GT




7AT
1AQ5, 1R5




7AU
6N6-G




7AV
1S4




7AX
6AE7-GT




7AZ
6SF7, 6SV7, 12SF7,
12SF7-GT




7B
6A6, 6E6, 53, 5608-A




7BA
3Q4, 3S4, 3W4



7BB
3A4




7BC
3A5




7BD
3BC5, 3CE5, 4BC5,
4CE5, 6AG5, 6AJ5,


6AK5, 6AN5, 6BC5,
6CE5, 408A, 5590,
5591, 5654, 6028,
6096, 6186, 6968,
9001, 9003



7BE
3B7




7BF
516, 616, 616-A,
1916, 5844, 5964,
6045, 6101, 7244,
7244-A




7BH
2C21/1642

RECEIVING TUBES



7BJ


6AN6




7BK

3AU6, 3BA6, 4AU6,
4BA6,


6AH6, 6AK6, 6AU6,
6AU6-A, 6BA6, 6BD6,
6CG6, 6FD6, 6HR6,
6HS6, 12AC6, 12AF6,
12AU6, 12BA6,
12BD6, 12BL6,
12CX6, 12CY6,
12DZ6, 12EA6,
12EK6, 12EZ6,
18GD6, 18GD6-A,
19HR6, 19HS6,
26A6, 26CG6, 5749,
6136, 6485, 6660,
7543, 8425, 8425-A,
8426, 8426-A



7BN


2D21, 5696,
5696-A, 5727, 6525

7BQ

6J4, 7137, 7245,
7245-A, 8532


7BR

6F4, 6L4



7BS


9002




7BT

3AV6, 4AV6, 6AQ6,
6AT6, 6AV6, 6BF6,

6BK6, 6BT6, 6BU6,
12AE6, 12AE6-A,
12AJ6, 12AT6,
12AV6, 12BF6,
12BK6, 12BT6,
12BU6, 12FK6,
12FM6, 12FT6,
18FY6, 18FY6-A,
18GE6, 18GE6-A,
26C6


KEY
7BW

3C6




7BZ

5AQ5, 6AQ5, 6AQ5-A,
6BF5, 6DS5, 6HG5, 6HR5,
11DS5, 12AQ5, 35B5, 50B5,
6005, 6095, 6669




7C

2A7, 6A7




7CA

6N4



7CB


1Z2

7CC
(See 7BK)


7CH

3BE6, 3BY6, 3CS6,
4BE6, 4CS6, 6BE6,


6BY6, 6CS6, 12AD6,
12AG6, 12BE6,
12CS6, 12EG6,
12FA6, 12GA6,
18FX6, 18FX6-A,
26D6, 5750, 5915,
5915-A, 7036

KEY
7CJ


3E6

KEY
7CK2E26, 6146, 6146-A,
6146-B, 6159-A, 6159-B,

6883, 6883-A,
6883-B, 8032-A, 8552,
7212, 7357, 7358,
7607, 8032,
8298,
8298-A



7CL

2E24



7CM

 3BZ6, 3CB6, 3CF6,
3DK6, 4BZ6,

4CB6, 4DE6, 4DK6,
 4EW6, 4GM6, 4JK6,
 4JL6, 4LU6, 4SEW6, 4SGM6,
 5JK6, 5JL6, 6AS6, 6BH6,
 6BJ6, 6BJ6-A, 6BZ6, 6CB6,
 6CB6-A, 6CF6, 6DB6, 6DC6,
 6DE6, 6DK6, 6EW6, 6GM6,
 6HQ6, 6JH6, 6JK6, 6JL6,
 6LU6, 12AW6, 12BZ6,
 12DK6, 15EW6, 5725,
 6187, 6265, 6661, 6662,
 6676, 6954, 7056,
 7732, 8084, 8136



7CQ

2E30



7CV

 4GZ5, 6AS5, 6CA5,
6CU5, 6EH5, (Cont'd)


7CV (Cont'd)
 6GZ5, 11C5,
 12AS5, 12C5, 12CA5,
 12CN5, 12CU5,
 12DM5, 12ED5,
 12EH5, 12FX5, 12R5,
 17C5, 17CA5, 17CU5,
 17R5, 19FX5, 25C5, 25CA5,
 25EH5, 25F5, 25F5-A,
 32E5, 32E5-A,
 34GD5, 35C5, 35EH5,
 40FR5, 50C5, 50CA5,
 50EH5, 50FA5,
 50FK5, 60FX5


7CX


5679


7CY


384


7D

2B7, 6B7


7DC

11L6, 1U6



7DF

 3BN6, 4BN6, 6BN6,
6KS6, 12BN6

7DK

 1DY4, 1DY4-A,
2AF4, 2AF4-A,


2AF4-B, 2DX4, 2DY4,
 2DY4-A, 2DZ4, 2T4,
 3AF4-A, 3AF4-B,
 3DX4, 3DY4,
 3DY4-A, 3DZ4,
 5AF4-A, 6AF4,
 6AF4-A, 6AN4,
 6DX4, 6DY4,
 6DY4-A, 6DZ4,
 6T4, 7738, 8334


7DW


12H4



7E

6F7


7EA


6CR6, 12CR6


7EG

 2BN4, 2BN4-A, 3BN4,
3BN4-A, 4BN4, 6BN4,
6BN4-A

7EN


 3DT6, 3DT6-A, 4DT6,
4DT6-A, 5GX6,

5HZ6, 6DT6,
 6DT6-A, 6GX6, 6GY6,
 6HZ6, 12DT6


7EQ


6842

RECEIVING TUBES




7EW

7EW (Cont'd)
3EV5,
4CY5, 6CY5, 6EA5,
6EV5, 7167, 7717,
8113



7F


12A5



7FB


12EL6

2CY5, 2EA5, 2EV5,
3CY5, 3EA5, (Cont'd)




7FD

12K5



7FL


2EN5



7FP


2ER5, 2ES5, 2FH5,
2FQ5, 2FQ5-A, 2FY5,

2GK5, 3ER5, 3ES5,
3FH5, 3FQ5, 3FQ5-A,
3GK5, 4GK5, 6ER5,
6ES5, 6FH5, 6FQ5,
6FQ5-A, 6FY5, 6GK5




7FQ

2FV6, 6FV6




7FZ

35GL6, 50HC6,
50HK6




7G

6C7




7GA

2FS5, 2GU5, 3FS5,
3GU5, 6FG5, 6FS5,
6GU5




7GE

7851



7GK


2GW5, 3GW5,
4GW5, 6GW5



7GM


2HA5, 2HK5, 2HM5,
2HQ5, 3HA5, 3HK5,

3HM5, 3HQ5, 4HA5,
4HK5, 4HM5, 4HQ5,
6HA5, 6HK5, 6HM5,
6HQ5




7H

6D7, 6E7



7K


12A7

S/NC
KEY
7Q

6AX6-G, 6H6,
6H6-GT, 12H6,

25X6-GT, 25Z6,
25Z6-GT, 35Z6-G,
50AX6-G, 50Y6-GT,
50Z6-G, 117Z6-GT

RECEIVING TUBES




7R
6J7, 6J7-G, 6J7-GT,
6K7, 6K7-G, (Cont'd)

7R (Cont'd)
6K7-GT, 6S7,
6S7-G, 6U7-G,
6W7-G, 12J7-GT,
12K7-GT, 1620


7S
(See 7AC)

6G6-G, 6G6-GT,
6K6-GT, 9EF6,
12EF6, 25A6,
25A6-GT, 25B6-G,
26E6-G, 1621, 6550
8417


6DG6-GT, 6EF6, 6F6,
6F6-G, 6F6-GT,



6L7, 6L7-G, 1612




6P7-G




6B6-G, 6Q7, 6Q7-G,
6Q7-GT,


6R7, 6R7-G, 6R7-GT,
6T7-G, 6V7-G,
12Q7-GT




6AC6-GT, 25N6-G




1A7-G, 1A7-GT,
1B7-G, 1B7-GT,
1C7-G, 1D7-G




6A8, 6A8-G, 6A8-GT,
6D8-G, 12A8-G,
12A8-GT




70L7-GT




70A7-GT




7A7, 7F7, 7N7,
14A7, 14F7, 14N7



6SA7-GT, 12SA7-GT,
12SY7-GT




7E7, 7R7, 14E7, 14R7




25D8-GT

8AJ
(See 8AW)

1D8-GT




7Q7, 14Q7




50Y7-GT, 50Z7-G

RECEIVING TUBES




8A0

117L7/M7-GT




8A5

3A8-GT




8AV

117N7-GT, 117P7-GT




8AW

1B8-GT




8AX

1L6




8AY

6A87-G




8B

6N7, 6N7-G, 6N7-GT,
6Y7-G, 6Z7-G, 1635

8BD


2C50, 2C52, 6AS7-G,
6AS7-GA,

6AS7-GYB, 6BL7-GT,
6BL7-GTA, 6BX7-GT,
6DN7, 6EA7, 6EM7,
6GL7, 6SL7-GT, 6SN7-GT,
6SN7-GTA, 6SN7-GTB,
6SU7-GTY, 8SN7-GTB,
10EG7, 10EM7, 12SL7-GT,
12SN7-GT, 12SN7-GTA,
12SX7-GT, 13EM7, 15EA7,
1633, 5691, 5692, 5998,
5998-A, 6080, 6082,
6082-A, 6113, 6188,
6336, 6336-A, 6394,
6394-A, 6520, 6528,
7105, 7236, 7802




8BE

6AH7-GT, 12AH7-GT




8BF

7K7




8BJ

7W7, 14W7




8BK

6SG7, 6SG7-GT,
6SH7, 6SH7-GT,
12SG7, 12SH7


8BL

7J7, 7S7, 14J7, 14S7




8BN

7E5




8BO

7AB7




8BS

28D7




8BU

12L8-GT, 26A7-GT,
1644

8BV


7G8




8BW

7F8, 14F8


RECEIVING TUBES




8BZ
7X7, 14X7




1E7-G, 1E7-GT



6S8-GT, 12S8-GT




6AL7-GT




8CJ

2C51, 5670, 6385,
6386, 6854, 7861




8CK

6AQ7-GT




8CN

1C8, 1E8




8CO

1Q6




8CP

1AC5, 1AD5, 1V5,
1W5




8CQ

6AW7-GT




8CS

5694




8CT

6BA7, 12BA7



8CY

5797




8CZ

5798




8DA

1S6, 1T6



8DB

5635




8DC

5636, 5908, 5916, 6205,
6206, 6943, 6944, 8414,
8443, 8517, 8522, 8524


8DE
(See 8DL)

5840, 8528, 8529, 8530



8DF

6AZ5




8DG

68F7, 68F7-A, 68G7,
6021, 6111, 6112, 6320,


RECEIVING TUBES

6321, 6832, 6947, 6948,
7079, 7327, 7550, 7759,
7760, 7887, 7889, 7962,
7963, 8103, 8525, 8526




8DJ

5896, 5903, 6110



8DK


6AD4, 6AK4, 5718, 5719,
5897, 5898, 5904, 5977,
6814, 6946, 7888, 8527



8DL


5639, 5840, 5899,
5900, 5901, 5902,

5905, 5906, 5907,
6049, 6223, 6224,
6225, 6788, 6945,
7761, 7762, 8064,
8211




8DM

5987




8DN

1D3




8DQ

5967, 5968




8DR

5969




8DS

5970




8DY

6BA5




8E

688, 688-G, 688-GT,
12C8




8EE

6169




8EH

6AZ6, 6184




8EL

6AH4-GT




8EP

6CA7



8EY

6352




8EZ

3A3, 3A3-A, 3A3-B

8EZ
(Cont'd)


3A3-C, 3AW3, 3CA3-A,
3CV3, 3CV3-A, 3CZ3,
3CZ3-A




8F

25A7-GT


RECEIVING TUBES


8FO


6247


**KEY
8FU**


6BD4, 6BD4-A


**KEY
8FV**


2V2, 3C2


8FY


6533, 8096



**KEY
8G**

6C8-G, 6F8-G



**KEY
8GB**

6BL4



**KEY
8GC**

 6BK4, 6BK4-A, 6BK4-B
6BK4-C, 6BU4

**KEY
8GD**


6CB5, 6CB5-A, 6CL5


**KEY
8GH**


3B2


**KEY
8GL**


6792


8GQ


6690


**KEY
8GS**


15A8


**KEY
8GT**


25E5, 50E5


**KEY
8GV**


6M3


**KEY
8H**


6J8-G


**KEY
8HC**


2B3


**KEY
8HE**


6853


8HF

6221, 6222



**KEY
8HG**

6889



**KEY
8HY**

7027, 7027-A


RECEIVING TUBES


8LS


8210


8LT


8213


8LW


8254


**KEY
8BMG**


50JY6



**KEY
8MH**

3CA3



**KEY
8MK**

3CU3, 3CU3-A



**KEY
8ML**


 61C6, 61H6,
61H6-A

**KEY
8MQ**

6LJ6, 6LJ6-A



**KEY
8MT**

3DF3, 3DF3-A, 3CX3



**KEY
8MU**

 2CN3-A, 2CN3-B, 3CN3,
3CN3-A, 3CN3-B

**KEY
8MW**


6EL4, 6EL4-A


**KEY
8MX**


3CY3, 3DB3, 3DJ3


**KEY
8MY**

3DA3



**KEY
8MZ**

3DC3



**KEY
8N**

 6AB7/1853, 6AC7,
6AJ7, 6SD7-GT,


8N (Cont'd)

 6SE7-GT, 6SJ7,
6SJ7-GT, 6SK7,
6SK7-GT, 6SS7,
12SJ7, 12SJ7-GT,
12SK7, 12SK7-GT,
5693, 6134, 6137,
6888

**KEY
8NB**


26HU5


**KEY
8NC**

6LW6, 26LW6



**KEY
8ND**

1DG3, 1DG3A



**KEY
8NJ**

6EN4


RECEIVING TUBES







3DR3, 3DS3




3DH3






6MA6

6SQ7, 6SQ7-GT, 6SR7, 6SR7-GT,
6ST7, 6SZ7, 12SQ7,
12SQ7-GT, 12SR7,
12SR7-GT, 12SW76SA7, 6SB7-Y, 12SA7,
12SY76SC7, 6SC7-GT,
12SC7, 1634


12B8-GT, 25B8-GT




7A8

7A7, 7AD7, 7AH7,
7AJ7, 7AK7, 7B7,7C7, 7G7, 7H7, 7L7,
7T7, 7V7, 14A7/12B7,
14C7, 14H7, 61457B6, 7C6, 7E6, 14B6,
14E6


7B8, 14B8




6AG7, 6AK7




32L7-GT

9A
6AU7, 6AX7, 7AU7,
9AU7, 12AD7,
(Cont'd)


9A (Cont'd)

12AE7, 12AT7, 12AU7,
12AU7-A, 12AV7, 12AX7,
12AX7-A, 12AY7, 12AZ7,
12AZ7-A, 12BH7,
12BH7-A, 12BZ7, 12DF7,
12DM7, 12DT7, 12DW7,
12FV7, 12U7, 5751, 5814,
5814-A, 5963, 5965,
5965-A, 6072, 6072-A, 6189,
6201, 6211, 6211-A, 6414,
6679, 6680, 6681, 6829,
6851, 6913, 6955, 7025,
7247, 7318, 7728, 7729,
7730

65A4, 65A4-A



5879

4BL8, 5EA8, 5GH8, 5GH8-A,
5KD8, 5MQ8, 5UB, 6AX8, 6BL8,
(Cont'd)


9AE (Cont'd)

6EA8, 6GH8, 6GH8-A,
6GJ8, 6HL8, 6KD8, 6LM8,
6LM8-A, 6LN8, 6MQ8, 6MUS
6U8, 6US-A, 8MUS, 9EA8,
9GH8-A, 9UB-A, 19EA8,
6678, 7059, 7687, 7731,
8445




9AG

12A4, 12B4, 12B4-A



9AH


6V8, 19V8



9AJ


4BC8, 4BQ7-A, 4BS8,
4BX8, 4BZ7, 4BZ8,
(Cont'd)

9AJ (Cont'd)
4KN8, 5BK7-A,
5BQ7-A, 5BS8, 5BZ7,
6AQ8, 6BC8, 6BK7,
6BK7-A, 6BK7-B,
6BQ7, 6BQ7-A,
6BS8, 6BX8, 6BZ7,
6BZ8, 6CG7, 6FW8,
6JK8, 6KN8, 6CG7,
8JK8, 17EW8, 17JK8,
7057, 7058, 7803,
8223, 8431




9AK

5X8, 6X8, 6XB-A,
9X8, 19X8




9AM

6BW6




9AQ

3EH7, 3EJ7,
4EH7, 4EJ7,
6EH7, 6EJ7, 6GK7




9AX

6BC7, 6BJ7




9BD

6V3, 6V3-A




9BF

11HM7, 12BV7, 12BY7,
12BY7-A, 12DQ7,
12GN7, 12GN7-A,
12HG7, 7733, 8448




9BJ

2HR8, 4HR8




9BQ

6BK5, 12BK5, 25BK5,
50BK5




9BS

12DF5, 26Z5




9BT

6BN7




9BV

6CL6, 6197, 6677




9BX

6AJ4, 6AM4




9CB

6AF3, 6AL3, 6BR3, 6R3,
12AF3, 12BR3, 12BY3,
16AQ3, 17BR3, 25BR3,
34R3




9CD

6203



9CE


6216




9CF

9BR7, 12BR7,
12BR7-A
8447

RECEIVING TUBES




9CK

5CM6, 6CM6, 6DW5,
12CM6, 12DW5


9CQ

6267




9CT


6287




9CV

6BQ5, 6CW5, 8BQ5,
8CW5, 8CW5-A, 10BQ5,
10CW5, 15CW5,
30CW5, 45B5, 7189,
8327


9CY

5A8B, 6A8B,
6A8B-A, 6HJ8

9CZ


12G8, 6350, 6463,
6840

9DA


5AN8, 6AN8,
6AN8-A, 10C8,
12CT8, 7060, 7258
8489

9DB

6DA5




9DC

4JW8, 5JW8, 5KE8, 6JW8, 6KE8,
6LX8, 6MGB, 8A8, 9A8
9JW8, 17A89DE
(SEE 9AJ)


9DH

6094




9DJ

6BW4, 12BW4




9DP

6AR8, 6JH8




9DR

6BC4




9DS

5AS8, 6AS8




9DT

152, 152-A, 2J2, 3A2




9DV

6486, 6486-A



9DW

5AT8, 6AT8, 6AT8-A




9DX


6A8B, 6A8B-A, 6AW8,
6AW8-A, 6BA8, 6BA8-A,
(Cont'd)

9DX (Cont'd)


6BH8, 6CX8, 6EB8, 6GN8,
6HF8, 6HZ8, 6J8B, 6JL8,
6JT8, 6JV8, 6KR8, 6KR8-A,
6KS8, 6KV8, 6LB8, 6LF8,
6LQ8, 6LY8, 6MVB, 8AUB,
8AUB-A, 8AW8-A, 8BA8-A,
8BH8, 8CX8, 8EB8, 8GN8,
8J8B, 8JL8, 8JT8, 8JV8,
8KR8, 8KS8, 10EB8,
10GN8, 10HF8, 10JT8,
10JY8, 10KR8, 10LB8,
10LW8, 10LY8, 10LZ8,
11J8B, 11KV8, 11LQ8,
12AUB, 7716




9DZ
5AV8




9E
5T8, 6R8, 6T8,
6T8-A, 19C8, 19T8




9EC
5B8




9ED
6AZ8




9EF
6CS7, 6DA7, 8CS7,
10DA7




9EG
5BE8, 5DH8, 6BE8,
6BE8-A




9EJ
6582, 6582-A




9EN
6CN7, 8CN7




9EP
7898




9EQ
6688, 7721, 7722




9ER
6BJ8, 6BN8, 8BN8




9ES
6CM7, 8CM7



9ET
6754




9EU
6GC5, 12AB5, 6973,
7061




9EX
6B8, 6FY8, 6HC8,
11B8, 12FY8, 16A8,
17MC8, 25FY8, 50BM8,
50FY8




9FA
5BR8, 5FV8, 5MB8,
6BR8, 6BR8-A, 6FV8,
6FV8-A, 6JN8, 6MB8,
12EC8, 12JN8, 19HV8,
19JN8, 8446




9FC
4CX7, 6CH7, 6CX7




9FE
5BT8, 6BT8




9FG
3B8, 3B8-A,
3KF8, 4B8, 4KF8,
6B8, 6B8-A, 6KF8,
6MK8, 6MK8-A




9FH
12F8



9H

 5687, 6900, 7044,
7370, 7892

9HE


6DC8


9HF


 6DE7, 6DR7, 6EW7,
6FD7, 6FR7, 10DE7,

 10DR7, 10EW7,
10FD7, 13DE7, 13DR7,
13FD7, 13FR7, 15EW7,
19DE7, 19EW7, 20EW7

9HG


12DE8


9HK

5BW8, 6BW8


9HL


7645


9HN


 5CZ5, 6CZ5, 6DT5,
6EM5, 8EM5, 12DT5,
25DT5

9HP


 6AY3, 6AY3-A, 6AY3-B,
6BA3, 6BH3, 6BH3-A,


 6BS3, 6BS3-A, 6CH3,
6CJ3, 6CK3, 6CI3, 6CM3,
6DW4, 6DW4-A, 6DW4-B,
6DN3, 12AY3, 12AY3-A, 12BS3,
12BS3-A, 12CK3, 12CL3,
12DW4-A, 17AY3,
17AY3-A, 17BH3,
17BH3-A, 17BS3,
17BS3-A, 17CK3, 17CL3,
17DW4-A, 22BH3,
22BH3-A, 25CK3, 25CM3,
34CM3

9HR

12DL8, 12DV8



9HV

12EM6



9HX

 6DX8, 10DX8,
15DQ8

9HZ


12DK7



9JC

12DW8



9JD

12DY8



9JE

 6DZ8, 9DZ8, 12DZ8,
18DZ8, 35DZ8

9JF

5EU8, 6EU8



9JG

5EH8, 6EH8


9JL


2DF4

RECEIVING TUBES




9JT

7199




9JU

12DS7, 12DS7-A




9JX

12DU7




9JY

12DV7




9K

5763




9KA

6EZ8, 19EZ8




9KD

7234




9KE

7235




9KH

7239




9KN

6GV7, 7GV7




9KP

6FH8




9KR

6FM8, 14GT8, 14JG8,
7724


9KS

7360




9KT

12FQ8




9KU

12FR8




9KV

12FX8, 12FX8-A




9LC

6GE8, 7734




9LE

7189-A



9LG


6CY7, 8CY7, 11CY7




9LJ

7548

RECEIVING TUBES




9QW

6HL5, 12HL5, 50HN5,
60HL5


9QX

8463




9QY


6LC8, 8LC8



9QZ


6LE8, 8LE8, 10LE8,
15LE8

9RA


6JQ6, 12JQ6, 17JQ6,
25JQ6

9RF


9KC6



9RG


1BC2, 1BC2-A, 1BC2-B
1BH2, 1BH2-A

9RJ


6KG6, 21KQ6, 27KG6,
29KQ6, 29LE6, 40KG6

9RL

6LT8, 8LT8, 11LT8




9RQ

6MD8, 6ML8,
9ML8, 12MD8


9RT

2BJ2, 2BJ2-A, 3A2-A




9RU

6ME8




9RW

7868



9RX

6CT3, 12CT3, 17CT3
25CT3


9S B

25HX5




9SD

6CJ3




9SF

6JG5




9S G

6DK3, 19DK3, 25DK3



9V


1AU2, 1V2, 2AV2, 2BA2




9V


5842

RECEIVING TUBES



9X

5847, 5847-A



9Y

 1AX2, 1BK2, 1BX2, 1X2,
1X2-A, 1X2-B, 1X2-C
2AZ2

10F


6C9, 17C9



10G

6J9



10H

19Q9



10K

 5U9, 5X9, 6U9, 6X9,
8U9, 8X9

10L

6Y9, 11Y9, 16Y9


10N

6AB9, 15AB9, 17AB9


12AQ


 2CW4, 2DS4, 2EG4,
6CW4, 6DS4, 13CW4,
7586, 7895, 8056, 8203,
8382, 8393, 8441, 8456,
8628

12AS


7587, 8380



12BA


7688, 7689, 7690


12BF


6B10, 8B10


12BJ


 6GE5, 6GF5, 6HB5,
10Z10 12GE5, 17GE5,
21HB5, 21HB5-A

12BL

 6AX3, 6BJ3, 12AX6,
12BT3, 17AX3, 22BW3

12BM


6FJ7



12BQ


6C10


12BR

5AZ3



12BT

 6J10, 6Z10, 13J10,
13Z10, 17AB10, 17X10

12BU

 6AL11, 6G11, 10AL11,
12AL11, 12G11

12BW


6J11

RECEIVING TUBES




12EU

7984, 8156




12EW

2A52, 2A52-A,
3B52, 3B52-A




12EY

6HE5, 6JA5, 6JB5
6JCS, 10JA5




12EZ

6AD10, 6AD10-A 6BF11,
6BY11, 6T10, 6Y10, 10T10,
12AE10, 12T10, 13V10,
17BF11, 17BF11-A, 18AJ10
24BF11




12FA

6EA4, 6EH4 6EH4-A




12FB

6HF5




12FC

33G7




12FE

6AC10, 6AK10, 6U10,
8AC10 8AC10-A 9AK10
12AC10




12FJ

6JM6, 6JM6-A,
17JM6, 17JM6-A




12FK

6JN6, 6JN6-A, 12JN6,
12JN6-A, 17JN6,
17JN6-A, 21JN6,
33JV6




12FL

6HJ5, 21HJ5, 30HJ5




12FM

6T9




12FN

33GY7, 33GY7-A
50GY7 50GY7-A




12FP

6BH11, 8BU11




12FQ

4HA7, 5HA7




12FR

4HC7, 5HC7




12FS

6HE7, 12HE7, 33HE7, 38HE7,
38HK7, 53HK7, 58HE7




12FU

8BM11, 9BJ11



12FV


3AT2, 3AT2-A, 3AT2-B,
3BN2, 3BN2-A



12FX

6BW3
6BZ3, 6CD3, 17BW3,
17BZ3, 22B3, 34CD3


RECEIVING TUBES



12FY


6JS6, 6JS6-A, 6JS6-B,
6JS6-C 6LR6, 6MB6 12JS6,
21JS6-A 23JS6-A, 23MB6
30MB6 31JS6-A, 31JS6-C

35LR6




12GA

6BE3, 6BE3-A, 12BE3,
12BE3-A, 17BE3,
17BE3-A




12GC

14BL11




12GD

6JZ6, 21JZ6




12GF

6BN11, 8BN11




12GH

16KA6, 21KA6




12GJ

6LB6




12GK

6CE3, 34CE3




12GL

14BR11




12GM

6KE6




12GN

8AC9




12GQ

3BF2




12GS

11BT11, 11CH11




12GT

6AG10



12GU


6KN6, 42KN6



12GV


1AD2, 1AD2-A

RECEIVING TUBES




12GW

6KD6, 6LF6, 6LV6
30KD6, 36KD6, 40KD6




12GX

6AF10




12GY

6H55, 6HV5, 6HV5-A
6HZ5, 6JD5




12GZ

6AK9, 16AK9, 23Z9




12HA

3AW2, 3AW2-A




12HB

6BV11, 12BV11




12HC

6EF4, 6EJ4, 6EJ4-A




12HD

6BW11




12HE

6AG9, 6AL9, 8AL9




12HF

6CG3, 6DQ3, 6DQ3-A
6DT3, 19CG3, 19DQ3
19DQ3-A, 25CG3




12HG

6MJ8




12HJ

6AH9, 9AH9




12HK

3BL2, 3BL2-A,
3BM2, 3BM2-A




12HL

6LG6, 21LG6, 21LG6-A




12HN

6CA11, 11CA11




12HR

31AL10




12HS

2BU2




12HT

32HQ7



12HU


6MN8, 9MN8



12HW


11CF11

RECEIVING TUBES




12HX

19DE3




12HY

3BT2, 3BT2-A, 3BS2
3BS2-A, 3BW2, 3BS2-B




12HZ

1BY2, 1BY2-A




KEY
12J

5890




12JA

6LX6




12JB

2BU2




12JE

6JH5, 6JK5




12JH

12JF5




FG-27-A

FG-27-A, 5632/C3J,
6011/710, 7725




FG-97

FG-97, FG-98-A




FG-105

FG-105




FG-154

FG-154




FG-172, 414




407A

407A




512-AX

1AG4, 512-AX, 6088,
6418, 6419, 6519,
6526, 6611, 6612




575-A

575-A




672-A

672-A




678


678



GL-5550



















GL-5551-A, GL-5552-A
GL-5553-B, GL-5822-A
GL-7681







GL-5554

RECEIVING TUBES



5675, 5876, 5876-A, 8727

5676, 5677, 6029, 6121, 6286, 7246




5702, 5784, 6245, 6540, 6872, 7083


5703

5704


RECEIVING TUBES




5744
5744



5767




5785
5785




5829
5829


5830
(See 4BL)




5855




5873
5873




5885
5885




5886
5886




5894-B




5971
5971




5975
5975, 6152




5993
5993




5995
5995




6051
6051, 7626




6173
6173




6193
6193




GL-6228






GL-6251




GL-6283 GL-7399


6299


6299, 7391, 7644


6325
6325

6327
6327

6355


6355


6442


6442, 6771




GL-6512



6763

6763



6807

 6807, 6809,
6858/760

6808


6808, 6859/760-P




GL-6848, GL-8513


6856


6856/740




GL-6942


6999


6999


7077



7077, 7486




GL-7151




GL-7171


7216

7266

7266, 7841


7289

7289


7296

7296, 7588


RECEIVING TUBES




7311
7311




7312
7312




7313
7313




7314
7314




7430
7430




7462
7462, 7625, 7720




7518/710L
7518/710L, 7726




GL-7669, GL-7671,
GL-7972, GL-7998




GL-7673




7768, 7913




7784




7815




7211, 7815R, 7855,
8403, 8745




7894
7894, 8228




7910




7911



7979
7979



7985




8081
8081, 8082, 8083




8100
8100, 8142, 8143, 8217,
8318, 8318-A, 8345,

RECEIVING TUBES


8100 (Cont'd)
8346, 8347, 8474, 8475,
8475-A, 8476, 8477,
8477-A, 8478, 8582,
8582-A, 8760




8108




8116, 8116A, 8117,
8117A, 8118, 8643




GL-8205




8412




8413, 8859



GL-8500




8506




8533


RADIATOR FOR 8535,
8537, 8539




8534, 8536, 8538




8595




8632




8639




8751, GE17701




8755, 8755A,
8847, 8847A




8808




GL-8866



8892




8893




8906


RECEIVING TUBES




8907




8917




GE12661




GE13971, GE16231, GE18651




GE14501




GE14811




GE15371




GE16411




GE16841




GE17241













GL-51025, GL-51074























GL-51038, GL-51065
GL-51070







GL-51064







MONOCHROME PICTURE TUBES





VIDICON TUBES



MEMORANDA
