

# MARCONI VALVES


## MARCONI VALVES

### TYPE DEP 410

*Approximate Operating Data—Neglecting Resistance of Output Circuit.*

Anode Volts	Negative Grid Bias Volts	Anode Current in milliamperes (approx.)
75	4½	4.5
100	6	6.5
125	9	6.8
150	10½	9.0

When used in the last stage of a 2 or 3 valve amplifier, it is desirable to employ a high tension battery voltage of 120 to 150 to ensure complete absence of distortion. If used in a low frequency amplifier in stages preceding the last position, about 75 to 100 volts H.T. is suitable. In all cases the requisite grid bias as shown in the preceding table should be employed.

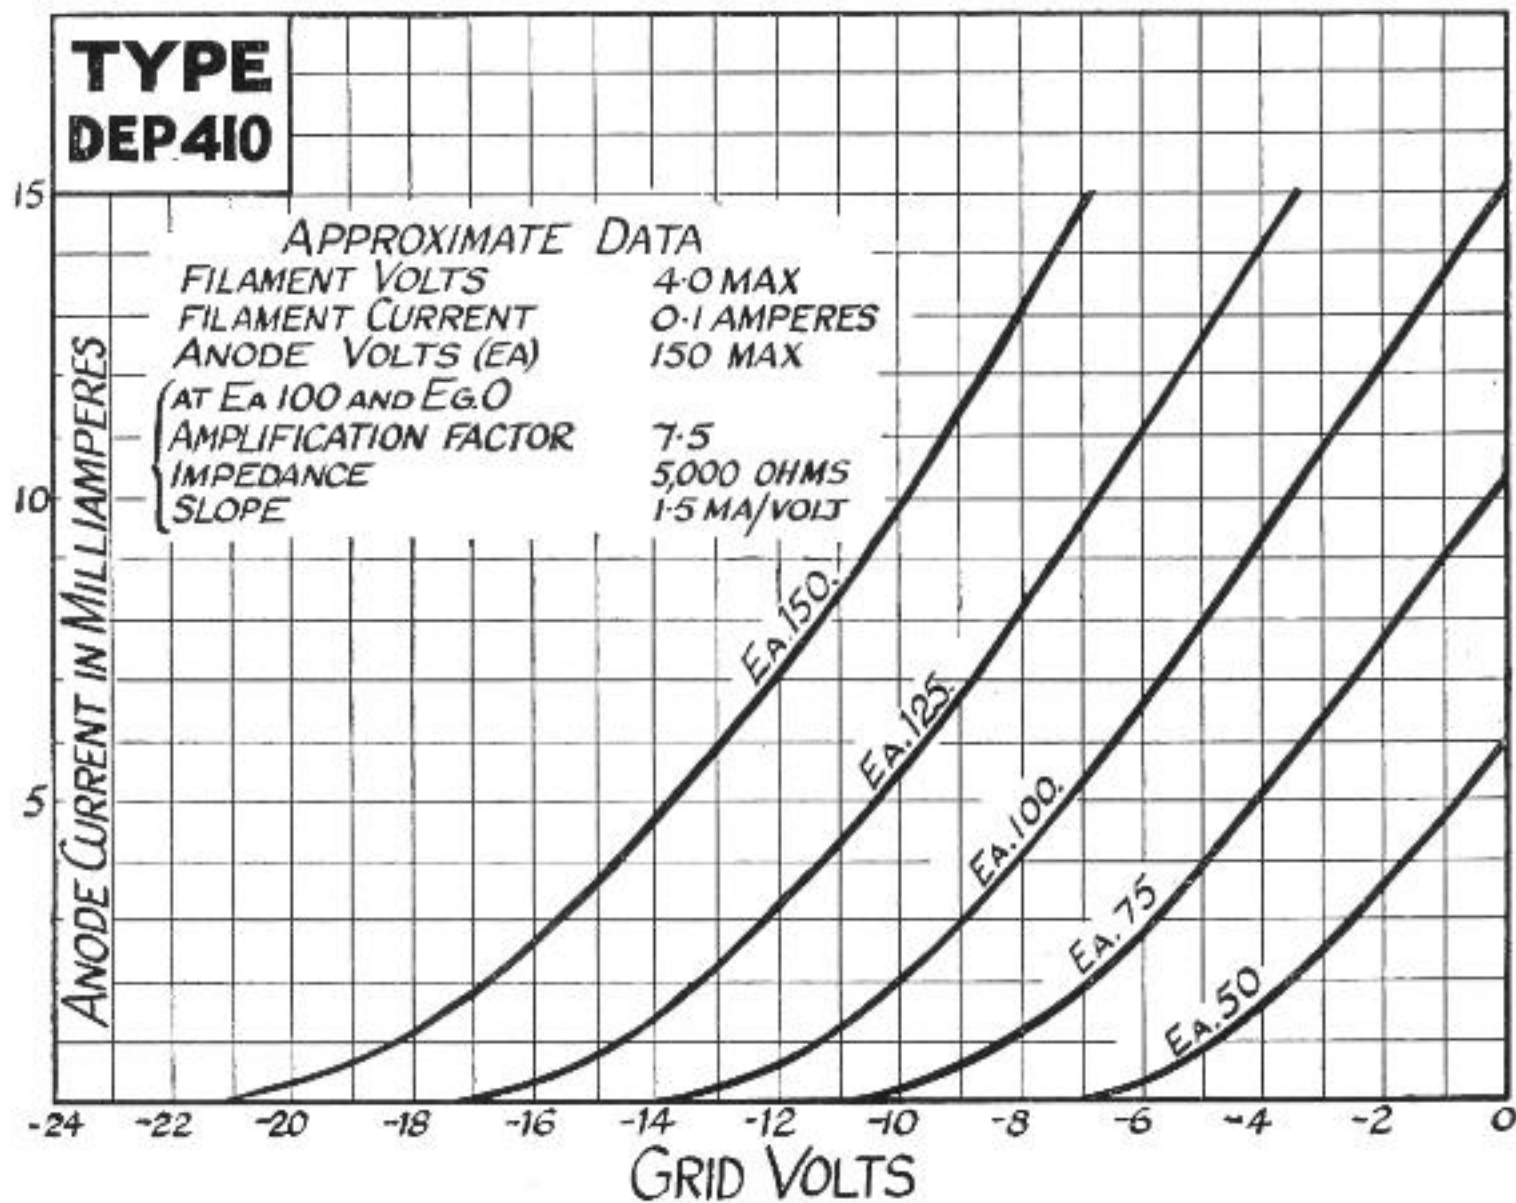

*Characteristic Curve of Average DEP 410 Valve.*

**The valve in the purple box**