

# MARCONI VALVES


## MARCONI VALVES

### TYPE LS 6A

*Approximate Operating Data—Neglecting Resistance of Output Circuit.*

Anode Volts	Negative Grid Bias Volts	Average Anode Current in Milliamperes
400	93	63
350	78	60
300	63	55
250	50	47
200	36	40

The accompanying data is approximate only, and it will be found that individual valves vary about these figures. It is recommended that the negative grid bias voltage be adjusted for each valve, so as to obtain approximately the anode currents stated at the respective H.T. voltages in the above table.

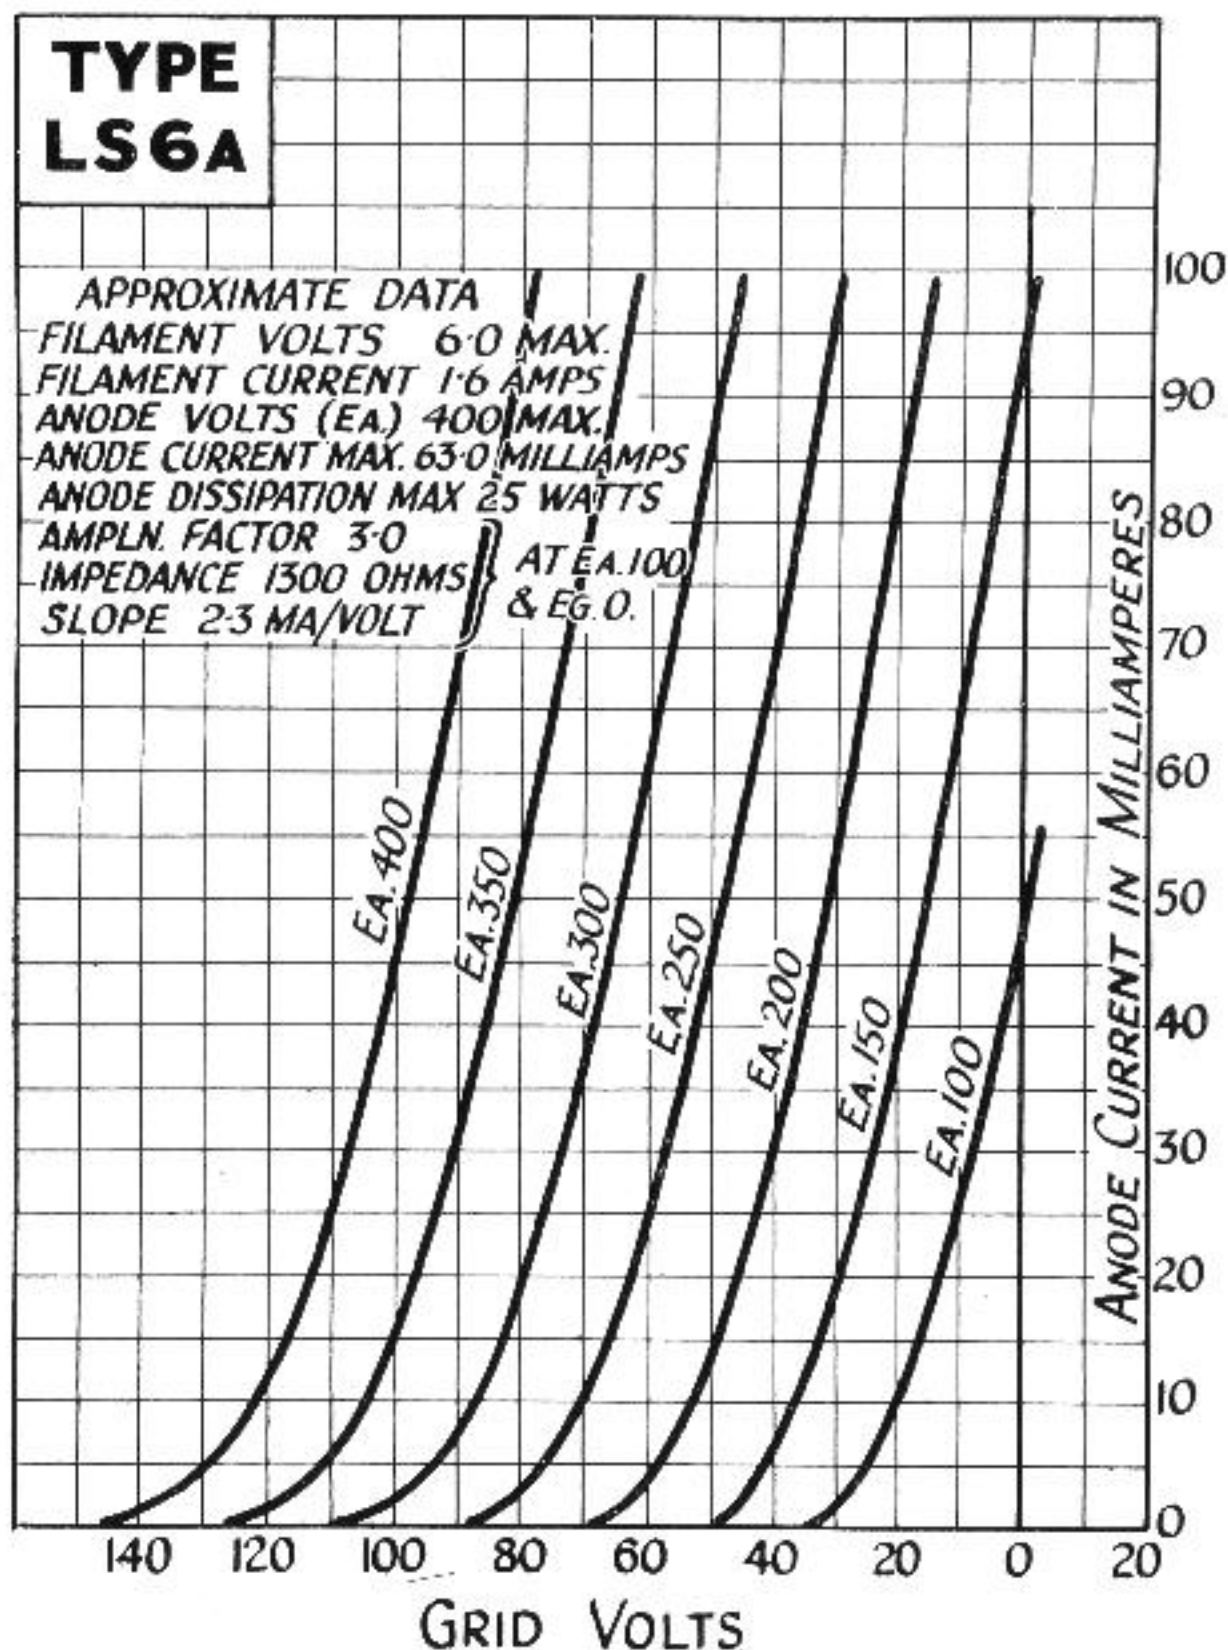

*Characteristic Curve of Average LS 6a Valve.*

**The valve in the purple box**