

Betriebsdaten:

Typical operation:

Exemple d'utilisation:

U_f . . . 2 V
 I_f . . . 0,24 A
 U_a . . +135 V=
 U_g . . . 0
 I_a . . 2×5 mA
 R_{aa} . . . 10 kΩ

Grenzdaten:

Ratings: / Conditions maxima:

U_a . . +150 V=
 I_a . . 2×25 mA
 η . . . 2,1 W
 = 2 Systeme

Prüfdaten:

Test operation:

Vérification:

U_f . . . 2 V~
 U_a . . +150 V=
 U_g . . 0 & -2 V=



In Stellung 13
auf Steuerwirkung
prüfen

In position 13 is to
prove the control grid.
En position 13 vérifier
l'action de commande de la
grille.

631

Patent-Röhrenprüfer Modell W19

MAX FUNKE, Adenau-Eifel 11. 54.

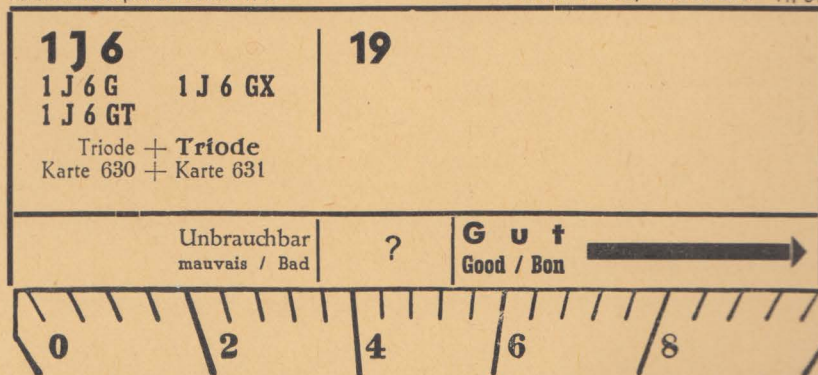

19

1J6

