

RADIO MANUFACTURERS ASSOCIATION ENGINEERING DEPARTMENT

RMA DATA BUREAU
90 WEST STREET
New York 6, N. Y.

sponsor:
Amperex Electronic Corp.

Release No. 657

April 30, 1948


GAMMA COUNTER TUBES

1B73, 1B74

1B73


1B74

Filling	Argon + quenching vapor	Argon + quenching vapor
Operating Temperature range	-20°C. to + 100°C.	0°C. to + 100°C.
Operating Voltage.....	1150 volts D.C.	1400 volts D.C.
Plateau	in excess of 300 volts	in excess of 500 volts
Slope of Plateau.....	2% to 5% per 100 volts	10% per 100 volts
Capacity at terminals.....	3.6 mmf	3.6 mmf
Cosmic Ray Efficiency.....	greater than 99%	greater than 20%
Dead time.....	200 microseconds	200 microseconds
Background—unshielded....	200 counts per minute	40 counts per minute
Life Expectancy in counts	greater than 10 ⁸ counts	greater than 10 ¹⁰ counts
Cathode Material.....	Copper	Copper
Effective Cathode Dimensions	8" long x 1" O.D. x 1/16" wall	8" long x 1" O.D. x 1/16" wall

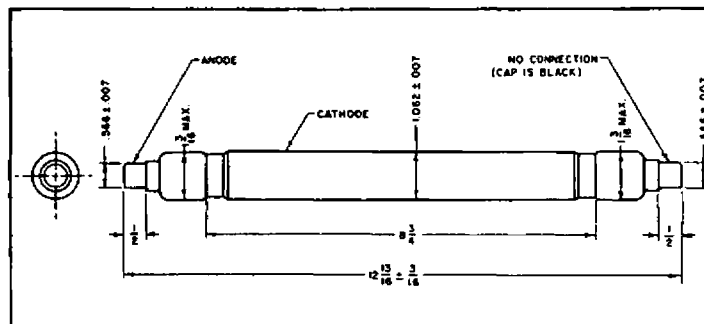


March 26th, 1949

<u>Tube Type</u>	<u>Item</u>	<u>As Registered</u>	<u>As Proposed</u>
1B69	Plateau Slope of Plateau Dead Time	in excess of 300 Volts 2% to 5% per 100 volts 200 microseconds	in excess of 200 volts 5% per 100 volts max. approx. 70 microseconds
1B73	Slope of Plateau Dead Time	2% to 5% per 100 volts 200 microseconds	5% per 100 volts max. approx. 100 microseconds
1B75	Oper. Temp. range Slope of Plateau	- 70°C to + 100°C 2% to 5% per 100 volts	- 55°C to +75°C 10% per 100 volts max.
1B76	Oper. Temp. range Operating Voltage Plateau Slope of Plateau	- 70°C to + 100°C 450 Volts D.C. in excess of 100 volts 5% per 100 Volts	- 55°C to + 75°C 700 Volts D.C. in excess of 200 volts 10% per 100 volts max.
1B77	Oper. Temp. range Slope of Plateau Dead time	- 70°C to + 100°C 2% to 5% per 100 volts 200 microseconds	- 55°C to + 75°C 10% per 100 volts max. approx. 320 microseconds
1B78	Oper. Temp Range Slope of Plateau Dead Time Outline drawing	- 70°C to + 100°C 5% per 100 volts 200 microseconds see attached sheet	- 55°C to + 75°C 10% per 100 volts max. approx 100 microseconds
1B80	Oper. Temp. range Operating voltage Plateau Slope of Plateau Dead time Outline drawing	- 70°C to + 100°C 450 volts D.C. in excess of 100 volts 5% per 100 volts 200 microseconds see attached sheet	- 55°C to + 75°C 700 Volts D.C. in excess of 200 volts 10% per 100 volts max. approx. 180 microseconds
1B81	Oper. Temp. Range Slope of Plateau	- 70°C to + 100°C 2% to 5% per 100 Volts	- 55°C to + 75°C 10% per 100 volts max.

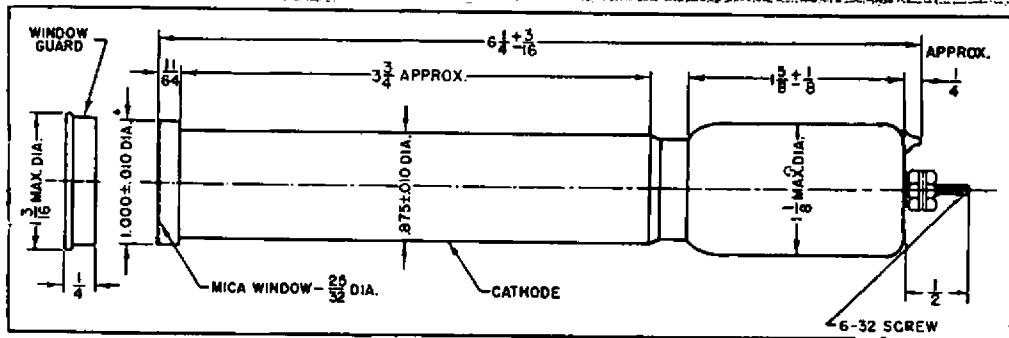

OLD TYPE 1B78 AND 1B80

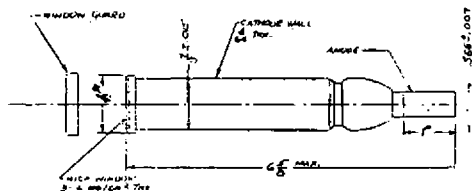

(NEW)

(1B78, 1B80)