




**SYLVANIA TYPES 6EV5
2EV5
3EV5**

VHF TETRODE

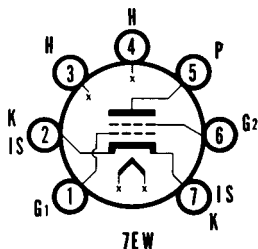

MECHANICAL DATA

Bulb.....	T-5 1/2
Base.....	E7-1, Miniature Button 7-Pin
Outline.....	5-2
Basing.....	7EW
Cathode.....	Coated Unipotential
Mounting Position.....	Any

ELECTRICAL DATA

HEATER CHARACTERISTICS

	2EV5	3EV5	6EV5
Heater Voltage.....	2.4	2.9	6.3 Volts
Heater Current.....	600	450	200 Ma
Heater Warm-up Time ¹	11	11	Seconds
Max. Heater Voltage Range ²			5.7-6.9 Volts
Max. Heater Current Range....	560-640	420-480	— Ma
Heater-Cathode Voltage (Design Maximum Values)			
Heater Negative with Respect to Cathode			
Total D C and Peak.....	200	200	100 Volts Max.
Heater Positive with Respect to Cathode			
D C.....	100	100	50 Volts Max.
Total D C and Peak.....	200	200	100 Volts Max.

DIRECT INTERELECTRODE CAPACITANCES (Shielded)³

Grid No. 1 to Plate.....	.035 μ f Max.
Input.....	4.5 μ f
Output.....	2.9 μ f

RATINGS (Design Maximum Values)

Plate Voltage.....	275 Volts Max.
Grid No. 2 Supply Voltage.....	180 Volts Max.
Grid No. 2 Voltage.....	See 6AM8 Rating Chart
Plate Dissipation.....	3.25 Watts Max.
Grid No. 2 Dissipation.....	0.2 Watts Max.
Positive Grid No. 1 Voltage.....	0 Volts Max.
Cathode Current.....	20 Ma Max.
Grid Circuit Resistance.....	0.5 Megohm Max.

CHARACTERISTICS AND TYPICAL OPERATION

Plate Voltage.....	250 Volts
Grid No. 2 Voltage.....	80 Volts
Grid No. 1 Voltage.....	-1 Volt
Plate Current.....	11.5 Ma
Grid No. 2 Current.....	0.9 Ma
Transconductance.....	8800 μ mhos
Plate Resistance.....	0.150 Megohm
Ec1 for Gm = 100 μ mhos (approx.).....	-4.5 Volts

NOTES:


1. Heater warm-up time is defined as the time required for the voltage across the heater to reach 80% of the rated heater voltage after applying four (4) times rated heater voltage to a circuit consisting of the tube heater in series with a resistance equal to three (3) times the rated heater voltage divided by the rated heater current.
2. Design Maximum Rating.
3. Shield No. 316 connected to cathode.

APPLICATION

The 2EV5, 3EV5 and 6EV5 are miniature, sharp cutoff tetrodes designed particularly for service as VHF amplifiers in television receiver tuners. The 2EV5 and 3EV5 feature controlled heater warm-up time for use in series string television receivers.

SYLVANIA TYPES 6EV5, 2EV5, 3EV5 (Cont'd)

AVERAGE PLATE CHARACTERISTICS

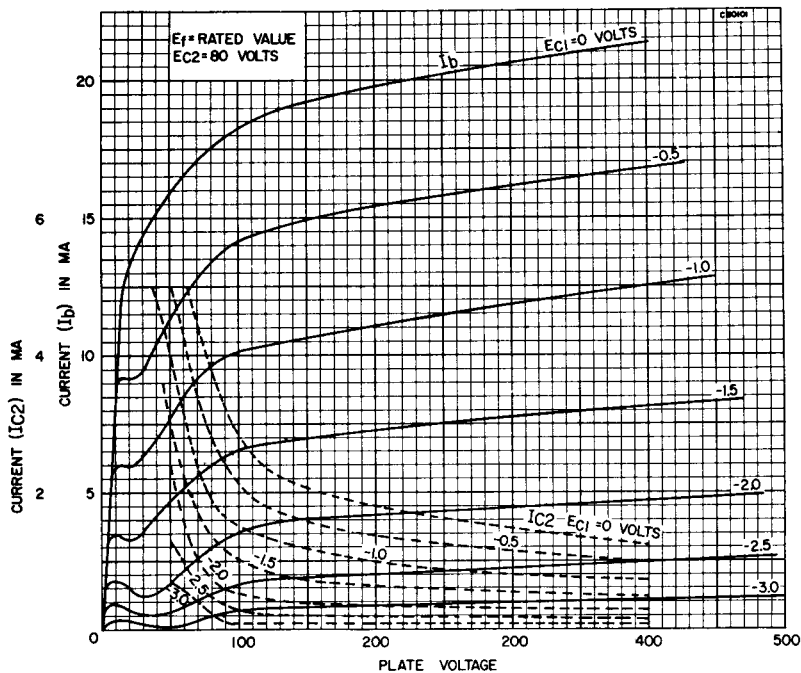

AVERAGE TRANSFER CHARACTERISTICS

