


**SYLVANIA TYPE 6BW4
12BW4
FULL WAVE RECTIFIER**



MECHANICAL DATA

Bulb.....	T-6½
Base.....	E9-1 Miniature Button, 9-Pin
Outline.....	6-3
Basing.....	9DJ
Cathode.....	Coated Unipotential
Mounting Position.....	Any

ELECTRICAL DATA

HEATER CHARACTERISTICS

	6BW4	12BW4
Heater Voltage ³ A C or D C.....	6.3	12.6 Volts
Heater Current.....	900	450 Ma
Maximum Heater Cathode Voltage Heater Negative, D C.....	450	Volts

MAXIMUM RATINGS (Design Center Values)¹

Rectifier Service

Peak Inverse Plate Voltage.....	1275 Volts
A C Plate Supply Voltage Each Plate, R M S (See Rating Chart I).....	450 Volts
D C Output Current.....	See Rating Chart 1
Steady State Peak Plate Current Each Plate (See Rating Chart II).....	350 Ma
Transient Peak Plate Current Each Plate (See Rating Chart III).....	2.0 Amperes

AVERAGE CHARACTERISTICS

Tube Voltage Drop Tube Conducting: 100 Ma Each Plate.....	40 Volts
---	----------

TYPICAL OPERATION

Full Wave Rectifier—Capacitor Input Filter

A C Plate Supply Voltage Each Plate, R M S ²	325 Volts
Filter Input Capacitor.....	40 μf
Effective Plate Supply Resistance, Each Plate.....	82 Ohms
D C Output Current.....	100 Ma
D C Output Voltage at Filter Input.....	330 Volts

Full Wave Rectifier—Choke Input Filter

A C Plate Supply Voltage Each Plate, R M S ²	450 Volts
Filter Input Choke.....	10 Henrys
D C Output Current.....	100 Ma
D C Output Voltage at Filter Input.....	360 Volts

NOTES:


1. See "Interpretation of Rating Charts."
2. A C plate voltage is measured without load.
3. The 12BW4 is intended to be used in automotive service from a nominal 12 volt battery source. The heater is therefore designed to operate over the 10.0 to 15.9 voltage range encountered in this type of service. The maximum ratings of the tube provide for an adequate safety factor such that the tube will withstand the wide variation in supply voltages.

APPLICATION


The Sylvania 6BW4 and 12BW4 are miniature cathode type full wave rectifiers featuring relatively high output current capabilities. The 12BW4 is intended primarily for use in auto receivers having a 12 volt heater supply.

6BW4, 12BW4 (Cont'd)

RATING CHART I

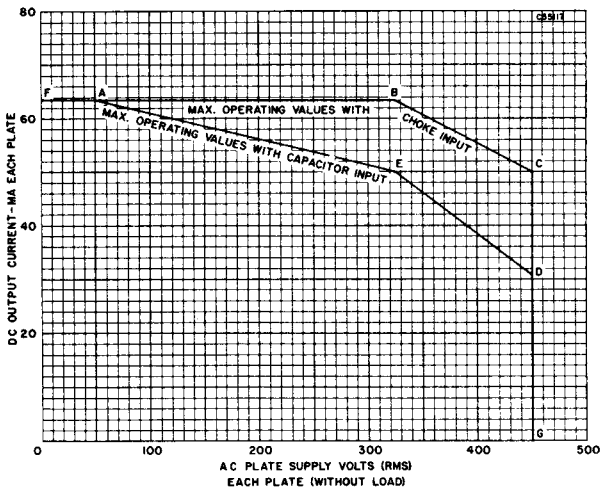

RATING CHART II

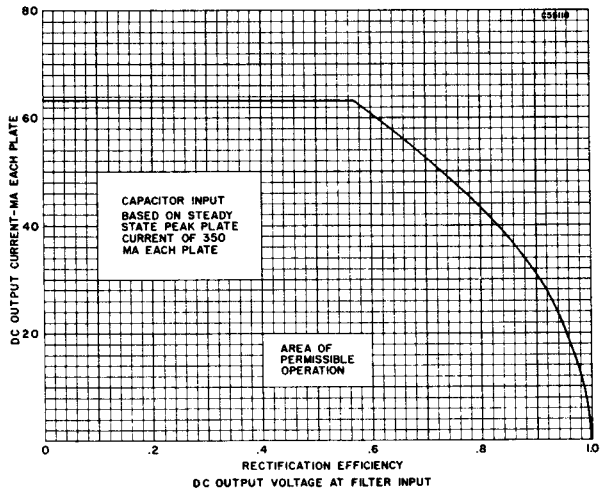

RATING CHART III

