

RELIABLE SUB-MINIATURE VOLTAGE REGULATOR



DESCRIPTION

This tube is a gas filled, cold cathode, subminiature voltage regulator, Type 5787 WA. The construction of this tube is such that it will withstand conditions of severe shock and vibration. The tube is characterized by long life and is designed to operate under conditions of high temperature. This tube may be soldered directly into any circuit and is particularly adaptable where space is of prime importance.

ELECTRICAL RATINGS

Anode Supply Voltage.....	140 Vdc min.
Ionization Voltage	135 Vdc max.
(For Ionization Voltage Distributions, See Fig. 2)	
Operating Voltage Range.....	95 - 103 Vdc
(For Operating Voltage Distributions, See Fig. 1)	
Operating Current Range.....	5 - 25 mAdc
Vibration Output (40 cps, 15G)....	50 mVac max.
Shock (30° Hammer Angle)	
Fatigue (96 hrs., 2.5G, 25-60 cps)	
Ambient Temperature Range.....	-55°C to +150°C
Maximum Bulb Temperature.....	+225°C

OPERATING NOTES

Attention should be given to the bulb temperature at which the tubes are to be operated. Reliability will be impaired if the maximum bulb temperature is exceeded. There are several requirements in the operation of a glow discharge tube, like the 5787 WA/TD-63, which must be adhered to carefully. The first is that the supply voltage must always be greater than the anode breakdown voltage. The second condition is that sufficient resistance must always be in series with the tube to limit the current to the minimum and maximum values specified in the ratings.

PHYSICAL CHARACTERISTICS

- *Envelope:* T-3.
- *Base:* Pressed Stem: (.016" finned flexible leads. Spacing 0.096" center to center. Length 1.5" minimum)
- *Terminal Connections:* Lead 1, Cathode; Lead 3, anode, Lead 5, cathode.
- *Maximum Bulb Dia.:* 0.400".
- *Maximum Sealed Bulb Height:* 2.063".
- *Mounting Position:* Any.

THE *Bendix* CORPORATION

Red Bank DIVISION, EATONTOWN, NEW JERSEY

ELECTRICAL CHARACTERISTICS & TEST CONDITIONS

RATINGS	Total Darkness Ionization Voltage	Ambient Light Ionization Voltage	Operating Voltage	Operating Current	T Envelope	Alt	TA
Absolute	Vdc	Vdc	Vdc	mAdc	°C	ft	°C
Maximum	—	—	98	25	+225	60,000	+150
Minimum:	141	141	—	5	—	—	-55
Test Cond.:	—	—	—	—	—	—	—
Cathode:	Glow Discharge						
Base:	Subminiature 5 Pin with Long Leads						
Pin No.:	1	2	3	4	5		
Element:	k	nc	p	nc	k		

The following tests shall be performed:

MEASUREMENTS ACCEPTANCE TESTS PART 1 NOTE 1

Ref.	Test	Conditions	AQL (%)	Insp. Level or Code	Sym.	LIMITS						Units
						Min.				Max.		
4.13.1	Ionization Voltage(1):	Ebb/lb = 5 - 25 mAdc; Illumination = 5 - 50 ft. candles	0.65	II	Ez:	—	—	—	—	135	—	Vdc
4.13.2	Tube Voltage Drop(1):	Ebb/lb = 25 mAdc	0.65	II	Etd:	95	—	—	—	103	—	Vdc
4.13.2	Tube Voltage Drop(2):	Ebb/lb = 5 mAdc	0.65	II	Etd:	95	—	—	—	103	—	Vdc
4.13.2.1	Regulation:	(1)Etd - (2)Etd	0.65	II	Reg:	—	—	—	—	±3	—	Vdc
4.7.5	Continuity and Shorts: (Inoperatives)		0.4	II		—	—	—	—	—	—	
4.9.1	Mechanical:	Envelope Outline No. 8-7 Except Dimension A = 2.063 max. Dimension B = 1.813 ± 0.100				—	—	—	—	—	—	

MEASUREMENTS ACCEPTANCE TESTS PART 2

4.13.4.3	Noise:	Ebb/lb = 25 mAdc	1.0	I	Eb:	—	—	—	—	20	—	mVac
4.13.4.2	Oscillation:	Esig = 100mVac; RL = 500 Ω Ebb/lb = 5 - 25 mAdc	1.0	I		—	—	—	—	—	—	mVac
4.13.1	Ionization Voltage(2):	Note 2	6.5	Code G	Ez:	—	—	—	—	141	—	Vdc
4.13.3	Leakage:	Eb = 50Vdc; Rp = 3000 Ω	6.5	Code G	Ilb:	—	—	—	—	5	—	uAdc
—	Repeatability:	Ebb/lb = 10 mAdc; Note 3	6.5	Code E	ΔEtd:	—	—	—	—	1.0	—	Vdc
4.9.19.1	Vibration(2):	Rp = 10,000 Ω; Ebb/lb = 25 mAdc; F = 40 cps; G = 15	6.5	Code G	Ep:	—	—	—	—	50	—	mVac

DEGRADATION RATE ACCEPTANCE TESTS

4.9.5.3	Subminiature Lead Fatigue		2.5	Code G		4	—	—	—	—	—	arcs
4.9.20.5	Shock:	Hammer Angle = 30°;	—	—	—	—	—	—	—	—	—	
4.9.20.6	Fatigue:	G = 2.5; Fixed Frequency; F = 25 min., 60 max.	6.5	—	—	—	—	—	—	—	—	
—	Post Shock and Fatigue Test End Points:	Vibration(2) Ionization Voltage(1) Tube Voltage Drop(1) Tube Voltage Drop(2) Regulation	—	—	Ep: Ez: Etd: Etd: Reg.	— — 95 95 —	— — — — —	— — — — —	— — — — —	100 141 105 105 ±4.0	— — — — —	mVac Vdc Vdc Vdc Vdc
—	Glass Strain		2.5	I		—	—	—	—	—	—	

ACCEPTANCE LIFE TESTS

Ref.	Test	Conditions	AQL (%)	Insp. Level or Code	Allowable Defective per Characteristic		Sym.	LIMITS		Units
					1st Sample	Combined Samples		Min.	Max.	
—	Stability Life Test (1 hour)	Ebb/lb = 25 mAdc; TA = Room	6.5	Code I	—	—		—	—	
4.11.4	Stability Life Test End Points:	Change in Tube Voltage Drop(1) of individual tubes	—	—	—	—	ΔEtd: †	—	1.0	Vdc
		Change in Tube Voltage Drop(2) of individual tubes	—	—	—	—	ΔEtd: †	—	1.0	Vdc
—	Survival Rate Life Test: (100 hours)	Stability Life Test Conditions or equivalent	—	II	—	—		—	—	
4.11.4	Survival Rate Life Test End Points:	Continuity and Shorts (Inoperatives)	0.65	—	—	—		—	—	
		Change in Tube Voltage Drop(1) of individual tubes	6.5	—	—	—	ΔEtd: †	—	1.0	Vdc
		Change in Tube Voltage Drop(2) of individual tubes	6.5	—	—	—	ΔEtd: †	—	1.0	Vdc
4.11.5	Intermittent Life Test:	Stability Life Test Conditions; T Envelope = 225°C min.	—	—	—	—		—	—	
4.11.4	Intermittent Life Test End Points: (500 hours)	Inoperatives	—	—	1	3		—	—	
		Regulation	—	—	1	3	Reg:	—	±5.0	Vdc
		Tube Voltage Drop(1)	—	—	1	3	Etd:	95	105	Vdc
		Tube Voltage Drop(2)	—	—	1	3	Etd:	95	105	Vdc
		Change in Tube Voltage Drop(1) of individual tubes	—	—	1	3	ΔEtd: †	—	3	%
		Change in Tube Voltage Drop(2) of individual tubes	—	—	1	3	ΔEtd: †	—	3	%
		Ionization Voltage(1)	—	—	1	3	Ez:	—	141	Vdc
4.11.4	Intermittent Life Test End Points: (1000 hours)	Total Defectives	—	—	4	8		—	—	
		Inoperatives	—	—	2	5		—	—	
		Regulation	—	—	2	5	Reg:	—	±6.0	Vdc
		Tube Voltage Drop(1)	—	—	2	5	Etd:	95	105	Vdc
		Tube Voltage Drop(2)	—	—	2	5	Etd:	95	105	Vdc
		Change in Tube Voltage Drop(1) of individual tubes	—	—	2	5	ΔEtd: †	—	4	%
		Change in Tube Voltage Drop(2) of individual tubes	—	—	2	5	ΔEtd: †	—	4	%
	Ionization Voltage(1)	—	—	2	5	Ez:	—	141	Vdc	
	Total Defectives	—	—	5	10		—	—		

Note 1: Characteristic Quality Control Test Procedures, Inspection Levels, and Inspection Instructions are made according to the appropriate paragraphs of MIL-E-1, and MIL-STD-105A.

Note 2: Conditions for this test shall be those of Ionization Voltage (1) except testing shall be done in total darkness and the tube shall not have conducted or have been exposed to light for at least 24 hours prior to testing.

Note 3: Repeatability shall be defined as the maximum shift in tube voltage drop between successive firings of the tube. The tube shall be tested in the following manner.

- a. Etd shall be read at 10 mAdc drain.
- b. The tube shall be turned off for one (1) minute.
- c. The tube shall be re-started and operated at the same current.
- d. Etd shall be read after one (1) minute of operation.
- e. The on-off cycle shall be repeated a minimum of five times. The range of Etd shall be taken as the measure of repeatability.

AVERAGE CHARACTERISTICS

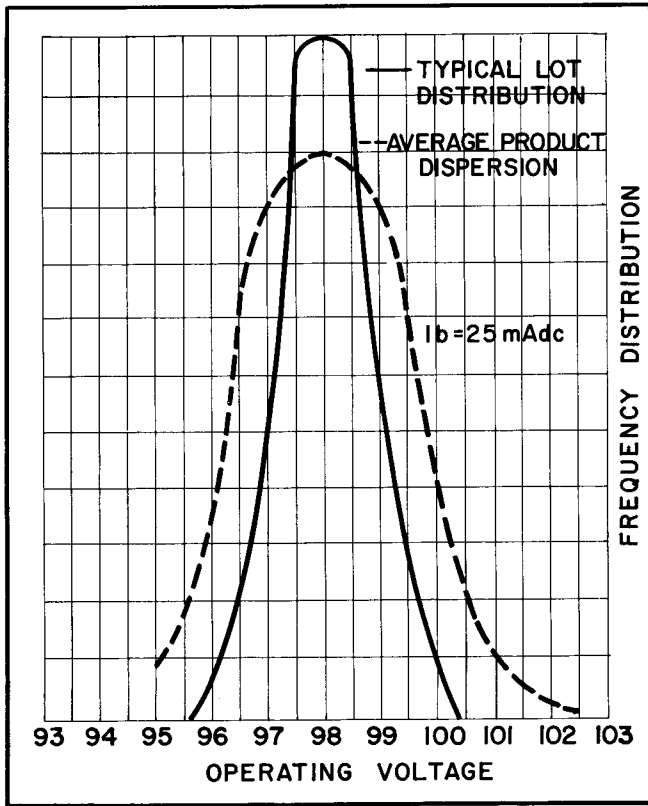


FIG. 1

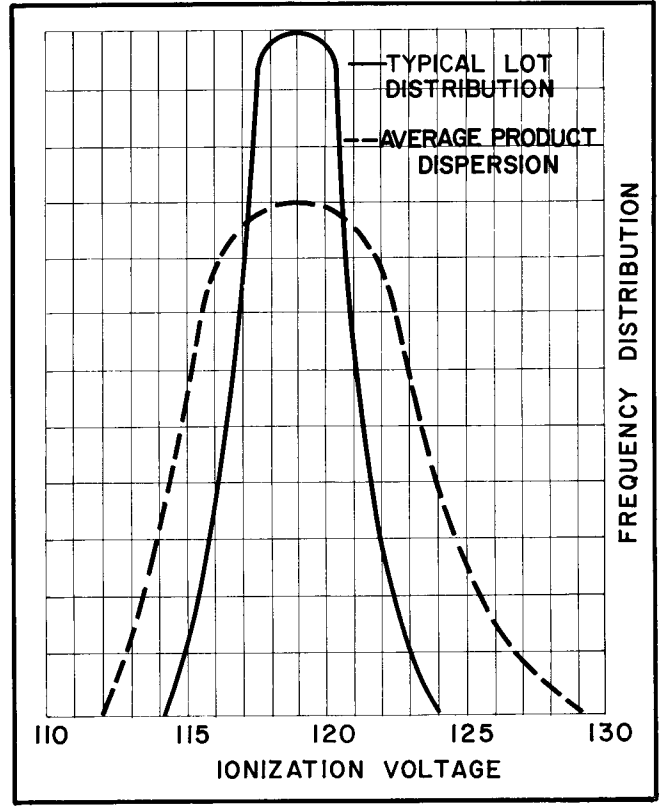


FIG. 2

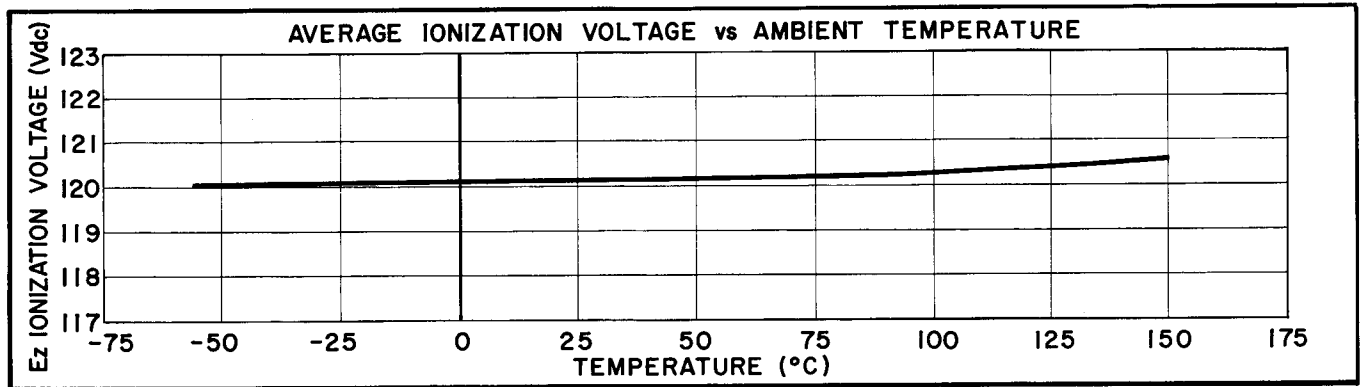


FIG. 3

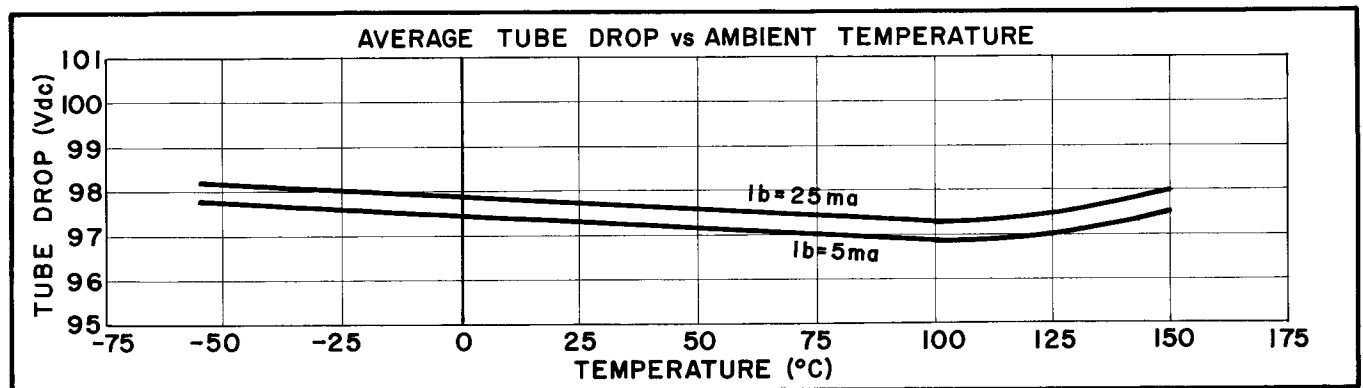


FIG. 4

AVERAGE CHARACTERISTICS


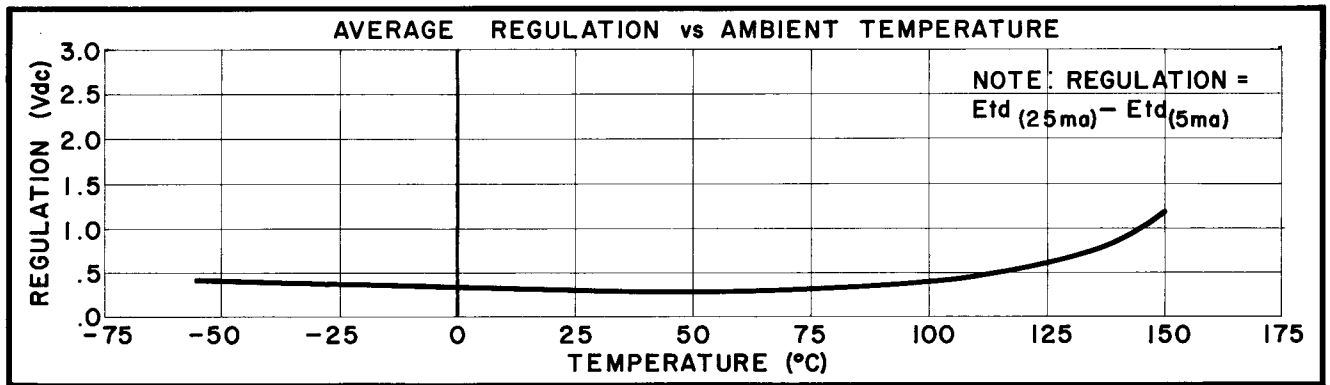


FIG. 5

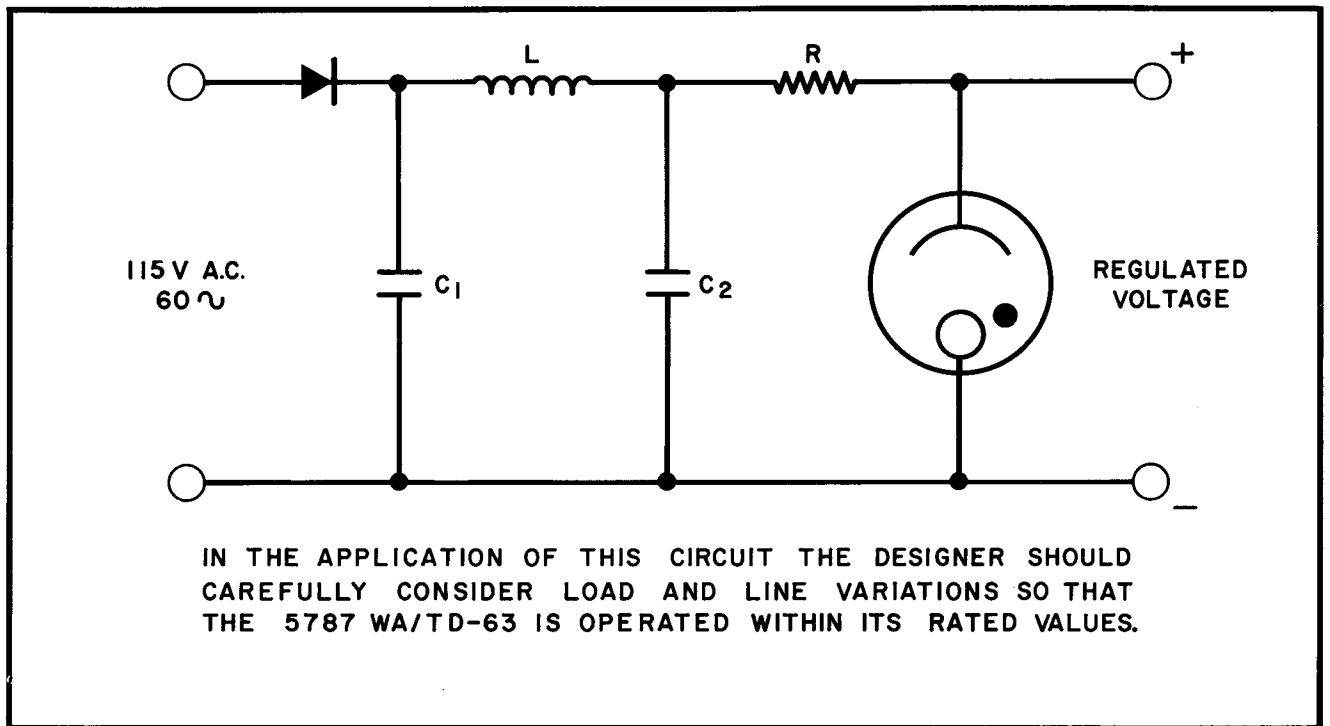

TYPICAL APPLICATION CIRCUIT FOR USE DIRECTLY FROM 110V AC LINE.

FIG. 6

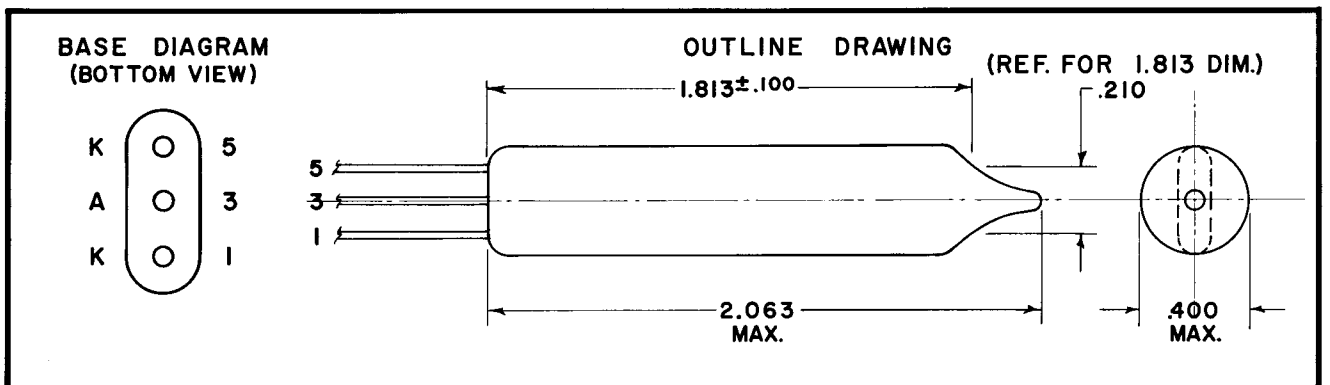


FIG. 7

For Additional Information Write—

ELECTRON TUBE PRODUCTS

THE *Bendix* CORPORATION

***Red Bank* DIVISION, EATONTOWN, NEW JERSEY**

Cable: **BENDIX-EATONTOWN**

Telephone: **LIBERTY 2-2000**

OR

The Bendix Corporation

1701 K Street, N. W.
Washington, D. C.
REpublic 7-3118

The Bendix Corporation

1900 Hulman Building
Dayton, Ohio
BAldwin 6-2341

The Bendix Corporation

2N565 York Road
Elmhurst, Illinois
BRowning 9-5050

The Bendix Corporation

8425 First Ave. South
Seattle 8, Washington
PArkway 5-9100

The Bendix Corporation

P.O. Box 35092
Dallas 35, Texas
FLeetwood 1-5411

The Bendix Corporation

117 East Providencia Ave.
Burbank, California
VICTORIA 9-3961

The Bendix Corporation

Bendix International Division
205 East 42nd Street
New York 17, N Y.

Computing Devices of Canada Ltd.

P.O. Box 508
Ottawa, Ontario, Canada