



6J6-5J6-19J6

TWIN TRIODE

6J6
5J6
19J6
ET-T892
Page 1
7-54

DESCRIPTION AND RATING

The 6J6 is a miniature medium-mu twin triode designed for use as a radio-frequency amplifier, oscillator, or mixer. With the grids connected in push-pull and the plates connected in parallel, each type may be used as a mixer at frequencies as high as 600 megacycles.

The 5J6, 6J6, and 19J6 are alike except for heater ratings and heater-cathode ratings. The 5J6, in addition, exhibits a controlled heater warm-up characteristic which makes the tube especially suited for use in television receivers which employ series-connected heaters. When the 5J6 is used in conjunction with other 600-milliamperre types which exhibit essentially the same heater warm-up characteristic, heater voltage surges across the individual tubes are minimized during the warm-up period.

GENERAL

ELECTRICAL

Cathode—Coated Unipotential

	5J6	6J6	19J6
Heater Voltage, AC or DC	4.7	6.3	18.9 Volts
Heater Current	0.6	0.45	0.15 Amperes
Heater Warm-up Time*	11 Seconds

Direct Interelectrode Capacitances	With Shield†	Without Shield
Grid to Plate, Each Section	1.5	1.6 $\mu\mu\text{f}$
Input, Each Section	2.6	2.2 $\mu\mu\text{f}$
Output, Section 1	1.6	0.4 $\mu\mu\text{f}$
Output, Section 2	1.0	0.4 $\mu\mu\text{f}$

MECHANICAL

Mounting Position—Any

Envelope—T-5½, Glass

Base—E7-1, Miniature Button 7-Pin


MAXIMUM RATINGS

DESIGN-CENTER VALUES, EACH SECTION	Class A ₁ Amplifier	Class C Telegraphy
Plate Voltage	300	300 Volts
Positive DC Grid Voltage	0	0 Volts
Negative DC Grid Voltage	40 Volts
Plate Input	4.5 Watts
Plate Dissipation	1.5	1.5 Watts
DC Plate Current	15 Milliamperes
DC Grid Current	8.0 Milliamperes

Heater-Cathode Voltage

	5J6	6J6	19J6	5J6	6J6	19J6
Heater Positive with Respect to Cathode	100	Volts
DC Component	100	Volts
Total DC and Peak	200	Volts
Heater Negative with Respect to Cathode
Total DC and Peak	200	Volts
Grid Circuit Resistance
With Cathode Bias‡	0.5	0.5	Megohms

BASING DIAGRAM




RETMA 78F

TERMINAL CONNECTIONS

- Pin 1—Plate (Section 2)
- Pin 2—Plate (Section 1)
- Pin 3—Heater
- Pin 4—Heater
- Pin 5—Grid (Section 1)
- Pin 6—Grid (Section 2)
- Pin 7—Cathode

PHYSICAL DIMENSIONS

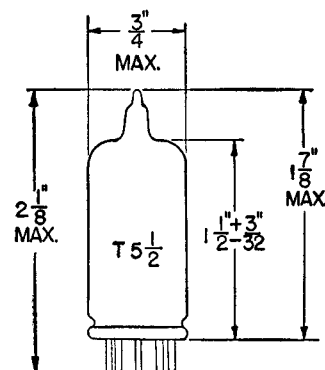

RETMA 5-2

GENERAL ELECTRIC

Supersedes ET-T835 dated 2-54

CHARACTERISTICS AND TYPICAL OPERATION

CLASS A₁ AMPLIFIER, EACH SECTION§

Plate Voltage	100 Volts
Cathode-Bias Resistor	50 Ohms
Amplification Factor	38
Plate Resistance, approximate	7100 Ohms
Transconductance	5300 Micromhos
Plate Current	8.5 Milliamperes


CLASS C TELEGRAPHY, RF POWER AMPLIFIER AND OSCILLATOR—BOTH SECTIONS IN PUSH-PULL

DC Plate Voltage	150 Volts
DC Grid Voltage π	-10 Volts
DC Plate Current	30 Milliamperes
DC Grid Current, approximate	16 Milliamperes
Grid Driving Power, approximate	0.35 Watts
Power Output, approximate	3.5 Watts

MIXER SERVICE, EACH SECTION Δ

Plate Voltage	150 Volts
Cathode-Bias Resistor	810 Ohms
Oscillator Peak Voltage	3.0 Volts
Plate Resistance, approximate	10200 Ohms
Conversion Transconductance	1900 Micromhos
Plate Current	4.8 Milliamperes

* Heater warm-up time is defined as the time required in the circuit shown at the right for the voltage across the heater terminals to increase from zero to the heater test voltage (V_1). For this type, $E=18.7$ volts (RMS or DC), $V_1=3.73$ volts (RMS or DC), and $R=23.5$ ohms.

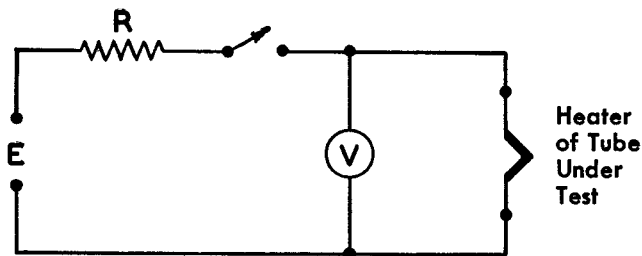

† With external shield (RETMA 316) connected to pin 7.

‡ Operation with fixed bias is not recommended.


§ Each section separately with specified voltages applied to both sections.

π Obtained by a 625-ohm grid resistor, a 220-ohm cathode resistor, or a fixed-voltage supply.


Δ Each section separately with grid and plate of opposite section grounded. In actual service, the value of the cathode-bias resistor is determined by the total cathode current of both sections.

Note: Approximately 1.0 watt can be obtained when the tube is operated as a push-pull oscillator at 250 megacycles with a plate voltage of 150 volts, with maximum rated plate dissipation, and with a grid resistor of 2000 ohms common to both sections.


AVERAGE PLATE CHARACTERISTICS
 EACH SECTION

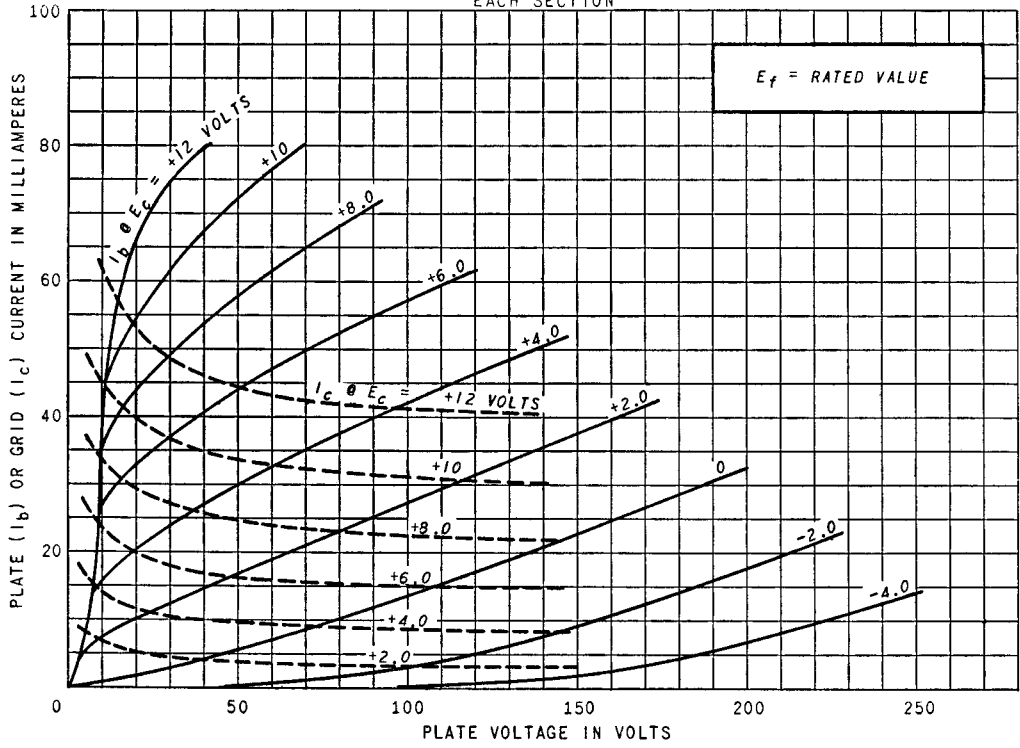


AVERAGE PLATE CHARACTERISTICS
 EACH SECTION

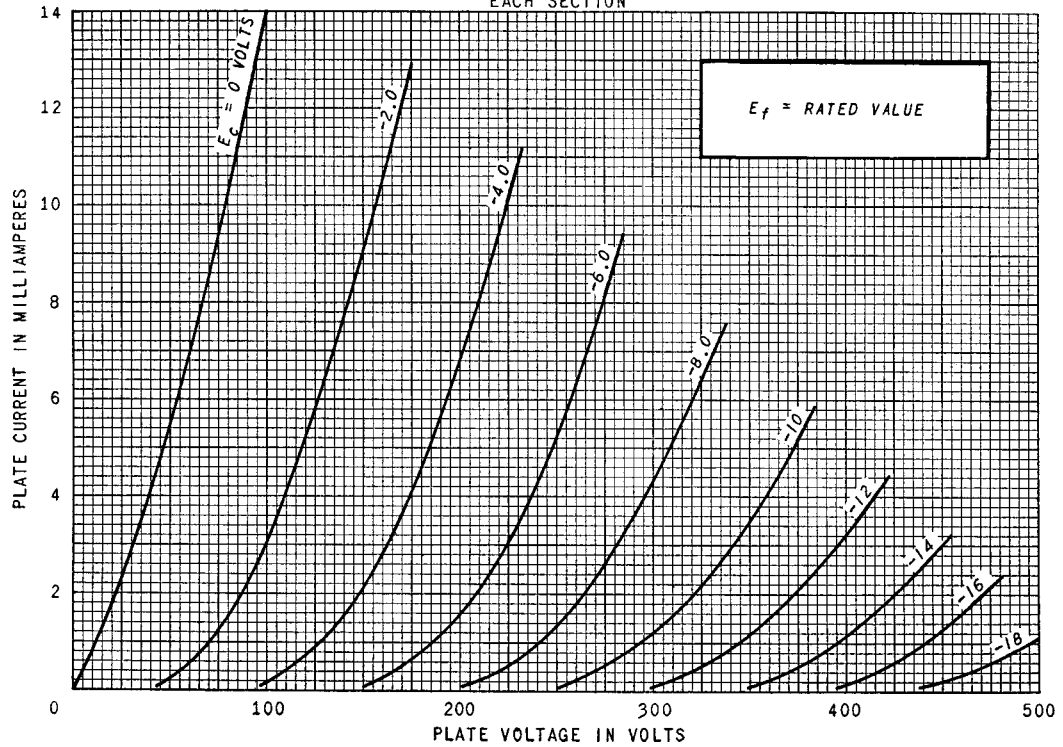

AVERAGE TRANSFER CHARACTERISTICS
EACH SECTION

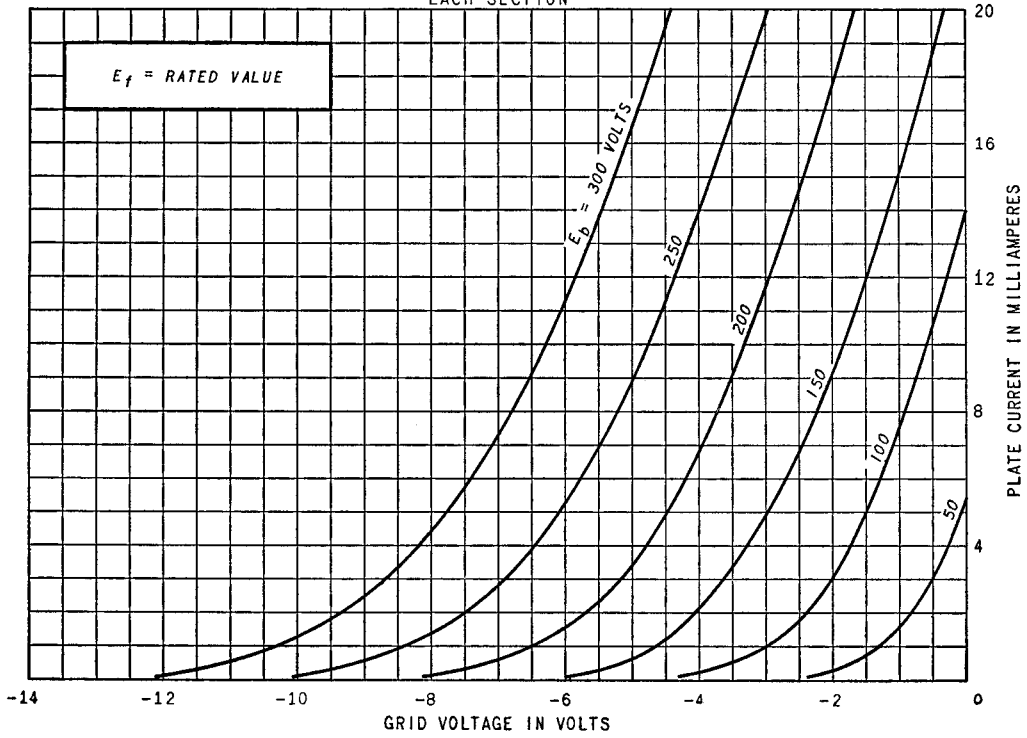

AVERAGE CHARACTERISTICS
EACH SECTION

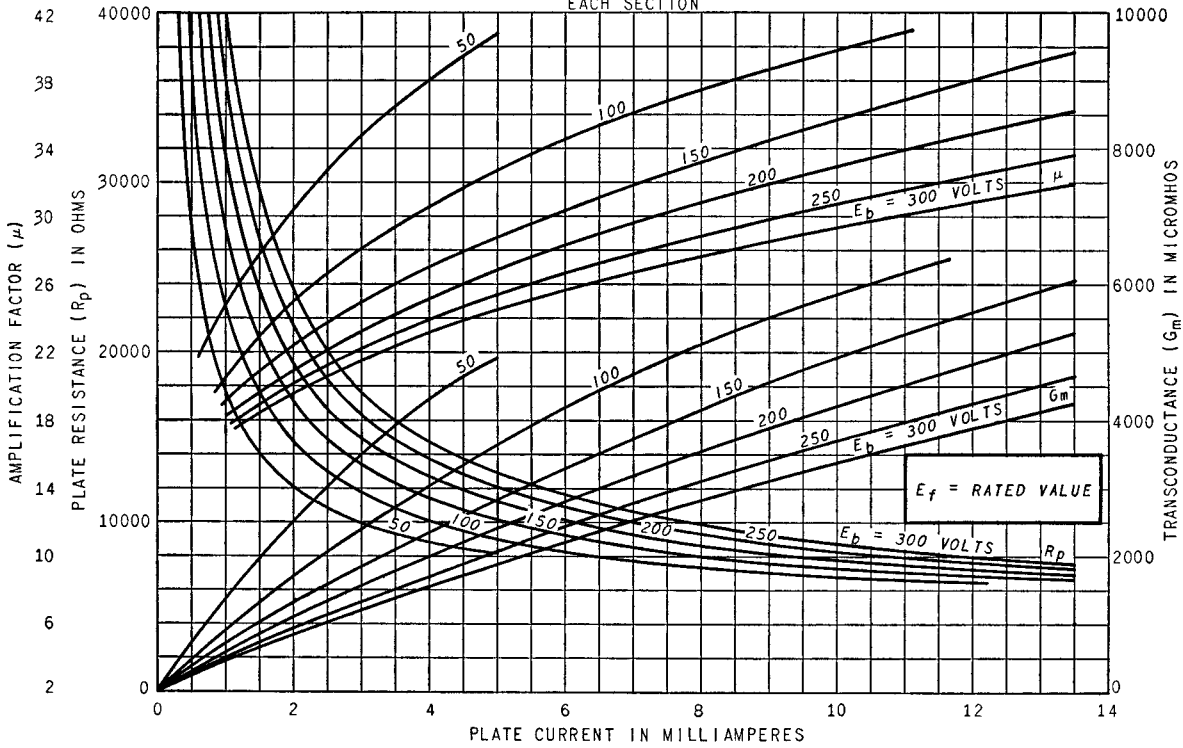

TUBE DEPARTMENT



Schenectady 5, N. Y.