

BEAM PENTODE

DESCRIPTION AND RATING

The 6AQ5 is a miniature beam-power pentode designed for use in the audio-frequency power output stage of television and radio receivers. It may also be used as a triode-connected vertical deflection amplifier in television receivers. Within its maximum ratings, the performance of the 6AQ5 is equivalent to that of the 6V6-GT.

Except for heater ratings, the 5AQ5 is identical to the 6AQ5. In addition, the 5AQ5, as a result of its controlled heater warm-up characteristic, is especially suited for use in television receivers which employ series-connected heaters. When the 5AQ5 is used in conjunction with other 600-milliamperre types which exhibit essentially the same heater warm-up characteristic, heater voltage surges across the individual tubes are minimized during the warm-up period.

GENERAL

ELECTRICAL

Cathode—Coated Unipotential

	5AQ5	6AQ5
Heater Voltage, AC or DC	4.7	6.3 Volts
Heater Current	0.6	0.45 Ampere
Heater Warm-up Time*	11	... Seconds
Direct Interelectrode Capacitances, approximate†		
Grid-Number 1 to Plate	0.4	μmf
Input	8.0	μmf
Output	8.5	μmf

MECHANICAL

Mounting Position—Any

Envelope—T-5½, Glass


Base—E7-1, Miniature Button 7-Pin

MAXIMUM RATINGS

DESIGN-CENTER VALUES UNLESS OTHERWISE INDICATED

	Class A1 Amplifier	Vertical- Deflection Amplifier‡ (Triode Connection)§
DC Plate Voltage	250	250 Volts
Peak Positive Pulse Plate Voltage		1100π Volts
Screen Voltage	250	... Volts
Peak Negative Grid-Number 1 Voltage		250 Volts
Plate Dissipation	12	9.0▲ Watts
Screen Dissipation	2.0	... Watts
DC Cathode Current		35 Milliamperes
Peak Cathode Current		105 Milliamperes
Heater-Cathode Voltage		
Heater Positive with Respect to Cathode		
DC Component	100	100 Volts
Total DC and Peak	200	200 Volts
Heater Negative with Respect to Cathode		
Total DC and Peak	200	200 Volts
Grid-Number 1 Circuit Resistance		
With Fixed Bias	0.1	... Megohms
With Cathode Bias	0.5	2.2 Megohms
Bulb Temperature at Hottest Point	250	250 C

BASING DIAGRAM




RETMA 7BZ

TERMINAL CONNECTIONS

- Pin 1—Grid-Number 1
- Pin 2—Cathode and Beam Plates
- Pin 3—Heater
- Pin 4—Heater
- Pin 5—Plate
- Pin 6—Grid-Number 2 (Screen)
- Pin 7—Grid-Number 1

PHYSICAL DIMENSIONS

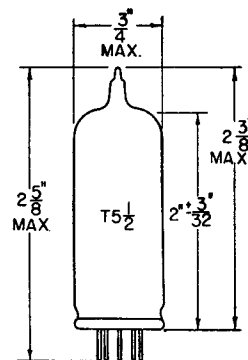

RETMA 5-3

CLASS A₁ AMPLIFIER

Plate Voltage	180	250 Volts
Screen Voltage	180	250 Volts
Grid-Number 1 Voltage	-8.5	-12.5 Volts
Peak AF Grid-Number 1 Voltage	8.5	12.5 Volts
Plate Resistance, approximate	58000	52000 Ohms
Transconductance	3700	4100 Micromhos
Zero-Signal Plate Current	29	45 Milliamperes
Maximum-Signal Plate Current	30	47 Milliamperes
Zero-Signal Screen Current	3.0	4.5 Milliamperes
Maximum-Signal Screen Current	4.0	7.0 Milliamperes
Load Resistance	5500	5000 Ohms
Total Harmonic Distortion, approximate	8	8 Percent
Maximum-Signal Power Output	2.0	4.5 Watts


PUSH-PULL CLASS AB₁ AMPLIFIER, VALUES FOR TWO TUBES

Plate Voltage	250 Volts
Screen Voltage	250 Volts
Grid-Number 1 Voltage	-15 Volts
Peak AF Grid-to-Grid Voltage	30 Volts
Zero-Signal Plate Current	70 Milliamperes
Maximum-Signal Plate Current	79 Milliamperes
Zero-Signal Screen Current	5.0 Milliamperes
Maximum-Signal Screen Current	13 Milliamperes
Effective Load Resistance, Plate-to-Plate	10000 Ohms
Total Harmonic Distortion	5 Percent
Maximum-Signal Power Output	10 Watts

AVERAGE CHARACTERISTICS, TRIODE CONNECTION§

Plate Voltage	250 Volts
Grid-Number 1 Voltage	-12.5 Volts
Amplification Factor	9.5
Plate Resistance, approximate	1970 Ohms
Transconductance	4800 Micromhos
Plate Current	49.5 Milliamperes
Grid-Number 1 Voltage, approximate $I_b = 0.5$ Milliampere	-37 Volts

* Heater warm-up time is defined as the time required in the circuit shown at the right for the voltage across the heater terminals to increase from zero to the heater test voltage (V_1). For this type, $E = 18.7$ volts (RMS or DC), $V_1 = 3.73$ volts (RMS or DC), and $R = 23.5$ ohms.

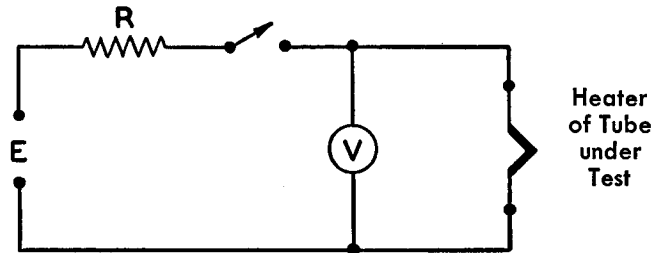

† Without external shield.


‡ For operation in a 525-line, 30-frame television system as described in "Standards of Good Engineering Practice Concerning Television Broadcast Stations," Federal Communications Commission. The duty cycle of the voltage pulse must not exceed 15 percent of one scanning cycle.

§ With screen tied to plate.


π Value given is to be considered as an Absolute Maximum Rating. In this case, the combined effect of supply voltage variation, manufacturing variation including components in the equipment, and adjustment of equipment controls should not cause the rated value to be exceeded.

▲ In stages operating with grid-leak bias, an adequate cathode-bias resistor or other suitable means is required to protect the tube in the absence of excitation.


AVERAGE PLATE CHARACTERISTICS

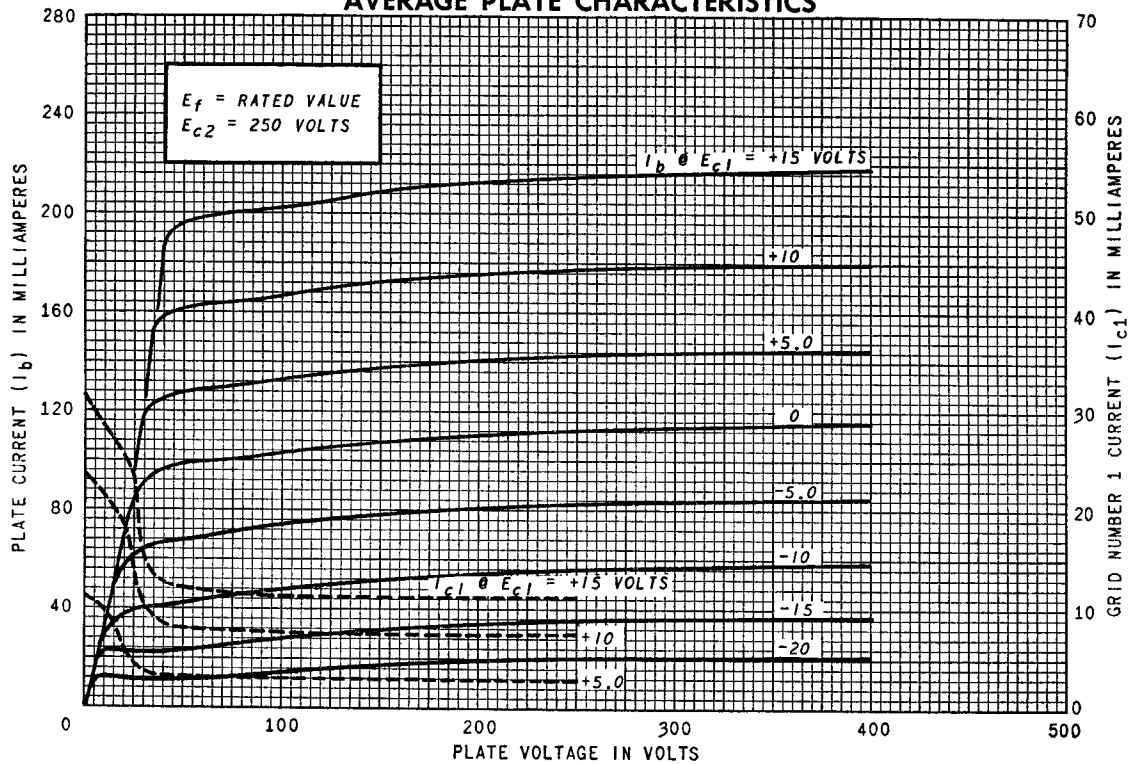


AVERAGE PLATE CHARACTERISTICS

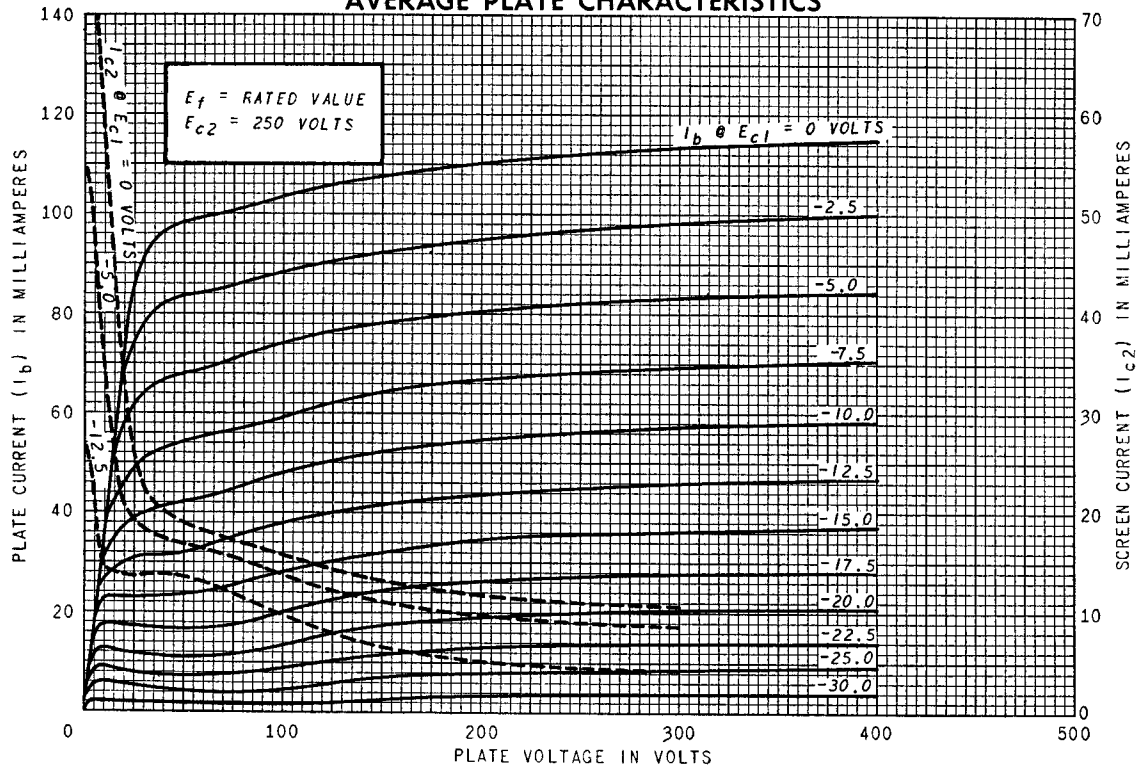


AVERAGE PLATE CHARACTERISTICS

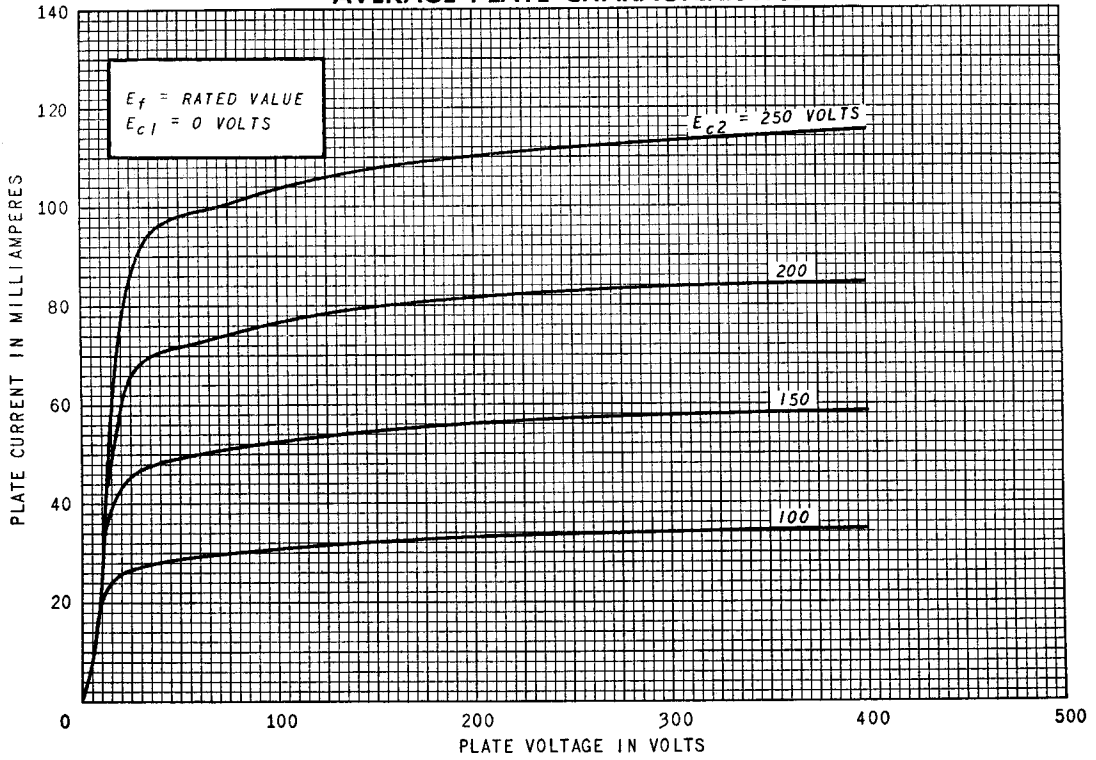


AVERAGE PLATE CHARACTERISTICS
 TRIODE CONNECTION

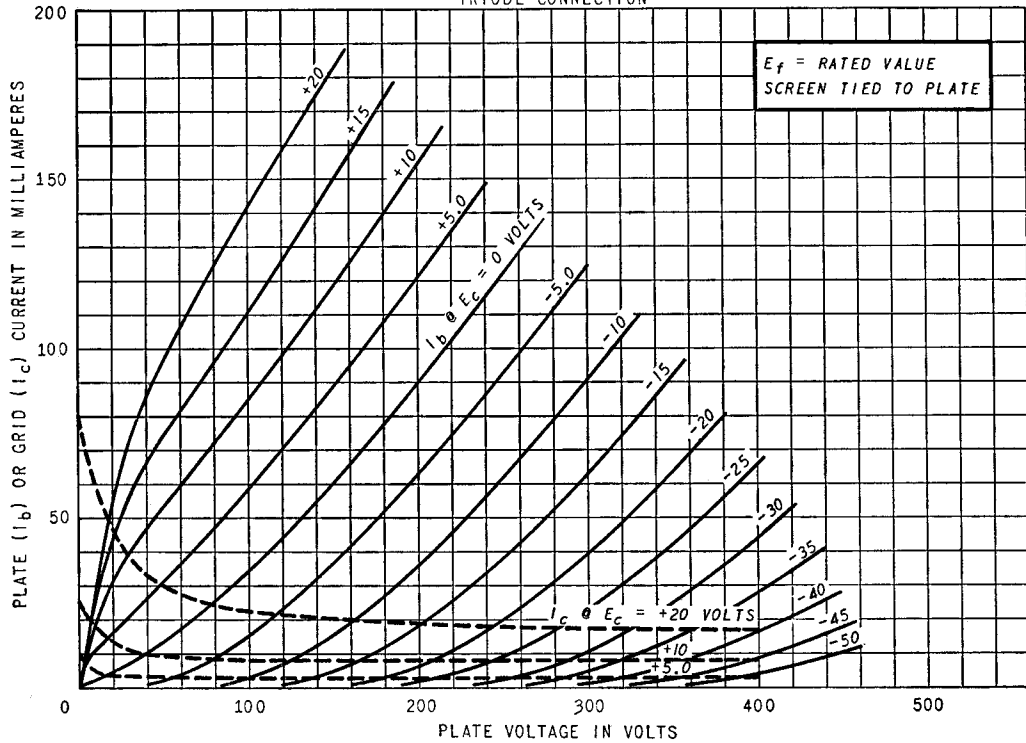


AVERAGE TRANSFER CHARACTERISTICS

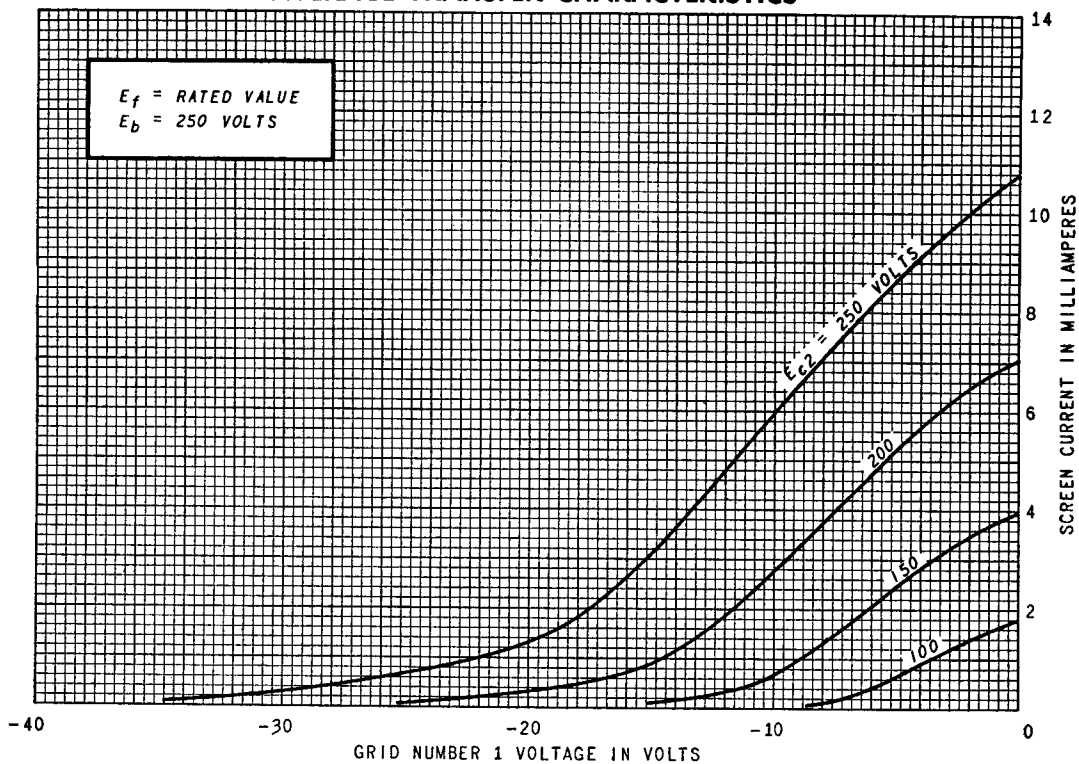

AVERAGE TRANSFER CHARACTERISTICS

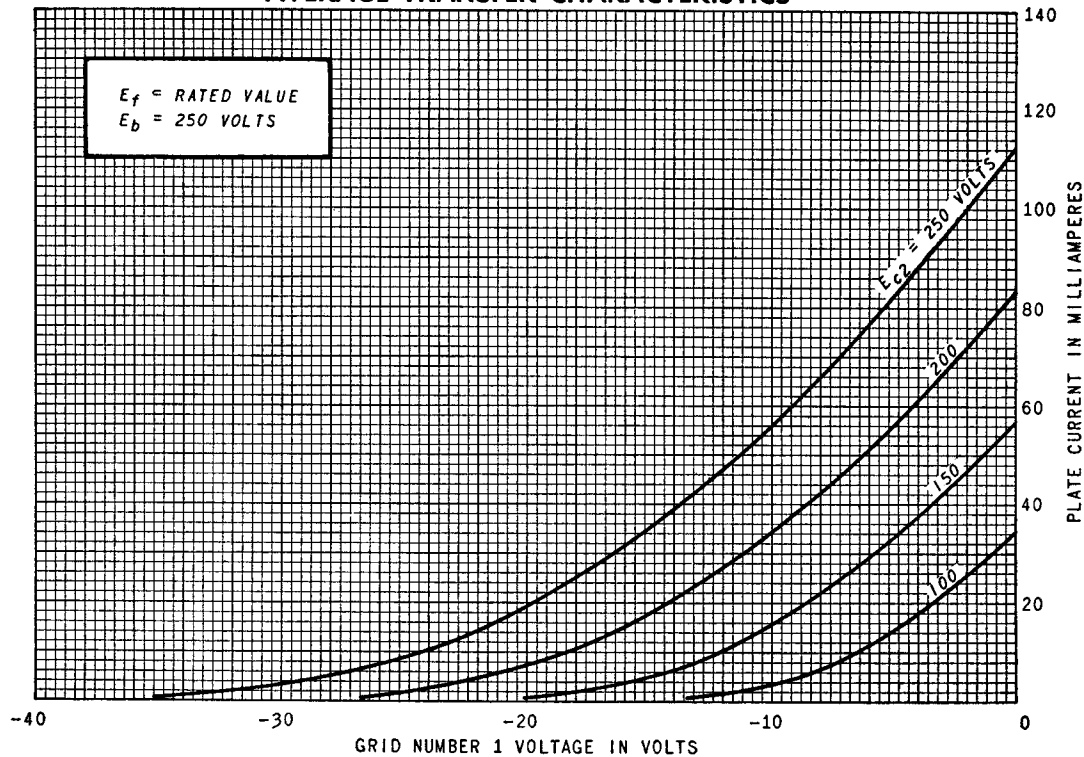

OPERATION CHARACTERISTICS

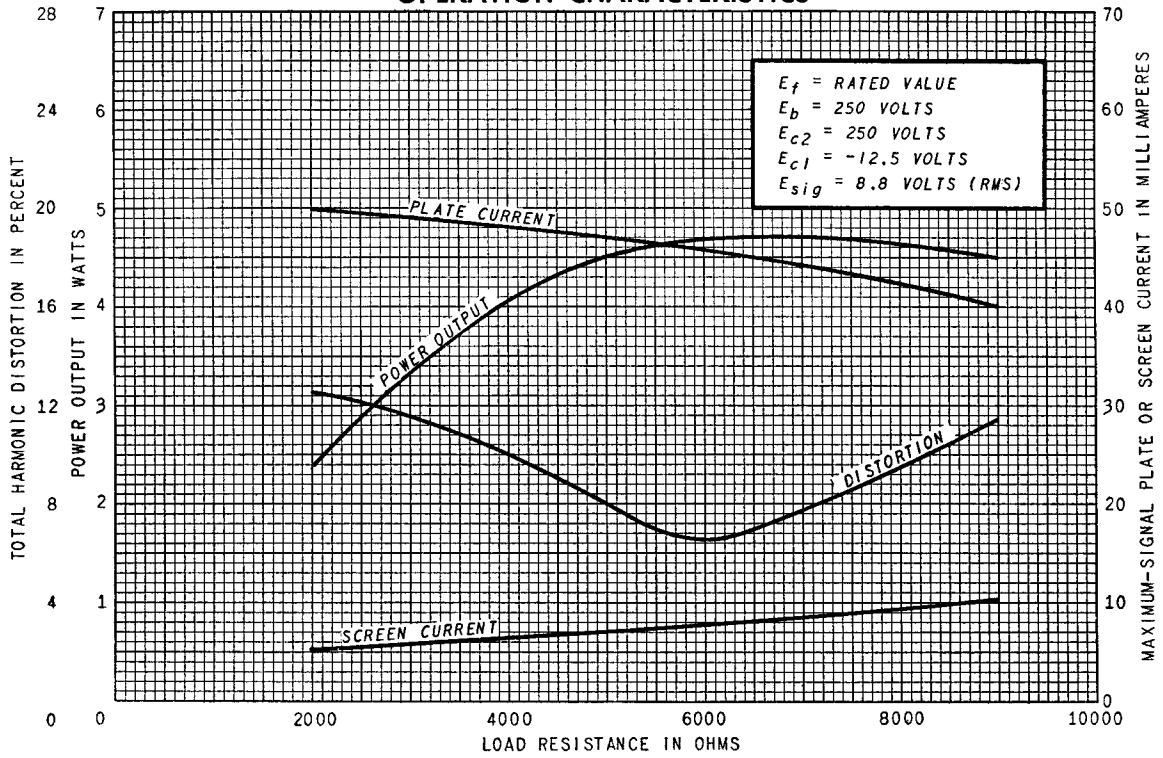

TUBE DEPARTMENT



Schenectady 5, N. Y.