

MARCONI VALVES

MARCONI VALVES

for use with 6-volt Accumulator

TYPES DEH 610 & DEL 610


TYPE DEH 610

DULL EMITTER, RESISTANCE CAPACITY
AMPLIFYING AND DETECTOR VALVE.

A highly efficient dull emitter valve, having a very high "Amplification Factor," making it suitable for the following purposes :

1. In resistance-capacity coupled amplifiers, except in the last stages, where types DEL 610, DEP 610, P 625 or P 625A should be used
2. As a detector valve, either with grid leak and condenser or for anode bend rectification, when followed by resistance-capacity coupling.
3. In high frequency amplifiers, where a circuit with some form of stabilising or damping is employed.

The maximum filament voltage is 6.0 and this figure should not be exceeded.

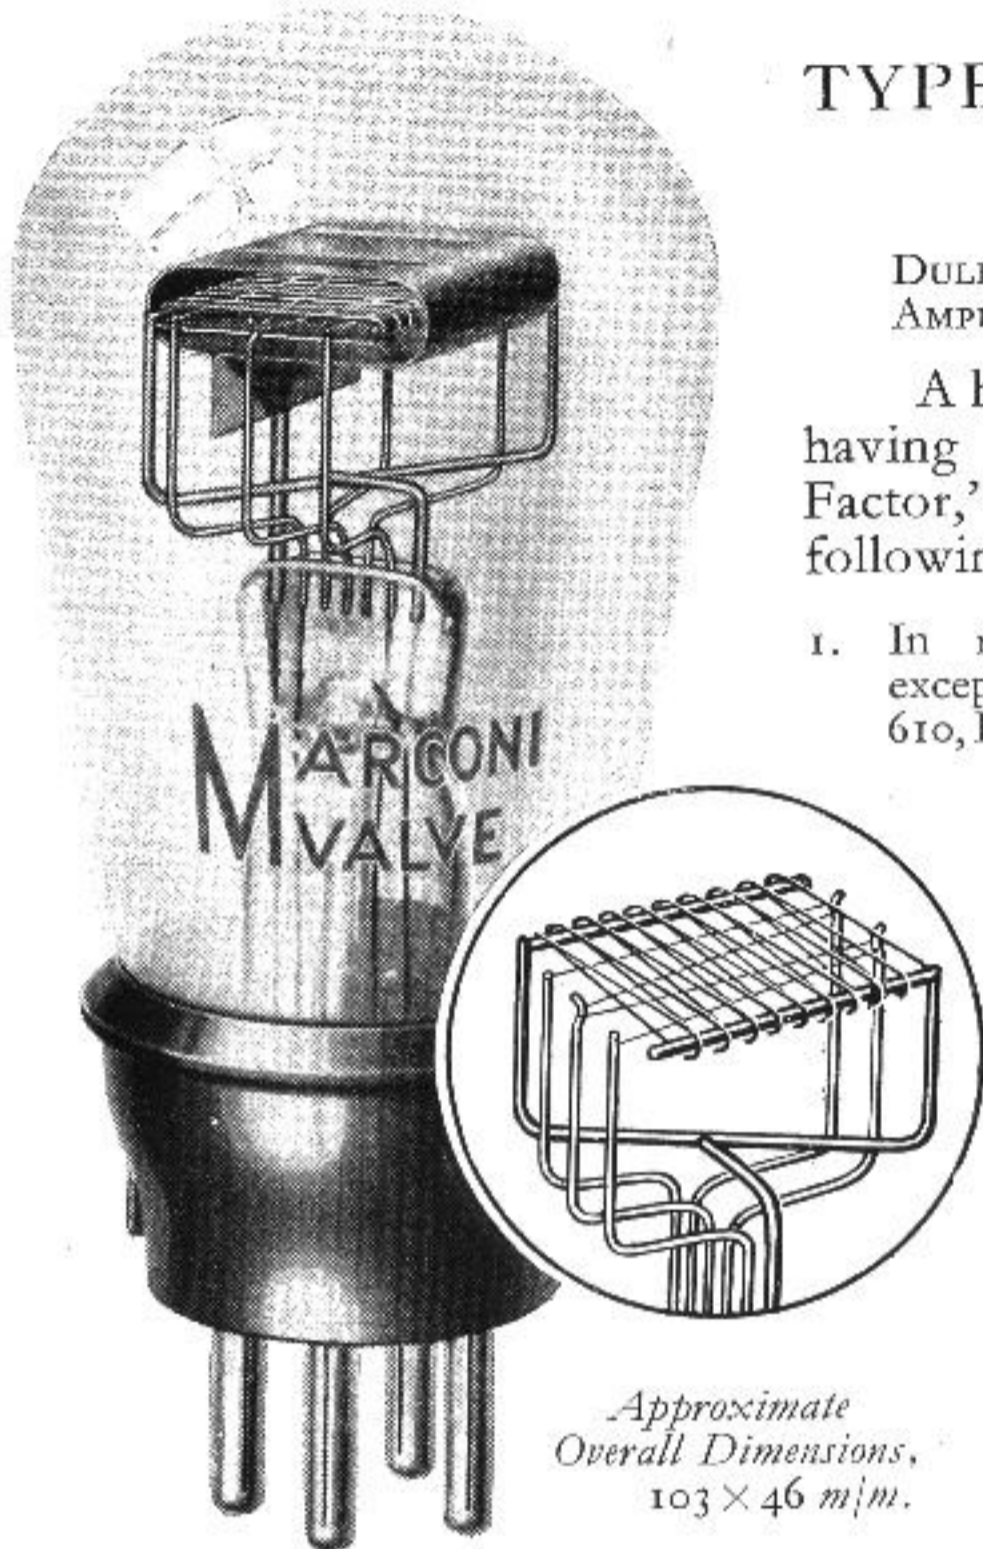

TYPE DEH 610

Fil. Volts.6.0 max.
Fil. Current0.1 amps.
Anode Volts150 max.
*Amp. Factor40
*Impedance...60,000 ohms.
*Normal Slope... .67 Ma/v.
*At Anode Volts 100
Grid Volts 0

Price, 10/6

TYPE DEL 610

Fil. Volts6.0 max.
Fil. current0.1 amp.
Anode Volts ...150 max.
*Amp. Factor15
*Impedance ... 7,500 ohms.
*Normal Slope...2.0 Ma/v.
*At Anode Volts 100
Grid Volts 0

Price, 10/6

TYPE DEL 610

DULL EMITTER, GENERAL PURPOSE VALVE.

A highly efficient dull emitter valve, having characteristics which make it very suitable for the following purposes :

1. In High Frequency amplifiers where a circuit with some method of stabilising or damping is employed.
2. As a Detector valve.
3. In transformer or choke-coupled Low Frequency amplifiers, in all stages except the last, where DEP 610 Power Valve, P 625 or P 625A Super Power Valves should be used.

The maximum filament voltage is 6.0 and this figure should not be exceeded.

The valve in the purple box