

Medium-Mu Triode— Sharp-Cutoff Pentode

9-PIN MINIATURE TYPE

GENERAL DATA

Electrical:

Heater, for Unipotential Cathodes:

Voltage (AC or DC)	6.3	volts
Current at 6.3 volts.	0.45 ± 6%	amp
Warm-up time (Average).	11	sec

Direct Interelectrode Capacitances:

	Without External Shield	With External Shield [▲]	
<i>Triode Unit:</i>			
Grid to plate.	1.6	1.6	μf
Grid to cathode, pentode grid No.3 & pentode cathode & internal shield, and heater . . .	3.4	3.6	μf
Plate to cathode, pentode grid No.3 & pentode cathode & internal shield, and heater . . .	1.7	2.2	μf
Heater to cathode.	3	3 [●]	μf
<i>Pentode Unit:</i>			
Grid No.1 to plate	0.02 max.	0.015 max.	μf
Grid No.1 to cathode & grid No.3 & internal shield, grid No.2, and heater	5.5	5.5	μf
Plate to cathode & grid No.3 & internal shield, grid No.2, and heater. .	2.6	3.4	μf
Heater to cathode & grid No.3 & internal shield .	3	3 [●]	μf

Characteristics, Class A₁ Amplifier:

	Triode Unit	Pentode Unit	
Plate Voltage.	125	125	volts
Grid-No.2 Voltage.	—	125	volts
Grid-No.1 Voltage.	-1	-1	volt
Amplification Factor	46	—	
Plate Resistance (Approx.)	5400	200000	ohms
Transconductance	8500	7500	μmhos
Plate Current.	13.5	12	ma
Grid-No.2 Current.	—	4	ma
Grid-No.1 Voltage (Approx.) for plate $\mu_a = 10$	-8	-8	volts




6GH8

Mechanical:

Operating Position. Any
 Maximum Overall Length. 2-3/16"
 Maximum Seated Length 1-15/16"
 Length, Base Seat to Bulb Top (Excluding tip). . . 1-9/16" ± 3/32"
 Diameter. 0.750" to 0.875"
 Dimensional Outline See *General Section*
 Bulb. T6-1/2
 Base. Small-Button Noval 9-Pin (JEDEC No. E9-1)
 Basing Designation for BOTTOM VIEW. 9AE

Pin 1 - Triode Plate
 Pin 2 - Pentode
 Grid No. 1
 Pin 3 - Pentode
 Grid No. 2
 Pin 4 - Heater
 Pin 5 - Heater
 Pin 6 - Pentode Plate



Pin 7 - Pentode
 Cathode,
 Pentode
 Grid No. 3,
 Internal
 Shield
 Pin 8 - Triode Cathode
 Pin 9 - Triode Grid

HORIZONTAL-DEFLECTION OSCILLATOR

Maximum Ratings, Design-Maximum Values:

*For operation in a 525-line, 30-frame system**

Triode Unit Pentode Unit

PLATE VOLTAGE.	330 max.	350 max.	volts
GRID-No. 2 (SCREEN-GRID) SUPPLY VOLTAGE	-	330 max.	volts
GRID-No. 2 VOLTAGE.	-	<i>See Grid-No. 2 Input</i>	
<i>Rating Chart at front of Receiving Tube Section</i>			
GRID-No. 1 (CONTROL-GRID) VOLTAGE:			
Positive-bias value.	0 max.	0 max.	volts
Peak-negative value.	-	175 max.	volts
CATHODE CURRENT:			
Peak	-	300 max.	ma
Average.	-	20 max.	ma
GRID-No. 2 INPUT:			
For grid-No. 2 voltages up to 165 volts.	-	0.55 max.	watt
For grid-No. 2 voltages between 165 and 330 volts.	-	<i>See Grid-No. 2 Input</i>	
<i>Rating Chart at front of Receiving Tube Section</i>			
PLATE DISSIPATION.	2.5 max.	2.5 max.	watts
PEAK HEATER-CATHODE VOLTAGE:			
Heater negative with respect to cathode	200 max.	200 max.	volts
Heater positive with respect to cathode	200♦ max.	200♦ max.	volts



Maximum Circuit Values:


	<i>Triode Unit</i>	<i>Pentode Unit</i>	
Grid-No.1-Circuit Resistance: For fixed-bias or cathode- bias operation.	2.2 max.	2.2 max.	megohms

- ▲ With external shield JEDEC No.315 connected to cathode of unit under test except as noted.
- With external shield JEDEC No.315 connected to ground.
- ★ As described in "Standards of Good Engineering Practice Concerning Television Broadcast Stations," Federal Communications Commission.
- ◆ The dc component must not exceed 100 volts.



6GH8


AVERAGE PLATE CHARACTERISTICS Triode Unit

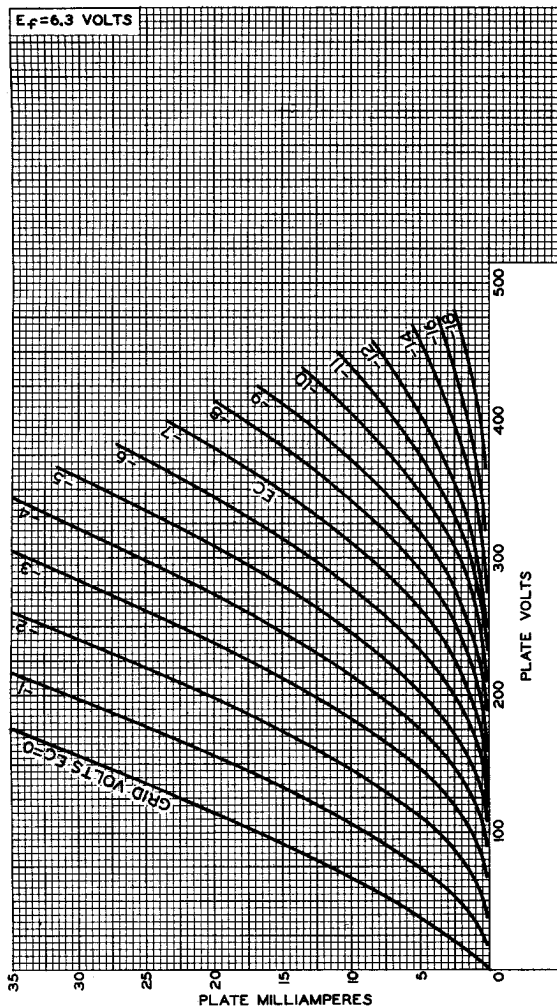

92CM-1042IRI



AVERAGE CHARACTERISTICS Triode Unit

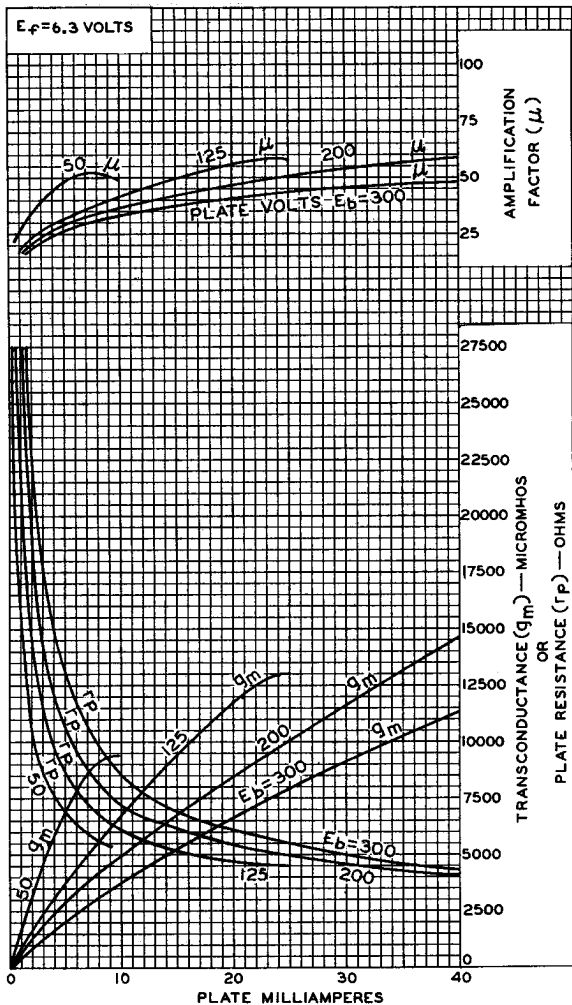


92CM-10428



6GH8

AVERAGE CHARACTERISTICS Pentode Unit

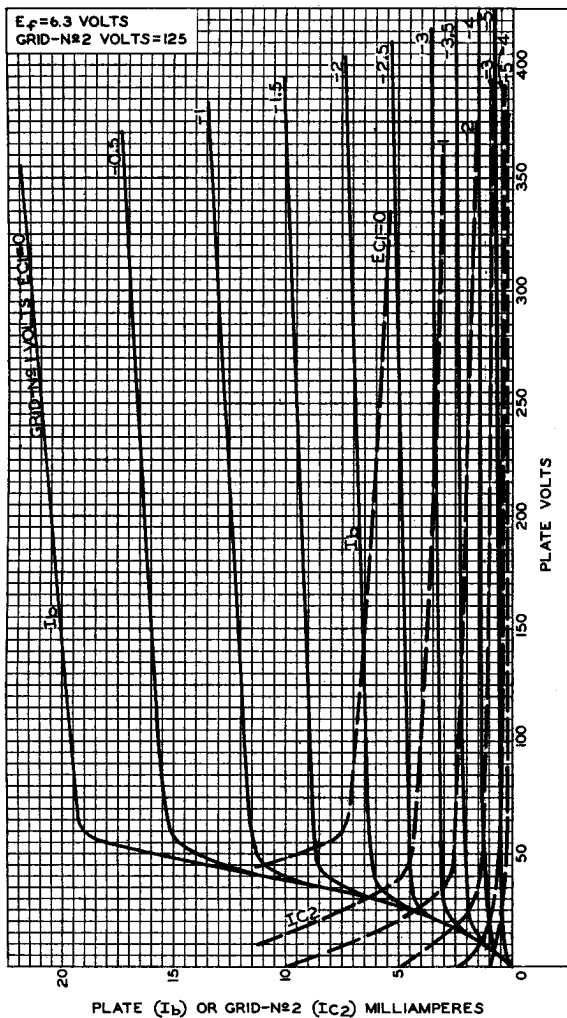


RADIO CORPORATION OF AMERICA
Electron Tube Division

Harrison, N. J.



AVERAGE CHARACTERISTICS Pentode Unit

$E_f = 6.3$ VOLTS
 PLATE VOLTS = 125
 GRID-N $\#$ 2 VOLTS = 125

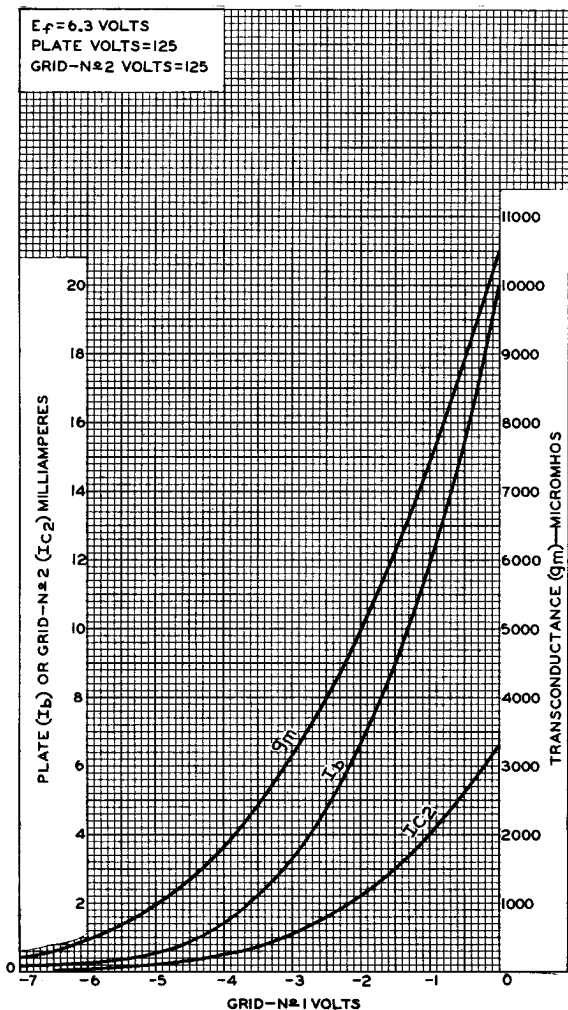

92CM-10417

