

# 6GH8-A

## TRIODE-PENTODE

### DESCRIPTION AND RATING

The 6GH8-A is a miniature tube which contains a sharp-cutoff pentode and a medium-mu triode. Each section has a separate cathode and is electrically independent. The pentode section is intended primarily for service as an oscillator in the horizontal-deflection system of television receivers.

Except for being controlled to assure low interelectrode leakage, the 6GH8-A is identical to the 6GH8.

### GENERAL

#### ELECTRICAL

Cathode - Coated Unipotential

Heater Characteristics and Ratings

Heater Voltage, AC or DC* . . . . .	6.3	Volts
Heater Current† . . . . .	0.45±0.03	Amperes
Heater Warm-up Time, average‡ . . . . .	11	Seconds

Direct Interelectrode Capacitances

	With Shield	Without Shield	
<b>Pentode Section</b>			
Grid-Number 1 to Plate: (Pg1 to Pp), maximum . . . . .	0.01¶	0.02	pf
Input: Pg1 to (h + k + Pg2 + Pg3 + i.s.) . . . . .	5.0¶	5.0	pf
Output: Pp to (h + k + Pg2 + Pg3 + i.s.) . . . . .	3.4¶	2.6	pf


**Triode Section**

Grid to Plate: (Tg to Tp) . . . . .	1.7#	1.7	pf
Input: Tg to (h + Tk + Pk + Pg3 + i.s.) . . . . .	3.2#	3.0	pf
Output: Tp to (h + Tk + Pk + Pg3 + i.s.) . . . . .	1.9#	1.4	pf
Heater to Cathode, Each SectionΔ	3.0	3.0	pf

#### MECHANICAL

Operating Position - Any	
Envelope - T-6 1/2, Glass	
Base - E9-1, Small Button 9-Pin	
Outline Drawing - EIA 6-2	
Maximum Diameter . . . . .	0.875 Inches
Maximum Over-all Length . . . . .	2.188 Inches
Maximum Seated Height . . . . .	1.938 Inches

#### PHYSICAL DIMENSIONS

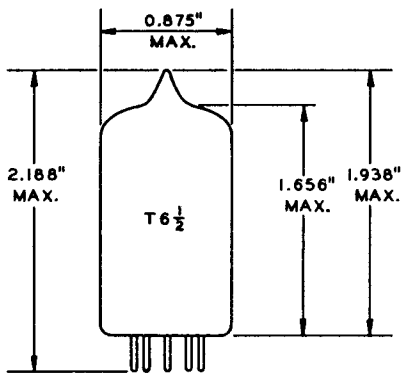


EIA 6-2

#### TERMINAL CONNECTIONS

- Pin 1 - Triode Plate
- Pin 2 - Pentode Grid Number 1
- Pin 3 - Pentode Grid Number 2 (Screen)
- Pin 4 - Heater
- Pin 5 - Heater
- Pin 6 - Pentode Plate
- Pin 7 - Pentode Cathode, Grid Number 3, and Internal Shield
- Pin 8 - Triode Cathode
- Pin 9 - Griode Grid

#### BASING DIAGRAM



EIA 9AE

The tubes and arrangements disclosed herein may be covered by patents of General Electric Company or others. Neither the disclosure of any information herein nor the sale of tubes by General Electric Company conveys any license under patent claims covering combinations of tubes with other devices or elements. In the absence of an

express written agreement to the contrary, General Electric Company assumes no liability for patent infringement arising out of any use of the tubes with other devices or elements by any purchaser of tubes or others.

**MAXIMUM RATINGS**

**DESIGN-MAXIMUM VALUES**

	<b>Pentode Section Horizontal Oscillator Service**</b>	<b>Triode Section</b>	
DC Plate Voltage . . . . .	350	330	Volts
Screen Supply Voltage. . . . .	330	---	Volts
Screen Voltage - See Screen Rating Chart			
Positive DC Grid-Number 1 Voltage. . . . .	0	0	Volts
Peak Negative DC Grid-Number 1 Voltage . . . . .	175	---	Volts
Plate Dissipation . . . . .	2.5	2.5	Watts
Screen Dissipation. . . . .	0.55	---	Watts
DC Cathode Current. . . . .	20	---	Milliamperes
Peak Cathode Current . . . . .	300	---	Milliamperes
Heater-Cathode Voltage			
Heater Positive with Respect to Cathode			
DC Component. . . . .	100	100	Volts
Total DC and Peak . . . . .	200	200	Volts
Heater Negative with Respect to Cathode			
Total DC and Peak . . . . .	200	200	Volts
Grid-Number 1 Circuit Resistance			
With Fixed Bias. . . . .	2.2	2.2	Megohms
With Cathode Bias . . . . .	2.2	2.2	Megohms

<p>Design-Maximum ratings are limiting values of operating and environmental conditions applicable to a bogey electron tube of a specified type as defined by its published data and should not be exceeded under the worst probable conditions.</p> <p>The tube manufacturer chooses these values to provide acceptable serviceability of the tube, making allowance for the effects of changes in operating conditions due to variations in the characteristics of the tube under consideration.</p>	<p>The equipment manufacturer should design so that initially and throughout life no design-maximum value for the intended service is exceeded with a bogey tube under the worst probable operating conditions with respect to supply-voltage variation, equipment component variation, equipment control adjustment, load variation, signal variation, environmental conditions, and variations in the characteristics of all other electron devices in the equipment.</p>
--	---


**CHARACTERISTICS AND TYPICAL OPERATION**

**AVERAGE CHARACTERISTICS**


	<b>Pentode Section</b>	<b>Triode Section</b>	
Plate Voltage . . . . .	125	125	Volts
Screen Voltage . . . . .	125	---	Volts
Grid-Number 1 Voltage. . . . .	-1.0	-1.0	Volts
Amplification Factor . . . . .	---	46	
Plate Resistance, approximate . . . . .	200000	5400	Ohms
Transconductance . . . . .	7500	8500	Micromhos
Plate Current . . . . .	12	13.5	Milliamperes
Screen Current . . . . .	4.0	---	Milliamperes
Grid-Number 1 Voltage, approximate			
I <sub>b</sub> = 10 Microamperes . . . . .	-8.0	-8.0	Volts

## NOTES


- \* Heater voltage for a bogey tube at  $I_f = 0.45$  amperes.
- ‡ The equipment designer should design the equipment so that heater current is centered at the specified bogey value, with heater supply variations restricted to maintain heater current within the specified tolerance.
- § The time required for the voltage across the heater to reach 80 percent of the bogey value after applying 4 times the bogey heater voltage to a circuit consisting of the tube heater in series with a resistance equal to 3 times the bogey heater voltage divided by the bogey heater current.
- ¶ With external shield (EIA 315) connected to pentode cathode.
- # With external shield (EIA 315) connected to triode cathode.
- Δ With external shield (EIA 315) connected to ground.
- \*\* For operation in a 525-line, 30-frame television system as described in "Standards of Good Engineering Practice Concerning Television Broadcast Stations", Federal Communications Commission. The duty cycle of the voltage pulse must not exceed 15 percent of one scanning cycle.

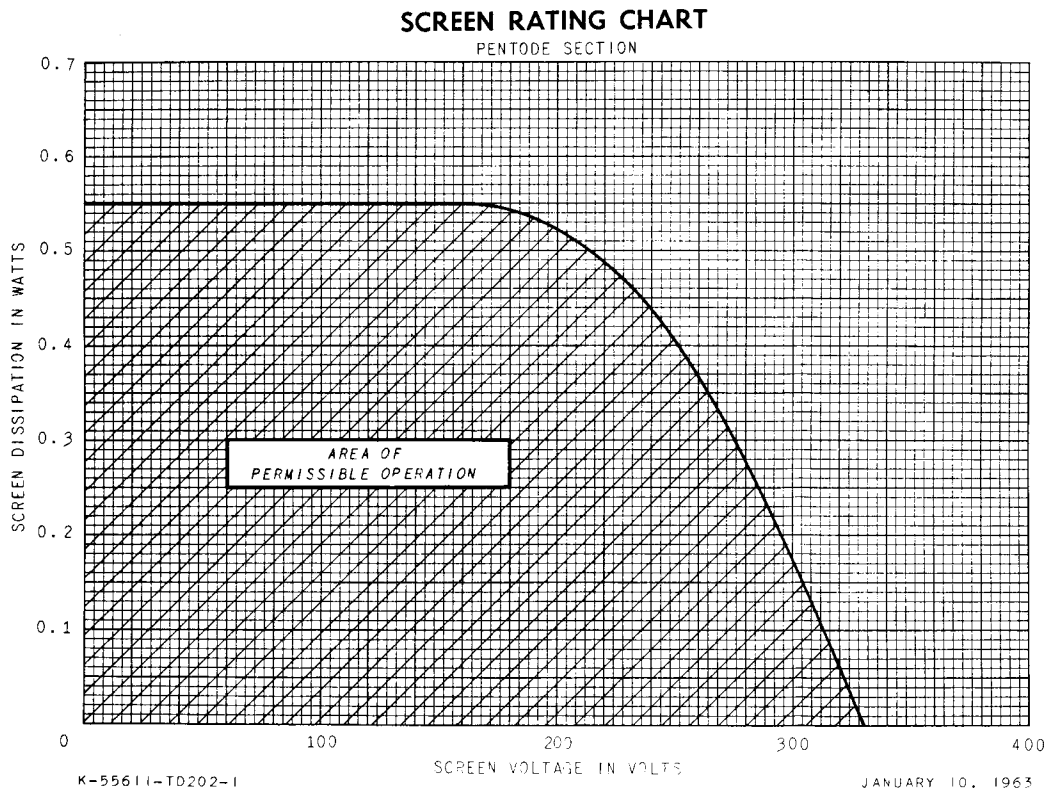

**AVERAGE PLATE CHARACTERISTICS**

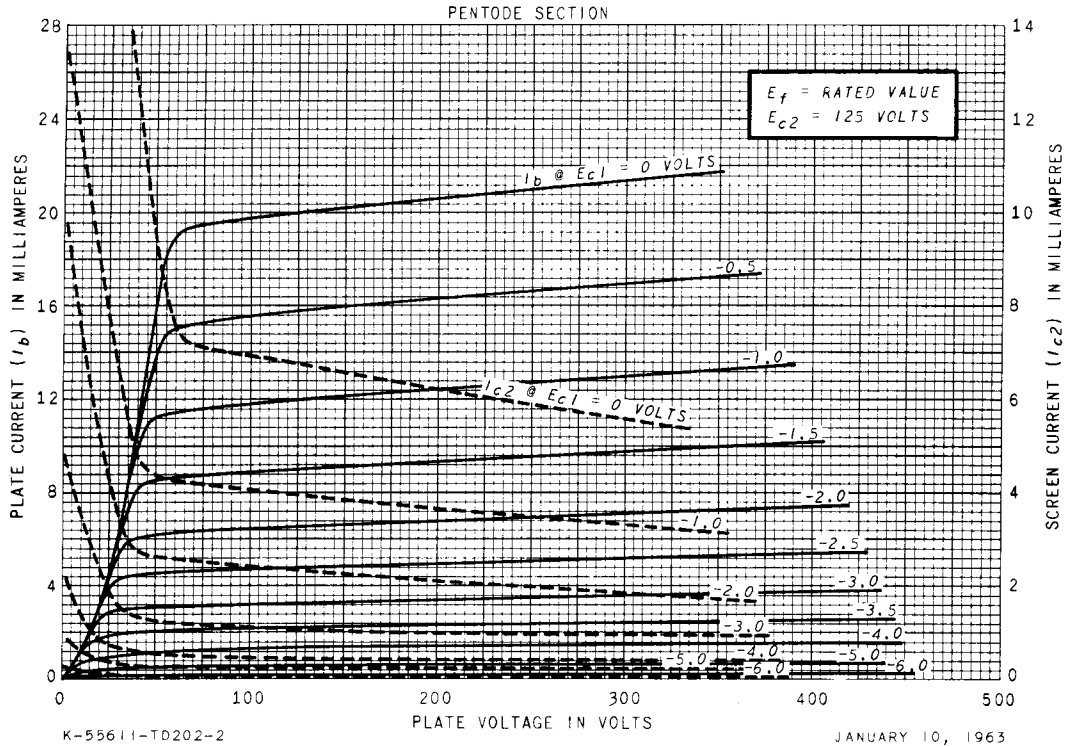


**AVERAGE TRANSFER CHARACTERISTICS**

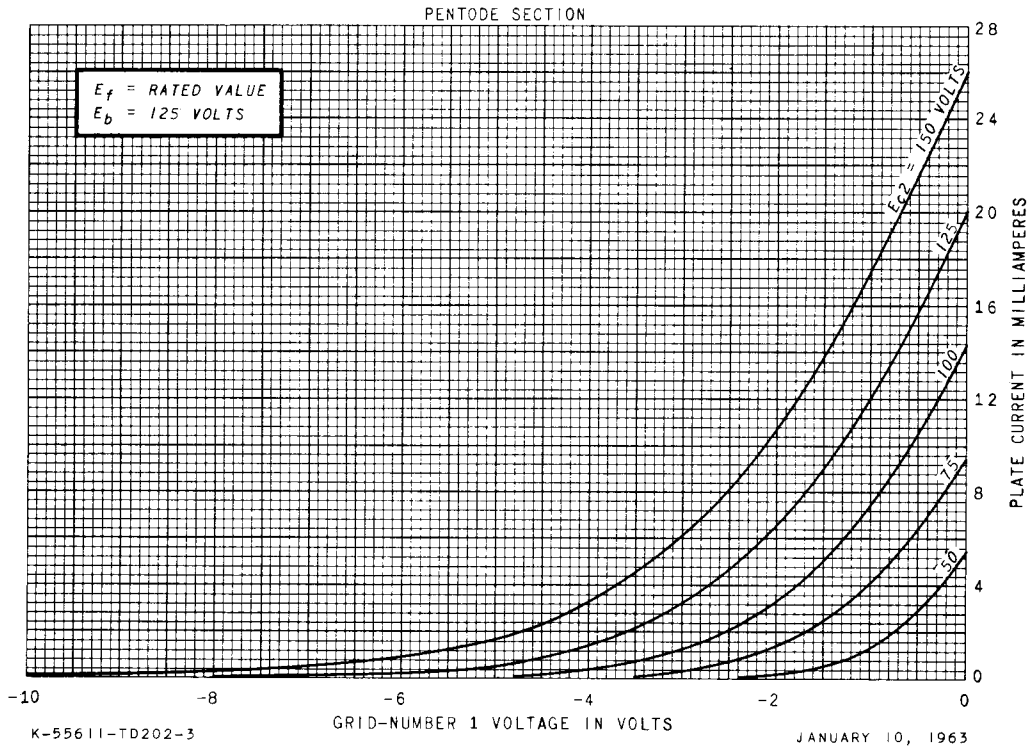


**AVERAGE TRANSFER CHARACTERISTICS**

PENTODE SECTION

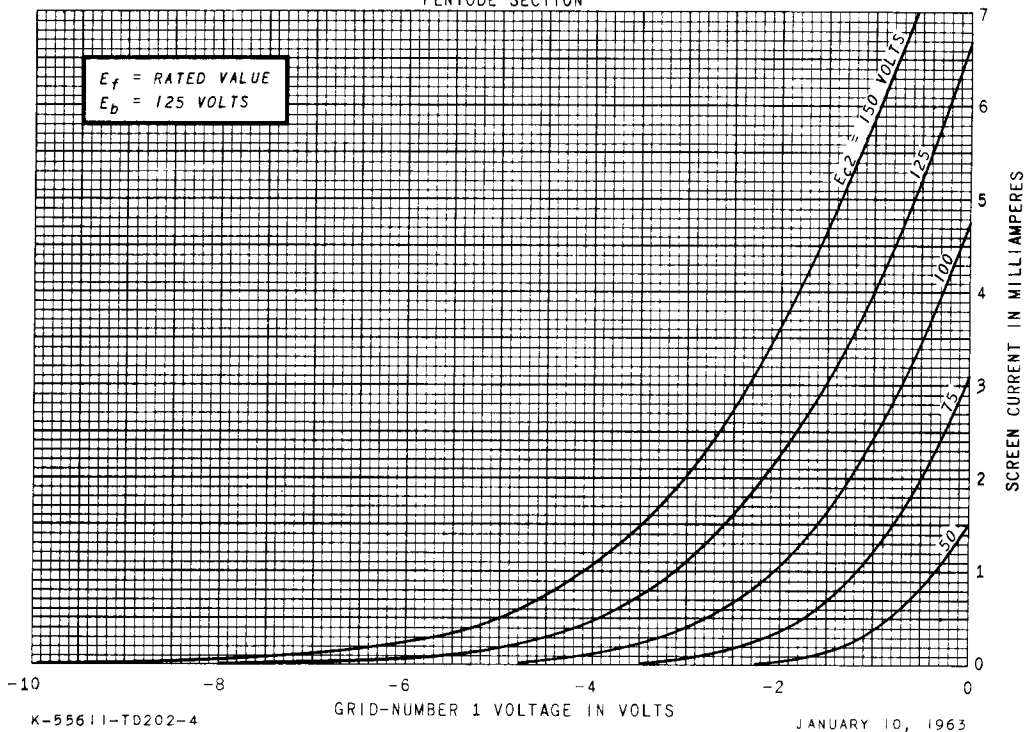


**AVERAGE TRANSFER CHARACTERISTICS**


PENTODE SECTION

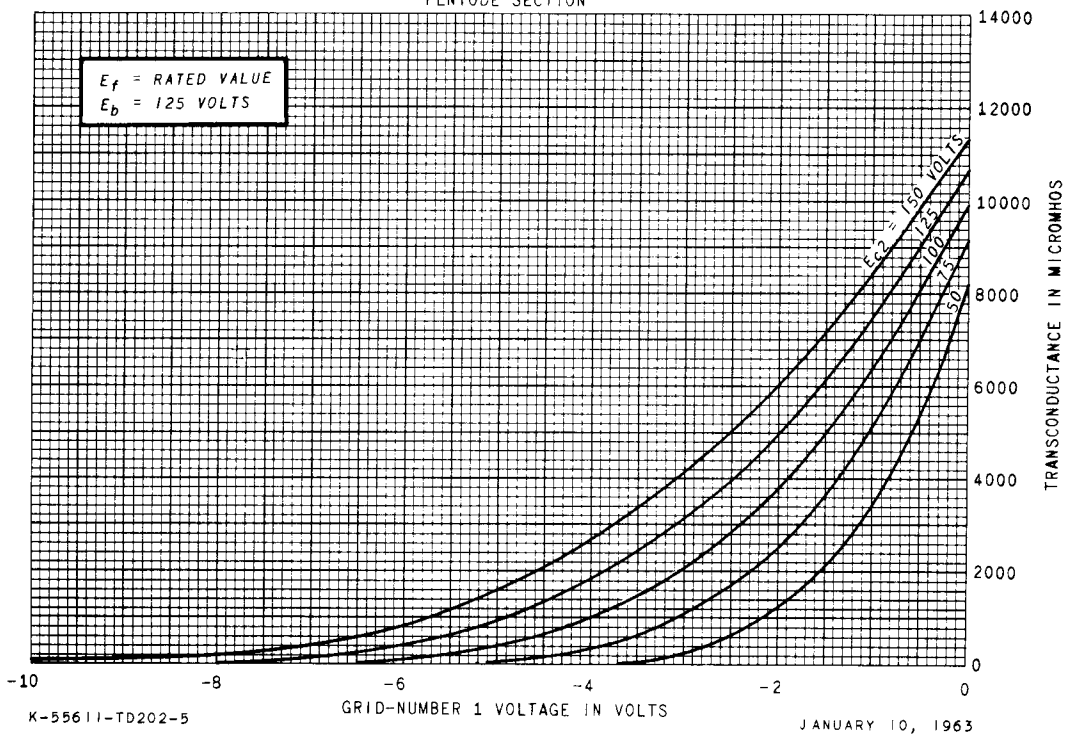

**AVERAGE PLATE CHARACTERISTICS**

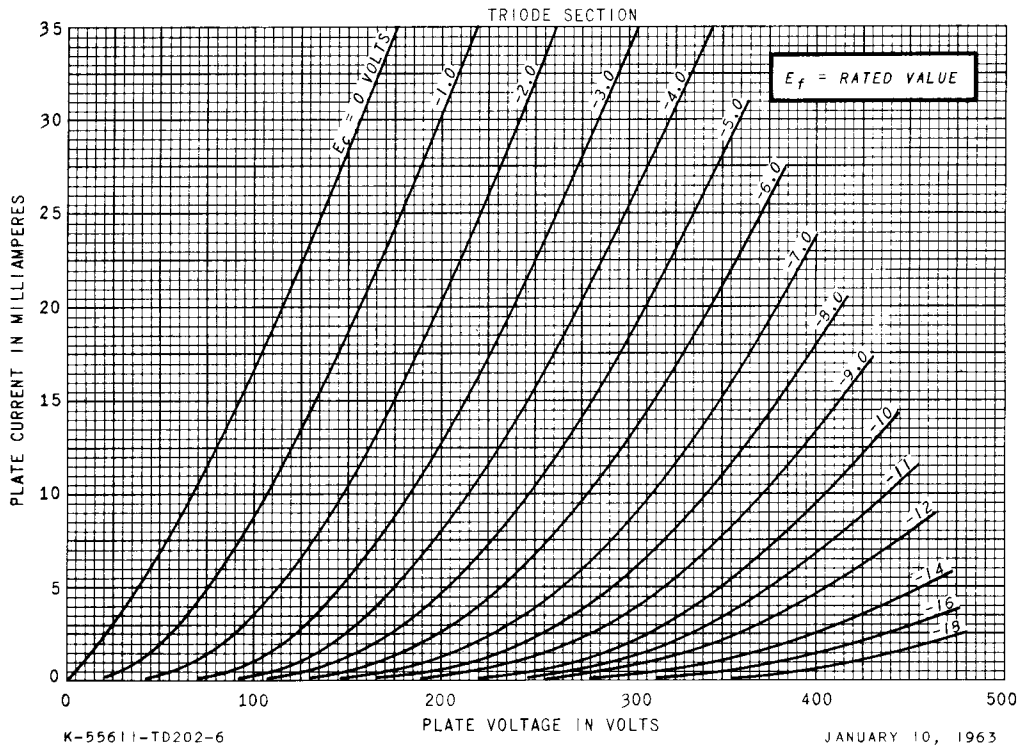

**AVERAGE TRANSFER CHARACTERISTICS**

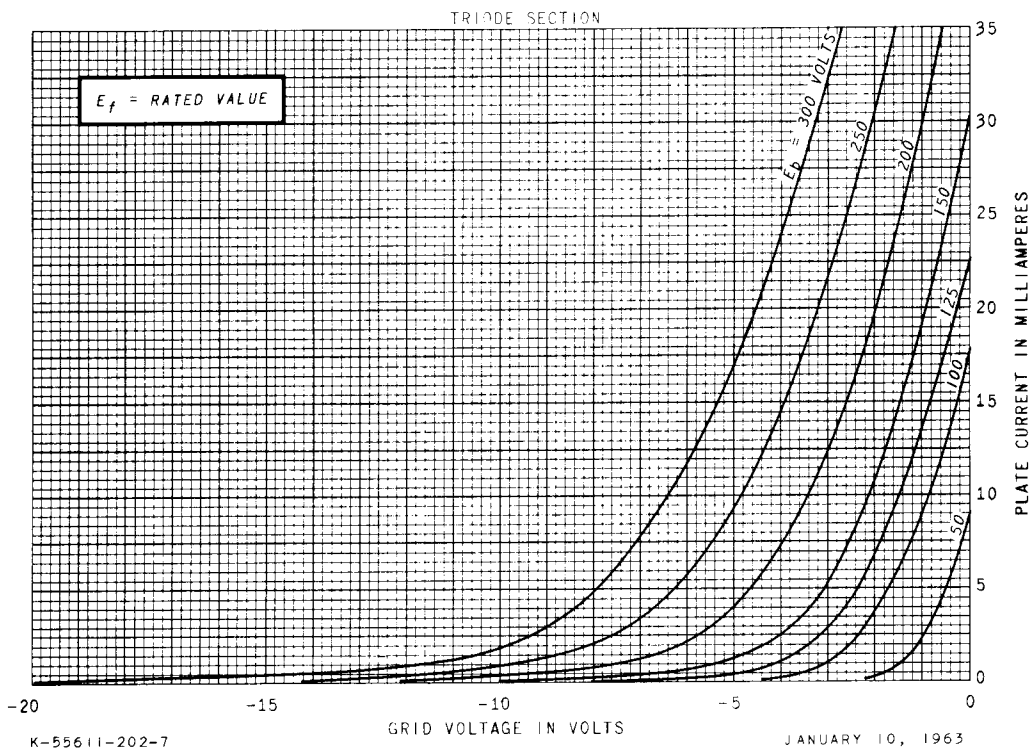

### AVERAGE CHARACTERISTICS

