


# MARCONI VALVES

## MARCONI VALVE

### TYPE HL 210

*Approximate Operating Data—Neglecting Resistance of Output Circuit.*

	Anode Volts	Grid Bias Volts
<b>In High Frequency Amplifier</b>	50-150	Positive, zero or negative, according to method of stabilising or damping circuit.
<b>As Grid Leak Detector</b>	50-150	Connect grid leak to positive end of filament.
<b>As Anode Bend Detector</b>	50-150	$-1\frac{1}{2}$ to $-6$
<b>In Low Frequency Amplifier</b>	75-150	$-1\frac{1}{2}$ to $-4$

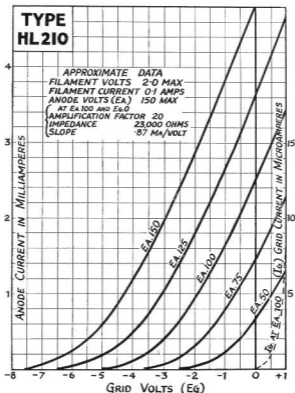

*Characteristic Curve of average HL 210 Valve.*

*The valve in the purple box*