


MARCONI VALVES

MARCONI VALVES

for use with 6-volt Accumulator

TYPE HL 610

DULL EMITTER, HIGH FREQUENCY DETECTOR AND LOW FREQUENCY AMPLIFYING VALVE.

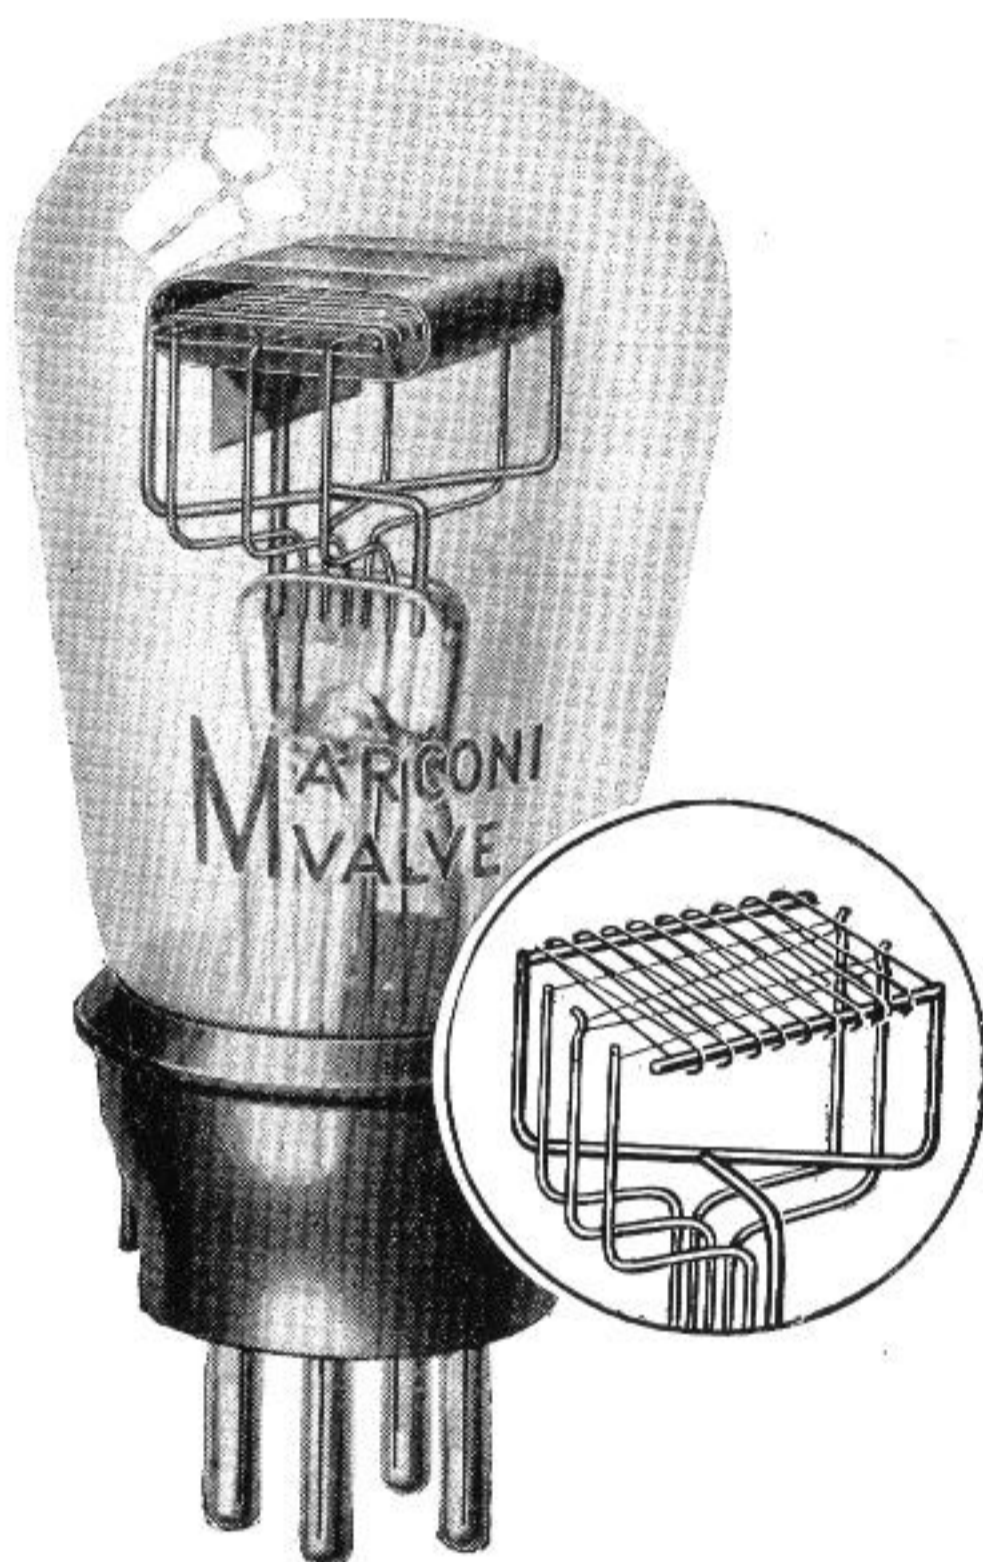

*Approximate Overall Dimensions,
103 × 46 m/m.*

Fil. Volts6.0 max.
Fil. Current0.1 amp.
Anode Volts (Ea) 150 max.
*Amp. Factor30
*Impedance 30,000 ohms.
*Normal Slope 1.0 Ma/v.
*At Anode Volts 100
Grid Volts 0

Price, 10/6.

The HL 610 is a very efficient dull emitter valve, having characteristics which make it suitable for the following purposes :

1. In High Frequency Amplifiers, where a circuit with some method of damping or stabilising is employed.
2. As a Detector Valve.
3. In the first stage only of L.F. Amplifiers.

The maximum filament voltage is 6.0 and this figure should not be exceeded.

The valve in the purple box