

MARCONI VALVES


MARCONI VALVES

TYPE P POINT 8

To avoid hum, the grid return lead should be taken to the slider or centre point of a potentiometer connected across the filament.

Approximate Operating Data—Neglecting Resistance of Output Circuit.

Anode Volts	Negative Grid Bias Volts	Average Anode Current in milliamperes
150	12	10.0
125	10.5	7.5
100	7.5	6.0
75	6.0	4.0

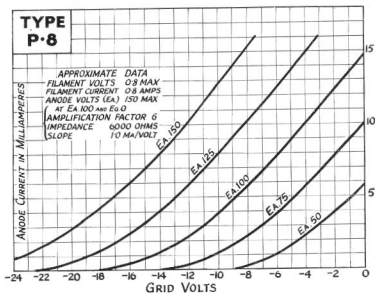

Characteristic Curve of average P.8 Valve.

The valve in the purple box