

MARCONI VALVES


MARCONI VALVES

TYPE P 625

Approximate Operating Data—Neglecting Resistance of Output Circuit.

Anode Volts	Negative Grid Bias Volts	Average Anode Current in Milliamperes
250	24	24
200	18	19
150	12	14.5
100	6	10

While the grid bias is being adjusted the high tension supply should be disconnected.

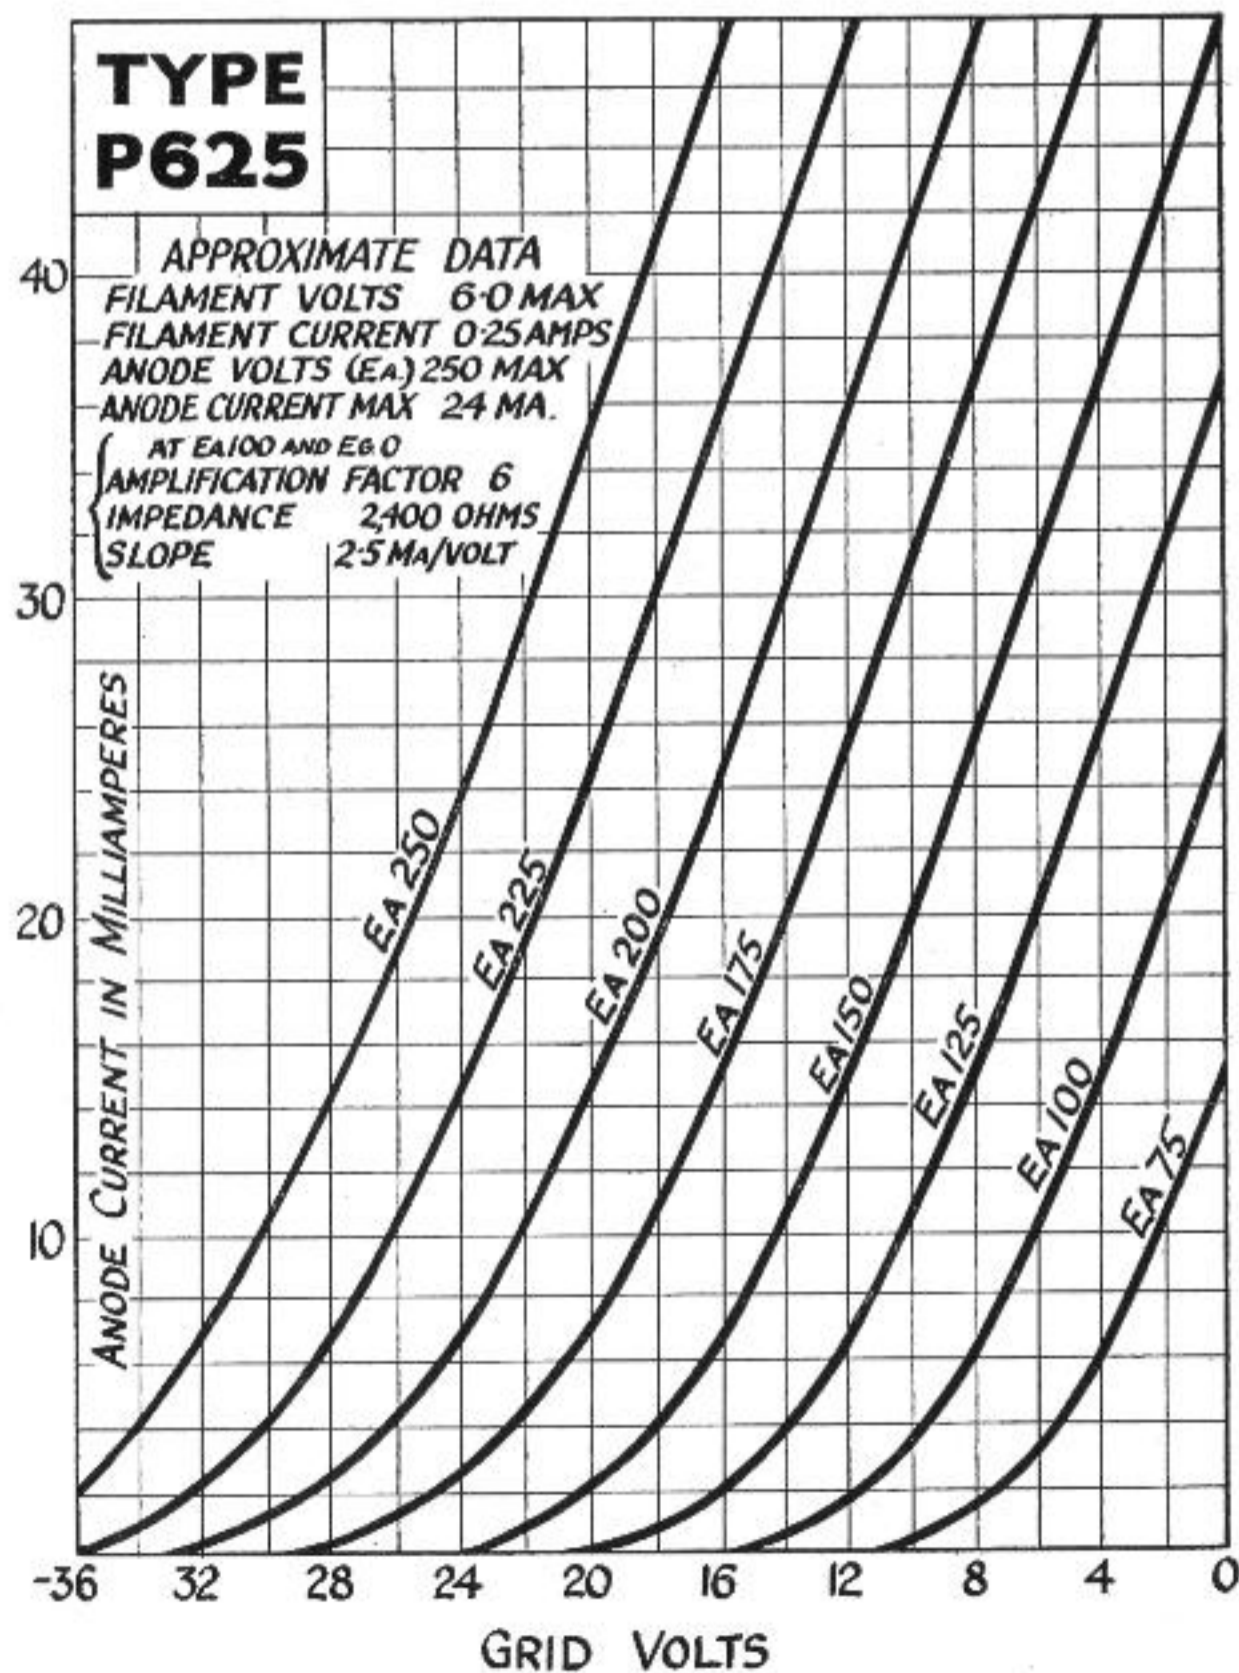

Characteristic Curve of Average P 625 Valve.

The valve in the purple box