



814

# TRANSMITTING BEAM POWER AMPLIFIER

## GENERAL DATA

### Electrical:

Filament, Thoriated Tungsten:

Voltage . . . . .	10 ± 0.5 . . . . .	ac or dc volts
Current . . . . .	3.25 . . . . .	amp

Transconductance (Approx.) for plate current of 39 ma.	3300 . . . . .	μmhos
---	----------------	-------

Direct Interelectrode Capacitances:<sup>o</sup>

Grid No.1 to Plate . . . . .	0.15 max. . . . .	μμf ←
Input . . . . .	13.5 . . . . .	μμf
Output . . . . .	13.5 . . . . .	μμf

<sup>o</sup> Without external shielding.

### Mechanical:

Mounting Position . . . . . Vertical, base down; Horizontal,  
pins 2 & 4 in vertical plane

Overall Length . . . . . 7-7/16" ± 1/4"

Seated Length . . . . . 6-13/16" ± 1/4"

Maximum Diameter . . . . . 2-1/16"

Bulb . . . . . T-16

Cap. . . . . Small


Base . . . . . Medium-Shell Small 5-Pin, Micanol

Basing Designation for BOTTOM VIEW . . . . . 5J

Pin 1 - Filament

Pin 2 - Grid No.2

Pin 3 - Grid No.1



Pin 4 - Grid No.3

Pin 5 - Filament

Cap - Plate

## RF POWER AMPLIFIER - Class B Telephony

Carrier conditions per tube for use with a max. modulation factor of 1.0

### Maximum Ratings, Absolute Values:

	CCS <sup>•</sup>	ICAS <sup>••</sup>	
DC PLATE VOLTAGE . . . . .	1250 max.	1500 max.	volts ←
DC GRID-No.2 (SCREEN) VOLTAGE.	400 max.	400 max.	volts
DC PLATE CURRENT . . . . .	60 max.	60 max.	ma
PLATE INPUT. . . . .	75 max.	90 max.	watts
GRID-No.2 INPUT. . . . .	6.7 max.	6.7 max.	watts
PLATE DISSIPATION. . . . .	50 max.	60 max.	watts

### Typical Operation:

DC Plate Voltage . . . . .	1000	1250	1500 . .	volts
DC Grid-No.3 (Suppressor) Voltage† . . . . .	0	0	0 . .	volts
DC Grid-No.2 Voltage . . . . .	200	200	250 . .	volts
DC Grid-No.1 (Control- Grid) Voltage <sup>‡</sup> . . . . .	-28	-28	-35 . .	volts

<sup>•</sup>, <sup>••</sup>, <sup>†</sup>, <sup>‡</sup>: See next page.

← indicates a change.



## TRANSMITTING BEAM POWER AMPLIFIER

	CCS*		ICAS**	
Peak RF Grid-No.1 Voltage. . .	50	50	56 . .	volts
DC Plate Current . . . . .	60	60	60 . .	ma
DC Grid-No.2 Current . . . .	1.3	1	1.5 . .	ma
DC Grid-No.1 Current (Approx.)* . . . . .	1.8	1.8	1.5 . .	ma
Driving Power (Approx.) <sup>□</sup> * . .	0.65	0.65	0.85 . .	watt
Power Output (Approx.) . . . .	20	25	30 . .	watts

### GRID-MODULATED RF POWER AMPLIFIER - Class C Telephony

Carrier conditions per tube for use with a max. modulation factor of 1.0

#### Maximum Ratings, Absolute Values:

	CCS*		ICAS**	
→ DC PLATE VOLTAGE . . . . .	1250 max.		1500 max.	volts
DC GRID-No.2 (SCREEN) VOLTAGE.	400 max.		400 max.	volts
DC GRID-No.1 (CONTROL- GRID) VOLTAGE. . . . .	-250 max.		-250 max.	volts
DC PLATE CURRENT . . . . .	60 max.		60 max.	ma
PLATE INPUT. . . . .	75 max.		90 max.	watts
GRID-No.2 INPUT. . . . .	6.7 max.		6.7 max.	watts
PLATE DISSIPATION. . . . .	50 max.		60 max.	watts

#### Typical Operation:

DC Plate Voltage . . . . .	1000	1250	1500 . .	volts
DC Grid-No.3 (Suppressor) Voltage† . . . . .	0	0	0 . .	volts
DC Grid-No.2 Voltage . . . . .	200	200	250 . .	volts
DC Grid-No.1 Voltage <sup>Ⓟ</sup> . . . .	-100	-100	-120 . .	volts
→ Peak RF Grid-No.1 Voltage. . .	129	129	150 . .	volts
Peak AF Grid-No.1 Voltage. . .	64	64	90 . .	volts
DC Plate Current . . . . .	60	60	60 . .	ma
DC Grid-No.2 Current . . . . .	2	1.4	3 . .	ma
DC Grid-No.1 Current (Approx.)* . . . . .	3	2.8	2.5 . .	ma
Driving Power (Approx.) <sup>□</sup> * . .	2.5	2.3	4.2 . .	watts
Power Output (Approx.) . . . .	25	29	35 . .	watts

### PLATE-MODULATED RF POWER AMPLIFIER - Class C Telephony

Carrier conditions per tube for use with a max. modulation factor of 1.0

#### Maximum Ratings, Absolute Values:

	CCS*		ICAS**	
→ DC PLATE VOLTAGE . . . . .	1000 max.		1250 max.	volts
DC GRID-No.2 (SCREEN) VOLTAGE.	400 max.		400 max.	volts
DC GRID-No.1 (CONTROL-GRID) VOLTAGE . . . . .	-300 max.		-300 max.	volts

□ At crest of audio-frequency cycle with a modulation factor of 1.0.

•, \*\*, †, Ⓟ, \*: See next page.

→ Indicates a change.



814

814

# TRANSMITTING BEAM POWER AMPLIFIER

	CCS*		ICAS**	
DC PLATE CURRENT . . . . .	120 max.		150 max.	ma
DC GRID-No.1 CURRENT . . . . .	15 max.		15 max.	ma
PLATE INPUT. . . . .	120 max.		180 max.	watts
GRID-No.2 INPUT. . . . .	6.7 max.		6.7 max.	watts
PLATE DISSIPATION. . . . .	34 max.		50 max.	watts

### Typical Operation:

DC Plate Voltage . . . . .	900	1000	1250	..	volts
DC Grid-No.3 (Suppressor) Voltage† . . . . .	0	0	0	..	volts
DC Grid-No.2 Voltage <sup>▲▲</sup> . . . . .	300	300	300	..	volts
	40000	40000	48000	..	ohms
DC Grid-No.1 Voltage†† <sup>⊕</sup> . . . . .	-150	-150	-150	..	volts
	15000	15000	15000	..	ohms
Peak RF Grid-No.1 Voltage. . . . .	215	222	222	..	volts
DC Plate Current . . . . .	120	120	144	..	ma
DC Grid-No.2 Current . . . . .	15	17.5	20	..	ma
DC Grid-No.1 Current (Approx.)* . . . . .	10	10	10	..	ma
Driving Power (Approx.)* . . . . .	2	2	2	..	watts
Power Output (Approx.) . . . . .	76	87	130	..	watts

▲▲ obtained preferably from modulated plate-voltage supply through resistor of value shown.

### RF POWER AMPLIFIER & OSCILLATOR - Class C Telegraphy

Key-down conditions per tube without modulation<sup>⊕</sup>

### Maximum Ratings, Absolute Values:

	CCS*		ICAS**	
DC PLATE VOLTAGE . . . . .	1250 max.		1500 max.	volts
DC GRID-No.2 (SCREEN) VOLTAGE.	400 max.		400 max.	volts
DC GRID-No.1 (CONTROL- GRID) VOLTAGE. . . . .	-300 max.		-300 max.	volts
DC PLATE CURRENT . . . . .	150 max.		150 max.	ma
DC GRID-No.1 CURRENT . . . . .	15 max.		15 max.	ma
PLATE INPUT. . . . .	180 max.		225 max.	watts
GRID-No.2 INPUT. . . . .	10 max.		10 max.	watts
PLATE DISSIPATION. . . . .	50 max.		65 max.	watts

### Typical Operation:

DC Plate Voltage . . . . .	1000	1250	1500	..	volts
DC Grid-No.3 (Suppressor) Voltage† . . . . .	0	0	0	..	volts
DC Grid-No.2 Voltage <sup>■ ■ ⊕</sup> . . . . .	300	300	300	..	volts
	40000	42000	50000	..	ohms
DC Grid-No.1 Voltage†† <sup>⊕</sup> . . . . .	-70	-80	-90	..	volts
	7000	8000	9000	..	ohms
Peak RF Grid-No.1 Voltage. . . . .	395	455	490	..	ohms
	150	165	170	..	volts

●, ●●, †, ⊕, ††, ■, ■■, ⊕: See next page.

← Indicates a change.



# TRANSMITTING BEAM POWER AMPLIFIER

	CCS*		ICAS**	
DC Plate Current . . . . .	150	144	150	ma
DC Grid-No.2 Current . . . . .	17.5	22.5	24	ma
DC Grid-No.1 Cur. (Approx.)*	10	10	10	ma
Driving Power Approx.)*. . . . .	1.35	1.5	1.5	watts
Power Output (Approx.) . . . . .	100	130	160	watts

• Continuous Commercial Service.

•• Intermittent Commercial & Amateur Service.

† Connect grid No.3 to mid-point of filament operated on ac, or to the negative end of filament operated on dc.

\* For effect of load resistance on grid current and driving power, refer to TUBE RATINGS—Grid Current and Driving Power in the General Section.

†† Obtained preferably from grid-No.1 resistor, although combination of either grid-No.1 resistor and cathode resistor or grid resistor and fixed supply may be used.

■ Modulation essentially negative may be used if the positive peak of the audio-frequency envelope does not exceed 115% of the carrier conditions.

■ Obtained from a separate source, from the plate-voltage supply with a voltage divider, or through a series resistor (40000, 42000, 50000).

⊕ If preceding stage is keyed, partial fixed-bias is required.

⊙ For ac filament supply.

## CHARACTERISTICS RANGE VALUES FOR EQUIPMENT DESIGN

	Note	Min.	Max.	
Filament Current . . . . .	1	3.10	3.40	amp
Grid No.1—Plate Capacitance	-	-	0.15	μf
Input Capacitance . . . . .	-	11.1	15.9	μf
Output Capacitance . . . . .	-	10.1	16.9	μf
Plate Current . . . . .	1,2	30	48	ma
Grid-No.2 Current . . . . .	1,2	-	3.5	ma
Grid-No.1 Current . . . . .	1,3	22	52	ma
Power Output . . . . .	1,4	120	-	watts

NOTE 1: DC filament volts = 10.0.

NOTE 2: With dc plate voltage of 1250 volts; dc grid-No.3 voltage of 0 volts; dc grid-No.2 voltage of 300 volts; and dc grid-No.1 voltage of -19 volts.

NOTE 3: With dc plate voltage of 175 volts; dc grid-No.3 voltage of 0 volts; dc grid-No.2 voltage of 175 volts; and dc grid-No.1 voltage of +65 volts.

NOTE 4: With dc plate voltage of 1250 volts; dc grid-No.3 voltage of 0 volts; dc grid-No.2 voltage of 300 volts; plate current of 150 ma., grid-No.1 current of 10-15 ma.; grid-No.1 resistor of 8000 ±10% ohms; and frequency of 15 Mc.

OUTLINE DIMENSIONS for Type 814 are the same as those for Type 828.

Data on operating frequencies for the 814 are given on the sheet TRANS. TUBE RATINGS vs FREQUENCY.


→ Indicates a change.



814

# AVERAGE PLATE CHARACTERISTICS WITH $E_{c1}$ AS VARIABLE

814

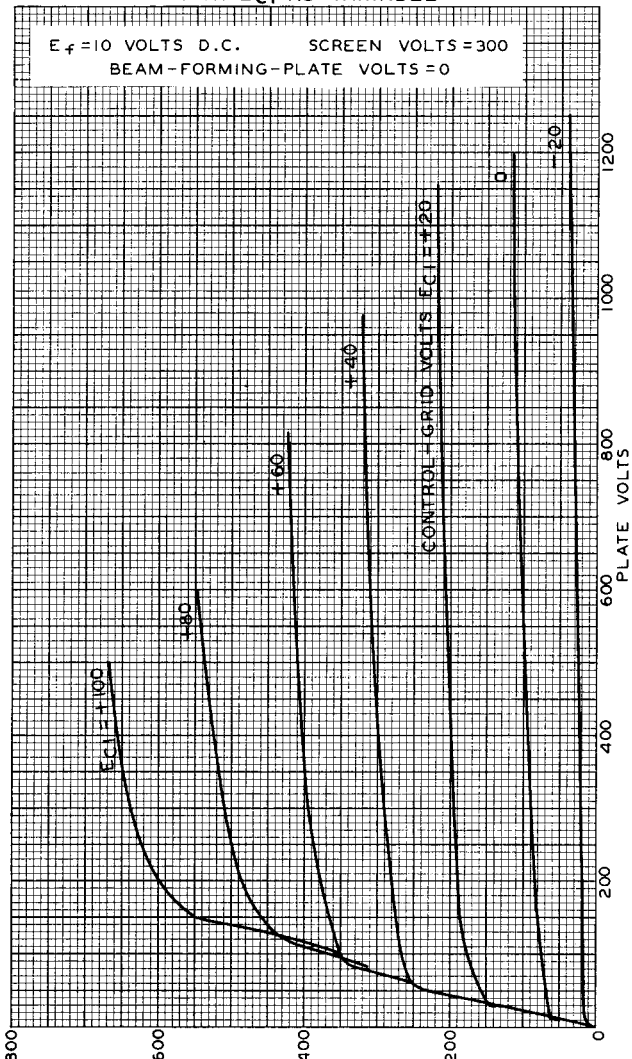

NOV. 11, 1937


PLATE MILLIAMPERES  
RCA RADIOTRON DIVISION  
RCA MANUFACTURING COMPANY, INC.

92C-4845




# TRANSMITTING BEAM POWER AMPLIFIER

## AVERAGE CHARACTERISTICS

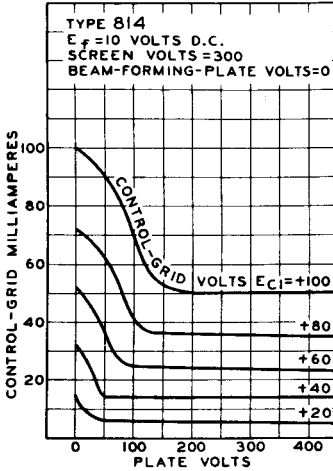

92C-4846

## AVERAGE CHARACTERISTICS

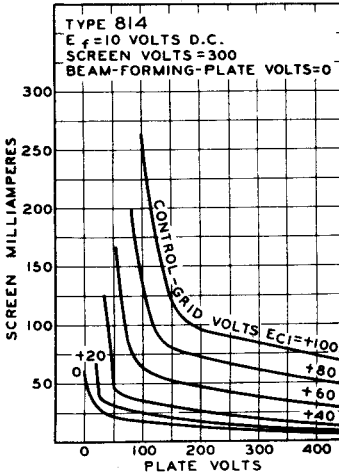

92C-4847