

WARNING THESE VALVES CONTAIN RADIO-ACTIVE MATERIAL

Page 1 (No. of Pages - 3)

MINISTRY OF SUPPLY - DLRD(A)/RRE

VALVE ELECTRONIC

CV 2248-52

Specification MOS(A)/CV2248-52 Issue 3 Dated 13. 12. 54 To be read in conjunction with K1001	<u>SECURITY</u>	
	<u>Specification</u> UNCLASSIFIED	<u>Valve</u> UNCLASSIFIED

—————> Indicates a change

TYPE OF VALVE - Hydrogen-filled Protective Spark Gap CATHODE - Gold ENVELOPE - Glass PROTOTYPE - VX9054	<u>MARKING</u>	
	See K1001/4 and also Note D	
	<u>BASE</u>	
	None See Drawing on Page 3.	
<u>RATING</u>	<u>CONNECTIONS AND DIMENSIONS</u>	
Max. Mean Current (mA) 2 A Max. Peak Current (A) 50 A,B Mean Breakdown Voltage (V) CV2248 1000 CV2249 1250 CV2250 1500 CV2251 1750 CV2252 2000	Note See Drawing on Page 3.	
	<u>MOUNTING POSITION</u>	
	Any	

NOTES

- A. Absolute maximum value
- B. Current pulse to be of approx sine waveform having 40 μ sec duration at half amplitude.
- C. The maximum repetition rate shall be adjusted such that over a period of 5 secs. the sum of the products (peak current X pulse width) does not exceed 10^4 micro-coulombs.
- D. In particular, the requirements of K1001/4.4 shall also apply to the valve and its packaging.


For handling and disposal instructions, see Memorandum in K1001 - Radioactive Valves - Handling and Disposal - dated September, 1953.

Z.8106.R.

CV2248-52/3/1

To be performed in addition to those applicable in K1001

Test Conditions - unless otherwise specified								
Notes 1 and 2								
Test	Test Conditions	AQL %	Insp. Level	Sym- bol	Limits		Units	
					Min.	Max.		
a	<u>Breakdown Voltage</u> CV2248 CV2249 CV2250 CV2251 CV2252	Voltage increased slowly until discharge occurs.		100%				
						870	1130	V
						1120	1380	V
						1370	1630	V
						1620	1880	V
						1870	2130	V
b	Life	Rate of discharge Note 3	10.0	IB		5000	-	dis- charges
<u>NOTES</u>								
1. Test to be performed after 7 days shelf life.								
2. Test to be performed using a current pulse of approximately sine waveform having 20 μ secs duration at half amplitude and 25A peak.								
3. The maximum repetition rate shall be adjusted such that over any period of 5 secs., the sum of the products (peak current X pulse width) does not exceed 10^4 micro-coulombs.								

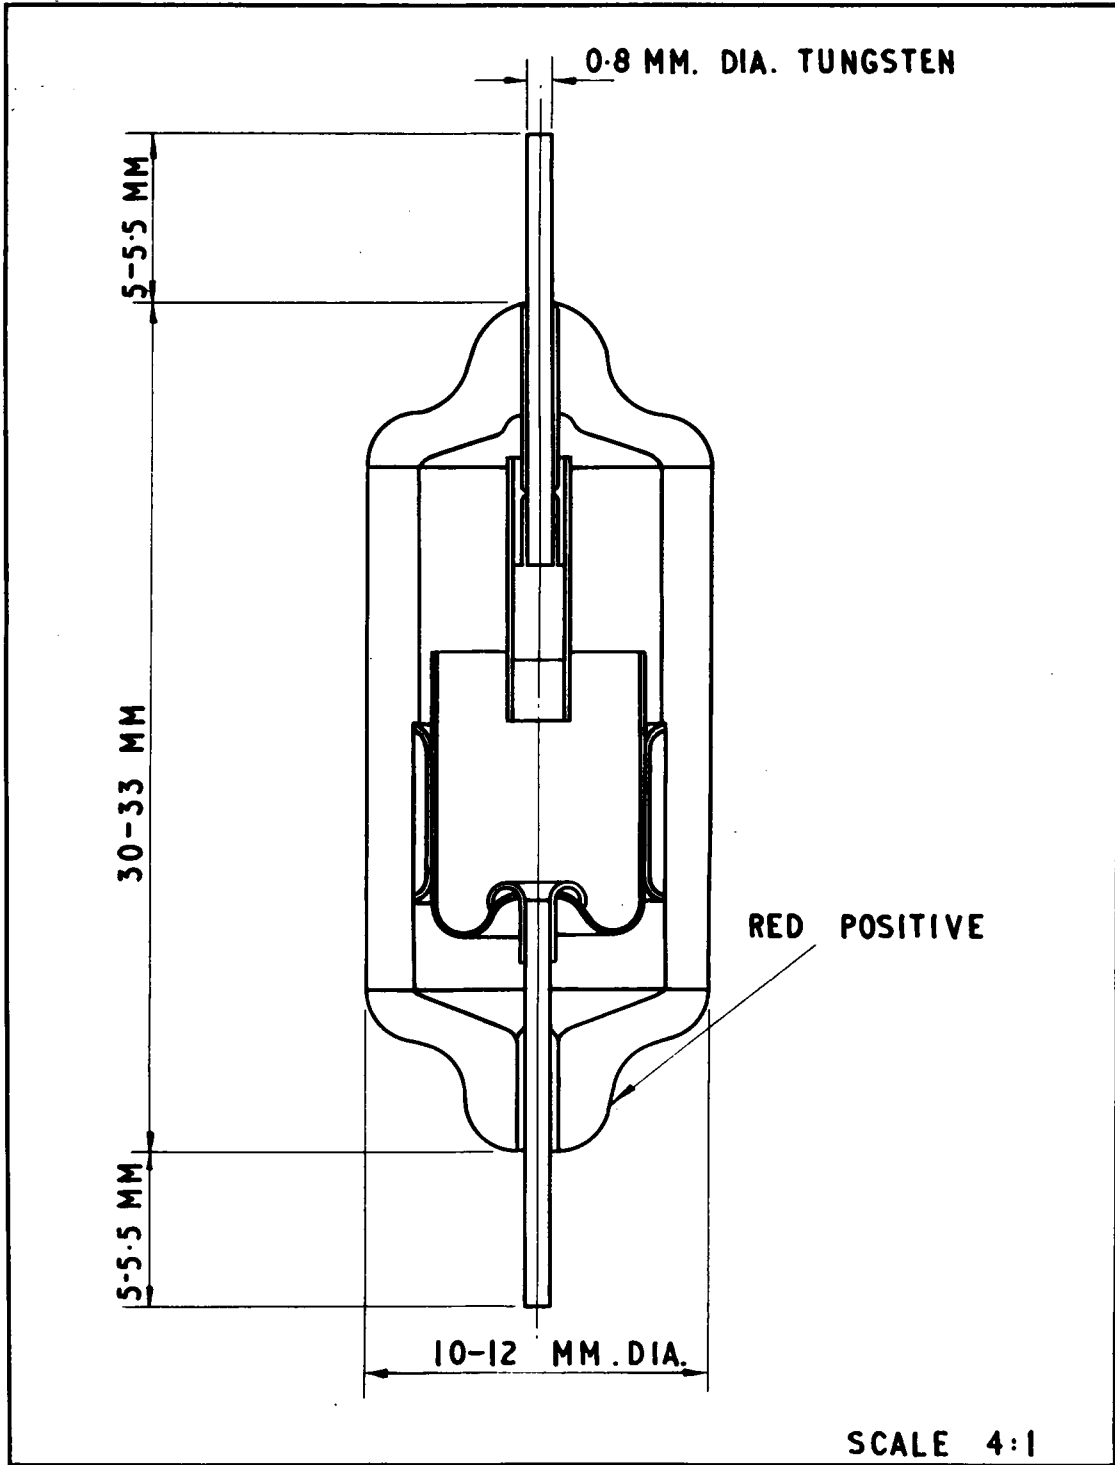

SCALE 4:1
CV 2248-52/3/3