

ELECTRONIC VALVE SPECIFICATIONS  
SPECIFICATION CV7484-89  
ISSUE 1. DATED 21st JANUARY, 1964.  
AMENDMENT No. 1.

Page 1. Mechanical Dimensions and Outlines K1007/NATO Ref.

Delete: 10.3.2.4. Insert: 10.3.2.3.

Delete: 10.4.2.4. Insert: 10.4.2.3.

Page 9. Sub Group 7 K1007/NATO Ref.

Delete: 6.6.1.2.2.

Insert: 6.6.1.2.1.

Sub Group 8 K1007/NATO Ref.

Delete: 6.6.1.2.2.

Insert: 6.6.1.2.1.

Ministry of Aviation/R.R.E.

March, 1965.

MILITARY SPECIFICATION  
**CV 7484-89**  
SEMICONDUCTOR DEVICE, TRANSISTOR

**Description:-** This specification covers the detail requirements for PNP Silicon, Transistors suitable for High Frequency, Medium Power applications, and is in accordance with K1007, Issue No. 3, except as otherwise stated.

**Mechanical Dimensions and Outlines:-** K1007, Section B.10.3.1, 10.3.2.4, 10.4.1, 10.4.2.4. Long lead

**Connections:-** Collector connected to case.  
 Lead 1 Emitter, Lead 2 Base, Lead 3 Collector.

**Absolute Maximum Ratings:-**

| Device     | Rating | V <sub>CB</sub> | V <sub>CE</sub> | V <sub>EB</sub> | I <sub>C</sub> | I <sub>E</sub> | P <sub>tot</sub> | T <sub>stg</sub> | T <sub>opn</sub> | Shock | Vibration |
|------------|--------|-----------------|-----------------|-----------------|----------------|----------------|------------------|------------------|------------------|-------|-----------|
|            | Unit   | V               | V               | V               | mA             | mA             | mW               | °C               | °C               | g     | g         |
| CV<br>7484 | Min.   |                 |                 |                 |                |                |                  | - 65             | - 65             |       |           |
|            | Max.   | -30             | -30             | -5              | 50             | 50             | 300              | +200             | +175             | 1500  | 20        |
| CV<br>7485 | Min.   |                 |                 |                 |                |                |                  | - 65             | - 65             |       |           |
|            | Max.   | -30             | -30             | -5              | 50             | 50             | 300              | +200             | +175             | 1500  | 20        |
| CV<br>7486 | Min.   |                 |                 |                 |                |                |                  | - 65             | - 65             |       |           |
|            | Max.   | -40             | -40             | -5              | 50             | 50             | 300              | +200             | +175             | 1500  | 20        |
| CV<br>7487 | Min.   |                 |                 |                 |                |                |                  | - 65             | - 65             |       |           |
|            | Max.   | -40             | -40             | -5              | 50             | 50             | 300              | +200             | +175             | 1500  | 20        |
| CV<br>7488 | Min.   |                 |                 |                 |                |                |                  | -65              | -65              |       |           |
|            | Max.   | -30             | -30             | -5              | 50             | 50             | 300              | +200             | +175             | 1500  | 20        |
| CV<br>7489 | Min.   |                 |                 |                 |                |                |                  | - 65             | - 65             |       |           |
|            | Max.   | -50             | -50             | -5              | 50             | 50             | 300              | +200             | +175             | 1500  | 20        |
|            | Note   |                 |                 |                 |                |                | A                |                  |                  | B     |           |

# CV 7484-89

Notes: A. See Derating Curve Fig. 1, Page 11,

B. 0.5 mSecs duration.

C. Commercial Equivalents 2H1254/5/6/7/8/9

## Primary Electrical Characteristics:

| Characteristic |                        | $I_{CBO}$ |     |     | $V_{CE}$<br>(Sat) | $h_{FE}$ | $h_{fe}$ | $C_{OB}$ | $t_{on}$ | $t_{off}$            | $t_s$                | Thermal Resist-<br>ance |
|----------------|------------------------|-----------|-----|-----|-------------------|----------|----------|----------|----------|----------------------|----------------------|-------------------------|
| Unit           |                        | uA        |     |     | Volts             |          |          | pf       | nS       | nS                   | nS                   | $^{\circ}C/mW$          |
| CV<br>7484     | Min.                   |           |     |     |                   | 25       | 1.5      |          |          |                      |                      | 0.5 $^{\circ}$          |
|                | Max.                   | 0.2       |     |     | 0.3               | 50       |          | 10       | 25       | 40                   |                      |                         |
| CV<br>7485     | Min.                   |           |     |     |                   | 40       | 2.5      |          |          |                      |                      | 0.5 $^{\circ}$          |
|                | Max.                   | 0.2       |     |     | 0.3               | 80       |          | 10       | 25       | 60                   |                      |                         |
| CV<br>7486     | Min.                   |           |     |     |                   | 25       | 1.5      |          |          |                      |                      | 0.5 $^{\circ}$          |
|                | Max.                   | 0.2       |     |     | 0.3               | 50       |          | 10       | 25       | 40                   |                      |                         |
| CV<br>7487     | Min.                   |           |     |     |                   | 40       | 2.5      |          |          |                      |                      | 0.5 $^{\circ}$          |
|                | Max.                   | 0.2       |     |     | 0.3               | 80       |          | 10       | 25       | 60                   |                      |                         |
| CV<br>7488     | Min.                   |           |     |     |                   | 75       | 2.0      |          |          |                      |                      | 0.5 $^{\circ}$          |
|                | Max.                   | 0.2       |     |     | 0.3               | 150      |          | 10       | 25       | 80                   |                      |                         |
| CV<br>7489     | Min.                   |           |     |     |                   | 25       | 2.0      |          |          |                      |                      | 0.5 $^{\circ}$          |
|                | Max.                   |           | 0.2 |     | 0.3               | 100      |          | 10       | 25       | 60                   |                      |                         |
| CONDITIONS     | $T_{case}$ $^{\circ}C$ | 25        | 25  | 25  | 25                | 25       | 25       | 25       | 25       | 25                   | 25                   |                         |
|                | $V_{CB}$ V             | -25       | -35 | -40 |                   |          |          | -10      | -10      |                      |                      |                         |
|                | $V_{CE}$ V             |           |     |     |                   | -1.0     |          |          |          |                      |                      |                         |
|                | $I_C$ mA               |           |     |     | -10               | -10      |          |          |          |                      |                      |                         |
|                | $I_E$ mA               |           |     |     |                   |          | 10       |          |          |                      |                      |                         |
|                | f Mc/s                 |           |     |     |                   |          | 20       | 0.14     |          | See Figure 2 Page 12 | See Figure 2 Page 12 |                         |
|                | $I_B$ mA               |           |     |     | -2                |          |          |          |          |                      |                      |                         |

Reliability Assurance Requirements:- Under discussion

Applicable DocumentsRequirements

Marking: The device shall be marked according to K1007,  
Issue No. 3, Section B.1.3.4.1 Minimum requirements  
1.3.4.1(a)(c).

Quality Assurance Provisions

Destructive Tests: The tests listed in Table 2, Group B  
Inspection, Sub-Group 2, 3 and Group C  
Inspection Sub Group 2 are considered destructive.

Group C Inspection: This inspection shall be conducted on  
the initial lot, and thereafter every  
ninety days or every fifth lot, whichever  
occurs first.

Preparation for Delivery

Packaging: The device shall be packed according to K1007,  
Issue No. 3, Section A.1.2 (c).

Joint Service Catalogue Numbers

|        |   |                  |
|--------|---|------------------|
| CV7484 | = | 5960-99-037-3694 |
| CV7485 | = | 5960-99-037-3695 |
| CV7486 | = | 5960-99-037-3696 |
| CV7487 | = | 5960-99-037-3697 |
| CV7488 | = | 5960-99-037-3698 |
| CV7489 | = | 5960-99-037-3699 |

This specification has been prepared by, and the Qualification Authority is:-  
Ministry of Aviation, Royal Radar Establishment, Malvern, Worcs., England.

TABLE 1 GROUP A INSPECTION

| Examination or Test                                    | TEST CONDITIONS |                               | AQI % | Insp. Level | Sym- bol | LIMITS |      | Units   |
|--|-----------------|-------------------------------|-------|-------------|----------|--------|------|---------|
|  | K1007/NATO Ref. | Specific Conditions           |       |             |          | Min.   | Max. |         |
| <u>SUB-GROUP 1</u><br>Visual and Mechanical Inspection | 5.1             | Excluding Physical Dimensions | 0.65  | I           |          |        |      |         |
|  |                 |                               |       |             |          |        |      |         |
| <u>SUB-GROUP 2</u><br>Collector Base Cut-off Current   | 7.2.5.1         | $V_{CB} = -25V$               | 0.65  | II          |          |        |      | $\mu A$ |
|  |                 | $I_E = 0$                     |       |             |          |        |      |         |
|  |                 | $V_{CB} = -25V$               |       |             |          |        |      |         |
|  |                 | $I_E = 0$                     |       |             |          |        |      |         |
|  |                 | $V_{CB} = -35V$               |       |             |          |        |      |         |
|  |                 | $I_E = 0$                     |       |             |          |        |      |         |
|  |                 | $V_{CB} = -35V$               |       |             |          |        |      |         |
|  |                 | $I_E = 0$                     |       |             |          |        |      |         |
|  |                 | $V_{CB} = -25V$               |       |             |          |        |      |         |
|  |                 | $I_E = 0$                     |       |             |          |        |      |         |
| Static Forward Current Transfer Ratio (1)              | 7.3.4           | $V_{CE} = -1$                 |       |             |          |        |      |         |
|  |                 | $I_C = -10mA$                 |       |             |          |        |      |         |
|  |                 |                               |       |             |          |        |      |         |
|  |                 |                               |       |             |          |        |      |         |
|  |                 |                               |       |             |          |        |      |         |
|  |                 |                               |       |             |          |        |      |         |

TABLE 1 GROUP A INSPECTION (Cont'd)

| Examination or Test   | K1007/NATO Ref. | TEST CONDITIONS<br>Specific Conditions  | AQL %  | Insp. Level | Sym-bol           | LIMITS |      | Units         |
|---|-----------------|---|--------|-------------|-------------------|--------|------|---------------|
|   |                 |   |        |             |                   | Min.   | Max. |               |
| <u>SUB-GROUP 2 Cont'd</u><br>Collector Emitter Saturation Voltage (1) | 7.3.3           | $I_C = -10\text{mA}$<br>$I_B = 2\text{mA}$  |        |             | $V_{CE}$<br>(Sat) | -      | -0.3 | V             |
| Emitter Base Cut-Off Current  | 7.2.5.1         | $V_{EB} = -3\text{V}$   |        |             | $I_{EBO}$         | -      | -0.2 | $\mu\text{A}$ |
| <u>SUB-GROUP 3</u><br>Base Emitter Saturation Voltage                 | 7.3.1           | $I_C = -10\text{mA}$<br>$I_B = -2\text{mA}$<br>$V_{CC} = -15\text{V}$<br>$V_{BB} = +1.5\text{V}$<br>$V_P = -7.5\text{V}$<br>Pulse length = 150 nSec | 4.0    | I           | $V_{BE}$<br>(Sat) | -      | -1.0 | V             |
| Switching Times   |                 |   |        |             | $t_d+t_r$         |        | 25   | nSec          |
|   |                 |   | CV7484 |             | $t_s+t_f$         |        | 40   | nSec          |
|   |                 |   | "      |             | $t_d+t_r$         |        | 25   | nSec          |
|   |                 |   | CV7485 |             | $t_s+t_f$         |        | 60   | nSec          |
|   |                 |   | "      |             | $t_d+t_r$         |        | 25   | nSec          |
|   |                 |   | CV7486 |             | $t_s+t_f$         |        | 40   | nSec          |
|   |                 |   | "      |             | $t_d+t_r$         |        | 25   | nSec          |
|   |                 |   | CV7487 |             | $t_s+t_f$         |        | 60   | nSec          |
|   |                 | "   |        | $t_d+t_r$   |                   | 25     | nSec |               |
|   |                 | CV7488  |        | $t_s+t_f$   |                   | 80     | nSec |               |
|   |                 | "   |        | $t_d+t_r$   |                   | 25     | nSec |               |
|   |                 | CV7489  |        | $t_s+t_f$   |                   | 25     | nSec |               |
|   |                 | "   |        | $t_d+t_r$   |                   | 60     | nSec |               |

Figure 2  
Page 12

TABLE 1 GROUP A INSPECTION

| Examination or Test   | K1007/NATO Ref. | TEST CONDITIONS     |        | AQL % | Insp. Level | Sym- bol | LIMITS |      | Units   |
|---|-----------------|---------------------|--------|-------|-------------|----------|--------|------|---------|
|   |                 | Specific Conditions |        |       |             |          | Min.   | Max. |         |
| <u>SUB-GROUP 3 Cont'd</u><br>Small Signal Forward<br>Current Transfer Ratio | 7.5.2           | $V_{CE}$ = -10V     | CV7484 |       |             | $h_{FE}$ | 1.5    | 7.5  | -       |
|   |                 | $I_E$ = 10mA        | CV7485 |       |             |          | 2.5    | 10   |         |
|   |                 | $f$ = 20Mc/s        | CV7486 |       |             |          | 1.5    | 7.5  |         |
| Collector Base Cut-Off<br>Current   | 7.2.5.1         | $T$ = 100°C         | CV7487 |       |             | $h_{FE}$ | 2.5    | 10   | -       |
|   |                 | $V_{CB}$ = -25V     | CV7488 |       |             |          | 2.5    | 10   |         |
|   |                 | $I_E$ = 0           | CV7489 |       |             |          | 2.0    | 10   |         |
| Static Forward<br>Current Transfer<br>Ratio                                 | 7.3.4           | $T$ = -55°C         | CV7484 |       |             | $h_{FE}$ | -      | 50   | $\mu A$ |
|   |                 | $V_{CE}$ = 1V       | CV7485 |       |             |          | 20     | 50   |         |
|   |                 | $I_C$ = 10mA        | CV7487 |       |             |          | 30     | 80   |         |
|   |                 |                     | CV7488 |       |             | $h_{FE}$ | 20     | 50   |         |
|   |                 |                     | CV7489 |       |             | $h_{FE}$ | 60     | 150  |         |
|   |                 |                     |        |       |             | $h_{FE}$ | 20     | 100  |         |

TABLE 1 GROUP A INSPECTION (Cont'd)

| Examination or Test                      | K1007/NATO Ref. | TEST CONDITIONS     |                              | AQL % | Insp. Level | Sym- bol | LIMITS |      | Units |
|--|-----------------|---------------------|------------------------------|-------|-------------|----------|--------|------|-------|
|  |                 | Specific Conditions |                              |       |             |          | Min.   | Max. |       |
| <u>SUB-GROUP 4</u><br>Output Capacitance | 7.4.8           | $V_{CB} = -10V$     | $f = 0.14 \text{ Mc/s min.}$ | 4.0   | 1A          | $C_{ob}$ | -      | 10   | pF    |
|  |                 | $I_E = 0$           |                              |       |             |          |        |      |       |
| Input Impedance                          |                 | $V_{CB} = -10V$     | $f = 1 \text{ Kc/s}$         |       |             | $h_{ib}$ |        | 30   | ohms  |
|  |                 | $I_E = -2mA$        |                              |       |             |          |        |      |       |
|  |                 |                     |                              |       |             |          |        |      |       |



TABLE 2 GROUP B INSPECTION  
See Quality Assurance Provisions Page 4 Destructive Tests


| Examination or Test                     | TEST CONDITIONS |   | AQL % | Insp. Level | Sym- bol | LIMITS |      | Units |
|---|-----------------|---|-------|-------------|----------|--------|------|-------|
|   | K1007/NATO Ref. | Specific Conditions   |       |             |          | Min.   | Max. |       |
| <u>SUB GROUP 1</u><br>Physical          | 5.1             | According to K1007, Section B, 10.3.3.1., 10.3.2.4., 10.4.1., 10.4.2.4. | 6.5   | 1A          |          |        |      |       |
| <u>SUB GROUP 2</u><br>Solderability     | 5.13            | 230° ± 5°c  | 4.0   | 1A          |          |        |      |       |
| Temperature Cycling                     | 5.5             | -65° to +150°c  |       |             |          |        |      |       |
| Moisture Resistance                     | 5.3             |   |       |             |          |        |      |       |
| <u>SUB GROUP 3</u><br>Vibration Fatigue | 5.15.1          | 20G   | 4.0   | 1A          |          |        |      |       |
| <u>SUB GROUP 4</u><br>Lead Fatigue      | 5.10.2          | 2 cycles  | 6.5   | 1A          |          |        |      |       |
| <u>SUB GROUP 5</u><br>Omitted           |                 |   |       |             |          |        |      |       |
| <u>SUB GROUP 6</u><br>Omitted           |                 |   |       |             |          |        |      |       |

TABLE 2. GROUP B INSPECTION (Cont'd)


| Examination or Test  | TEST CONDITIONS    |  | Insp. Level | Symbol           | LIMITS |                                  | Units                       |
|--|--------------------|--|-------------|------------------|--------|----------------------------------|-----------------------------|
|  | K1007/NATO Ref.    | Specific Conditions  |             |                  | Min.   | Max.                             |                             |
| <u>SUB-GROUP 7</u><br>High Temperature Life<br>(non-operating)   | 6.2.1<br>6.6.1.2.2 | T <sub>stg</sub> = +200°C<br>Duration = 1000 hours   | 1           |                  |        |                                  |                             |
| <u>SUB-GROUP 8</u><br>Operating Life   | 6.3<br>6.6.1.2.2   | T <sub>amb</sub> at any single temp.<br>between 25°C and 150°C with<br>the corresponding P <sub>tot</sub> given<br>on the derating curve Fig. 1,<br>Page 11.<br>V <sub>CE</sub> max. for device<br>Duration 1000 hours | 1A          |                  |        |                                  |                             |
| <u>Post Test End Points for<br/>Sub-Group 2, 3, 7 and 8</u><br>Collector Base Cut-off<br>current<br>Static Forward Current<br>Transfer Ratio | 7.2.5.1<br>7.3.4   | As in Group A, Sub-Group 2<br>As in Group A, Sub-Group 2<br>CV7484<br>CV7485<br>CV7486<br>CV7487<br>CV7488<br>CV7489   |             | I <sub>CBO</sub> | 0.5    | 20<br>35<br>20<br>35<br>70<br>20 | uA<br>-<br>-<br>-<br>-<br>- |

TABLE 3 GROUP C INSPECTION

| Examination or Test                         | TEST CONDITIONS |  | AQL % | Insp. Level | Sym-bol          | LIMITS |      | Units |
|---|-----------------|--|-------|-------------|------------------|--------|------|-------|
|   | K1007/NATO Ref. | Specific Conditions                                    |       |             |                  | Min.   | Max. |       |
| <u>SUB-GROUP 1</u><br>(Omitted)             |                 |  |       |             |                  |        |      |       |
| <u>SUB-GROUP 2</u><br>Shock (Non operating) | 5.17.1          | 5 blows in each of 3 mutually perpendicular directions | 6.5   | 1A          |                  |        |      |       |
| <u>Post Test End Points</u>                 |                 |  |       |             |                  |        |      |       |
| Collector Base Cut-off current              | 7.2.5.1         | As in Group A, Sub-Group 2                             |       |             | I <sub>CBO</sub> |        | 0.5  | μA    |
| Static Forward Current Transfer Ratio       | 7.3.4           | As in Group A, Sub-Group 2<br>CV7484                   |       |             | h <sub>FE</sub>  | 20     | 55   | -     |
|   |                 | CV7485   |       |             | h <sub>FE</sub>  | 35     | 85   | -     |
|   |                 | CV7486   |       |             | h <sub>FE</sub>  | 20     | 55   | -     |
|   |                 | CV7487   |       |             | h <sub>FE</sub>  | 35     | 85   | -     |
|   |                 | CV7488   |       |             | h <sub>FE</sub>  | 70     | 155  | -     |
|   |                 | CV7489   |       |             | h <sub>FE</sub>  | 20     | 105  | -     |

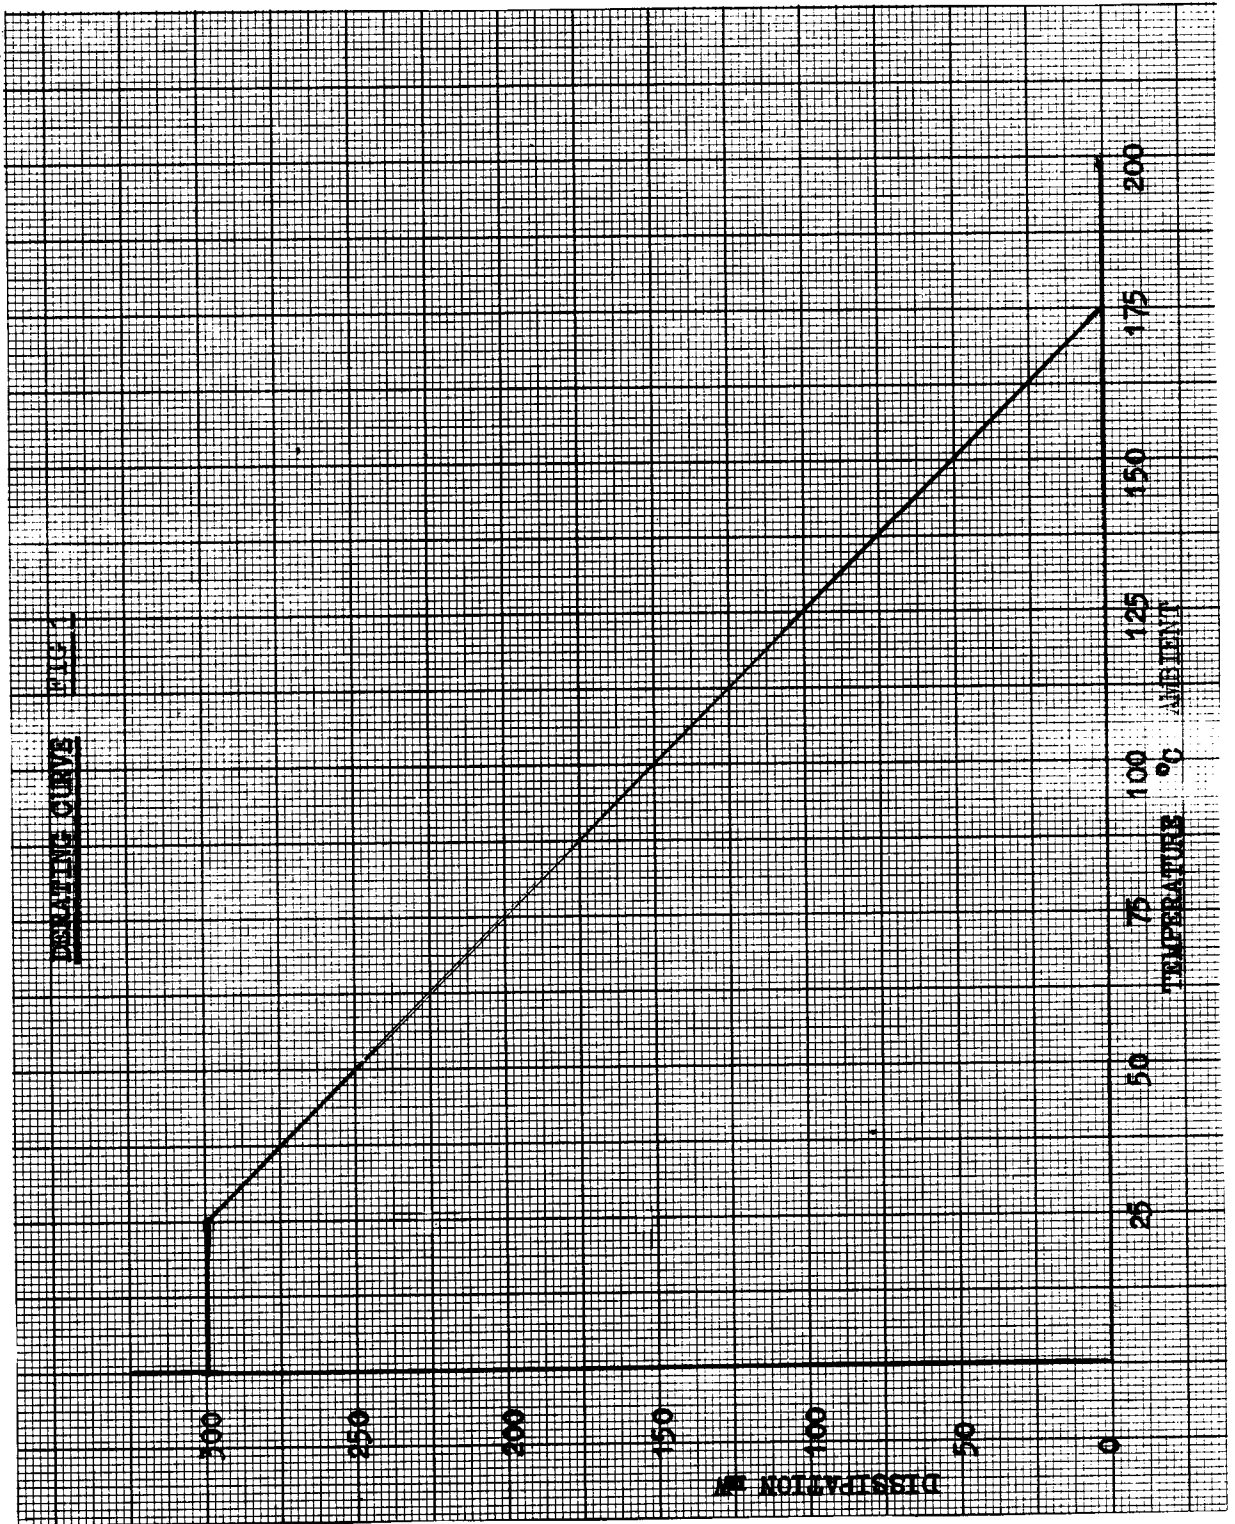

## SWITCHING CIRCUIT

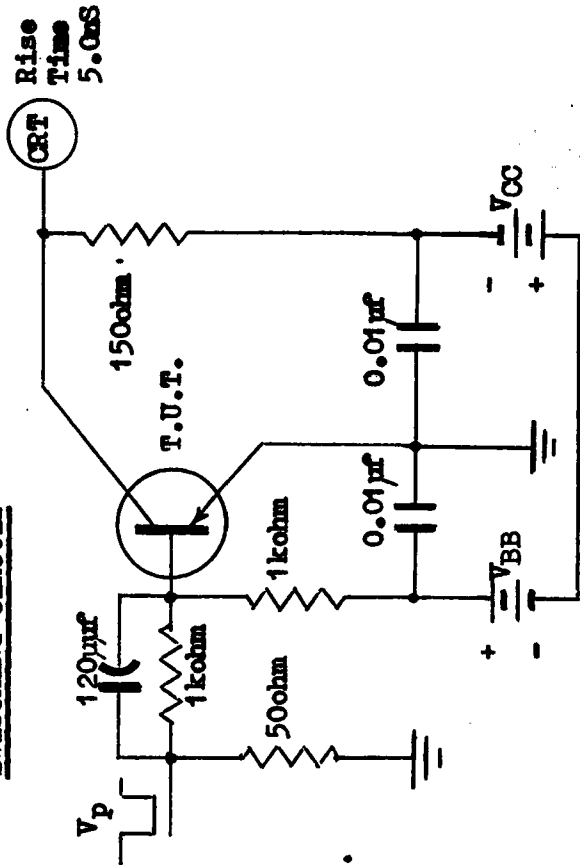

Conditions:-

$V_{CC} = -15V$

$V_{BB} = +1.5V$

$V_p = -7.5V$

Pulse Length = 150ns-300ns

Rise Time = 3.0ns Max

P.R.F.  $\leq$  150 p.p.s

## DETERMINATION OF SWITCHING TIMES FROM OSCILLOSCOPE DISPLAY

