


# TYPE MULLARD D.W.4 DIRECTLY HEATED FULL WAVE RECTIFIER VALVE

APPLICATION. Full wave rectifier in A.C. receivers and H.T. supply units (eliminators) providing anode current for valves operating at H.T. voltages up to 500 V.

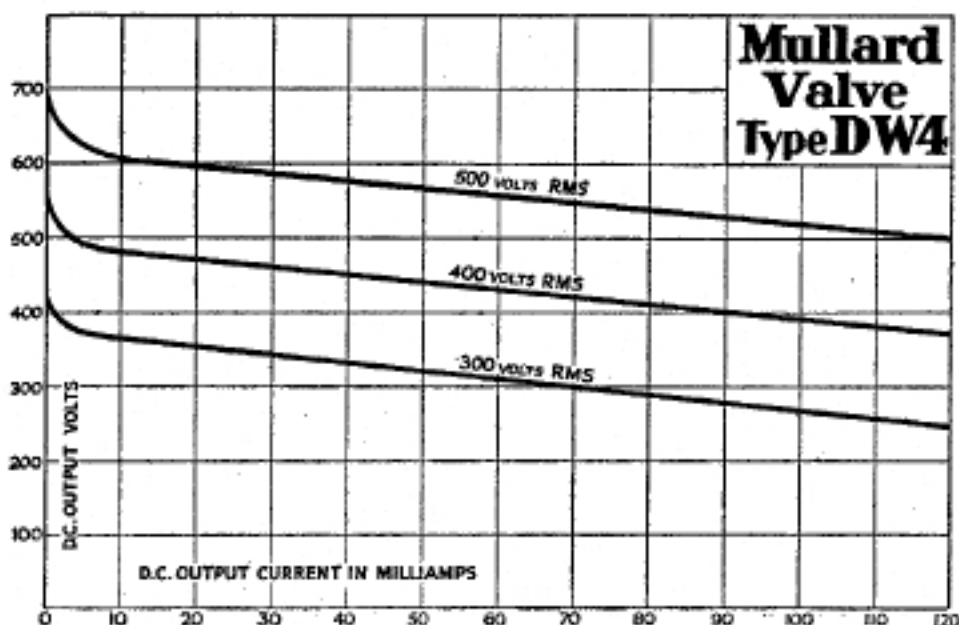

## OPERATING DATA.

Filament Voltage ... 4.0 V.  
 Filament Current ... 2.0 A.  
 Max. Anode Voltage 500-0-500 V.  
 R.M.S.

## OUTPUT.

Maximum rectified output  
 120 mA. D.C. at 500 V.

**PRICE 20/-**



**Mullard**  
 THE MASTER VALVE

