

*Information
Release*

PHILIPS ELECTRON TUBE DIVISION

Dear Sirs,


We have pleasure in announcing herewith the cathode-ray tube type DG 13-32, which has been incorporated in our programme to suit the requirements for 13 cm tubes for service oscilloscopes and the like.

The cathode-ray tube DG 13-32 is equivalent to the American type 5UP1 and combines a great deflection sensitivity, a small line width and high brilliancy.

We remain,

Very truly yours,

GENERAL-PURPOSE CATHODE-RAY TUBE

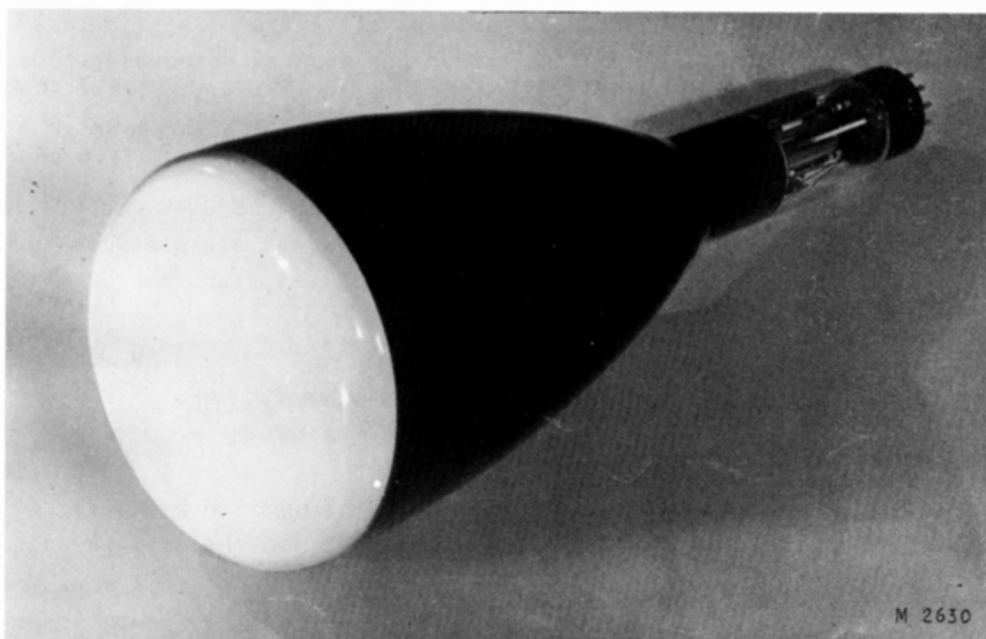

The Philips Cathode-Ray Tube DG 13-32 is especially designed to satisfy the requirements for visual observation of oscillographic phenomena.

The characteristic features of the tube are:

- double symmetric electrostatic deflection;
- high deflection sensitivity at full scan;
- brilliant and fine spot at operation beam-current;
- 4 watt cathode adapted to existing circuitry technique;
- equivalent to the Cathode-Ray Tube 5UP 1.

ELECTRICAL DATA

HEATING

Indirect by a.c. or d.c.
 Parallel supply
 Heater voltage 6.3 V
 Heater current 0.6 A

SCREEN

Fluorescence green
 Persistence medium

FOCUSING

Electrostatic

DEFLECTION

Double electrostatic $D_1 D_1'$ symmetric
 $D_2 D_2'$ symmetric


DIRECT INTERELECTRODE CAPACITANCES

Grid No.1 to all other electrodes	C_{g_1}	=	4.3 pF
Cathode to all other electrodes	C_k	=	6.5 pF
D_1 to all other electrodes	C_{D_1}	=	4.6 pF ¹⁾
D_1' to all other electrodes	$C_{D_1'}$	=	4.6 pF ¹⁾
D_2 to all other electrodes	C_{D_2}	=	9.3 pF ¹⁾
D_2' to all other electrodes	$C_{D_2'}$	=	5. pF ¹⁾
D_1 to D_1'	$C_{D_1 D_1'}$	=	1.5 pF
D_2 to D_2'	$C_{D_2 D_2'}$	=	2 pF

LINE WIDTH at

Grid No.2 + 4 voltage $V_{(g_2 + g_4)} = 2000$ V
 Screen current $I_1 = 0.5$ μ A 0.4 mm ²⁾

MAXIMUM DIMENSIONS (in mm) AND ELECTRODE CONNECTIONS

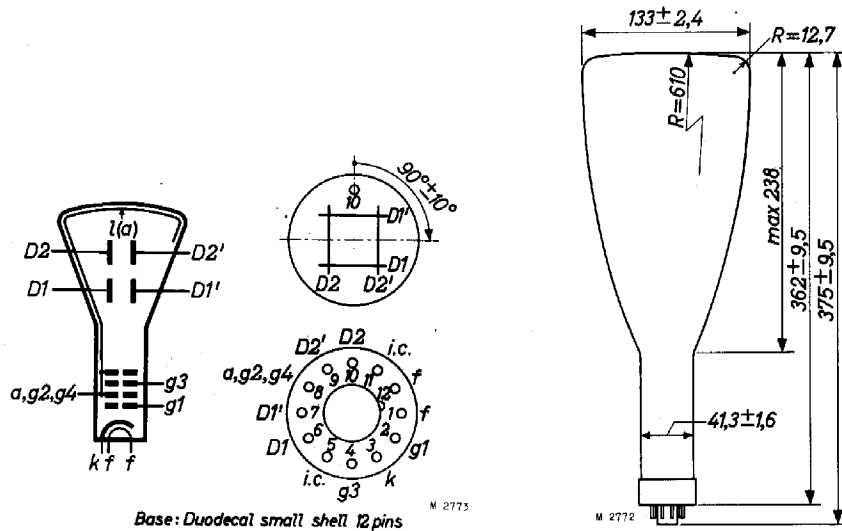

¹⁾ To all electrodes, except the opposite deflection plate.
²⁾ Measured on a circle of 50 mm diameter.

TYPICAL OPERATING CONDITIONS

Grid No.2 and 4 voltage	$V_{g_2 + g_4}$	=	2000 V
Grid No.3 voltage	V_{g_3}	=	340 - 640 V ³⁾
Neg. grid No.1 voltage for visual extinction of the focused spot	$-V_{g_1}$	=	max. 90 V
Sensitivity ($D_1 D_1'$)	N_1	=	0.41 - 0.55 mm/V
Sensitivity ($D_2 D_2'$)	N_2	=	0.33 - 0.45 mm/V

LIMITING VALUES (Design centre value)

Grid No.2 and 4 voltage	$V_{g_2 + g_4}$	=	max. 2500 V
Grid No.3 voltage	V_{g_3}	=	max. 1000 V ³⁾
Grid No.1 voltage Negative value	$-V_{g_1}$	=	max. 200 V
Positive value	V_{g_1}	=	max. 0 V
Peak voltage on deflection plates $D_1 D_1'$	$V_{D_1 D_1' p}$	=	max. 500 V
Peak voltage on deflection plates $D_2 D_2'$	$V_{D_2 D_2' p}$	=	max. 500 V
Voltage between cathode and heater	V_{kf}	=	max. 125 V
Screen dissipation	W_l	=	max. 3 mW/cm ²
Grid No.2 and 4 dissipation	$W_{g_2 + g_4}$	=	max. 4 W

MAX. CIRCUIT VALUES

Deflection plate resistance	R_D	=	max. 5 MΩ
Grid No.1 circuit resistance	R_{g_1}	=	max. 1.5 MΩ

MECHANICAL DATA

MOUNTING POSITION

Any


DIMENSIONS

Overall length 375 ± 9.5 mm ($14\frac{3}{4} \pm \frac{3}{8}$ ")
 Screen diameter 13 cm (5")


NET WEIGHT

790 g (1 lb 12 oz.)

³⁾ For calculation of the grid No.3 voltage potentiometer, a grid No.3 current of min. -15 μA and max. +10 μA must be taken into account.

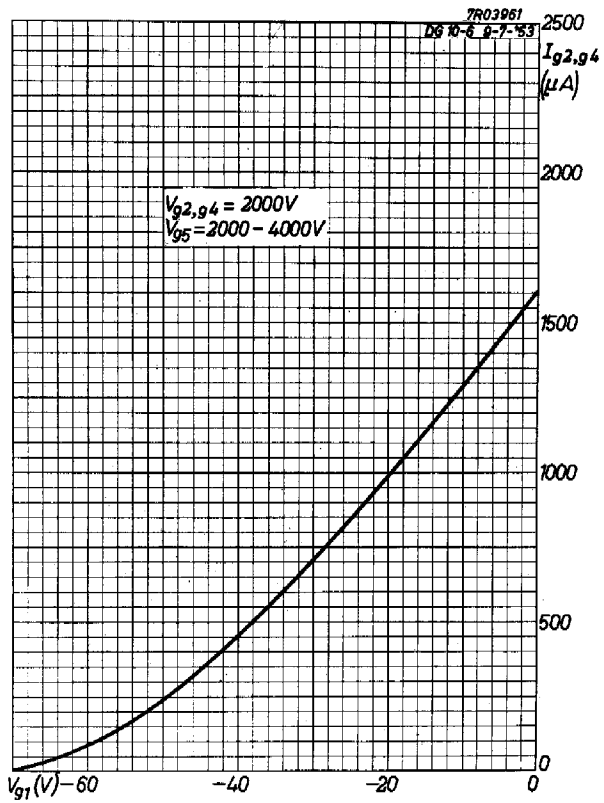

Grid No. 2 and No. 4 current plotted against negative grid No. 1 current.

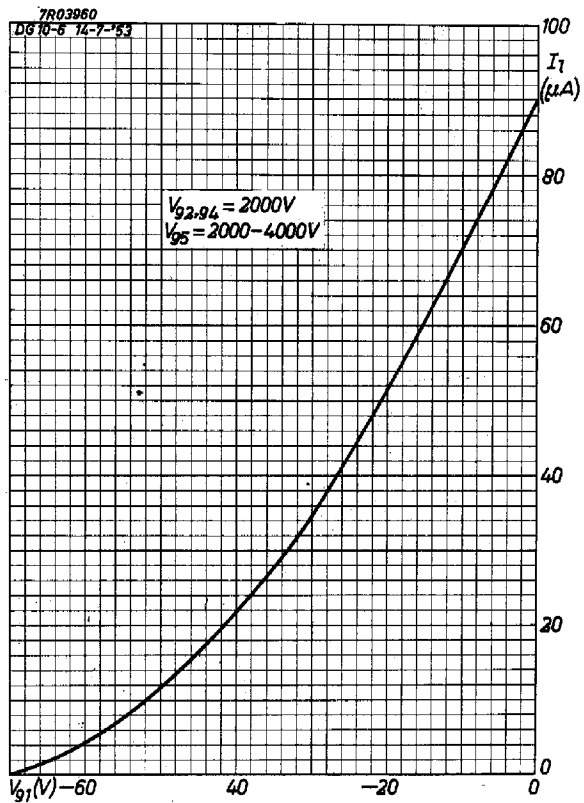

Screen current as a function of negative grid-cut-off voltage.