


MARCONI VALVES

MARCONI VALVES

TYPE HL 610

Approximate Operating Data—Neglecting Resistance of Output Circuit.

	Anode Volts	Grid Bias Volts
In High Frequency Amplifier:	75 to 150	Positive, zero or negative according to method of stabilising or damping circuit.
As Grid Leak Detector:	75 to 150	Connect grid leak to positive end of filament.
As Anode Bend Detector:	75 to 150	$-1\frac{1}{2}$ to -3
In Low Frequency Amplifier:	120 to 150	$-1\frac{1}{2}$

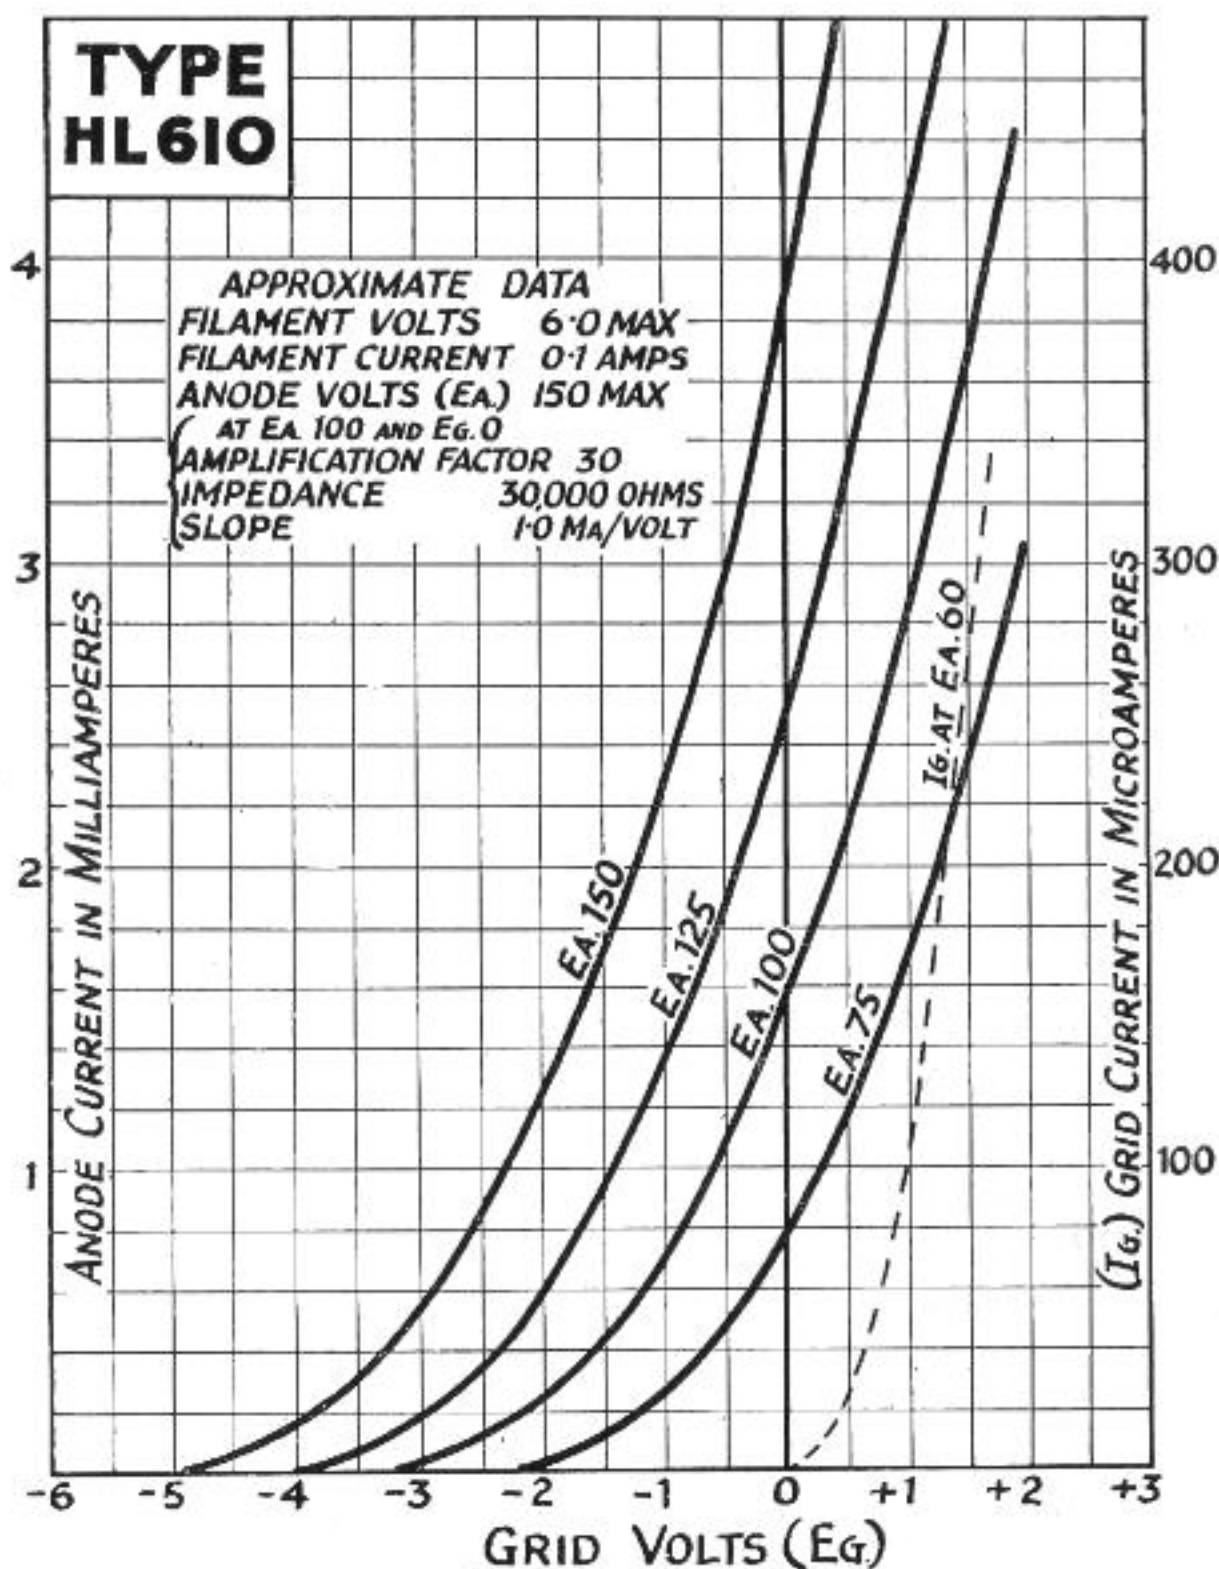

Characteristic Curve of Average HL 610 Valve.

The valve in the purple box