


U192

Half Wave Rectifier 0.3A, 19V Heater

Typical Operation

I_a	180	mA
$V_{in(r.m.s.)}$	250	V
V_{out}	195	V
P.I.V.max	700	V
C_{res}	60	μF
R_{lim}	125	Ω

B9A

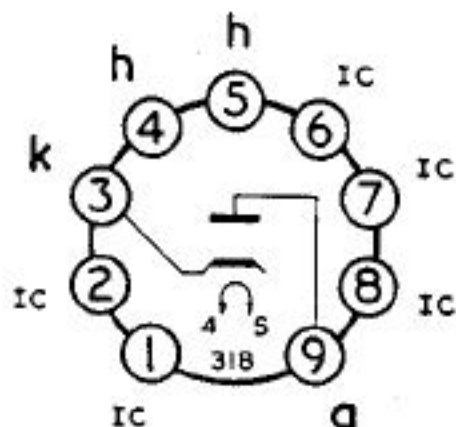

U193

Efficiency Diode 0.3A, 19V Heater

For use with 110° tubes

Ratings

P.I.V.max	5.5	kV
$I_a(max)$	175	mA
$i_a(pk)max$	450	mA
$V_{h-k(pk)max}$	5.5	kV

B9A

