


MARCONI VALVES

MARCONI VALVES

for use with 2-volt Accumulator

TYPE DEP 215

DUAL EMITTER, LOW FREQUENCY POWER AMPLIFYING VALVE.

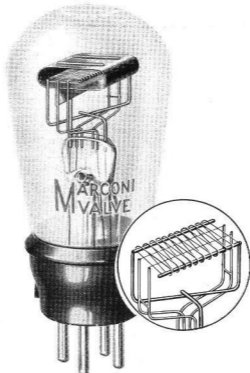

Approximate Overall Dimensions,

103 × 40 *m/m.*

Fil. Volts2.0 max.
Fil. Current0.15 amps
Anode Volts150 max.
*Amp. Factor7
*Impedance ...5,000 ohms.
*Normal Slope 1.4 Ma/v.
*At Anode Volts 100
Grid Volts 0

Price 12/6.

The DEP 215 is a low frequency power amplifying valve designed for use in the last stages of sets operating from a 2 volt accumulator.

The maximum filament voltage is 2.0 and this figure should not be exceeded.

The valve in the purple box