


MARCONI VALVES

MARCONI VALVES

for use with 6-volt Accumulator

TYPE DEP 610

DULL EMITTER, LOW FREQUENCY, POWER AMPLIFYING VALVE.

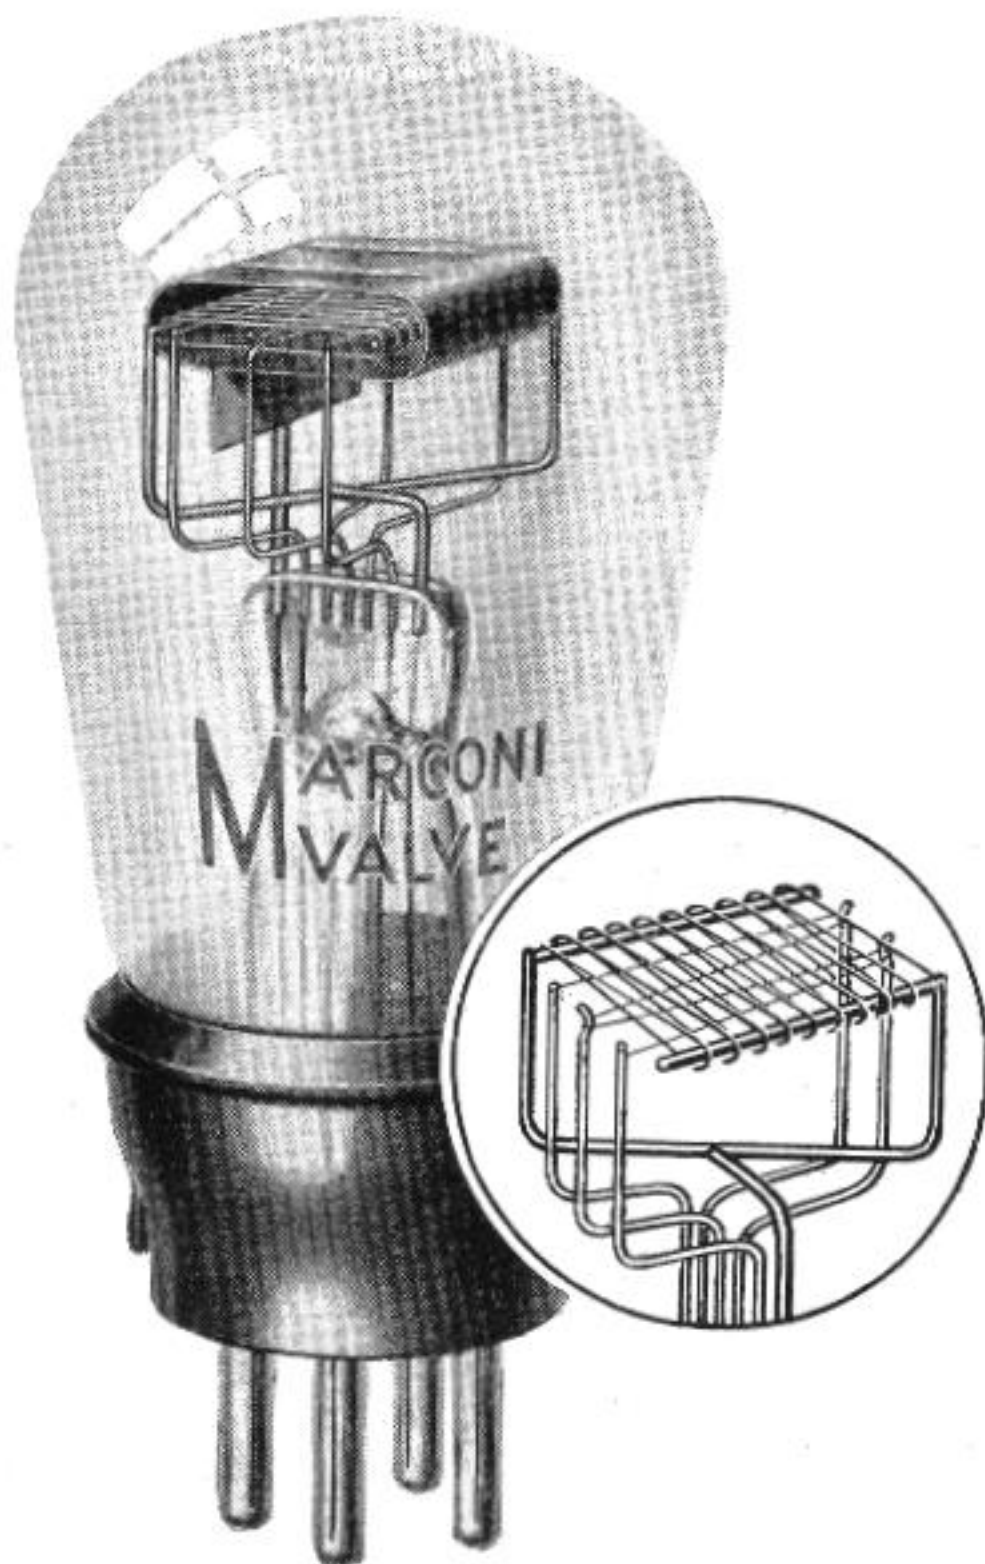

Approximate Overall Dimensions,

$103 \times 46 \text{ m/m.}$

Fil. Volts6.0 max.
Fil. Current0.1 amp.
Anode Volts150 max.
*Amp. Factor8
*Impedance 3,500 ohms.
*Normal Slope 2.28 Ma/v.
*At Anode Volts 100
Grid Volts 0

Price, 12/6.

The DEP 610 is a low frequency power amplifying valve designed for use in the last stages of sets operating from a 6-volt accumulator.

For these purposes it has exceptionally good characteristics, and if used under the conditions given on next page will give great amplification without distortion.

The maximum filament voltage is 6.0 and this figure should not be exceeded.

The valve in the purple box