


PHILIPS AMATEURZENDLAMP TA 08/10

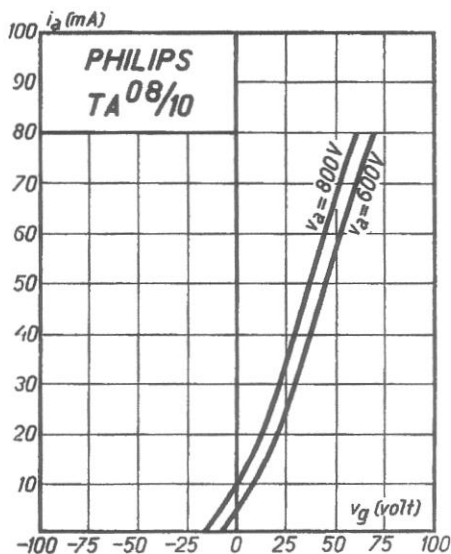

Gloeispanning	$v_f = 5,7 V$
Gloeistroom	$i_f = \text{ca. } 1,9 A$
Verzadigingsstroom	$i_s = \text{ca. } 100 \text{ mA}$
Anodespanning	$v_a = 500\text{--}800 V$
Anodedissipatie	$W_a = 20 W$
Anodedissipatie beproefd op	$W_{at} = 50 W$
Versterkingsfactor	$g = \text{ca. } 50$
Steilheid	$S = \text{ca. } 1,4 \text{ mA/V}$
Inwendige weerstand	$R_i = \text{ca. } 36000 \text{ ohm}$
Grootste lengte	$d = 54 \text{ mm}$
Grootste diameter	$l = 115 \text{ mm}$